

FCC PART 27 FCC PART 22H, PART 24E TEST REPORT

For

SENWA MEXICO, S.A.DE C.V

Av.Javier Barros Sierra 540, Torre I, Planta 5; COL.LOMAS DE SANTA FE DELEGACION, ALVARO OBREGON, Mexico

FCC ID: 2AAA6-LS5U

Report Type: Product Type:

Original Report Mobile Phone

Report Number: RSZ180108002-00D

Report Date: 2018-01-31

Candy Li

Reviewed By: RF Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Candy, Li

Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*".

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	9
APPLICABLE STANDARD	
Test Result	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50 (D) (H) - RF OUTPUT POWER	11
Applicable Standard	
TEST PROCEDURE TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	30
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA	
TERMINALS	
APPLICABLE STANDARD	
TEST PROCEDURE TEST DATA	
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS	
APPLICABLE STANDARD	
TEST PROCEDURE TEST DATA	
FCC § 22.917 (A); § 24.238 (A); §27.53 (H)(M) - BAND EDGES	
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	
APPLICABLE STANDARD	
TEST PROCEDURE	
Test Data	131

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SENWA MEXICO, S.A.DE C.V's product, model number: LS5U (FCC ID: 2AAA6-LS5U) or the "EUT" in this report was a *Mobile Phone*, which was measured approximately: 14.5 cm (L) * 7.3 cm (W) * 1.1 cm (H), rated with input voltage: DC 3.8 V from rechargeable li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: LS5U

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1000 mA

Objective

This test report is prepared on behalf of SENWA MEXICO, S.A.DE C.V in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Subpart 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS & DSS submissions with FCC ID: 2AAA6-LS5U.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D and KDB 971168 D01 v03.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

^{*}All measurement and test data in this report was gathered from production sample serial number: 1702963 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-01-08.

Parameter		uncertainty	
Occupied Char	nnel Bandwidth	±5%	
RF output pov	ver, conducted	±1.5dB	
Unwanted Emission, conducted		±1.5dB	
Emissions,	Below 1GHz	±4.70dB	
radiated	Above 1GHz	±4.80dB	
Temperature		±1°C	
Supply	voltages	±0.4%	

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50- 116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

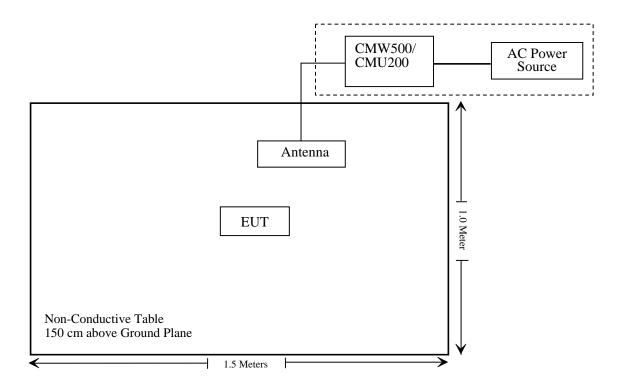

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c); \$27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ180108002-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
		Radiated Emission	on Test	•	
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal ANALYZER	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-07	2018-12-07
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724- 30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-19	2018-05-21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-29
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-29
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description Model Serial Nu		Serial Number	Calibration Date	Calibration Due Date
		RF Conducted	Test		
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Aglient	ESG Vector Signal Generator	E4438C	MY42080875	2017-05-09	2018-05-09
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-12-14	2018-12-14
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520- wh	2017-04-24	2018-04-24
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHEL	3dB Attenuator	N/A	N/A	2017-11-22	2018-05-23
WEINSCHEL	10dB Attenuator	5324	AU 3842	2017-11-22	2018-05-23
N/A	Power Splitter	N/A	N/A	2017-05-21	2018-05-21

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180108002-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d), Part 22H & 24E & 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50 (d) (h) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-01-23.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	31.30	38.45
GSM	190	836.6	31.44	38.45
	251	848.8	31.57	38.45

Mode	Channel Frequency		Average Output Power (dBm)				Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	31.26	29.46	27.65	25.64	38.45
GPRS	190	836.6	31.48	29.61	27.81	25.84	38.45
	251	848.8	31.61	29.74	27.98	26.01	38.45

Mode Test		t Test	3GPP Sub	Average Output Power (dBm)			
Mode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	20.44	20.33	20.34	
			1	20.61	20.35	20.46	
		HSDPA	2	20.13	20.81	20.44	
			3	20.38	20.39	20.37	
			4	20.69	20.18	20.35	
WCDMA (Band V)	Normal		1	20.79	20.81	20.80	
(Dune)		HSUPA	2	20.77	20.79	20.75	
			3	20.78	20.76	20.71	
			4	20.73	20.71	20.74	
			5	20.78	20.74	20.71	
		HSPA+	1	20.74	20.78	20.73	

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	28.24	33
GSM	661	1880.0	28.16	33
	810	1909.8	28.80	33

Mode	Channel Frequency		Average Output Power (dBm)				Limit
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	29.76	27.31	25.77	24.60	33
GPRS	661	1880.0	29.67	27.21	25.68	24.51	33
	810	1909.8	29.32	26.88	25.32	24.17	33

Mode	Test	Test	3GPP Sub	Average Output Power (dBm)			
Wiode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	20.43	20.45	20.49	
			1	20.42	20.35	20.47	
		HSDPA	2	20.38	20.54	20.39	
			3	20.35	20.44	20.43	
			4	20.42	20.41	20.38	
WCDMA (Band II)	Normal		1	20.38	20.43	20.38	
(Build II)			2	20.32	20.44	20.32	
		HSUPA	3	20.35	20.34	20.58	
			4	20.39	20.41	20.36	
			5	20.38	20.42	20.54	
		HSPA+	1	20.35	20.38	20.37	

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)		
	Low	2.12	13		
GSM	Middle	2.65	13		
	High	2.86	13		

Mode	Channel	PAR (dB)	Limit (dB)
27.60	Low	3.54	13
RMC (BPSK)	Middle	3.63	13
(BI SIC)	High	3.73	13
*****	Low	4.68	13
HSDPA (16QAM)	Middle	4.71	13
(ToQ/MVI)	High	4.65	13
	Low	4.84	13
HSUPA (BPSK)	Middle	e 4.57	
(Elbit)	High	4.69	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
	Low	2.29	13
GSM	Middle	2.65	13
	High	2.73	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.42	13
RMC (BPSK)	Middle	3.73	13
(BI SII)	High	3.66	13
	Low	3.70	13
HSDPA (16QAM)	Middle	3.65	13
(10Q/11/1)	High	3.81	13
	Low	5.56	13
HSUPA (BPSK)	Middle	5.71	13
(Bi sii)	High	5.83	13

Radiated Power

GSM Mode:

Receiver		Turntable	Rx An	tenna	S	ubstitut	ed	Absolute	FCC Part	t 22H/24E
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level class			Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle Channel									
836.6	92.16	84	1.5	Н	29.8	0.7	0.0	29.10	38.45	9.35
836.6	87.15	144	1.7	V	26.7	0.7	0.0	26.00	38.45	12.45
		EII	RP for PC	S Band	(Part 24E)), Middle	Channel			
1880.00	90.09	355	1.4	Н	20.0	1.30	8.50	27.20	33	5.8
1880.00	88.27	70	1.9	V	18.0	1.30	8.50	25.20	33	7.8

WCDMA Mode:

Re	Receiver	Turntable	Rx An	Rx Antenna		Substitut	ed	Absolute	FCC Pai	FCC Part 22H/24E	
Frequency	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
	ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	82.77	162	1.1	Н	20.4	0.7	0.0	19.70	38.45	18.75	
836.6	78.56	141	2.5	V	18.1	0.7	0.0	17.40	38.45	21.05	
	EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	82.35	358	1.7	Н	12.3	1.30	8.50	19.50	33	13.5	
1880.00	79.12	13	1.5	V	8.9	1.30	8.50	16.10	33	16.9	

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.00	22.23	22.51
		RB Size=1, RB Offset=2	22.46	22.38	22.48
		RB Size=1, RB Offset=5	22.36	22.5	22.52
	QPSK	RB Size=3, RB Offset=0	22.49	22.46	22.41
		RB Size=3, RB Offset=1	22.47	22.56	22.46
		RB Size=3, RB Offset=2	22.42	22.37	22.54
1 /		RB Size=6, RB Offset=0	22.37	22.29	22.35
1.4		RB Size=1, RB Offset=0	22.45	22.03	22.42
		RB Size=1, RB Offset=2	22.46	22.38	22.46 22.54 22.35
		RB Size=1, RB Offset=5	21.55	21.4	21.37
	16QAM	RB Size=3, RB Offset=0	21.59	21.79	21.44
		RB Size=3, RB Offset=1	21.50	21.43	21.51
		RB Size=3, RB Offset=2	21.42	21.28	21.33
		RB Size=6, RB Offset=0	21.36	21.38	21.32
		RB Size=1, RB Offset=0	22.19	22.2	22.25
		RB Size=1, RB Offset=7	22.13	22.14	22.15
		RB Size=1, RB Offset=14	22.16	22.09	22.25
	QPSK	RB Size=8, RB Offset=0	21.37	21.31	21.33
		RB Size=8, RB Offset=4	21.29	21.2	21.21
		RB Size=8, RB Offset=7	21.32	21.5	21.3
3.0		RB Size=15, RB Offset=0	21.21	21.06	21.12
3.0		RB Size=1, RB Offset=0	22.02	22.24	22.06
		RB Size=1, RB Offset=7	21.97	22.01	21.98
		RB Size=1, RB Offset=14	22.04	21.08	21.12
	16QAM	RB Size=8, RB Offset=0	20.64	20.57	20.59
		RB Size=8, RB Offset=4	20.81	20.93	20.66
		RB Size=8, RB Offset=7	20.89	20.82	20.81
		RB Size=15, RB Offset=0	20.87	20.92	20.84

RB Size=50, RB Offset=0

20.59

20.58

20.55

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.88	13	Pass
QPSK (100RB Size)	4.96	13	Pass
16QAM (1RB Size)	5.42	13	Pass
16QAM (100RB Size)	5.55	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	5	Substitute	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz 1	Bandwidth				
1880.00	83.26	85	1.6	Н	13.2	1.30	8.50	20.40	33
1880.00	82.09	321	1.3	V	11.8	1.30	8.50	19.00	33
	_	_	-	3 MHz B	andwidth	_			
1880.00	83.94	215	2.1	Н	13.9	1.30	8.50	21.10	33
1880.00	82.42	49	2.0	V	12.2	1.30	8.50	19.40	33
				5 MHz B	andwidth	_			
1880.00	83.77	220	2.4	Н	13.7	1.30	8.50	20.90	33
1880.00	81.69	134	1.8	V	11.4	1.30	8.50	18.60	33
			1	0 MHz I	Bandwidth				
1880.00	83.09	90	1.7	Н	13.0	1.30	8.50	20.20	33
1880.00	82.17	9	2.4	V	11.9	1.30	8.50	19.10	33
			1	5 MHz I	Bandwidth				
1880.00	83.94	323	1.9	Н	13.9	1.30	8.50	21.10	33
1880.00	81.90	93	1.8	V	11.6	1.30	8.50	18.80	33
			. 2	20 MHz I	Bandwidth				
1880.00	83.15	272	1.1	Н	13.1	1.30	8.50	20.30	33
1880.00	82.06	87	1.7	V	11.8	1.30	8.50	19.00	33

16QAM:

	n	Turn	Rx An	tenna		Substitut	ed	Alimal 4	
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth				
1880.00	83.13	16	1.1	Н	13.1	1.30	8.50	20.30	33
1880.00	82.94	359	1.4	V	12.7	1.30	8.50	19.90	33
				3 MHz B	andwidth				
1880.00	82.98	349	1.7	Н	12.9	1.30	8.50	20.10	33
1880.00	82.17	218	2.3	V	11.9	1.30	8.50	19.10	33
				5 MHz B	andwidth				
1880.00	83.67	66	1.2	Н	13.6	1.30	8.50	20.80	33
1880.00	82.48	300	1.8	V	12.2	1.30	8.50	19.40	33
				10 MHz I	Bandwidth				
1880.00	83.23	183	2.2	Н	13.2	1.30	8.50	20.40	33
1880.00	82.85	220	1.6	V	12.6	1.30	8.50	19.80	33
				5 MHz I	Bandwidth				
1880.00	83.11	104	1.4	Н	13.1	1.30	8.50	20.30	33
1880.00	82.58	265	1.6	V	12.3	1.30	8.50	19.50	33
			. 2	20 MHz I	Bandwidth			<u></u>	
1880.00	83.24	56	1.3	Н	13.2	1.30	8.50	20.40	33
1880.00	82.76	250	2.3	V	12.5	1.30	8.50	19.70	33

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.55	22.47	22.44
		RB Size=1, RB Offset=2	22.59	22.69	22.63
		RB Size=1, RB Offset=5	22.71	22.74	(dBm) 22.44
	QPSK	RB Size=3, RB Offset=0	22.79	22.85	22.70
		RB Size=3, RB Offset=1	22.84	22.65	22.95
		RB Size=3, RB Offset=2	22.87	22.82	22.84
1.4		RB Size=6, RB Offset=0	21.69	21.67	21.71
1.4		RB Size=1, RB Offset=0	21.66	21.76	21.77
		RB Size=1, RB Offset=2	21.61	21.63	21.63
		RB Size=1, RB Offset=5	21.62	21.70	21.53
	16QAM	RB Size=3, RB Offset=0	22.02	21.38	21.73
		RB Size=3, RB Offset=1	22.78	21.60	21.18
		RB Size=3, RB Offset=2	21.58	21.69	21.50
		RB Size=6, RB Offset=0	20.75	20.69	20.87
		RB Size=1, RB Offset=0	22.31	22.37	22.37
		RB Size=1, RB Offset=7	22.43	22.41	22.41
		RB Size=1, RB Offset=14	22.45	22.70	22.53
	QPSK	RB Size=8, RB Offset=0	21.68	21.55	21.73
		RB Size=8, RB Offset=4	21.64	21.77	21.69
		RB Size=8, RB Offset=7	21.67	21.58	21.71
3.0		RB Size=15, RB Offset=0	21.70	21.70	21.58
3.0		RB Size=1, RB Offset=0	21.72	21.71	21.69
		RB Size=1, RB Offset=7	21.81	22.07	21.87
		RB Size=1, RB Offset=14	21.78	21.39	21.61
	16QAM	RB Size=8, RB Offset=0	20.86	20.92	20.96
		RB Size=8, RB Offset=4	20.95	20.98	20.48
		RB Size=8, RB Offset=7	20.72	20.75	20.69
		RB Size=15, RB Offset=0	20.68	20.56	20.51

RB Size=100, RB Offset=0

20.57

20.43

20.52

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.88	13	Pass
QPSK (100RB Size)	3.97	13	Pass
16QAM (1RB Size)	4.33	13	Pass
16QAM (100RB Size)	4.82	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitute	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz 1	Bandwidth					
1732.50	86.02	213	1.4	Н	12.9	1.30	9.10	20.70	30	
1732.50	83.97	126	1.2	V	11.4	1.30	9.10	19.20	30	
	_			3 MHz B	andwidth	_				
1732.50	86.42	298	1.9	Н	13.3	1.30	9.10	21.10	30	
1732.50	84.17	355	1.6	V	11.6	1.30	9.10	19.40	30	
			_	5 MHz B	andwidth	_				
1732.50	85.97	242	1.9	Н	12.8	1.30	9.10	20.60	30	
1732.50	84.22	250	1.9	V	11.7	1.30	9.10	19.50	30	
			1	0 MHz I	Bandwidth					
1732.50	86.08	215	1.1	Н	12.9	1.30	9.10	20.70	30	
1732.50	84.35	17	1.2	V	11.8	1.30	9.10	19.60	30	
			1	5 MHz I	Bandwidth					
1732.50	86.04	178	1.1	Н	12.9	1.30	9.10	20.70	30	
1732.50	84.62	8	1.1	V	12.1	1.30	9.10	19.90	30	
	20 MHz Bandwidth									
1732.50	86.29	339	1.2	Н	13.1	1.30	9.10	20.90	30	
1732.50	83.97	339	2.4	V	11.4	1.30	9.10	19.20	30	

16QAM:

	D:	Turn	Rx An	tenna	5	Substitut	ed	Abaalata		
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	
	Middle Channel									
			1	.4 MHz	Bandwidth					
1732.50	86.20	222	2.3	Н	13.0	1.30	9.10	20.80	30	
1732.50	85.37	45	2.0	V	12.8	1.30	9.10	20.60	30	
				3 MHz B	andwidth					
1732.50	86.17	347	2.4	Н	13.0	1.30	9.10	20.80	30	
1732.50	85.20	186	1.8	V	12.6	1.30	9.10	20.40	30	
				5 MHz B	andwidth					
1732.50	86.23	296	1.0	Н	13.1	1.30	9.10	20.90	30	
1732.50	84.97	146	1.4	V	12.4	1.30	9.10	20.20	30	
				10 MHz 1	Bandwidth					
1732.50	86.51	351	2.0	Н	13.3	1.30	9.10	21.10	30	
1732.50	84.72	27	1.6	V	12.2	1.30	9.10	20.00	30	
				15 MHz I	Bandwidth					
1732.50	86.43	324	1.4	Н	13.3	1.30	9.10	21.10	30	
1732.50	84.85	310	1.3	V	12.3	1.30	9.10	20.10	30	
	20 MHz Bandwidth									
1732.50	86.26	66	1.5	Н	13.1	1.30	9.10	20.90	30	
1732.50	84.69	43	1.0	V	12.1	1.30	9.10	19.90	30	

LTE Band 7:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	21.24	21.94	21.86
		RB Size=1, RB Offset=12	21.72	21.42	21.25
		RB Size=1, RB Offset=24	21.31	21.91	21.79
	QPSK	RB Size=12, RB Offset=0	21.95	21.11	21.27
		RB Size=12, RB Offset=6	21.99	21.58	21.93
		RB Size=12, RB Offset=11	21.04	21.22	21.43
5.0		RB Size=25, RB Offset=0	21.97	21.57	21.58
3.0		RB Size=1, RB Offset=0	20.91	20.87	20.08
		RB Size=1, RB Offset=12	20.98	21.76	21.06
		RB Size=1, RB Offset=24	20.89	21.92	21.22
	16QAM	RB Size=12, RB Offset=0	20.75	20.93	20.79
		RB Size=12, RB Offset=6	20.62	20.74	20.87
		RB Size=12, RB Offset=11	20.57	20.63	20.66
		RB Size=25, RB Offset=0	20.52	20.51	20.62
		RB Size=1, RB Offset=0	21.60	21.37	21.78
		RB Size=1, RB Offset=24	21.70	21.31	21.60
		RB Size=1, RB Offset=49	21.55	21.23	21.73
	QPSK	RB Size=25, RB Offset=0	21.82	21.58	22.04
		RB Size=25, RB Offset=12	21.84	21.74	21.95
		RB Size=25, RB Offset=24	21.77	21.71	21.72
10.0		RB Size=50, RB Offset=0	21.58	21.52	21.49
10.0		RB Size=1, RB Offset=0	21.31	21.30	21.21
		RB Size=1, RB Offset=24	20.97	21.14	20.93
		RB Size=1, RB Offset=49	20.94	21.20	20.95
	16QAM	RB Size=25, RB Offset=0	20.89	20.98	20.80
		RB Size=25, RB Offset=12	20.78	20.86	20.76
		RB Size=25, RB Offset=24	20.66	20.82	20.67
		RB Size=50, RB Offset=0	20.53	20.77	20.58

RB Size=50, RB Offset=24

RB Size=50, RB Offset=49

RB Size=100, RB Offset=0

20.98

20.68

20.69

20.99

20.74

20.71

20.87

20.77

20.54

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.46	13	Pass
QPSK (100RB Size)	5.64	13	Pass
16QAM (1RB Size)	5.95	13	Pass
16QAM (100RB Size)	5.63	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	Substituted		ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
Middle Channel										
				5 MHz B	andwidth					
2535.00	83.27	11	2.1	Н	13.8	2.60	9.30	20.50	33	
2535.00	82.39	122	1.3	V	13.5	2.60	9.30	20.20	33	
			1	10 MHz I	Bandwidth					
2535.00	83.11	213	1.2	Н	13.6	2.60	9.30	20.30	33	
2535.00	82.50	240	2.3	V	13.6	2.60	9.30	20.30	33	
			1	15 MHz I	Bandwidth					
2535.00	83.23	257	2.2	Н	13.7	2.60	9.30	20.40	33	
2535.00	82.77	194	1.2	V	13.9	2.60	9.30	20.60	33	
	20 MHz Bandwidth									
2535.00	83.74	161	1.8	Н	14.3	2.60	9.30	21.00	33	
2535.00	82.31	331	1.5	V	13.4	2.60	9.30	20.10	33	

16QAM:

	Receiver	Turn	Rx An	tenna		Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
	Middle Channel									
			_	5 MHz B	andwidth					
2535.00	83.60	7	1.8	Н	14.1	2.60	9.30	20.80	33	
2535.00	82.77	126	1.2	V	13.9	2.60	9.30	20.60	33	
				10 MHz I	Bandwidth					
2535.00	83.24	304	1.6	Н	13.8	2.60	9.30	20.50	33	
2535.00	82.63	300	1.3	V	13.8	2.60	9.30	20.50	33	
				15 MHz I	Bandwidth					
2535.00	83.79	23	1.4	Н	14.3	2.60	9.30	21.00	33	
2535.00	82.61	193	2.4	V	13.7	2.60	9.30	20.40	33	
	20 MHz Bandwidth									
2535.00	83.96	127	1.8	Н	14.5	2.60	9.30	21.20	33	
2535.00	82.49	321	1.2	V	13.6	2.60	9.30	20.30	33	

Note:

All above data were tested with no amplifier Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

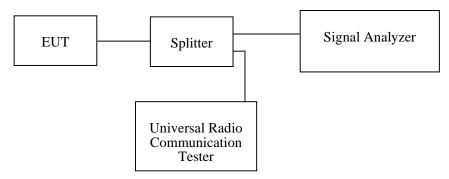

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-01-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.00	313.32

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.10	4.68
HSUPA (BPSK)	836.6	4.08	4.68
HSDPA (16QAM)	836.6	4.10	4.68


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	248.00	313.15

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.12	4.68
HSUPA (BPSK)	1880.0	4.12	4.68
HSDPA (16QAM)	1880.0	4.12	4.68


Report No.: RSZ180108002-00D

Cellular Band (Part 22H) 26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

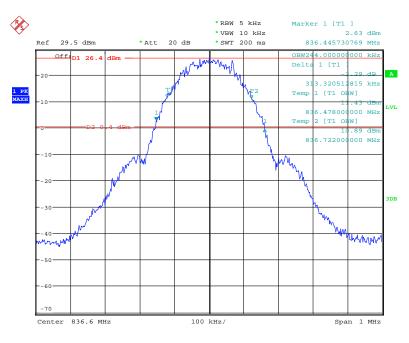


Date: 23.JAN.2018 18:09:38

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

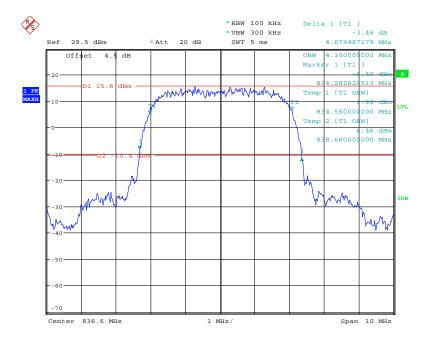


Date: 23.JAN.2018 19:39:31

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

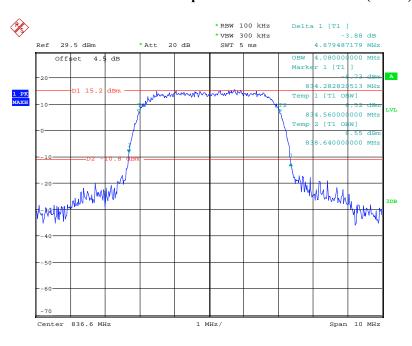


Date: 23.JAN.2018 19:38:09

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

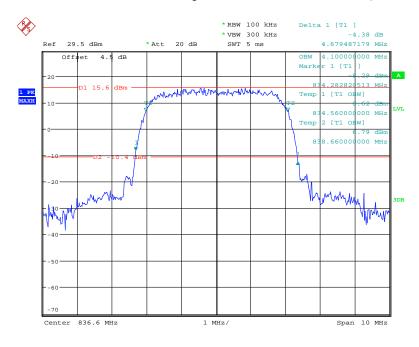


Date: 23.JAN.2018 19:38:57

PCS Band (Part 24E)
26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

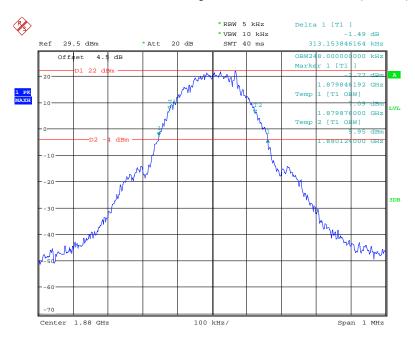


Date: 23.JAN.2018 18:16:56

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

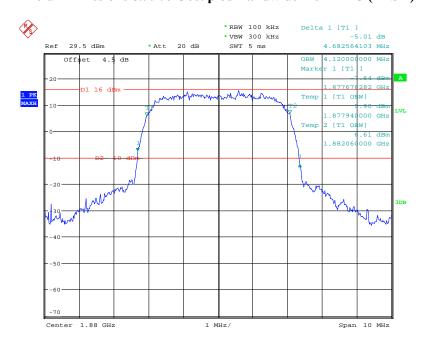


Date: 23.JAN.2018 19:46:34

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

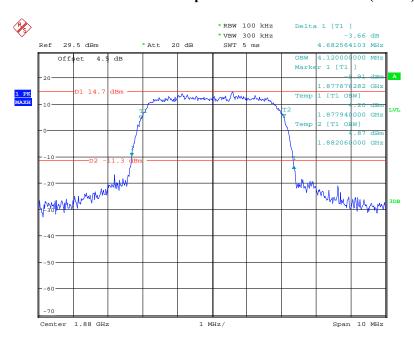

Date: 23.JAN.2018 19:48:58

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

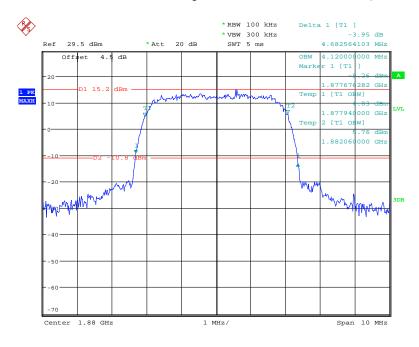

Date: 23.JAN.2018 19:47:17

20.0

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.120	1.481
	16QAM	1.139	1.486
3.0	QPSK	2.692	3.013
	16QAM	2.692	3.042
5.0	QPSK	4.567	5.417
	16QAM	4.551	5.337
10.0	QPSK	8.974	9.840
	16QAM	8.974	9.776
15.0	QPSK	13.558	15.000
	16QAM	13.510	14.856
1			

18.013

18.013

QPSK


16QAM

Report No.: RSZ180108002-00D

20.128


20.000

QPSK (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

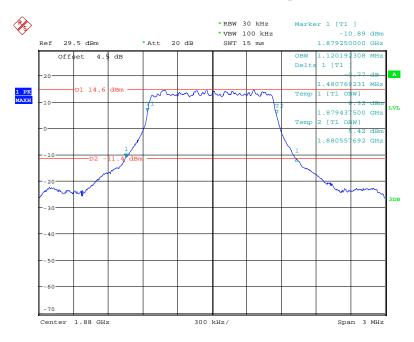


Date: 23.JAN.2018 11:20:27

16-QAM (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

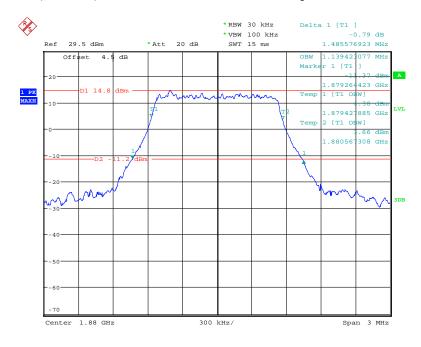


Date: 23.JAN.2018 11:18:56

QPSK (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

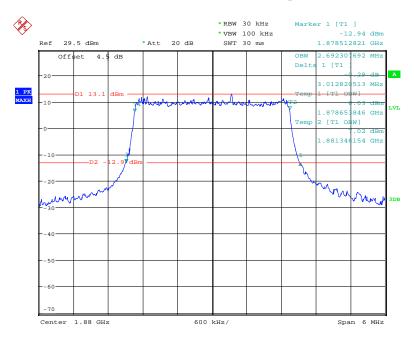


Date: 23.JAN.2018 11:17:55

16-QAM (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

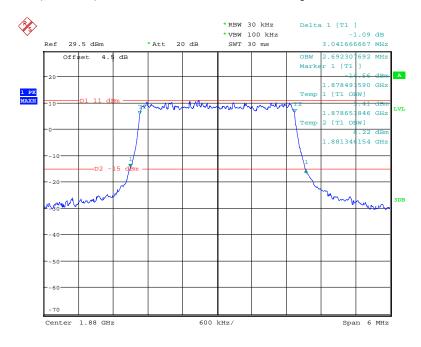


Date: 23.JAN.2018 11:17:14

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

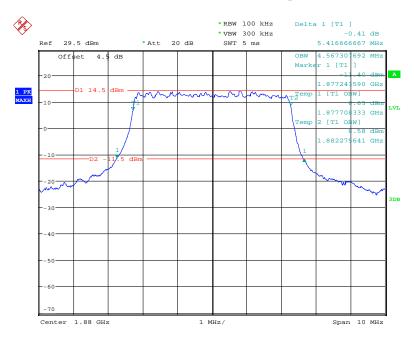


Date: 23.JAN.2018 11:15:58

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

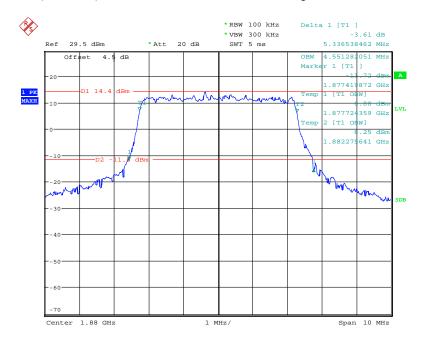


Date: 23.JAN.2018 11:14:32

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

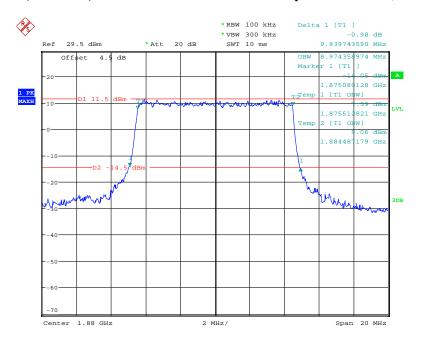


Date: 23.JAN.2018 11:12:39

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

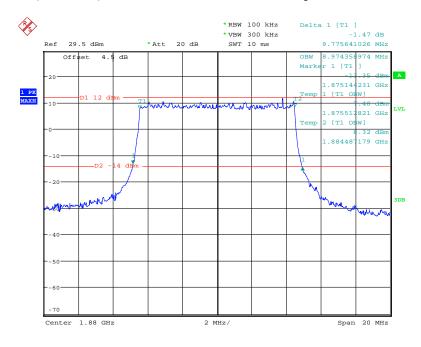


Date: 23.JAN.2018 11:13:28

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

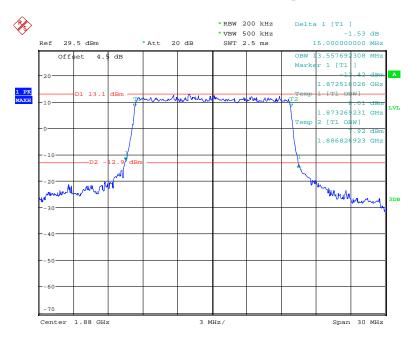


Date: 23.JAN.2018 11:11:27

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

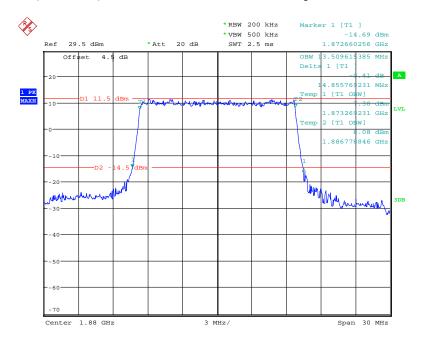


Date: 23.JAN.2018 11:10:11

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

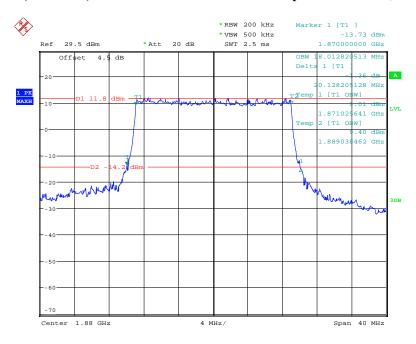

Date: 23.JAN.2018 11:06:09

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

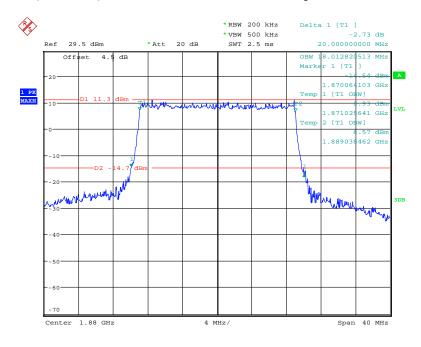


Date: 23.JAN.2018 11:08:48

LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.130	1.534
	16QAM	1.149	1.534
3.0	QPSK	2.702	3.063
	16QAM	2.702	3.082
5.0	QPSK	4.567	5.449
	16QAM	4.551	5.353
10.0	QPSK	8.974	9.936
	16QAM	8.974	9.840
15.0	QPSK	13.510	14.957
	16QAM	13.510	14.957
20.0	QPSK	17.949	19.444
	16QAM	17.949	19.444


Report No.: RSZ180108002-00D

QPSK (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

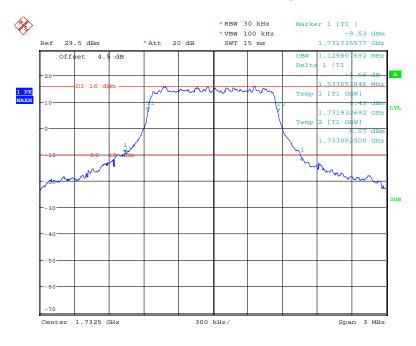


Date: 23.JAN.2018 10:50:17

16-QAM (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

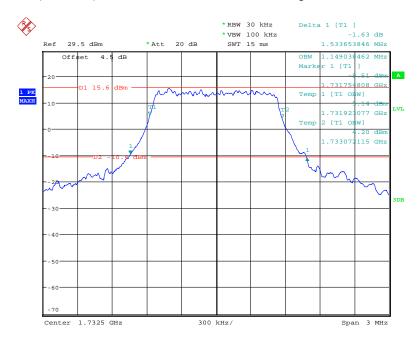


Date: 23.JAN.2018 10:52:51

QPSK (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

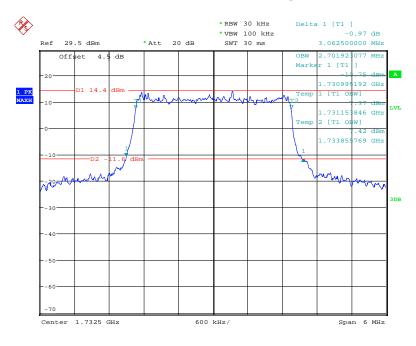


Date: 23.JAN.2018 10:53:55

16-QAM (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

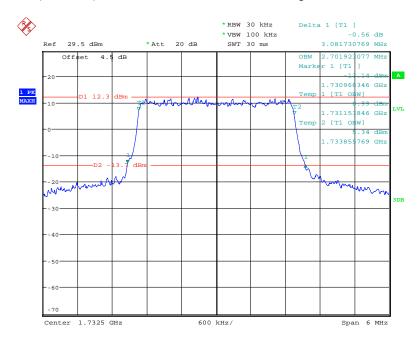


Date: 23.JAN.2018 10:55:16

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

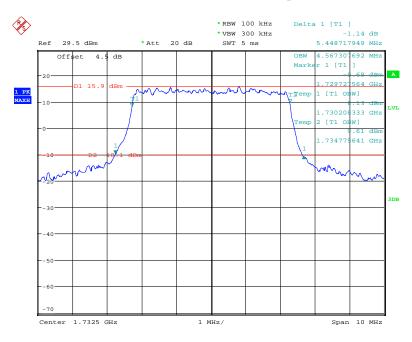


Date: 23.JAN.2018 10:44:50

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

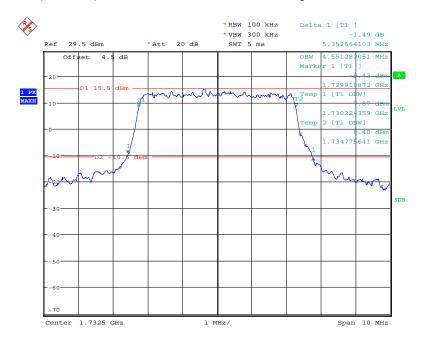


Date: 23.JAN.2018 10:45:59

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

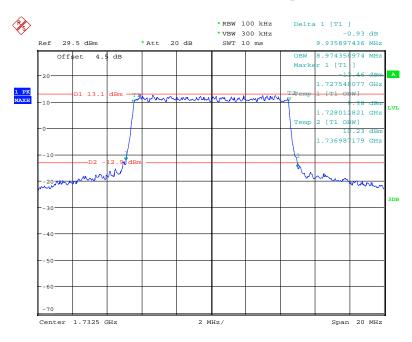


Date: 23.JAN.2018 10:49:03

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

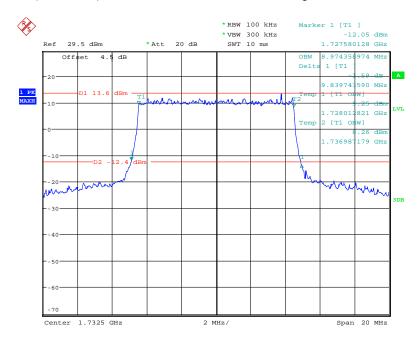


Date: 23.JAN.2018 10:47:21

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

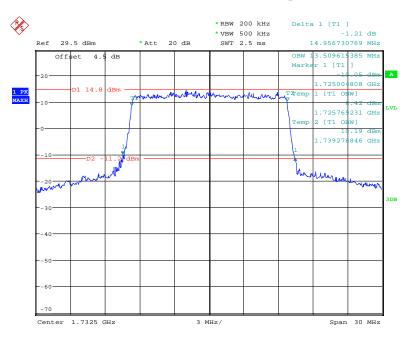


Date: 23.JAN.2018 10:56:31

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

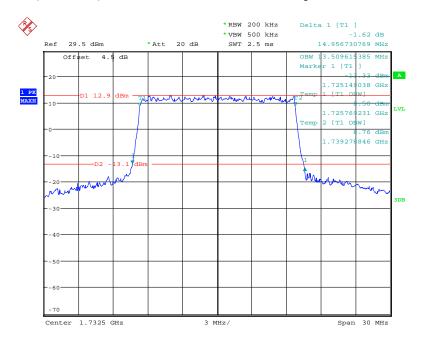


Date: 23.JAN.2018 10:59:37

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

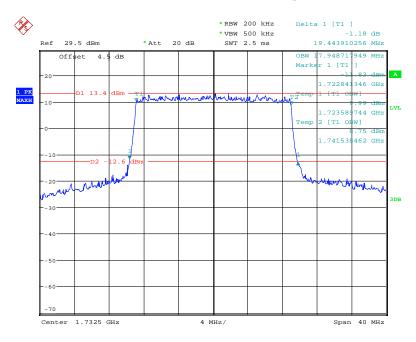

Date: 23.JAN.2018 11:01:40

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

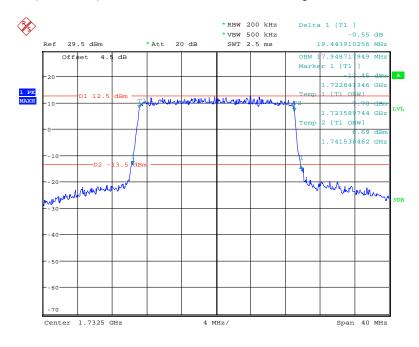


Date: 23.JAN.2018 11:00:32

LTE Band 7: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.551	5.369
	16QAM	4.551	5.385
10.0	QPSK	8.974	9.824
	16QAM	8.974	9.728
15.0	QPSK	13.462	15.016
	16QAM	13.510	14.872
20.0	QPSK	17.949	19.551
	16QAM	17.885	19.679


Report No.: RSZ180108002-00D

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

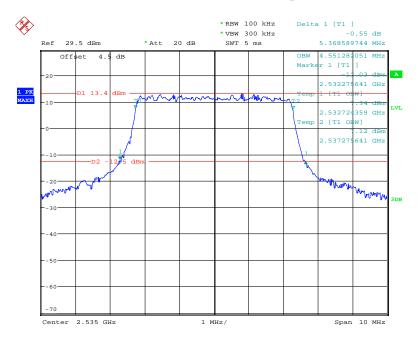


Date: 23.JAN.2018 10:42:29

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

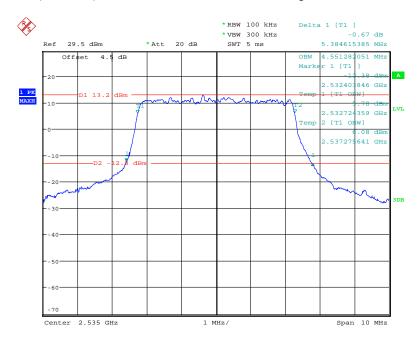


Date: 23.JAN.2018 10:40:55

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

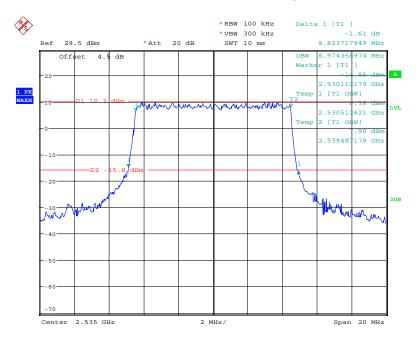


Date: 23.JAN.2018 10:36:34

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

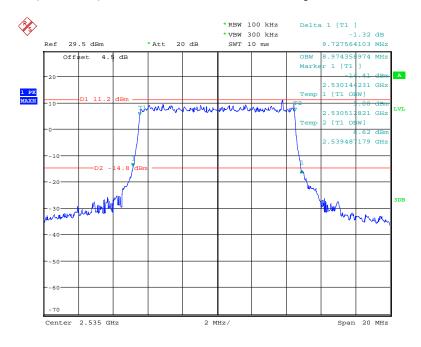


Date: 23.JAN.2018 10:37:23

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

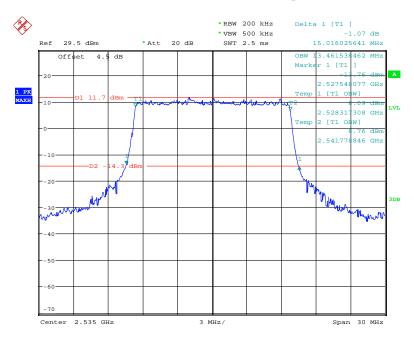


Date: 23.JAN.2018 10:35:03

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

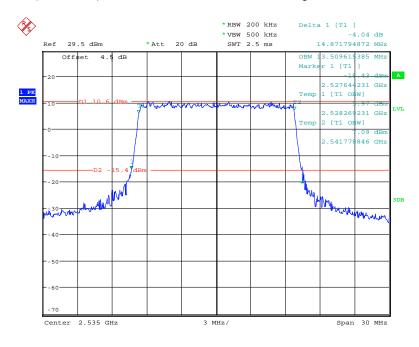


Date: 23.JAN.2018 10:32:43

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

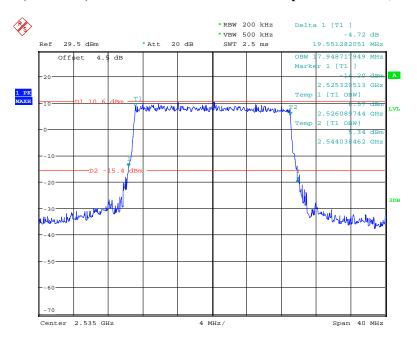

Date: 23.JAN.2018 10:29:05

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

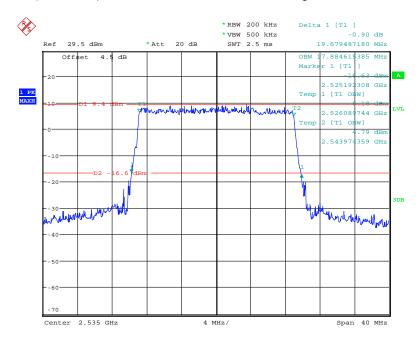

Date: 23.JAN.2018 10:30:58

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

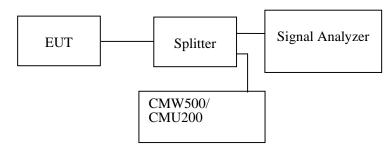

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He from 2018-01-12 to 2018-01-23.

Test result: Compliance,


EUT operation mode: transmitting

Please refer to the following plots.

Report No.: RSZ180108002-00D


Cellular Band (Part 22H)

30 MHz - 1 GHz (GSM Mode)

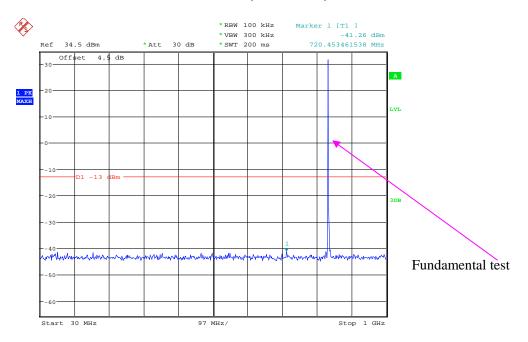


Date: 23.JAN.2018 18:10:49

1 GHz – 10 GHz (GSM Mode)

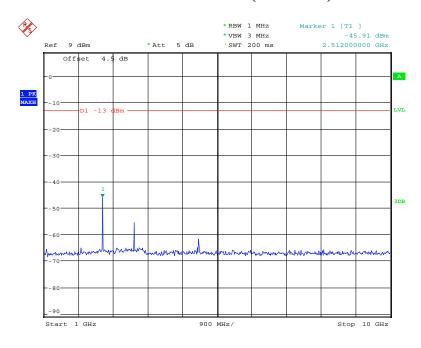


Date: 23.JAN.2018 18:11:52

30 MHz - 1 GHz (WCDMA Mode)

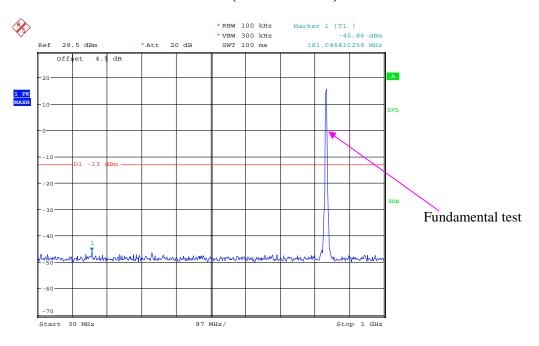

Date: 23.JAN.2018 19:40:44


1 GHz – 10 GHz (WCDMA Mode)

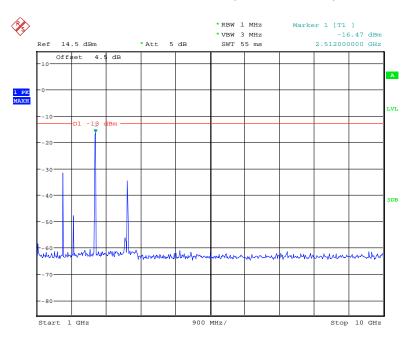

Date: 23.JAN.2018 19:41:31


PCS Band (Part 24E)

30 MHz - 1 GHz (GSM Mode)

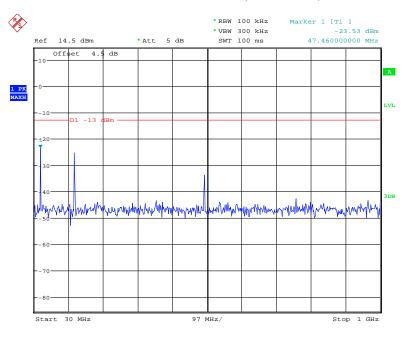


Date: 23.JAN.2018 18:14:55

1 GHz – 2 GHz (GSM Mode)

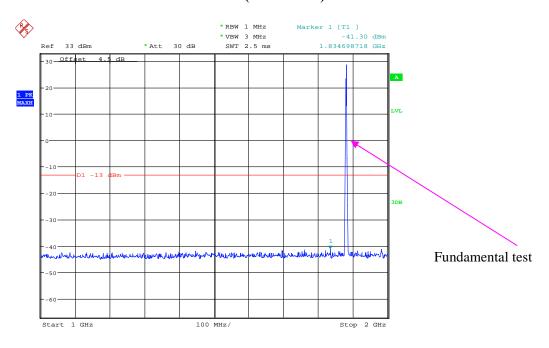


Date: 12.JAN.2018 10:40:34

2 GHz - 20 GHz (GSM Mode)

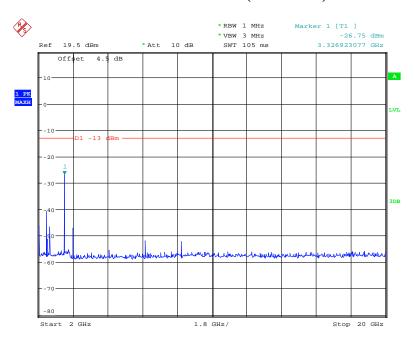


Date: 12.JAN.2018 10:41:24

30 MHz – 1 GHz (WCDMA Mode)

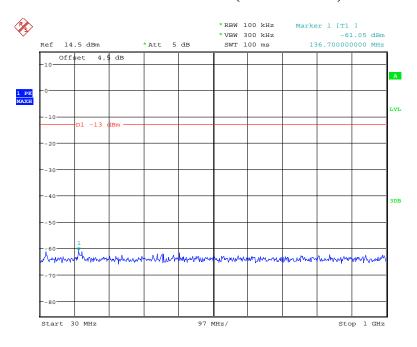


Date: 23.JAN.2018 19:45:39

1 GHz – 2 GHz (WCDMA Mode)

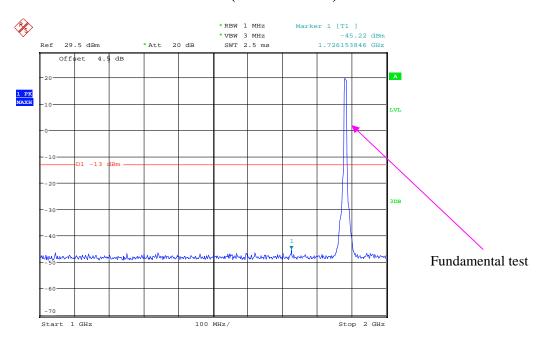

Date: 23.JAN.2018 19:44:48


2 GHz - 20 GHz (WCDMA Mode)

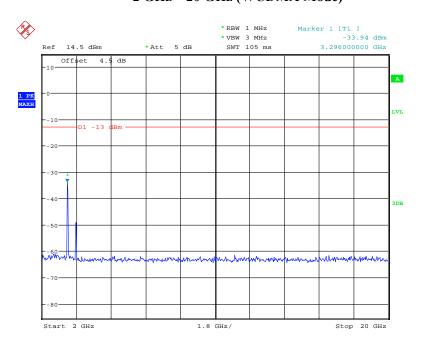

Date: 23.JAN.2018 19:45:16


LTE Band 2: (QPSK)

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

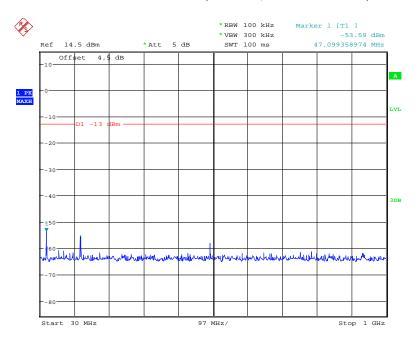


Date: 23.JAN.2018 11:22:16

1 GHz - 2 GHz (1.4 MHz, Middle Channel)

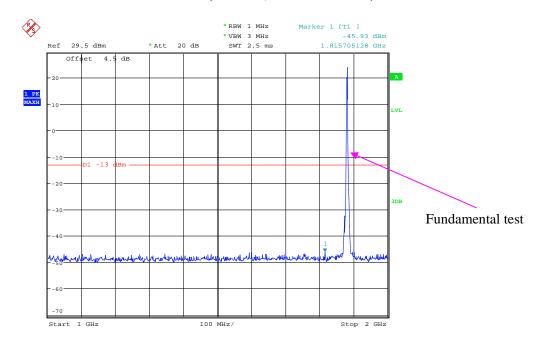


Date: 23.JAN.2018 11:34:36

2 GHz - 20 GHz (1.4 MHz, Middle Channel)

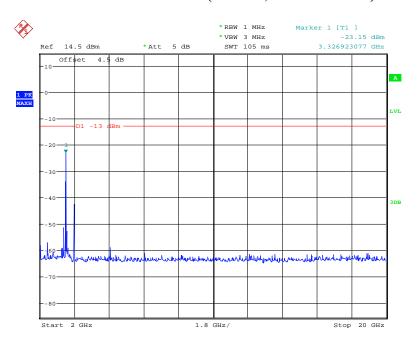


Date: 23.JAN.2018 11:34:06

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

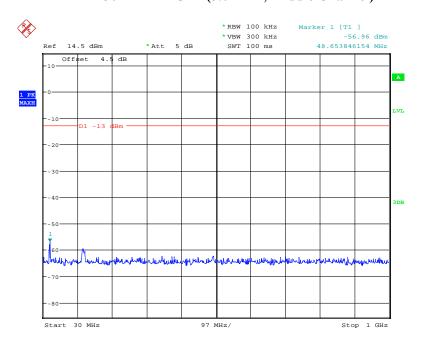


Date: 23.JAN.2018 11:23:42

1 GHz - 2 GHz (3.0 MHz, Middle Channel)

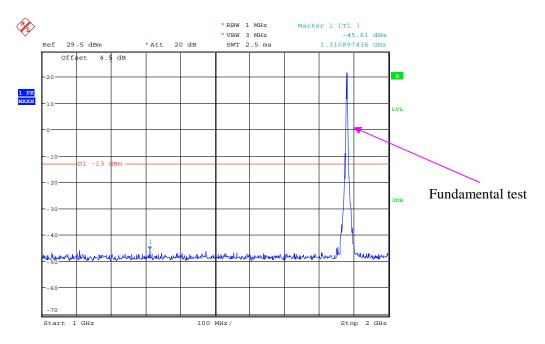


Date: 23.JAN.2018 11:35:01

2 GHz - 20 GHz (3.0 MHz, Middle Channel)

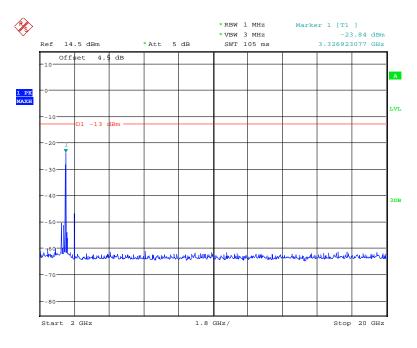


Date: 23.JAN.2018 11:33:51

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

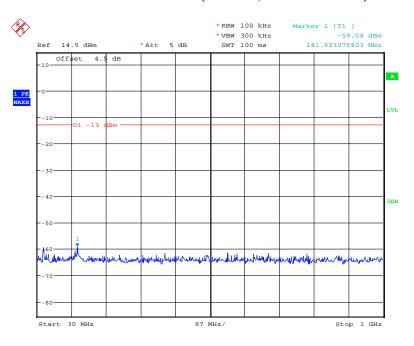


Date: 23.JAN.2018 11:24:05

1 GHz - 2 GHz (5.0 MHz, Middle Channel)

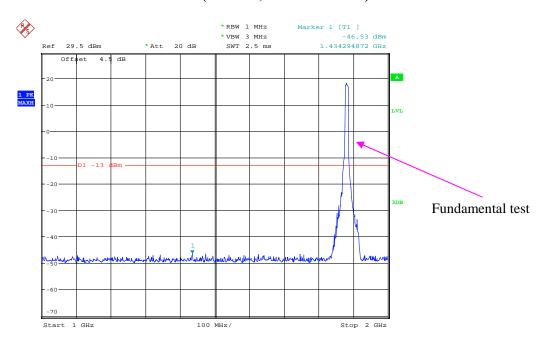


Date: 23.JAN.2018 11:35:53

2 GHz - 20 GHz (5.0 MHz, Middle Channel)

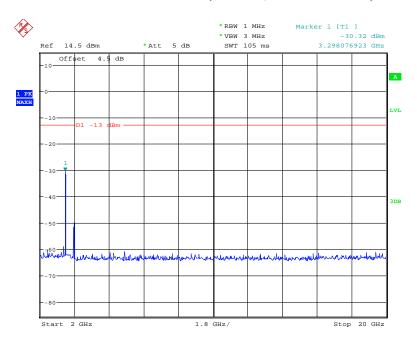


Date: 23.JAN.2018 11:33:20

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

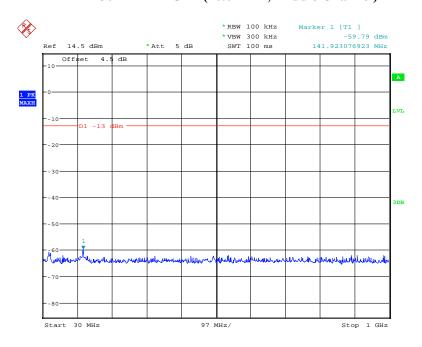


Date: 23.JAN.2018 11:24:24

1 GHz - 2 GHz (10.0 MHz, Middle Channel)

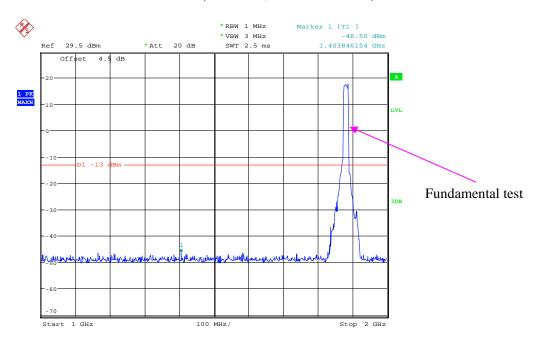


Date: 23.JAN.2018 11:36:10

2 GHz - 20 GHz (10.0 MHz, Middle Channel)

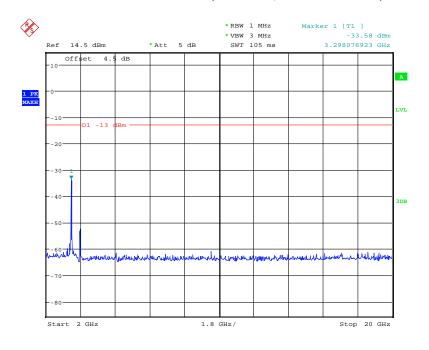


Date: 23.JAN.2018 11:33:03

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

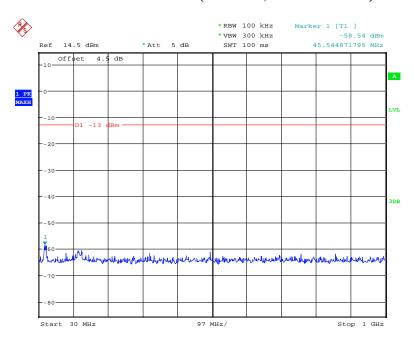


Date: 23.JAN.2018 11:24:41

1 GHz - 2 GHz (15.0 MHz, Middle Channel)

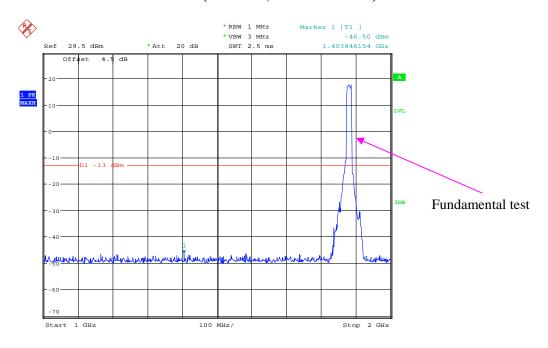


Date: 23.JAN.2018 11:36:10

2 GHz - 20 GHz (15.0 MHz, Middle Channel)

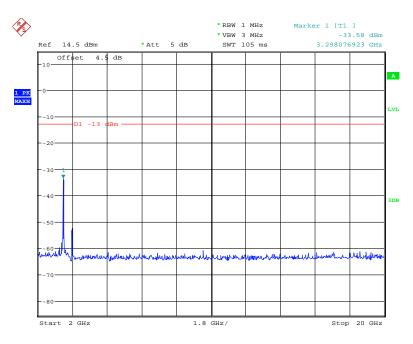


Date: 23.JAN.2018 11:33:03

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

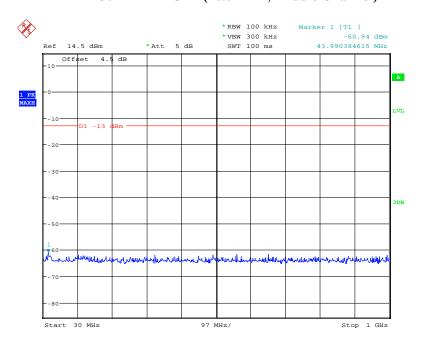


Date: 23.JAN.2018 11:25:20

1 GHz - 2 GHz (20.0 MHz, Middle Channel)

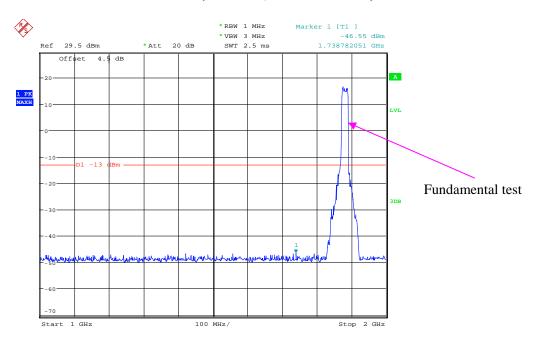

Date: 23.JAN.2018 11:36:29


2 GHz - 20 GHz (20.0 MHz, Middle Channel)

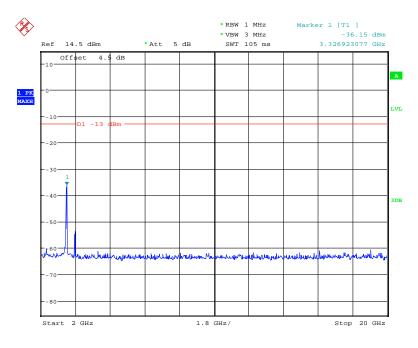

Date: 23.JAN.2018 11:32:48


LTE Band 4: (QPSK)

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

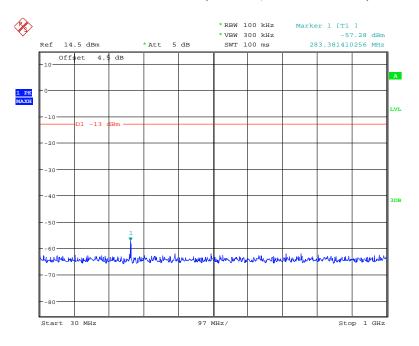


Date: 23.JAN.2018 11:27:18

1 GHz - 2 GHz (1.4 MHz, Middle Channel)

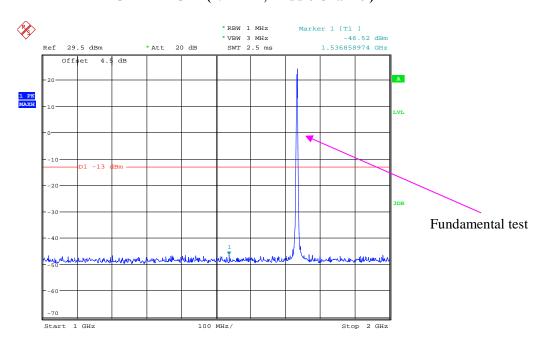


Date: 23.JAN.2018 11:39:12

2 GHz - 20 GHz (1.4 MHz, Middle Channel)

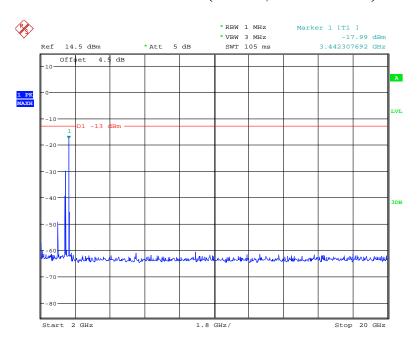


Date: 23.JAN.2018 11:31:05

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

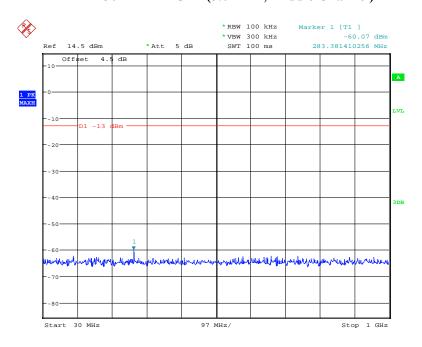


Date: 23.JAN.2018 11:27:02

1 GHz - 2 GHz (3.0 MHz, Middle Channel)

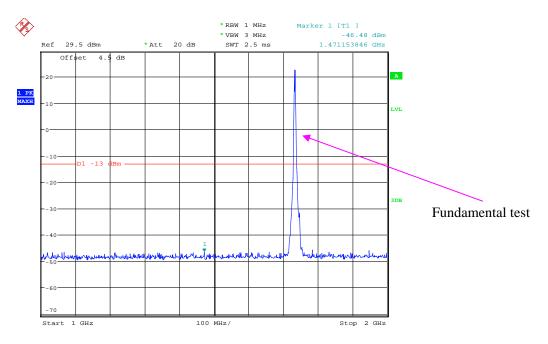


Date: 23.JAN.2018 11:38:51

2 GHz - 20 GHz (3.0 MHz, Middle Channel)

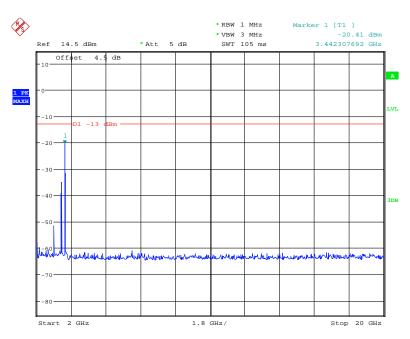


Date: 23.JAN.2018 11:31:33

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

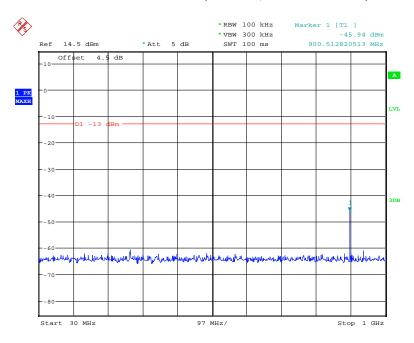


Date: 23.JAN.2018 11:26:46

1 GHz - 2 GHz (5.0 MHz, Middle Channel)

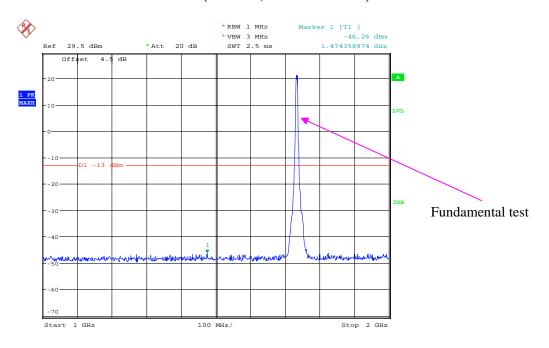


Date: 23.JAN.2018 11:38:22

2 GHz - 20 GHz (5.0 MHz, Middle Channel)

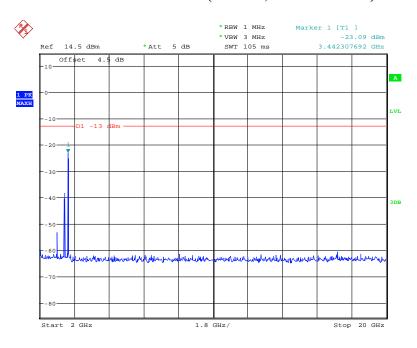


Date: 23.JAN.2018 11:31:47

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

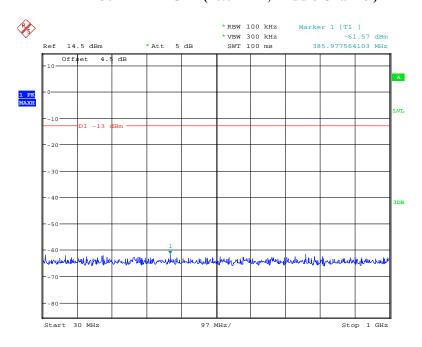


Date: 23.JAN.2018 11:26:24

1 GHz - 2 GHz (10.0 MHz, Middle Channel)

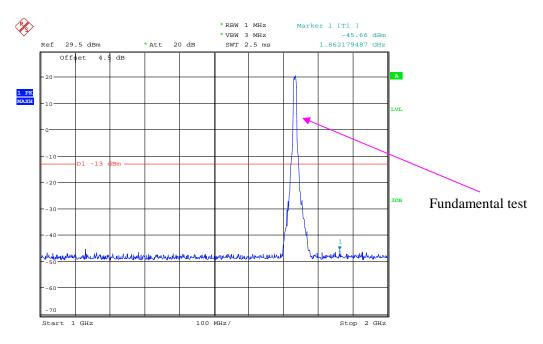


Date: 23.JAN.2018 11:37:56

2 GHz - 20 GHz (10.0 MHz, Middle Channel)

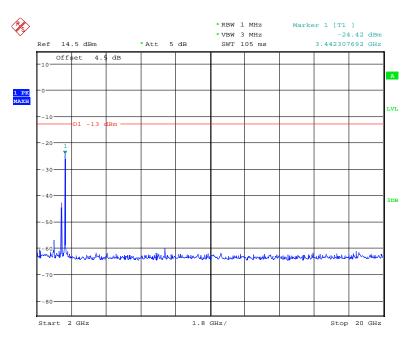


Date: 23.JAN.2018 11:32:01

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

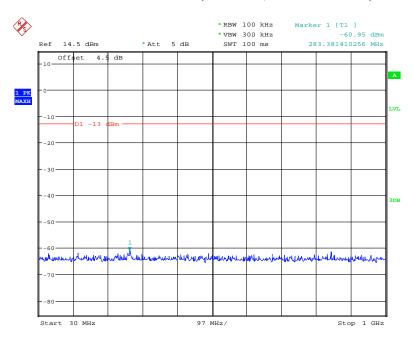


Date: 23.JAN.2018 11:26:04

1 GHz - 2 GHz (15.0 MHz, Middle Channel)

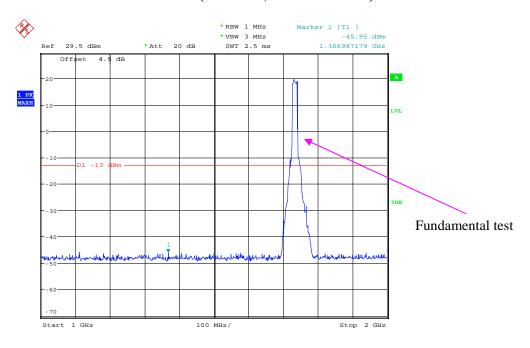


Date: 23.JAN.2018 11:37:28

2 GHz - 20 GHz (15.0 MHz, Middle Channel)

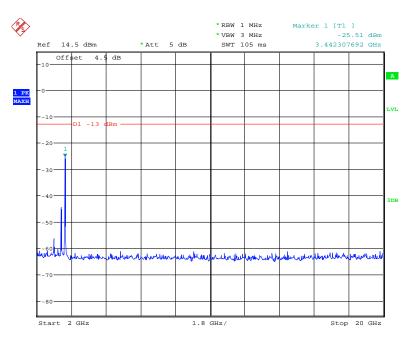


Date: 23.JAN.2018 11:32:15

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

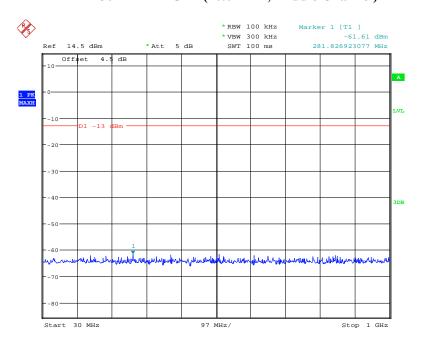


Date: 23.JAN.2018 11:25:44

1 GHz - 2 GHz (20.0 MHz, Middle Channel)

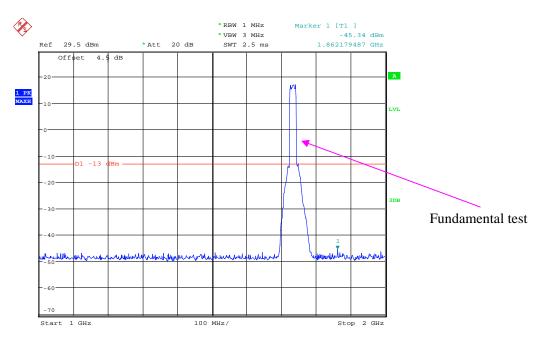

Date: 23.JAN.2018 11:36:54


2 GHz - 26 GHz (20.0 MHz, Middle Channel)

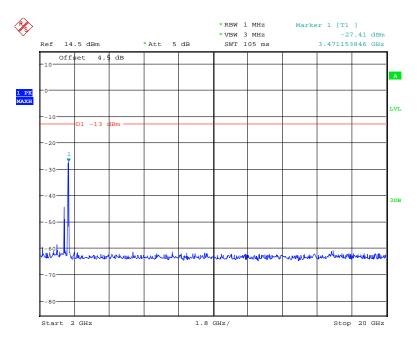

Date: 23.JAN.2018 11:32:29


LTE Band 7: (QPSK)

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

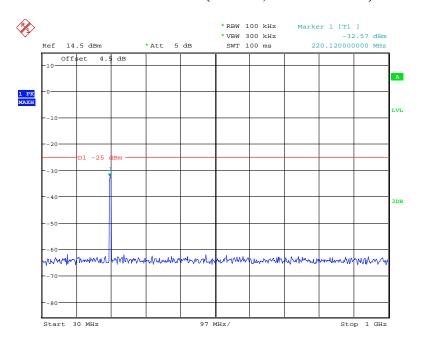


Date: 23.JAN.2018 17:53:16

1 GHz - 3 GHz (5.0 MHz, Middle Channel)

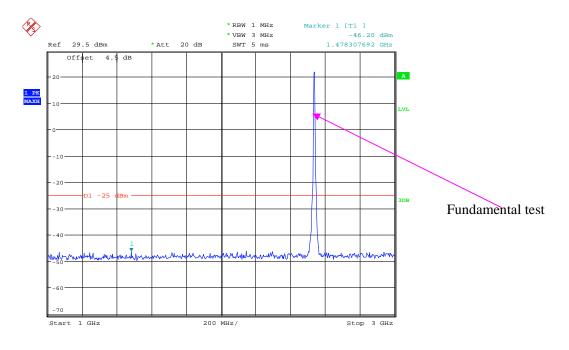


Date: 23.JAN.2018 17:59:57

3 GHz - 26 GHz (5.0 MHz, Middle Channel)

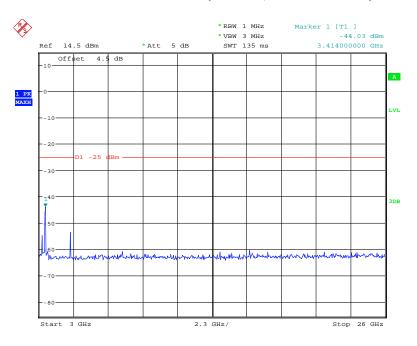


Date: 23.JAN.2018 17:53:57

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

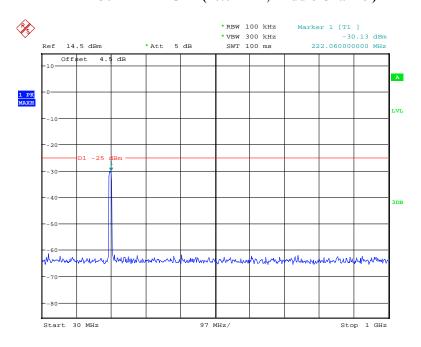


Date: 23.JAN.2018 17:52:59

1 GHz - 3 GHz (10.0 MHz, Middle Channel)

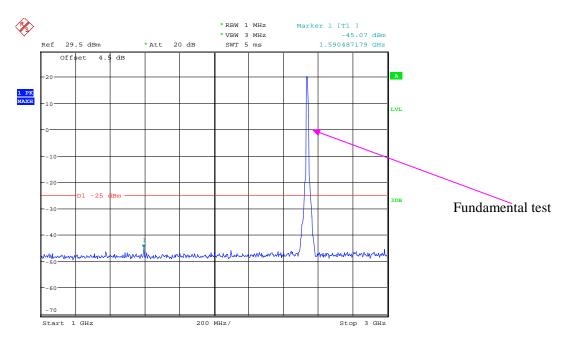


Date: 23.JAN.2018 17:59:43

3 GHz - 26 GHz (10.0 MHz, Middle Channel)

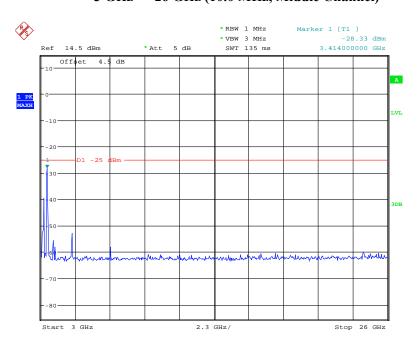


Date: 23.JAN.2018 17:54:27

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

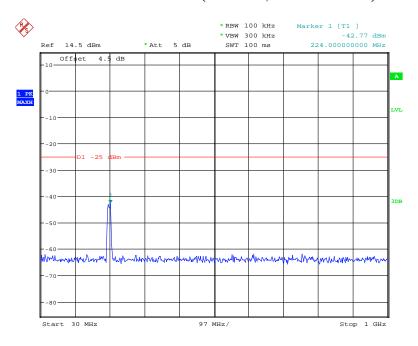


Date: 23.JAN.2018 17:52:41

1 GHz - 3 GHz (15.0 MHz, Middle Channel)

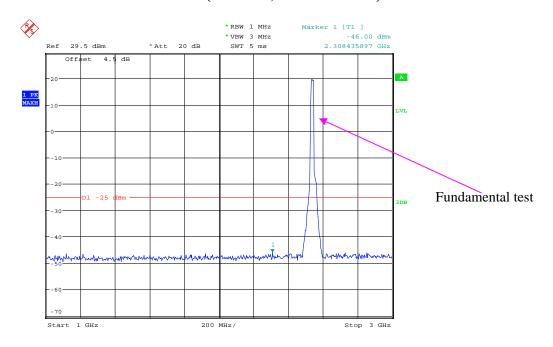


Date: 23.JAN.2018 17:59:24

3 GHz - 26 GHz (15.0 MHz, Middle Channel)

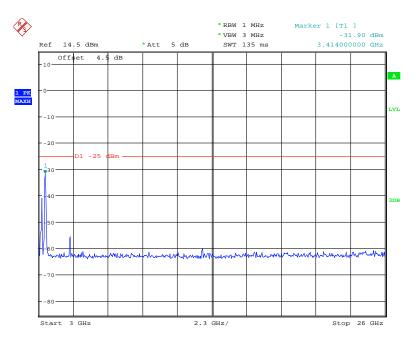


Date: 23.JAN.2018 17:54:43

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

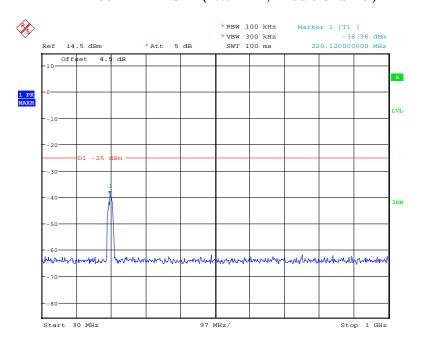


Date: 23.JAN.2018 17:52:18

1 GHz - 3 GHz (20.0 MHz, Middle Channel)

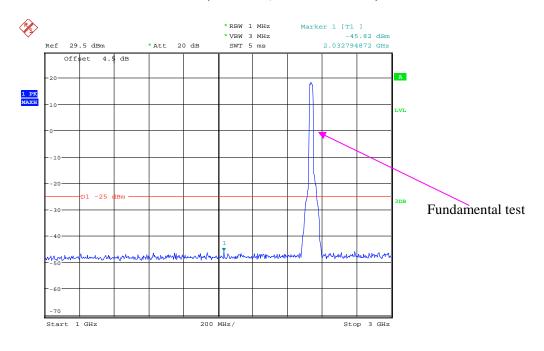

Date: 23.JAN.2018 17:59:06

3 GHz - 26 GHz (20.0 MHz, Middle Channel)

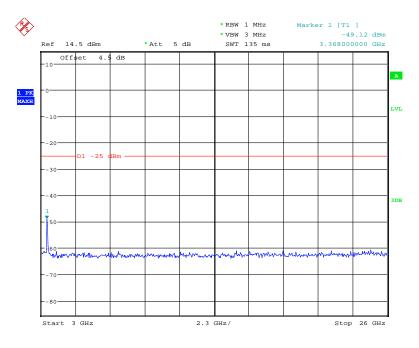

Date: 23.JAN.2018 17:54:59

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	25 ℃				
Relative Humidity:	52 %				
ATM Pressure:	101.0 kPa				

The testing was performed by Hill He on 2018-01-17.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ **10 GHz**:

Cellular Band (Part 22H)

	Receiver Reading (dBμV) Receiver Angle Degree	Tuuntakla	Rx Antenna		Substituted			Absolute	FCC Part 22H	
Frequency (MHz)		Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
GSM Mode, Middle channel										
167.35	37.08	180	1.8	Н	-59.9	0.28	0	-60.18	-13	47.18
167.35	37.45	167	1.9	V	-59.5	0.28	0	-59.78	-13	46.78
1673.20	54.83	101	1.8	Н	-52.2	1.30	9.10	-44.40	-13	31.40
1673.20	53.39	9	2.1	V	-53.1	1.30	9.10	-45.30	-13	32.30
2509.80	51.41	15	2.4	Н	-52.1	2.60	9.30	-45.40	-13	32.40
2509.80	53.15	291	1.8	V	-49.8	2.60	9.30	-43.10	-13	30.10
3346.40	41.8	183	1.1	Н	-58.5	1.50	9.60	-50.40	-13	37.40
3346.40	41.83	26	1.6	V	-58.5	1.50	9.60	-50.40	-13	37.40
	WCDMA Mode, Middle channel									
167.35	37.37	295	1.7	Н	-59.6	0.28	0	-59.88	-13	46.88
167.35	37.15	281	1.5	V	-59.8	0.28	0	-60.08	-13	47.08
1673.20	54.83	158	2.3	Н	-52.2	1.30	9.10	-44.40	-13	31.40
1673.20	46.01	60	1.6	V	-60.5	1.30	9.10	-52.70	-13	39.70
2509.80	48.17	192	2.1	Н	-55.4	2.60	9.30	-48.70	-13	35.70
2509.80	48.58	343	1.5	V	-54.3	2.60	9.30	-47.60	-13	34.60
3346.40	42.82	41	2.2	Н	-57.5	1.50	9.60	-49.40	-13	36.40
3346.40	42.52	357	1.6	V	-57.9	1.50	9.60	-49.80	-13	36.80

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

	' Resolutio Anoie	Turntable	Rx Antenna		Substituted			Absolute	FCC Part 24E	
Frequency (MHz)		Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
GSM Mode, Middle channel										
167.35	37.80	26	1.6	Н	-59.2	0.28	0	-59.48	-13	46.48
167.35	36.30	46	2.2	V	-60.7	0.28	0	-60.98	-13	47.98
3760.00	43.74	256	1.9	Н	-57.5	1.50	9.70	-49.30	-13	36.30
3760.00	45.80	120	1.9	V	-55.0	1.50	9.70	-46.80	-13	33.80
5640.00	54.66	238	2.2	Н	-42.9	1.70	11.20	-33.40	-13	20.40
5640.00	51.72	4	2.3	V	-45.5	1.70	11.20	-36.00	-13	23.00
WCDMA Mode, Middle channel										
167.35	37.02	170	1.6	Н	-60.0	0.28	0	-60.28	-13	47.28
167.35	36.59	23	1.0	V	-60.4	0.28	0	-60.68	-13	47.68
3760.00	51.59	275	1.8	Н	-49.6	1.50	9.70	-41.40	-13	28.40
3760.00	54.77	289	2.3	V	-46.0	1.50	9.70	-37.80	-13	24.80
5640.00	49.32	234	1.0	Н	-48.3	1.70	11.20	-38.80	-13	25.80
5640.00	48.77	357	1.4	V	-48.5	1.70	11.20	-39.00	-13	26.00

LTE Band: (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx An	tenna	Substituted			Absolute		
(MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	Band 2, Middle channel, QPSK, 1.4MHz									
Test frequency range: 30 MHz ~ 20 GHz										
167.35	36.56	301	2.2	Н	-60.4	0.28	0	-60.68	-13	47.68
167.35	37.34	261	2.2	V	-59.7	0.28	0	-59.98	-13	46.98
3760.00	49.07	76	1.6	Н	-52.2	1.50	9.70	-44.00	-13	31.00
3760.00	49.86	165	1.4	V	-50.9	1.50	9.70	-42.70	-13	29.70
5640.00	50.64	159	1.1	Н	-47.0	1.70	11.20	-37.50	-13	24.50
5640.00	51.39	305	2.0	V	-45.9	1.70	11.20	-36.40	-13	23.40
Band 4, Middle channel, QPSK, 1.4MHz										
Test frequency range: 30 MHz ~ 18 GHz										
167.35	36.41	12	1.6	Н	-60.6	0.28	0	-60.88	-13	47.88
167.35	37.00	247	1.1	V	-60.0	0.28	0	-60.28	-13	47.28
3465.00	48.81	254	1.4	Н	-51.6	1.50	9.70	-43.40	-13	30.40
3465.00	49.16	237	1.1	V	-52.0	1.50	9.70	-43.80	-13	30.80
5197.50	51.32	77	2.2	Н	-47.3	1.60	11.20	-37.70	-13	24.70
5197.50	52.06	87	1.3	V	-46.1	1.60	11.20	-36.50	-13	23.50
	Band 7, Middle channel, QPSK, 1.4MHz									
Test frequency range: 30 MHz ~ 26 GHz										
167.35	36.63	7	1.3	Н	-60.4	0.28	0	-60.68	-25	35.68
167.35	37.66	288	2.4	V	-59.3	0.28	0	-59.58	-25	34.58
5070.00	58.06	170	1.4	Н	-39.8	1.60	11.20	-30.20	-25	5.20
5070.00	54.96	198	2.4	V	-42.9	1.60	11.20	-33.30	-25	8.30
7605.00	43.27	269	1.4	Н	-51.9	2.10	11.60	-42.40	-25	17.40
7605.00	44.71	7	2.4	V	-50.3	2.10	11.60	-40.80	-25	15.80
7605.00	51.13	12	2.1	Н	-44.1	2.10	11.60	-34.60	-25	9.60
7605.00	50.96	184	2.4	V	-44.0	2.10	11.60	-34.50	-25	9.50

Note:

¹⁾ Absolute Level = Substituted Level - Cable loss + Antenna Gain

²⁾ Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) \, dB$.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

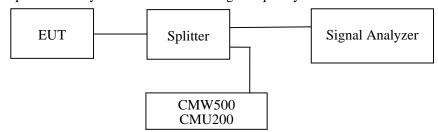

Test Data

Environmental Conditions


Temperature:	25 °C				
Relative Humidity:	52 %				
ATM Pressure:	101.0 kPa				

The testing was performed by Hill He on 2018-01-23.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

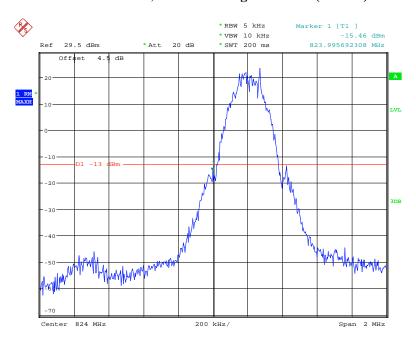


Date: 23.JAN.2018 18:06:58

Cellular Band, Right Band Edge for GSM (GMSK) Mode

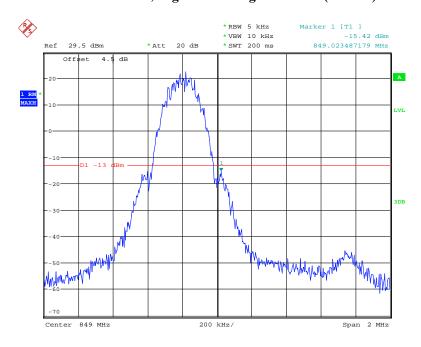


Date: 23.JAN.2018 18:07:46

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

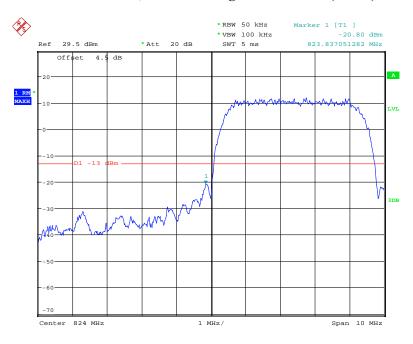


Date: 23.JAN.2018 19:28:21

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

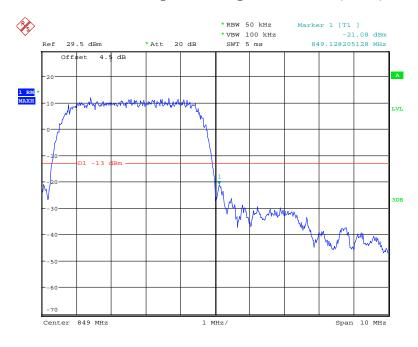


Date: 23.JAN.2018 19:34:49

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

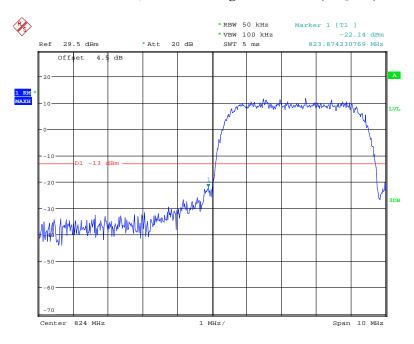


Date: 23.JAN.2018 19:36:23

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

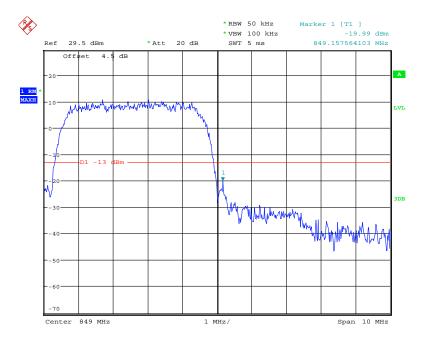


Date: 23.JAN.2018 19:36:45

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

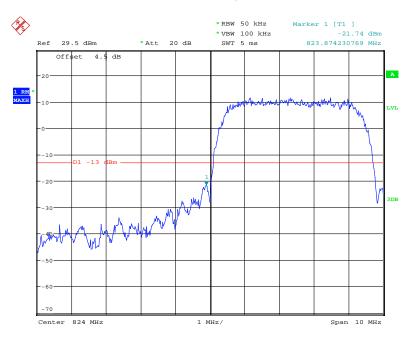


Date: 23.JAN.2018 19:35:55

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

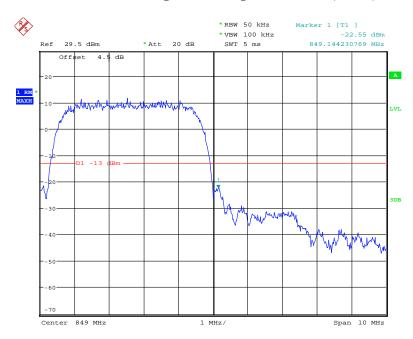


Date: 23.JAN.2018 19:35:21

PCS Band, Left Band Edge for GSM (GMSK) Mode

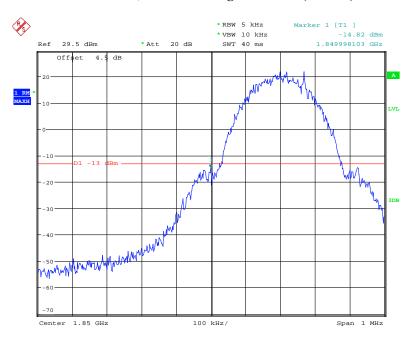


Date: 23.JAN.2018 18:17:47

PCS Band, Right Band Edge for GSM (GMSK) Mode

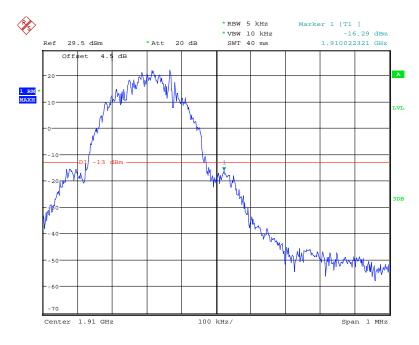


Date: 23.JAN.2018 18:18:50

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

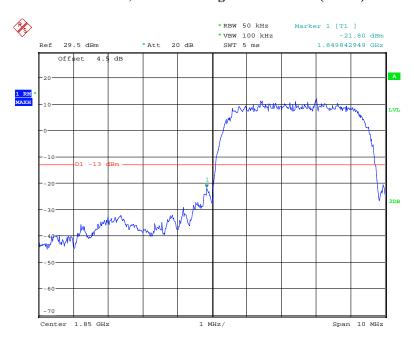


Date: 23.JAN.2018 19:56:02

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

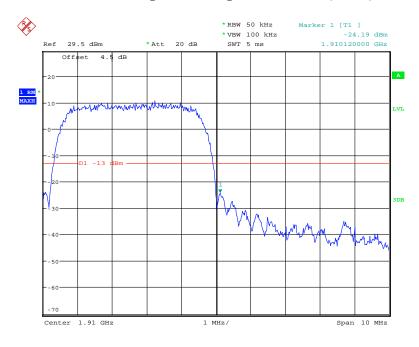


Date: 23.JAN.2018 19:56:42

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

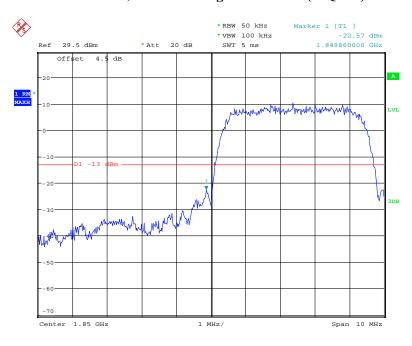


Date: 23.JAN.2018 19:55:31

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

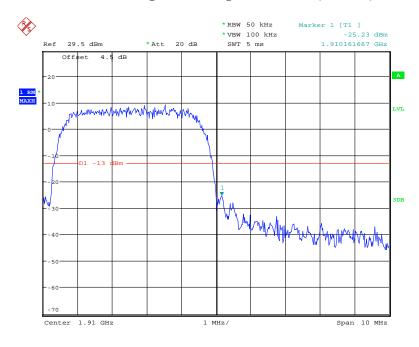


Date: 23.JAN.2018 19:55:00

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

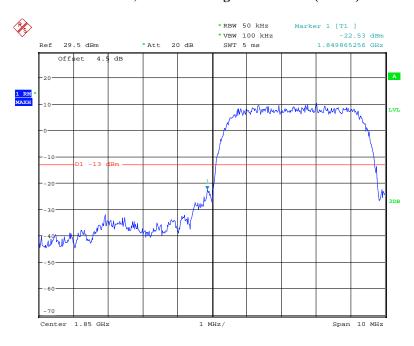

Date: 23.JAN.2018 19:52:05


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

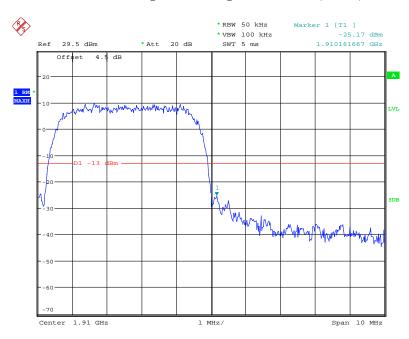

Date: 23.JAN.2018 19:52:48


LTE Band 2:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

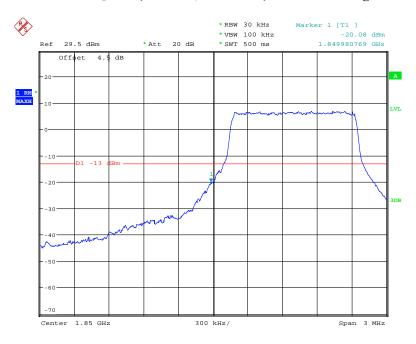


Date: 23.JAN.2018 09:26:55

QPSK (1.4 MHz, FULL RB) - Right Band Edge

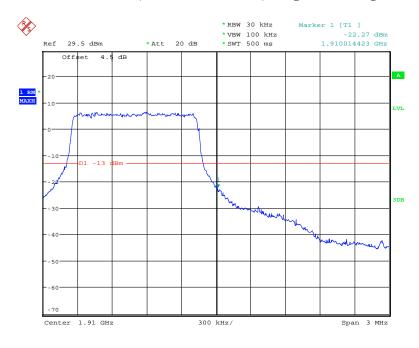


Date: 23.JAN.2018 09:29:19

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

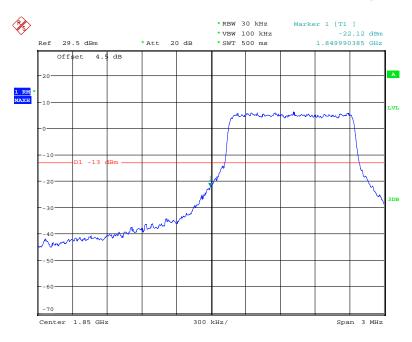


Date: 23.JAN.2018 09:28:13

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

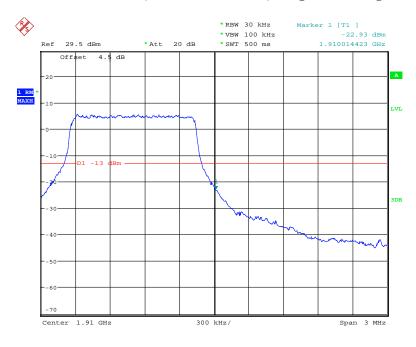


Date: 23.JAN.2018 09:29:01

QPSK (3.0 MHz, FULL RB) - Left Band Edge

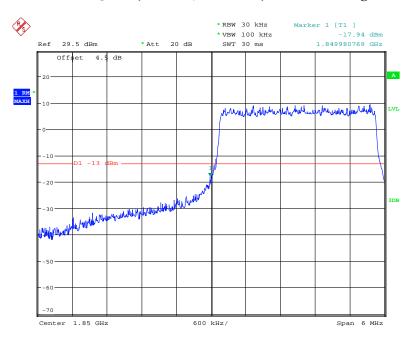


Date: 23.JAN.2018 09:34:06

QPSK (3.0 MHz, FULL RB) - Right Band Edge

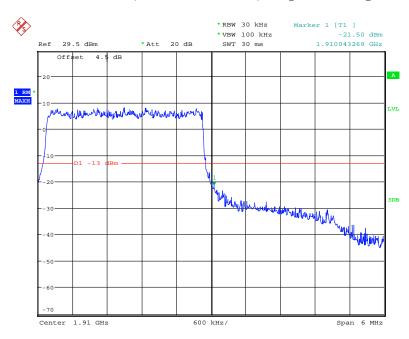


Date: 23.JAN.2018 09:31:19

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

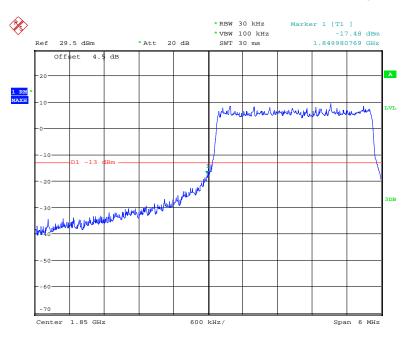


Date: 23.JAN.2018 09:33:41

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

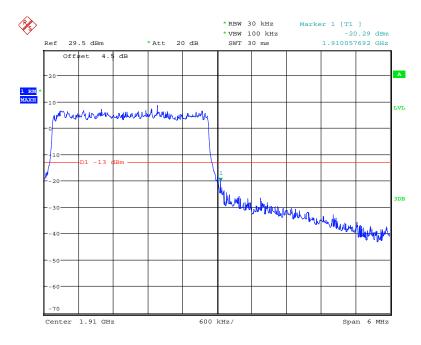


Date: 23.JAN.2018 09:32:09

QPSK (5.0 MHz, FULL RB) - Left Band Edge

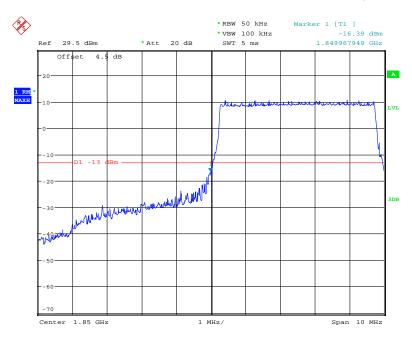


Date: 23.JAN.2018 09:36:23

QPSK (5.0 MHz, FULL RB) - Right Band Edge

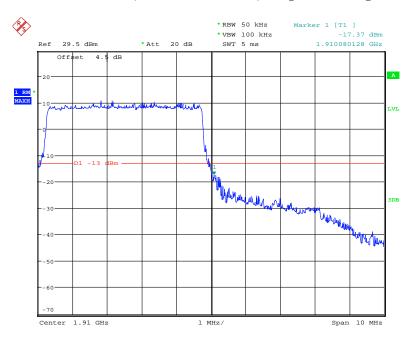


Date: 23.JAN.2018 09:37:21

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

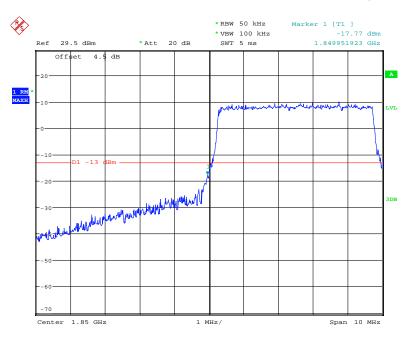


Date: 23.JAN.2018 09:35:26

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

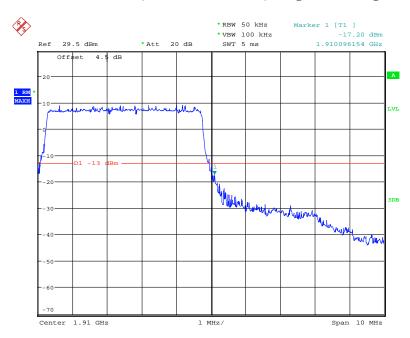


Date: 23.JAN.2018 09:37:58

QPSK (10.0 MHz, FULL RB) - Left Band Edge

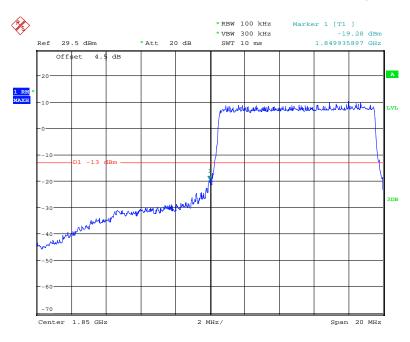


Date: 23.JAN.2018 09:42:34

QPSK (10.0 MHz, FULL RB) - Right Band Edge

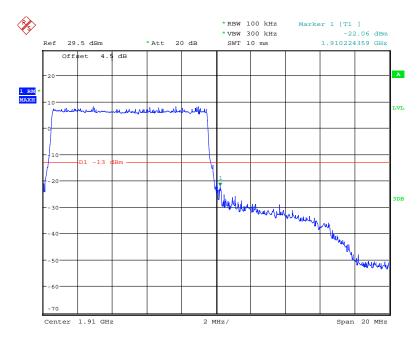


Date: 23.JAN.2018 09:38:54

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

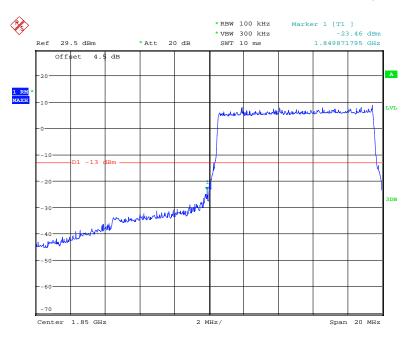


Date: 23.JAN.2018 09:40:33

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

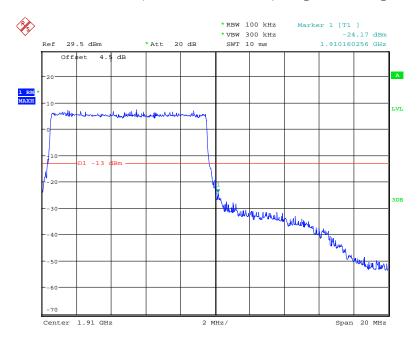


Date: 23.JAN.2018 09:39:30

QPSK (15.0 MHz, FULL RB) - Left Band Edge

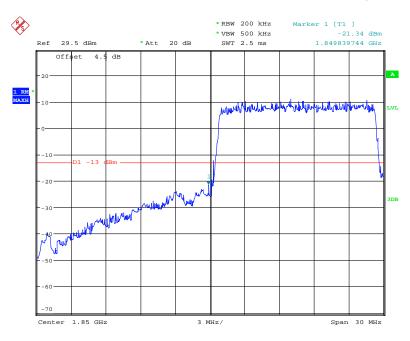


Date: 23.JAN.2018 09:44:09

QPSK (15.0 MHz, FULL RB) - Right Band Edge

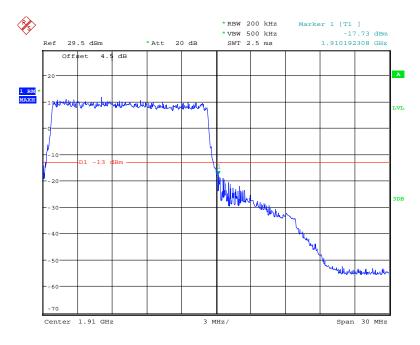


Date: 23.JAN.2018 09:45:26

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

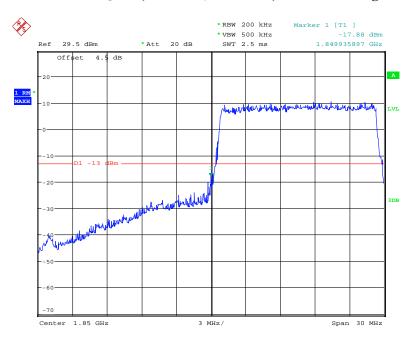


Date: 23.JAN.2018 09:43:40

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

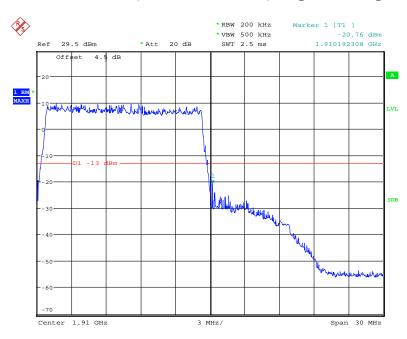


Date: 23.JAN.2018 09:46:22

QPSK (20.0 MHz, FULL RB) - Left Band Edge

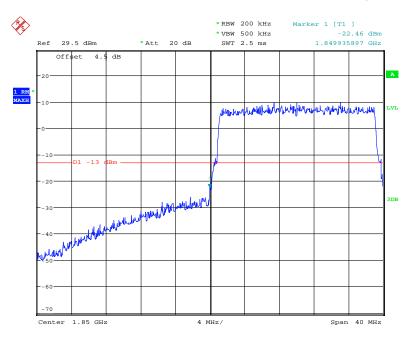


Date: 23.JAN.2018 09:50:01

QPSK (20.0 MHz, FULL RB) - Right Band Edge

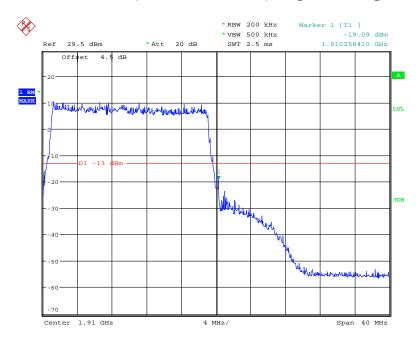


Date: 23.JAN.2018 09:48:04

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

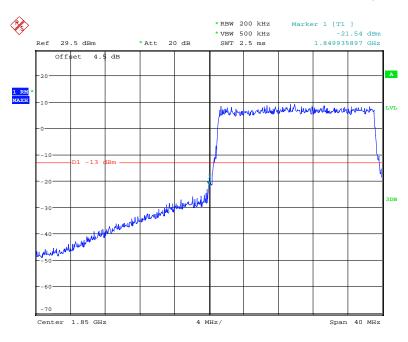

Date: 23.JAN.2018 09:49:37


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

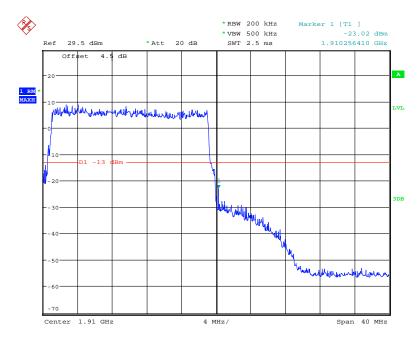

Date: 23.JAN.2018 09:48:43


LTE Band 4:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

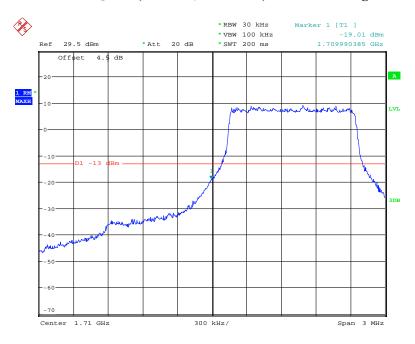


Date: 23.JAN.2018 10:11:03

QPSK (1.4 MHz, FULL RB) - Right Band Edge

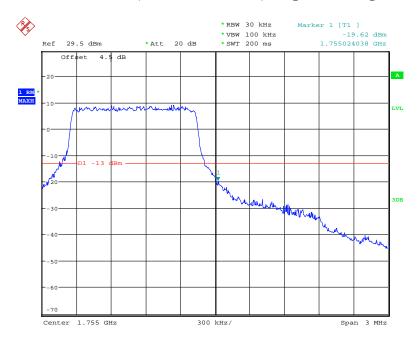


Date: 23.JAN.2018 10:09:33

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

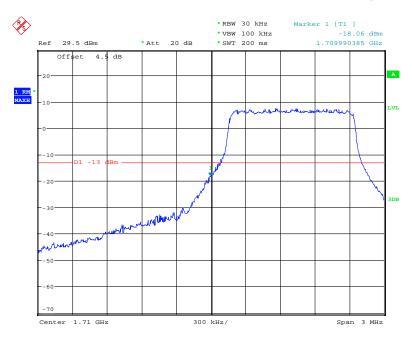


Date: 23.JAN.2018 10:10:39

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

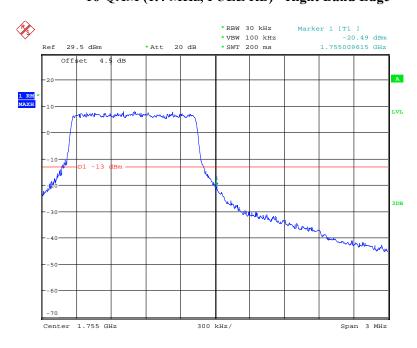


Date: 23.JAN.2018 10:09:58

QPSK (3.0 MHz, FULL RB) - Left Band Edge

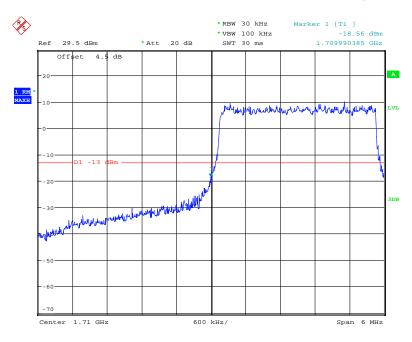


Date: 23.JAN.2018 10:04:59

QPSK (3.0 MHz, FULL RB) - Right Band Edge

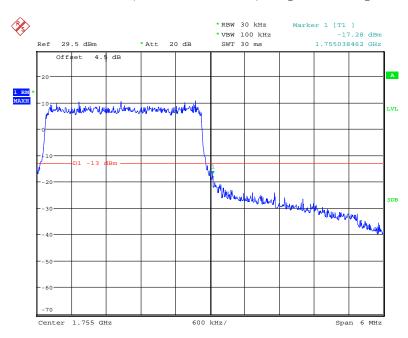


Date: 23.JAN.2018 10:08:33

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

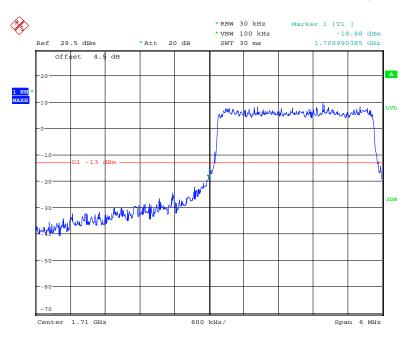


Date: 23.JAN.2018 10:05:32

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

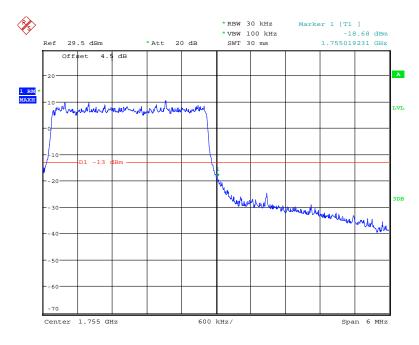


Date: 23.JAN.2018 10:08:13

QPSK (5.0 MHz, FULL RB) - Left Band Edge

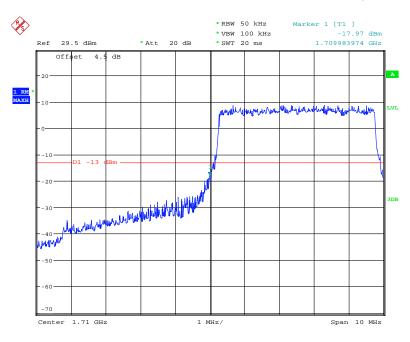


Date: 23.JAN.2018 10:03:46

QPSK (5.0 MHz, FULL RB) - Right Band Edge

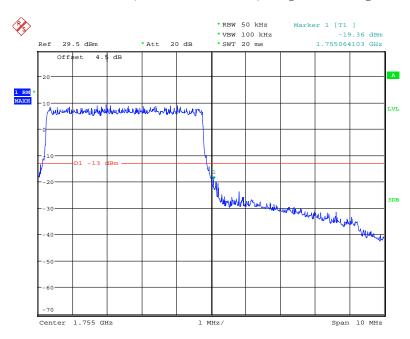


Date: 23.JAN.2018 10:02:50

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

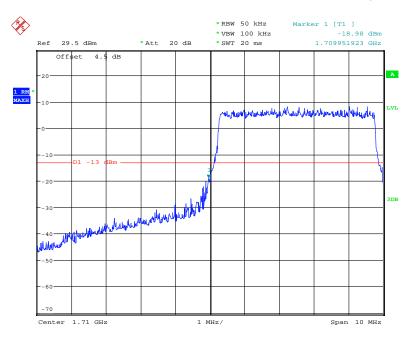


Date: 23.JAN.2018 10:04:12

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

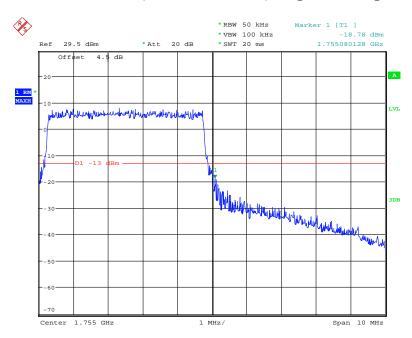


Date: 23.JAN.2018 10:02:21

QPSK (10.0 MHz, FULL RB) - Left Band Edge

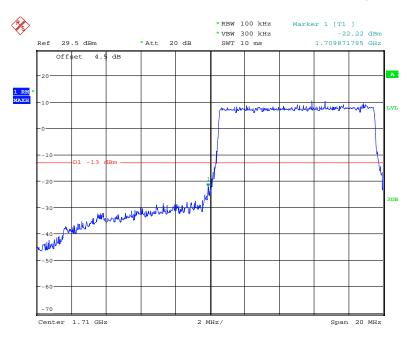


Date: 23.JAN.2018 09:58:14

QPSK (10.0 MHz, FULL RB) - Right Band Edge

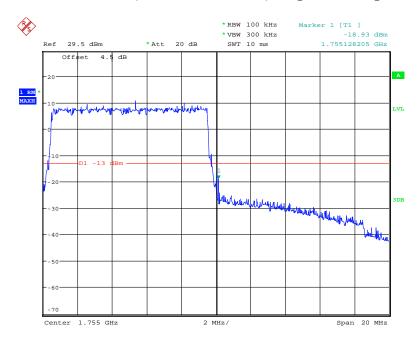


Date: 23.JAN.2018 10:00:35

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

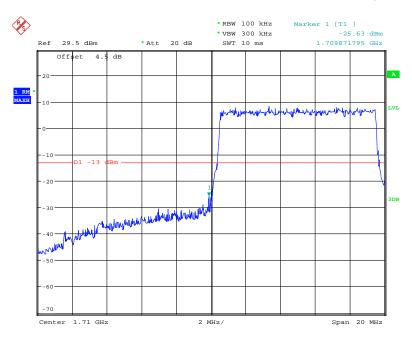


Date: 23.JAN.2018 09:58:58

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

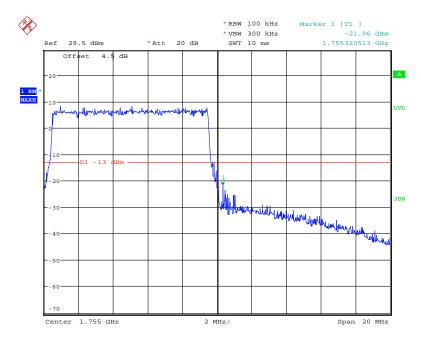


Date: 23.JAN.2018 09:59:56

QPSK (15.0 MHz, FULL RB) - Left Band Edge

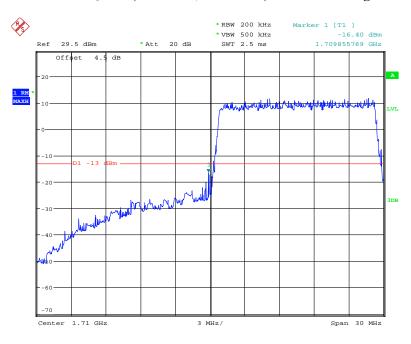


Date: 23.JAN.2018 09:56:27

QPSK (15.0 MHz, FULL RB) - Right Band Edge

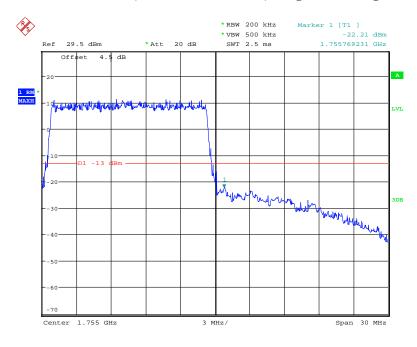


Date: 23.JAN.2018 09:55:31

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

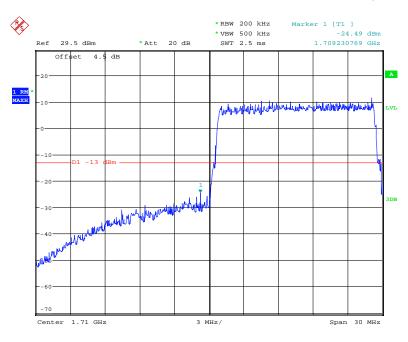


Date: 23.JAN.2018 09:57:16

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

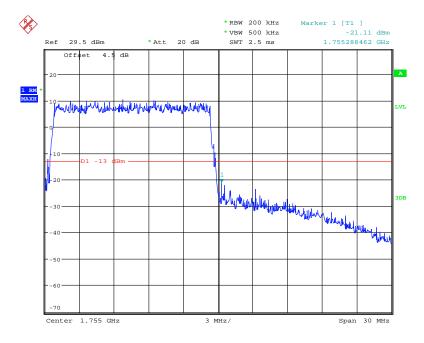


Date: 23.JAN.2018 09:55:03

QPSK (20.0 MHz, FULL RB) - Left Band Edge

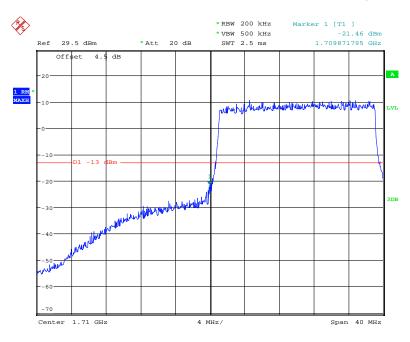


Date: 23.JAN.2018 09:51:40

QPSK (20.0 MHz, FULL RB) - Right Band Edge

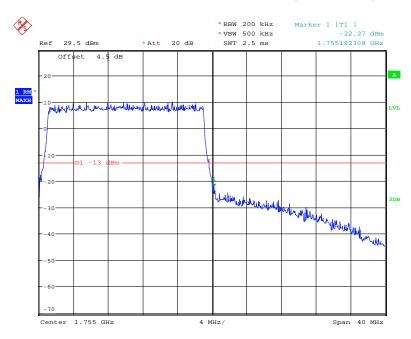


Date: 23.JAN.2018 09:53:38

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

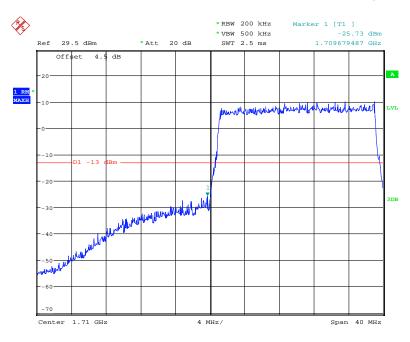

Date: 23.JAN.2018 09:52:18


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

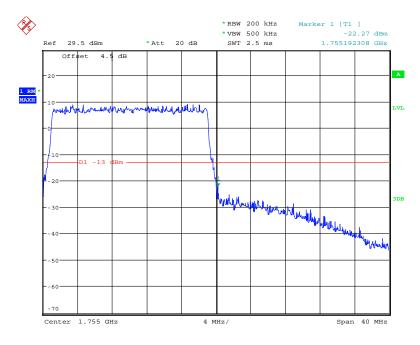

Date: 23.JAN.2018 09:53:12


LTE Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

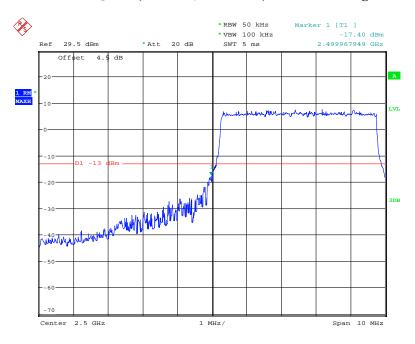


Date: 23.JAN.2018 10:14:12

QPSK (5.0 MHz, FULL RB) - Right Band Edge

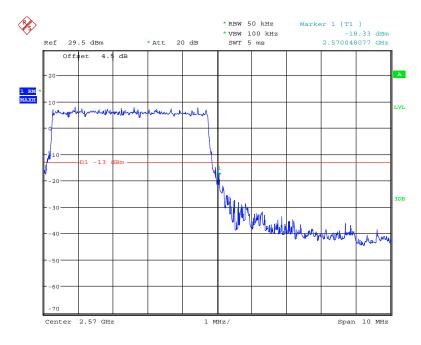


Date: 23.JAN.2018 10:14:47

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

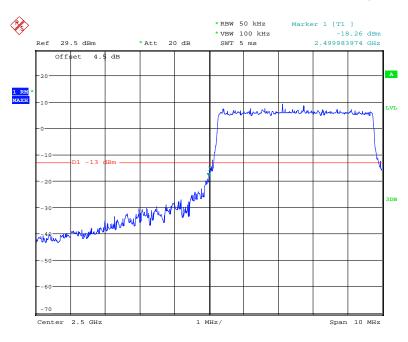


Date: 23.JAN.2018 10:13:29

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

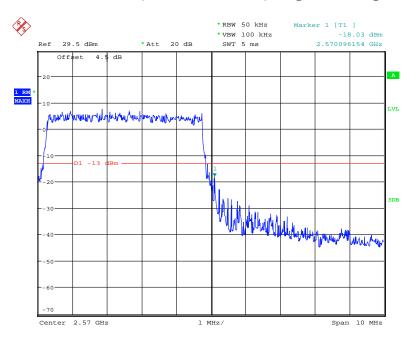


Date: 23.JAN.2018 10:15:15

QPSK (10.0 MHz, FULL RB) - Left Band Edge

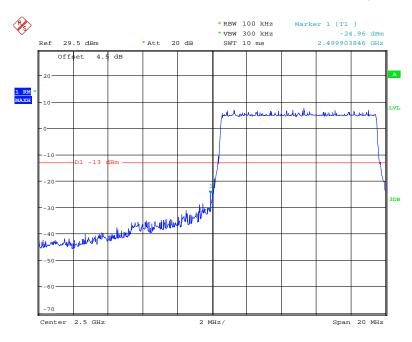


Date: 23.JAN.2018 10:18:53

QPSK (10.0 MHz, FULL RB) - Right Band Edge

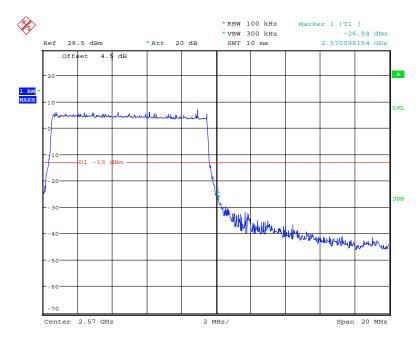


Date: 23.JAN.2018 10:16:47

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

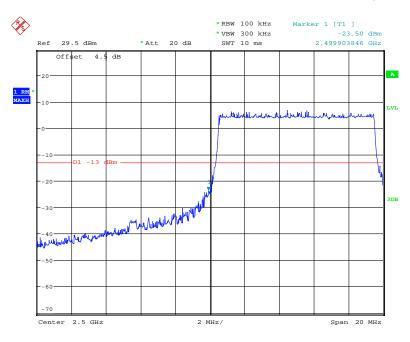


Date: 23.JAN.2018 10:18:23

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

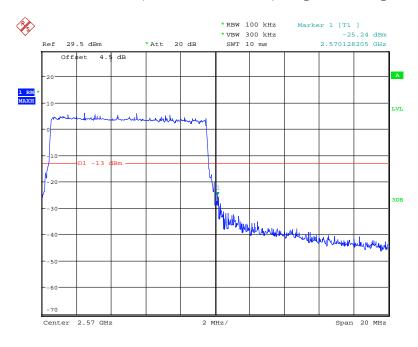


Date: 23.JAN.2018 10:17:17

QPSK (15.0 MHz, FULL RB) - Left Band Edge

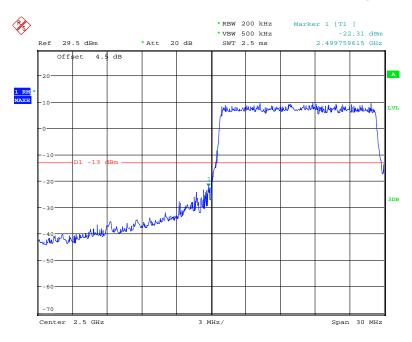


Date: 23.JAN.2018 10:20:54

QPSK (15.0 MHz, FULL RB) - Right Band Edge

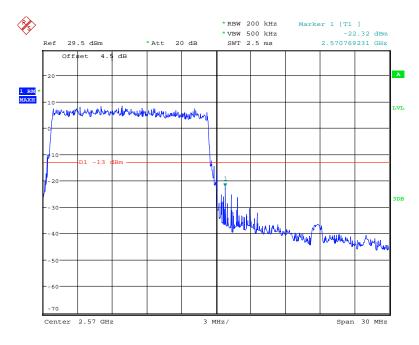


Date: 23.JAN.2018 10:21:57

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

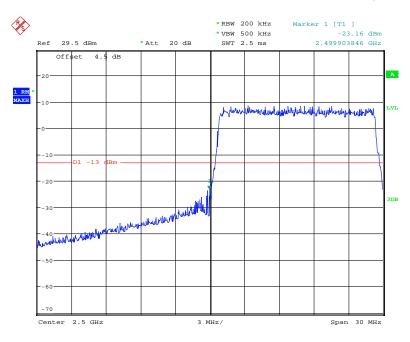


Date: 23.JAN.2018 10:19:51

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

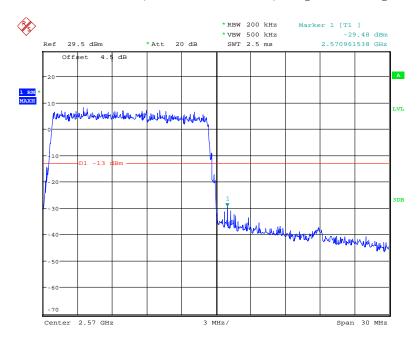


Date: 23.JAN.2018 10:22:25

QPSK (20.0 MHz, FULL RB) - Left Band Edge

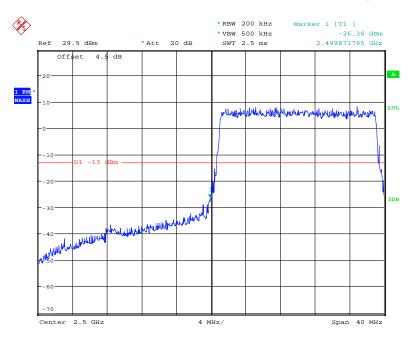


Date: 23.JAN.2018 10:25:17

QPSK (20.0 MHz, FULL RB) - Right Band Edge

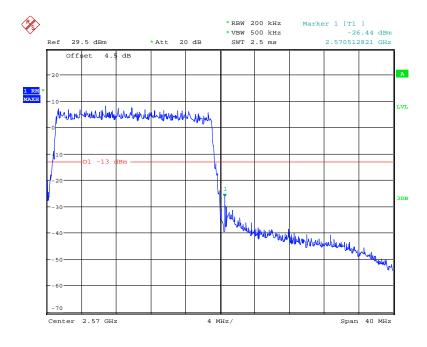


Date: 23.JAN.2018 10:23:19

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

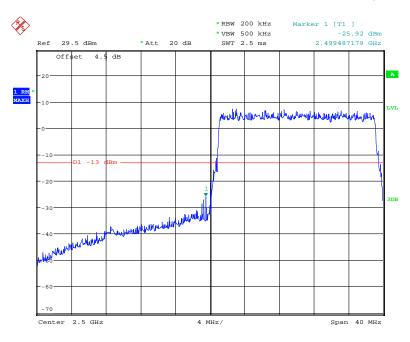

Date: 23.JAN.2018 10:24:36

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

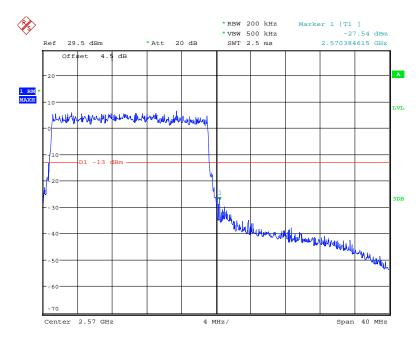

Date: 23.JAN.2018 10:23:43

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance	for Transmitters	in the Public	Mobile Services
---------------------	------------------	---------------	-----------------

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

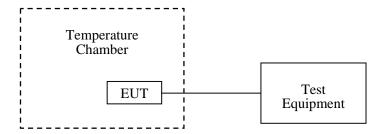

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-01-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, f _o =836.6MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		-4	-0.004781	2.5	
-20		5	0.005977	2.5	
-10		-2	-0.002391	2.5	
0	3.8	8	0.009563	2.5	
10		4	0.004781	2.5	
20		3	0.003586	2.5	
30		7	0.008367	2.5	
40		-5	-0.005977	2.5	
50		-1	-0.001195	2.5	
25	V min.= 3.5	1	0.001195	2.5	
	V max.= 4.2	6	0.007172	2.5	

WCDMA Mode

	Middle Channel, f _o =836.6MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30		3	0.003586	2.5		
-20		-5	-0.005977	2.5		
-10	3.8	-2	-0.002391	2.5		
0		6	0.007172	2.5		
10		4	0.004781	2.5		
20		2	0.002391	2.5		
30		1	0.001195	2.5		
40		-1	-0.001195	2.5		
50		3	0.003586	2.5		
25	V min.= 3.5	-2	-0.002391	2.5		
	V max.= 4.2	5	0.005977	2.5		

PCS Band (Part 24E) GSM Mode

Middle Channel, f_o=1880.0 MHz Frequency Voltage Frequency Temperature **Supplied** Error **Error** Result (°C) (V_{DC}) (Hz) (ppm) -30 -5 -0.002660 pass -20 -9 -0.004787 pass 5 -10 0.002660 pass 0 7 0.003723 pass 10 1 0.000532 3.8 pass 20 -5 -0.002660 pass 30 3 0.001596 pass 40 -1 -0.000532 pass 50 2 0.001064 pass -3 V min.= 3.5 -0.001596 pass 25

-2

-0.001064

V max.= 4.2

pass

Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-1	-0.000532	pass	
-20		2	0.001064	pass	
-10	3.8	-5	-0.002660	pass	
0		-2	-0.001064	pass	
10		3	0.001596	pass	
20		1	0.000532	pass	
30		4	0.002128	pass	
40		7	0.003723	pass	
50		-3	-0.001596	pass	
25	V min.= 3.5	6	0.003191	pass	
	V max.= 4.2	-4	-0.002128	pass	

LTE: QPSK:

Band 2:

	10.0 MHz Middle Channel, f _o =1880 MHz					
Temperature (℃)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		6	0.003191	pass		
-20		-2	-0.001064	pass		
-10		8	0.004255	pass		
0		1	0.000532	pass		
10	3.8	5	0.002660	pass		
20		1	0.000532	pass		
30		3	0.001596	pass		
40		4	0.002128	pass		
50		-3	-0.001596	pass		
20	V min.= 3.5	-4	-0.002128	pass		
	V max.= 4.2	2	0.001064	pass		

Band 4:

10.0 MHz Middle Channel, f ₀ =1732.5 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		12	0.006926	pass	
-20		8	0.004618	pass	
-10	3.8	3	0.001732	pass	
0		5	0.002886	pass	
10		2	0.001154	pass	
20		5	0.002886	pass	
30		-5	-0.002886	pass	
40		-3	-0.001732	pass	
50		4	0.002309	pass	
20	V min.= 3.5	6	0.003463	pass	
	V max.= 4.2	7	0.004040	pass	

Band 7:

10.0 MHz Middle Channel, f _o =2535 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		9	0.003550	pass	
-20		5	0.001972	pass	
-10		2	0.000789	pass	
0	3.8	7	0.002761	pass	
10		-3	-0.001183	pass	
20		3	0.001183	pass	
30		-5	-0.001972	pass	
40		4	0.001578	pass	
50		-2	-0.000789	pass	
20	V min.= 3.5	6	0.002367	pass	
	V max.= 4.2	-1	-0.000394	pass	

***** END OF REPORT *****