

FCC PART 27 FCC PART 22H, PART 24E TEST REPORT

For

SENWA MEXICO,S.A.DE C.V

Av. Javier Barros Sierra 540, Torre I, Planta 5; COL. LOMAS DE SANTA FE DELEGACION ALVARO OBREGON Mexico

FCC ID: 2AAA6-LS50F

Report Type:
Original Report

Mobile Phone

Report Number: RSZ180109006-00D

Report Date: 2018-02-01

Rocky Kang

Reviewed By: RF Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Rocky Kang

Shenzhen, Guangdong, China Tel: +86-755-33320018

Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*".

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	9
APPLICABLE STANDARD	
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50 (D) (H) - RF OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	
Applicable Standard	
TEST PROCEDURE TEST DATA	
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	56
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC § 22.917 (A); § 24.238 (A); §27.53 (H)(M) - BAND EDGES	
Applicable Standard	
TEST DATA	
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SENWA MEXICO,S.A.DE C.V's product, model number: LS50F (FCC ID: 2AAA6-LS50F) or the "EUT" in this report was a Mobile Phone, which was measured approximately: 145.6 mm (L) \times 72.5 mm (W) \times 10.2 mm (H), rated with input voltage: DC 3.7 V battery or DC 5V from adapter.

Adapter Information:

Model: LS50F

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5V, 1000 mA

*All measurement and test data in this report was gathered from production sample serial number: 1702972 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-01-09.

Objective

This test report is prepared on behalf of *SENWA MEXICO,S.A.DE C.V* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Subpart 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS & DSS submissions with FCC ID: 2AAA6-LS50F.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D and KDB 971168 D01 v03.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Parameter		uncertainty
Occupied Char	nnel Bandwidth	±5%
RF output pov	ver, conducted	±1.5dB
Unwanted Emission, conducted		±1.5dB
Emissions,	Below 1GHz	±4.70dB
radiated	Above 1GHz	±4.80dB
Temperature		±1°C
Supply	voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	er Description		Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50- 116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

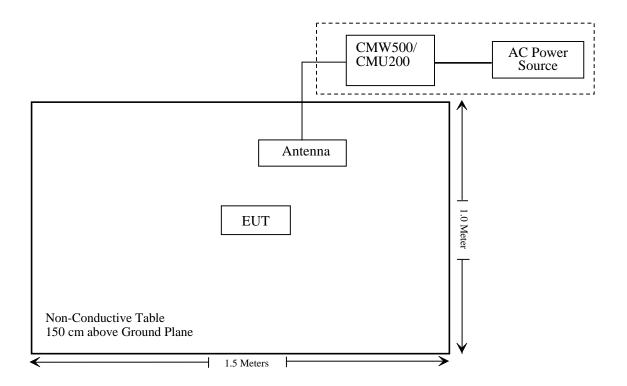

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c); \$27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ180109006-20.

TEST EQUIPMENT LIST

Mr. C. A.	D : (M. 1.1	C. C.IN	Calibration	Calibration
Manufacturer	Description	Model	Serial Number	Date	Due Date
		Radiated Emission	on Test		
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal ANALYZER	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2017-12-13	2020-12-13
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-07	2018-12-07
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724- 30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-19	2018-05-21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-29
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-29
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description Model S		Serial Number	Calibration Date	Calibration Due Date
		RF Conducted	Test		
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-12-14	2018-12-14
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520- wh	2017-04-24	2018-04-24
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746- zn	2017-08-19	2018-08-19
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHEL	3dB Attenuator	N/A	N/A	2017-11-22	2018-05-23
WEINSCHEL	10dB Attenuator	5324	AU 3842	2017-11-22	2018-05-23
N/A	Power Splitter	N/A	N/A	2017-05-21	2018-05-21

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180109006-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d), Part 22H & 24E & 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50 (d) (h) - RF OUTPUT POWER

Applicable Standard

According to FCC $\S 2.1046$ and $\S 22.913$ (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2018-01-11.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	32.24	38.45
GSM	190	836.6	32.61	38.45
	251	848.8	32.73	38.45

Mode Channel		Frequency		Limit			
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	32.79	32.21	30.33	29.31	38.45
GPRS	190	836.6	32.78	32.17	30.25	29.17	38.45
	251	848.8	32.82	32.11	30.14	28.99	38.45

Mode Test		est Test	3GPP Sub	Average Output Power (dBm)			
Mode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.61	22.81	22.43	
			1	21.05	21.48	20.66	
		HSDPA	2	20.92	21.45	20.51	
			3	21.36	21.22	20.42	
			4	20.98	21.16	20.37	
WCDMA (Band V)	Normal	Normal	1	21.12	21.29	20.13	
(Build 1)			2	21.02	21.20	20.13	
		HSUPA	3	21.17	21.24	20.99	
			4	21.24	21.24	20.83	
			5	21.14	21.13	20.73	
		HSPA+	1	20.18	20.45	20.31	

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	29.59	33
GSM	661	1880.0	28.93	33
	810	1909.8	28.83	33

Mode	Channel	Frequency		verage Output Power (dBm)			
		(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	29.45	28.65	25.34	24.94	33
GPRS	661	1880.0	28.93	28.42	26.33	25.13	33
	810	1909.8	28.31	27.93	26.24	25.32	33

Mode	Test	Test	3GPP Sub	Average Output Power (dBm)			
Mode	Condition	Mode	Test	Low Frequency	Middle Frequency	High Frequency	
		RMC	12.2k	22.27	22.45	22.29	
			1	20.59	21.07	20.65	
		HCDDA	2	20.43	20.91	20.68	
		HSDPA	3	20.61	21.54	20.53	
			4	20.20	20.61	20.34	
WCDMA (Band II)	Normal		1	20.94	21.03	20.77	
(Build II)			2	20.62	20.91	20.70	
		HSUPA	3	20.81	21.14	20.92	
			4	20.65	20.98	20.69	
			5	20.82	21.05	20.81	
		HSPA+	1	20.44	20.95	20.63	

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)		
	Low	11.28	13		
GSM	Middle	11.36	13		
	High	11.19	13		

Mode	Channel	PAR (dB)	Limit (dB)
53.46	Low	3.45	13
RMC (BPSK)	Middle	3.82	13
(BI SIL)	High	3.63	13
***	Low	3.62	13
HSDPA (16QAM)	Middle	3.73	13
(100/11/1)	High	3.48	13
******	Low	3.42	13
HSUPA (BPSK)	Middle	3.14	13
(Bi Sit)	High	3.36	13
	Low	3.81	13
HSPA+	Middle	3.75	13
	High	3.36	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)	
	Low	10.32	13	
GSM	Middle	10.59	13	
	High	10.69	13	

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.43	13
RMC (BPSK)	Middle	3.16	13
(Bi Sit)	High	3.44	13
	Low	3.75	13
HSDPA (16QAM)	Middle	3.64	13
(100/11/1)	High	3.82	13
	Low	3.76	13
HSUPA (BPSK)	Middle	3.87	13
(Bi Sit)	High	3.75	13
	Low	3.39	13
HSPA+	Middle	3.28	13
	High	3.17	13

Radiated Power

GSM Mode:

	Receiver	Turntable	Rx An	tenna	S	ubstitut	ed	Absolute	FCC Part	t 22H/24E
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle Channel									
836.6	96.57	96	1.6	Н	25.4	0.66	0.00	24.74	38.45	13.71
836.6	100.11	37	1.5	V	29.0	0.66	0.00	28.34	38.45	10.11
		EII	RP for PC	S Band	(Part 24E)), Middle	e Channel			
1880	116.37	239	2.0	Н	19.7	1.40	7.30	25.60	33	7.4
1880	112.46	251	1.5	V	17.3	1.40	7.30	23.20	33	9.8

WCDMA Mode:

	Receiver	Turntable	Rx An	tenna	S	Substitut	ed	Absolute	FCC Pai	rt 22H/24E
LIMOGRADOMAN	Reading (dBµV)	ng Angle Height Polar Level Cable Antenna Level		Level (dBm)	Limit (dBm)	Margin (dB)				
	ERP for WCDMA Band V (Part 22H), Middle Channel									
836.60	91.36	96	1.6	Н	19.2	0.66	0.00	19.54	38.45	18.91
836.60	93.27	37	1.7	V	18.1	0.66	0.00	20.44	38.45	18.01
		EIRP	for WCD	MA Ban	d II (Part	24E), M	iddle Chan	nel		
1880.00	112.01	168	1.7	Н	13.3	1.40	7.30	21.20	33	11.8
1880.00	105.80	321	1.6	V	10.7	1.40	7.30	16.60	33	16.4

Note:

 $Absolute\ Level = Substituted\ Level - Cable\ loss + Antenna\ Gain$

Margin = Limit- Absolute Level

LTE Band 2:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.61	22.49	22.6
		RB Size=1, RB Offset=2	22.83	22.95	22.77
		RB Size=1, RB Offset=5	22.98	23	Channel (dBm) 22.6
	QPSK	RB Size=3, RB Offset=0	22.88	22.98	22.95
		RB Size=3, RB Offset=1	22.94	23.19	22.93
		RB Size=3, RB Offset=2	22.88	22.82	22.87
1.4		RB Size=6, RB Offset=0	22.95	22.56	23.02
		RB Size=1, RB Offset=0	22.69	22.40	22.16
		RB Size=1, RB Offset=2	21.37	21.41	21.25
		RB Size=1, RB Offset=5	21.51	21.41	21.6
	16QAM	RB Size=3, RB Offset=0	21.46	21.56	21.42
		RB Size=3, RB Offset=1	21.47	21.46	21.54
		RB Size=3, RB Offset=2	21.42	21.4	21.44
		RB Size=6, RB Offset=0	21.44	21.29	21.52
		RB Size=1, RB Offset=0	22.18	22.22	22.15
		RB Size=1, RB Offset=7	22.3	22.3	22.19
		RB Size=1, RB Offset=14	22.34	22.32	22.21
	QPSK	RB Size=8, RB Offset=0	21.28	21.41	21.14
		RB Size=8, RB Offset=4	21.35	21.27	21.41
		RB Size=8, RB Offset=7	21.27	21.32	21.14
3.0		RB Size=15, RB Offset=0	21.21	21.36	21.16
3.0		RB Size=1, RB Offset=0	22.37	22.21	22.4
		RB Size=1, RB Offset=7	22.35	22.1	21.52 22.15 22.19 22.21 21.14 21.41 21.16 22.4 22.19 22.36
		RB Size=1, RB Offset=14	22.3	22	22.36
	16QAM	RB Size=8, RB Offset=0	20.58	20.39	20.62
		RB Size=8, RB Offset=4	20.33	20.37	20.28
		RB Size=8, RB Offset=7	20.3	20.14	20.35
		RB Size=15, RB Offset=0	20.26	20.17	20.44

RB Size=50, RB Offset=0

20.26

20.21

20.3

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	6.65	13	Pass
QPSK (100RB Size)	6.34	13	Pass
16QAM (1RB Size)	7.56	13	Pass
16QAM (100%RB Size)	7.42	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz]	Bandwidth				
1880.00	85.14	10	1.3	Н	15.1	1.30	8.50	22.30	33
1880.00	82.76	180	1.0	V	12.5	1.30	8.50	19.70	33
				3 MHz B	andwidth				
1880.00	85.42	357	1.5	Н	15.4	1.30	8.50	22.60	33
1880.00	83.49	252	1.2	V	13.2	1.30	8.50	20.40	33
				5 MHz B	andwidth				
1880.00	85.21	239	1.9	Н	15.2	1.30	8.50	22.40	33
1880.00	82.55	55	1.9	V	12.3	1.30	8.50	19.50	33
]	0 MHz I	Bandwidth				
1880.00	85.51	103	1.2	Н	15.5	1.30	8.50	22.70	33
1880.00	82.35	90	2.5	V	12.1	1.30	8.50	19.30	33
]	5 MHz I	Bandwidth				
1880.00	84.95	285	1.5	Н	14.9	1.30	8.50	22.10	33
1880.00	82.70	161	1.4	V	12.4	1.30	8.50	19.60	33
			2	20 MHz I	Bandwidth				
1880.00	85.16	328	1.9	Н	15.1	1.30	8.50	22.30	33
1880.00	82.51	336	2.2	V	12.2	1.30	8.50	19.40	33

16QAM:

	D:	Turn	Rx An	tenna	5	Substitut	ed	Abaalata	
Frequency (MHz)	Receiver Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth				
1880.00	84.35	178	1.8	Н	14.3	1.30	8.50	21.50	33
1880.00	81.36	62	1.5	V	11.1	1.30	8.50	18.30	33
				3 MHz B	andwidth				
1880.00	83.25	356	2.3	Н	13.2	1.30	8.50	20.40	33
1880.00	81.54	155	1.1	V	11.3	1.30	8.50	18.50	33
				5 MHz B	andwidth				
1880.00	84.21	206	1.4	Н	14.2	1.30	8.50	21.40	33
1880.00	82.41	66	1.3	V	12.1	1.30	8.50	19.30	33
				10 MHz 1	Bandwidth				
1880.00	83.59	352	2.4	Н	13.5	1.30	8.50	20.70	33
1880.00	81.47	347	2.1	V	11.2	1.30	8.50	18.40	33
				15 MHz I	Bandwidth	_			
1880.00	83.90	133	1.2	Н	13.8	1.30	8.50	21.00	33
1880.00	82.08	314	2.1	V	11.8	1.30	8.50	19.00	33
			. 2	20 MHz I	Bandwidth				
1880.00	83.81	131	2.4	Н	13.8	1.30	8.50	21.00	33
1880.00	81.89	225	1.1	V	11.6	1.30	8.50	18.80	33

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.28	22.30	22.48
		RB Size=1, RB Offset=2	22.62	22.82	22.61
		RB Size=1, RB Offset=5	22.33	21.26 22.5	22.51
	QPSK	RB Size=3, RB Offset=0	22.60	22.53	22.54
		RB Size=3, RB Offset=1	22.44	22.50	22.68
		RB Size=3, RB Offset=2	22.49	22.38	22.40
1.4		RB Size=6, RB Offset=0	21.83	21.14	21.49
1.4		RB Size=1, RB Offset=0	21.14	21.80	21.81
		RB Size=1, RB Offset=2	21.04	21.19	22.54 22.68 22.40 21.49
		RB Size=1, RB Offset=5	21.79	21.52	21.33
	16QAM	RB Size=3, RB Offset=0	22.68	21.73	21.70
		RB Size=3, RB Offset=1	22.74	21.16	21.48
		RB Size=3, RB Offset=2	22.08	21.65	(dBm) 22.48 22.61 22.51 22.54 22.68 22.40 21.49 21.81 21.94 21.33 21.70 21.48 21.55 20.37 22.74 22.68 22.61 21.87 21.63 21.53 21.42 21.47 21.52 21.44 20.81 20.61
		RB Size=6, RB Offset=0	20.61	20.25	20.37
		RB Size=1, RB Offset=0	22.76	22.88	22.74
		RB Size=1, RB Offset=7	22.63	22.73	22.68
		RB Size=1, RB Offset=14	22.61	22.7	22.61
	QPSK	RB Size=8, RB Offset=0	21.86	21.9	21.87
		RB Size=8, RB Offset=4	21.71	21.73	21.63
		RB Size=8, RB Offset=7	21.53	21.47	21.53
3.0		RB Size=15, RB Offset=0	21.5	21.57	21.42
3.0		RB Size=1, RB Offset=0	21.44	21.34	21.47
		RB Size=1, RB Offset=7	21.47	21.39	Channel (dBm) 22.48 22.61 22.51 22.54 22.68 22.40 21.49 21.81 21.94 21.33 21.70 21.48 21.55 20.37 22.74 22.68 22.61 21.87 21.63 21.53 21.42 21.47 21.52 21.44 20.81
		RB Size=1, RB Offset=14	21.37	21.35	21.44
	16QAM	RB Size=8, RB Offset=0	20.76	20.74	20.81
		RB Size=8, RB Offset=4	20.65	20.52	20.61
		RB Size=8, RB Offset=7	20.57	20.5	20.48
		RB Size=15, RB Offset=0	20.54	20.4	20.53

20.71

20.86

20.91

20.93

20.51

21

20.99

21.05

16QAM

RB Size=25, RB Offset=0 RB Size=25, RB Offset=12

RB Size=25, RB Offset=24

RB Size=50, RB Offset=0

20.73

20.92

21.02

21.07

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	6.37	13	Pass
QPSK (100RB Size)	6.82	13	Pass
16QAM (1RB Size)	6.64	13	Pass
16QAM (100%RB Size)	6.58	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			1	.4 MHz 1	Bandwidth				
1732.5	85.25	353	1.9	Н	12.1	1.30	9.10	19.90	30
1732.5	83.01	349	1.8	V	10.4	1.30	9.10	18.20	30
				3 MHz B	andwidth				
1732.5	85.35	340	2.0	Н	12.2	1.30	9.10	20.00	30
1732.5	83.20	177	1.7	V	10.6	1.30	9.10	18.40	30
			_	5 MHz B	andwidth				
1732.5	85.26	137	1.9	Н	12.1	1.30	9.10	19.90	30
1732.5	82.98	326	2.2	V	10.4	1.30	9.10	18.20	30
			1	0 MHz I	Bandwidth				
1732.5	86.55	101	1.3	Н	13.4	1.30	9.10	21.20	30
1732.5	82.88	19	2.4	V	10.3	1.30	9.10	18.10	30
			1	5 MHz I	Bandwidth				
1732.5	86.14	260	1.5	Н	13.0	1.30	9.10	20.80	30
1732.5	82.34	30	1.8	V	9.8	1.30	9.10	17.60	30
	20 MHz Bandwidth								
1732.5	86.01	152	1.5	Н	12.8	1.30	9.10	20.60	30
1732.5	82.24	126	1.3	V	9.7	1.30	9.10	17.50	30

16QAM:

	Receiver	Turn	Rx An	tenna	,	Substitut	ed	Absolute	
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)
				Middle	Channel				
			. 1	.4 MHz	Bandwidth	l .			
1732.5	85.82	194	2.0	Н	12.6	1.30	9.10	20.40	30
1732.5	83.07	196	1.5	V	10.5	1.30	9.10	18.30	30
				3 MHz B	andwidth				
1732.5	85.41	134	1.0	Н	12.2	1.30	9.10	20.00	30
1732.5	82.79	241	2.5	V	10.2	1.30	9.10	18.00	30
				5 MHz B	andwidth				
1732.5	85.14	358	1.9	Н	12.0	1.30	9.10	19.80	30
1732.5	82.94	188	1.6	V	10.4	1.30	9.10	18.20	30
				10 MHz I	Bandwidth				
1732.5	85.78	219	1.5	Н	12.6	1.30	9.10	20.40	30
1732.5	82.84	246	1.9	V	10.3	1.30	9.10	18.10	30
				15 MHz I	Bandwidth	÷.			
1732.5	84.93	352	1.2	Н	11.8	1.30	9.10	19.60	30
1732.5	82.89	94	1.5	V	10.3	1.30	9.10	18.10	30
	20 MHz Bandwidth								
1732.5	84.80	54	1.7	Н	11.6	1.30	9.10	19.40	30
1732.5	82.90	20	2.0	V	10.3	1.30	9.10	18.10	30

LTE Band 7:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		RB Size=1, RB Offset=0	22.33	22.33	22.38
		RB Size=1, RB Offset=12	22.35	22.49	22.52
		RB Size=1, RB Offset=24	22.54	22.59	22.45
	QPSK	RB Size=12, RB Offset=0	21.34	21.21	21.49
		RB Size=12, RB Offset=6	21.6	21.53	21.55
		RB Size=12, RB Offset=11	22.09	21.12	21.41
5.0		RB Size=25, RB Offset=0	21.07	21.34	22.22
5.0		RB Size=1, RB Offset=0	22.21	21.67	22.02
		RB Size=1, RB Offset=12	22.38	21.76	22.05
		RB Size=1, RB Offset=24	22.50	21.93	22.23
	16QAM	RB Size=12, RB Offset=0	21.73	20.90	21.22
		RB Size=12, RB Offset=6	21.60	21.08	21.20
		RB Size=12, RB Offset=11	21.54	20.97	21.34
		RB Size=25, RB Offset=0	21.09	20.73	20.59
		RB Size=1, RB Offset=0	22.52	22.63	22.65
		RB Size=1, RB Offset=24	22.47	22.66	22.41
		RB Size=1, RB Offset=49	22.46	22.35	22.64
	QPSK	RB Size=25, RB Offset=0	21.34	21.45	21.37
		RB Size=25, RB Offset=12	21.66	21.62	21.65
		RB Size=25, RB Offset=24	21.72	21.9	21.68
10.0		RB Size=50, RB Offset=0	21.71	21.54	21.54
10.0		RB Size=1, RB Offset=0	21.75	21.75	21.72
		RB Size=1, RB Offset=24	21.69	21.68	21.64
		RB Size=1, RB Offset=49	21.62	21.59	21.65
	16QAM	RB Size=25, RB Offset=0	21.54	21.65	21.31
		RB Size=25, RB Offset=12	21.05	21.05	21.19
		RB Size=25, RB Offset=24	21.36	21.48	21.76
		RB Size=50, RB Offset=0	21.13	21.58	20.39

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.00	13	Pass
QPSK (100RB Size)	4.26	13	Pass
16QAM (1RB Size)	4.24	13	Pass
16QAM (100%RB Size)	4.05	13	Pass

QPSK:

	Receiver	Turn	Rx An	tenna	S	Substitut	ed	Absolute			
Frequency (MHz)	Reading (dBµV)	table Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)		
	Middle Channel										
				5 MHz B	andwidth						
2535	85.49	270	1.9	Н	16.0	2.60	9.30	22.70	33		
2535	82.48	13	1.9	V	13.6	2.60	9.30	20.30	33		
			1	10 MHz I	Bandwidth						
2535	85.90	107	2.4	Н	16.4	2.60	9.30	23.10	33		
2535	83.29	344	2.4	V	14.4	2.60	9.30	21.10	33		
			1	15 MHz I	Bandwidth						
2535.00	83.30	287	2.1	Н	13.3	1.65	8.60	20.25	33		
2535.00	81.60	37	1.9	V	11.6	1.65	8.60	18.55	33		
	20 MHz Bandwidth										
2535.00	83.50	321	1.3	Н	13.5	1.65	8.60	20.45	33		
2535.00	81.90	222	2.5	V	11.9	1.65	8.60	18.85	33		

16QAM:

	Receiver	Turn	Rx An	tenna	,	Substitut	ed	Absolute		
Frequency (MHz)	Frequency Pending	table Angle	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	
				Middle	Channel					
			_	5 MHz B	andwidth					
2535	85.46	316	1.5	Н	16.0	2.60	9.30	22.70	33	
2535	83.17	147	1.2	V	14.3	2.60	9.30	21.00	33	
				10 MHz 1	Bandwidth					
2535	84.32	65	2.2	Н	14.8	2.60	9.30	21.50	33	
2535	82.50	176	1.3	V	13.6	2.60	9.30	20.30	33	
				15 MHz I	Bandwidth					
2535	85.15	144	1.3	Н	15.7	2.60	9.30	22.40	33	
2535	82.82	96	1.3	V	13.9	2.60	9.30	20.60	33	
	20 MHz Bandwidth									
2535	84.47	351	1.9	Н	15.0	2.60	9.30	21.70	33	
2535	82.83	332	2.4	V	13.9	2.60	9.30	20.60	33	

Note:

All above data were tested with no amplifier Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

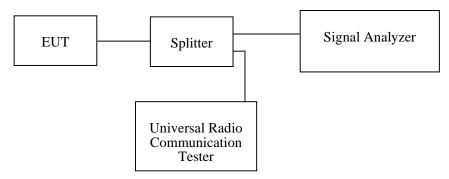

Test Data

Environmental Conditions

Temperature:	22~24 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.4~101.0 kPa

The testing was performed by Vincent Zheng from 2018-01-11 to 2018-01-27.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	243.59	302.88

Mode	Frequency (MHz) 99% Occupied Bandwidth (MHz)		26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.103	4.679
HSUPA (BPSK)	836.6	4.103	4.679
HSDPA (16QAM)	836.6	4.103	4.679


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	243.59	312.50

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.087	4.647
HSUPA (BPSK)	1880.0	4.087	4.679
HSDPA (16QAM)	1880.0	4.103	4.679


Report No.: RSZ180109006-00D

Cellular Band (Part 22H) 26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

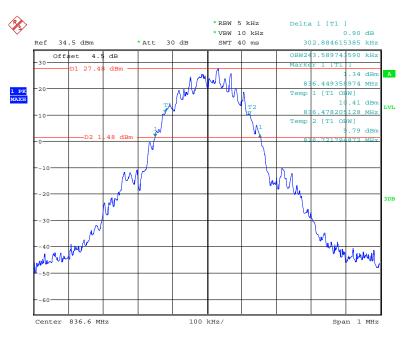


Date: 27.JAN.2018 16:32:30

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

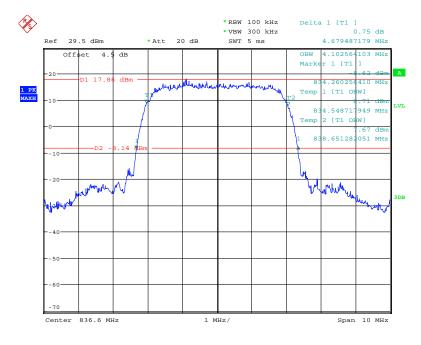


Date: 27.JAN.2018 17:06:14

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

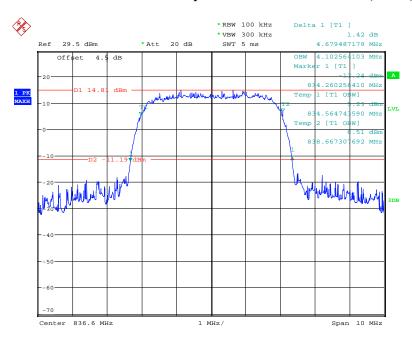


Date: 27.JAN.2018 17:20:05

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

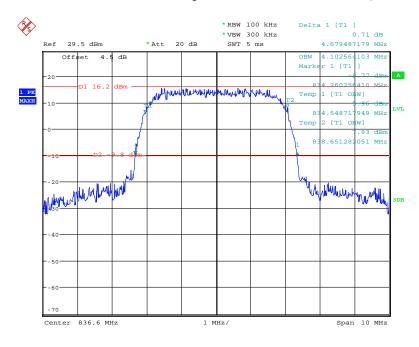


Date: 27.JAN.2018 17:12:10

PCS Band (Part 24E)
26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

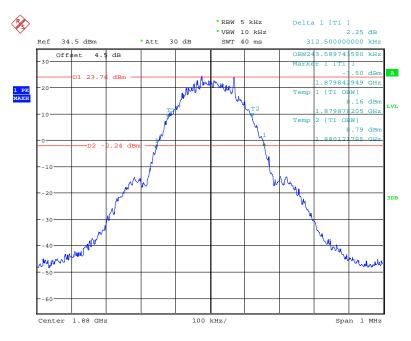


Date: 27.JAN.2018 16:45:59

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

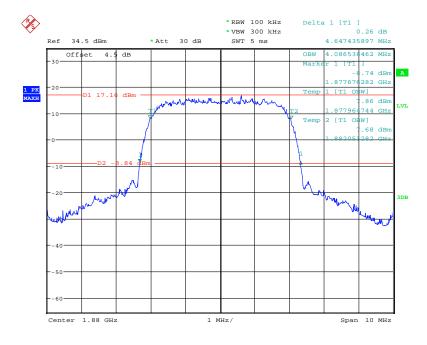


Date: 27.JAN.2018 16:57:31

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

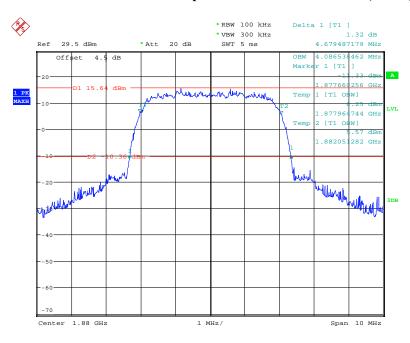

Date: 27.JAN.2018 17:18:27

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

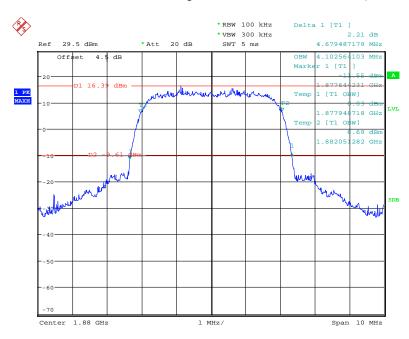


Date: 27.JAN.2018 17:13:22

LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.115	1.423
	16QAM	1.120	1.481
3.0	QPSK	2.692	3.038
	16QAM	2.692	3.038
5.0	QPSK	4.551	5.369
	16QAM	4.551	5.369
10.0	QPSK	8.974	9.824
	16QAM	8.974	9.824
15.0	QPSK	13.462	14.968
	16QAM	13.462	14.872
20.0	QPSK	17.949	19.840
	16QAM	18.013	19.904


Report No.: RSZ180109006-00D

QPSK (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

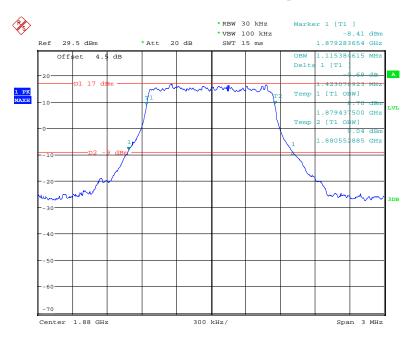


Date: 11.JAN.2018 15:32:20

16-QAM (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

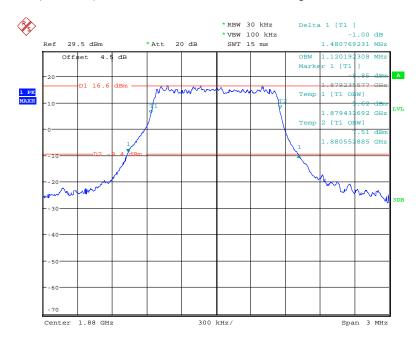


Date: 11.JAN.2018 15:33:15

QPSK (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

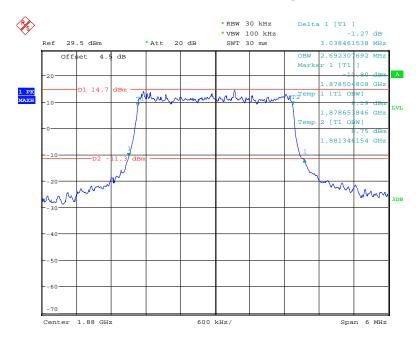


Date: 11.JAN.2018 15:34:19

16-QAM (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

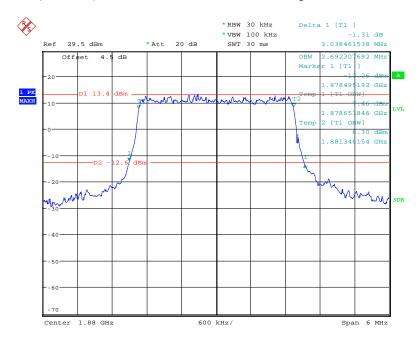


Date: 11.JAN.2018 15:35:19

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

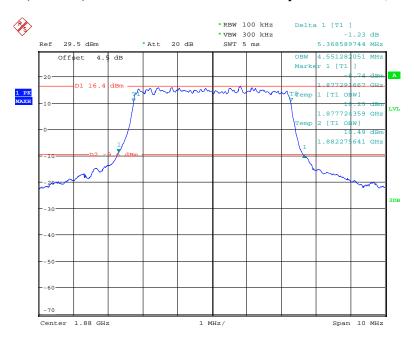


Date: 11.JAN.2018 15:45:04

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

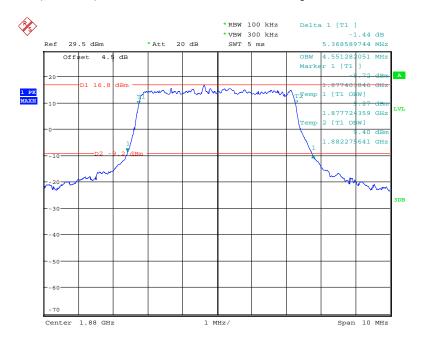


Date: 11.JAN.2018 15:43:01

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

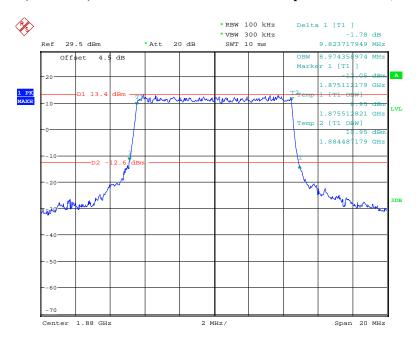


Date: 11.JAN.2018 15:45:59

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

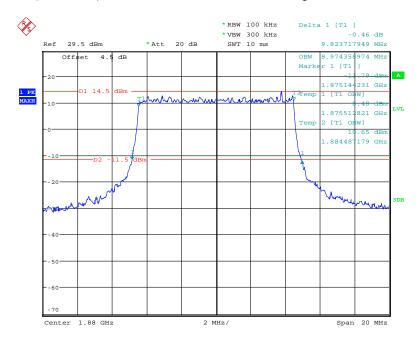


Date: 11.JAN.2018 15:47:07

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

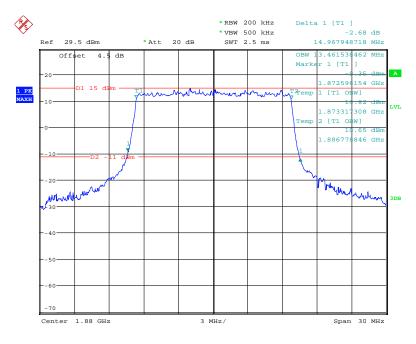


Date: 11.JAN.2018 15:50:41

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

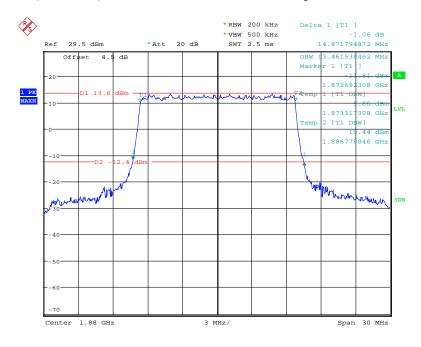


Date: 11.JAN.2018 15:48:51

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

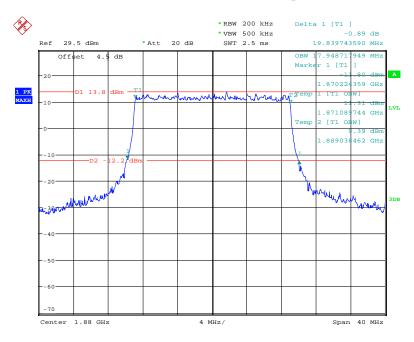

Date: 11.JAN.2018 15:53:46

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

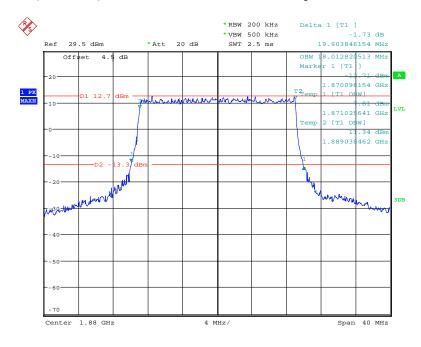


Date: 11.JAN.2018 15:56:57

LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.120	1.478
	16QAM	1.144	1.463
3.0	QPSK	2.692	3.022
	16QAM	2.692	3.042
5.0	QPSK	4.567	5.401
	16QAM	4.551	5.369
10.0	QPSK	8.974	9.856
	16QAM	8.974	9.824
15.0	QPSK	13.510	14.952
	16QAM	13.510	14.856
20.0	QPSK	17.885	19.615
	16QAM	17.949	19.679


Report No.: RSZ180109006-00D

QPSK (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

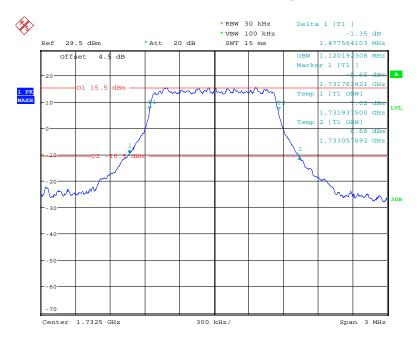


Date: 11.JAN.2018 16:12:47

16-QAM (1.4 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

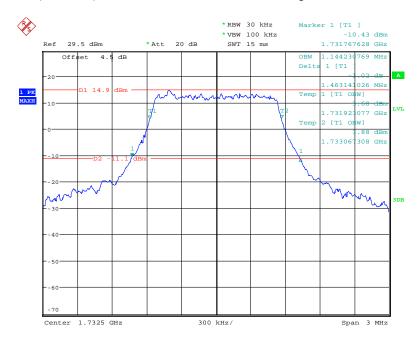


Date: 11.JAN.2018 16:11:44

QPSK (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

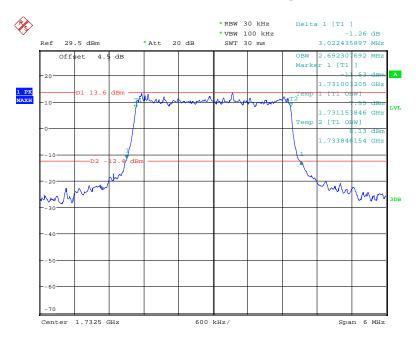


Date: 11.JAN.2018 16:10:47

16-QAM (3.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

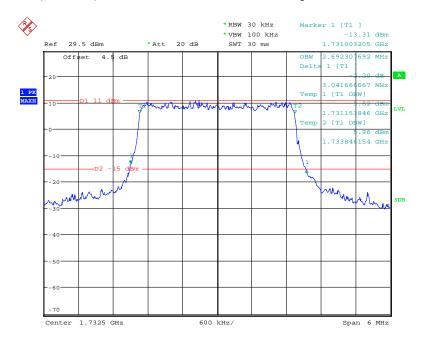


Date: 11.JAN.2018 16:09:54

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

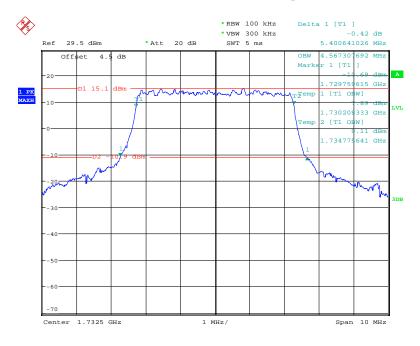


Date: 11.JAN.2018 16:06:19

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

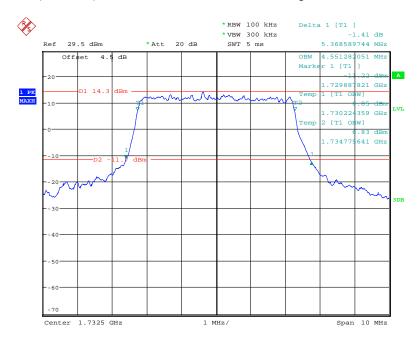


Date: 11.JAN.2018 16:08:43

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

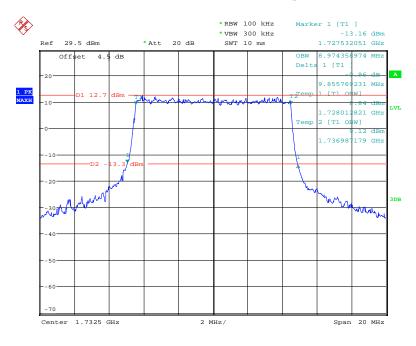


Date: 11.JAN.2018 16:05:05

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

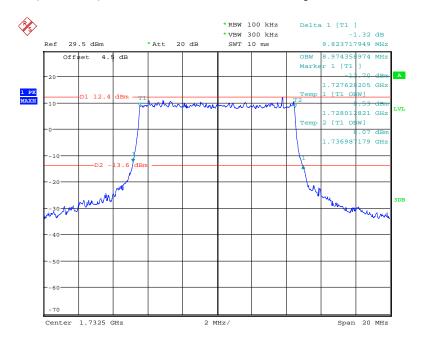


Date: 11.JAN.2018 16:03:57

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

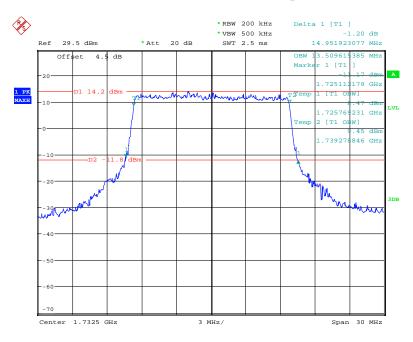


Date: 11.JAN.2018 16:00:58

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

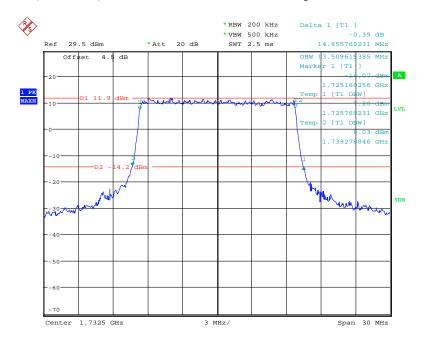


Date: 11.JAN.2018 16:02:44

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

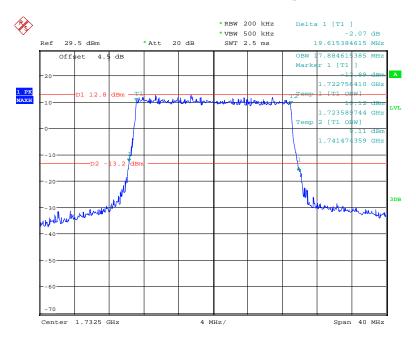

Date: 11.JAN.2018 15:59:20

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

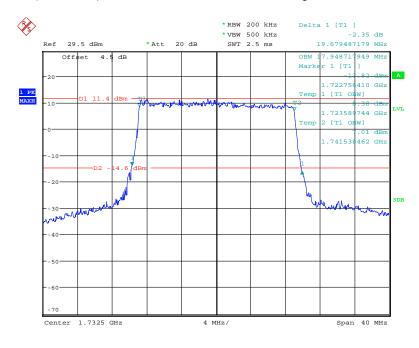


Date: 11.JAN.2018 15:58:43

LTE Band 7: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.535	5.369
	16QAM	4.583	5.529
10.0	QPSK	8.974	9.920
	16QAM	8.974	9.952
15.0	QPSK	13.510	14.952
	16QAM	13.462	14.760
20.0	QPSK	17.949	19.439
	16QAM	17.885	19.696


Report No.: RSZ180109006-00D

QPSK (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

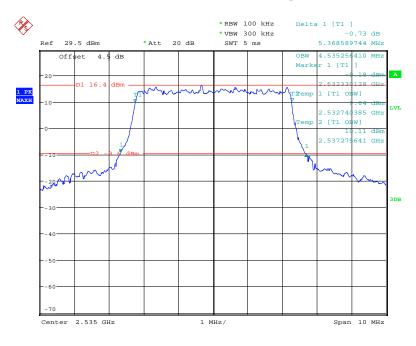


Date: 11.JAN.2018 16:17:06

16-QAM (5.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

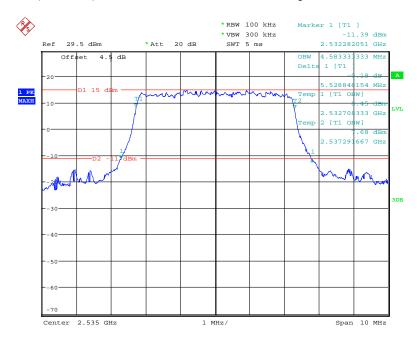


Date: 11.JAN.2018 16:14:48

QPSK (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

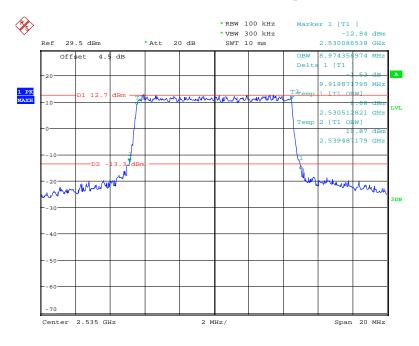


Date: 11.JAN.2018 16:18:41

16-QAM (10.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

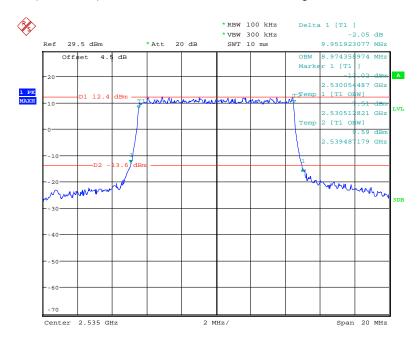


Date: 11.JAN.2018 16:20:48

QPSK (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

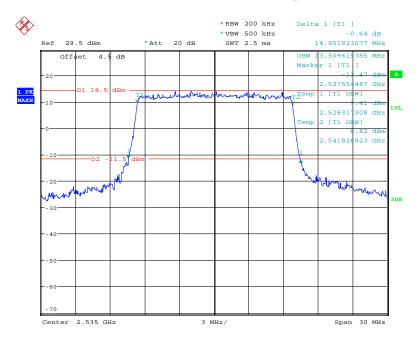


Date: 11.JAN.2018 16:25:19

16-QAM (15.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

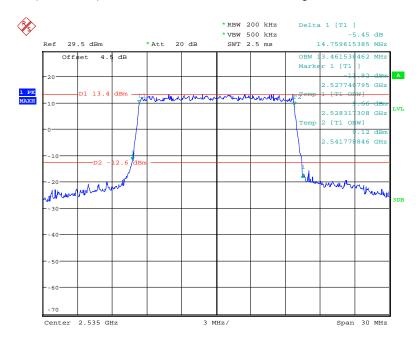


Date: 11.JAN.2018 16:22:44

QPSK (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

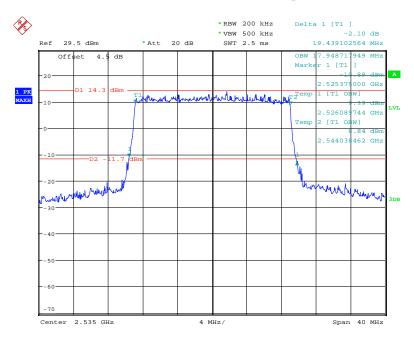

Date: 11.JAN.2018 16:27:03

16-QAM (20.0 MHz) - 26 dB Bandwidth & 99% Occupied Bandwidth, Middle channel

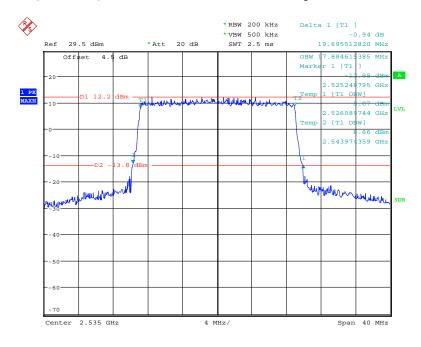

Date: 11.JAN.2018 16:29:31

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

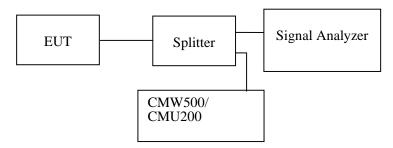

Test Data

Environmental Conditions

Temperature:	24~25 ℃
Relative Humidity:	50~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Vincent Zheng from 2018-01-11 to 2018-02-01.

Test result: Compliance,


EUT operation mode: transmitting

Please refer to the following plots.

Report No.: RSZ180109006-00D


Cellular Band (Part 22H)

30 MHz - 1 GHz (GSM Mode)

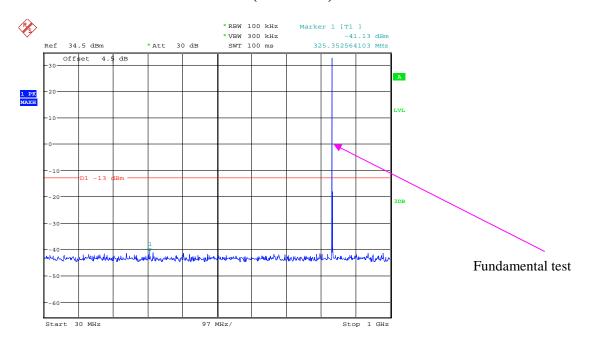


Date: 27.JAN.2018 16:51:28

1 GHz – 10 GHz (GSM Mode)

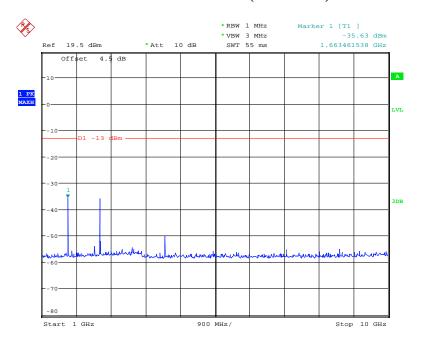


Date: 27.JAN.2018 16:38:51

30 MHz – 1 GHz (WCDMA Mode)

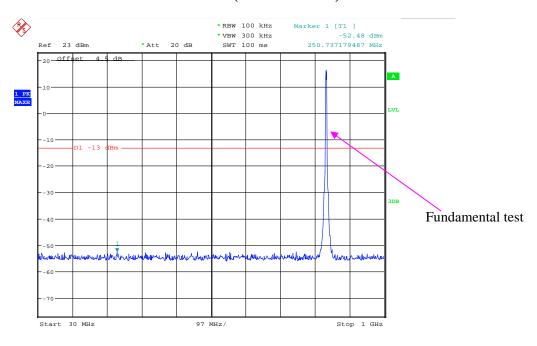

Date: 27.JAN.2018 17:04:57


1 GHz – 10 GHz (WCDMA Mode)

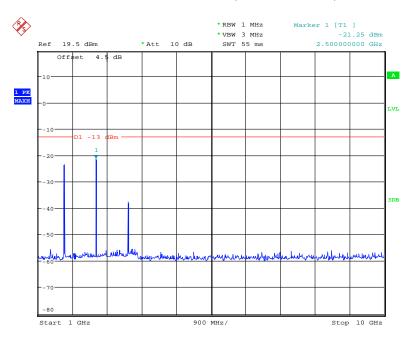

Date: 27.JAN.2018 17:04:10


PCS Band (Part 24E)

30 MHz - 1 GHz (GSM Mode)

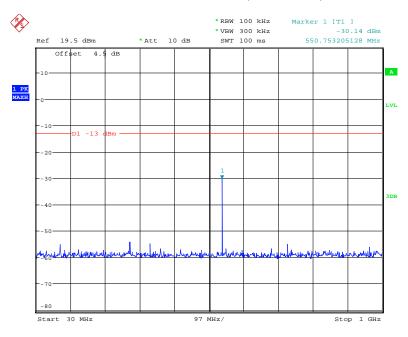


Date: 27.JAN.2018 16:49:25

1 GHz – 2 GHz (GSM Mode)

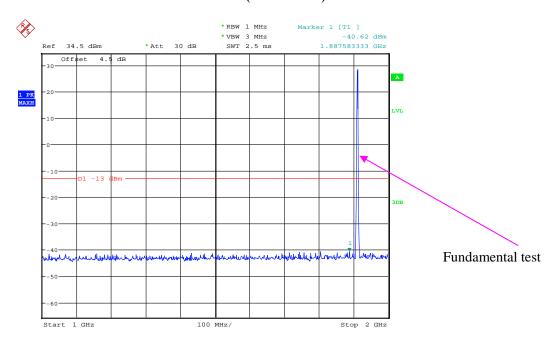


Date: 27.JAN.2018 16:48:27

2 GHz - 20 GHz (GSM Mode)

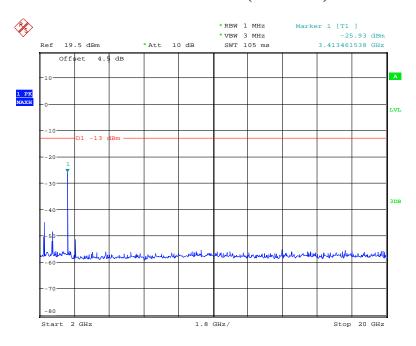


Date: 27.JAN.2018 16:48:56

30 MHz - 1 GHz (WCDMA Mode)

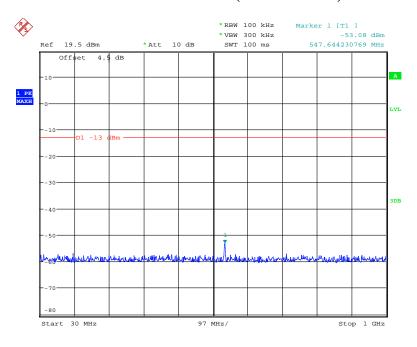


Date: 27.JAN.2018 17:01:39

1 GHz – 2 GHz (WCDMA Mode)

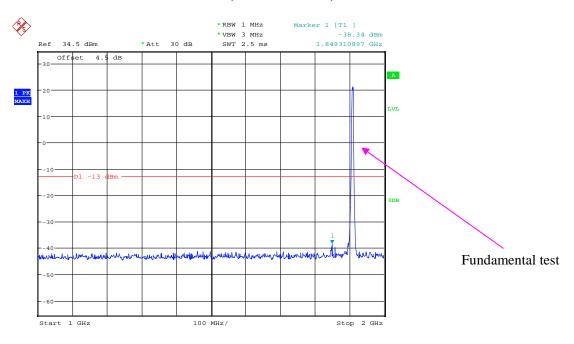

Date: 27.JAN.2018 17:00:26


2 GHz - 20 GHz (WCDMA Mode)

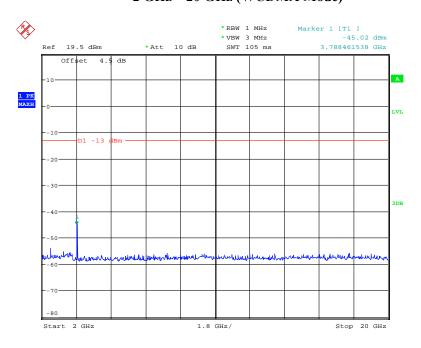

Date: 27.JAN.2018 17:01:17


LTE Band 2: (QPSK)

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

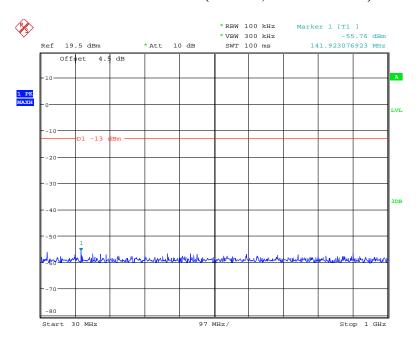


Date: 11.JAN.2018 17:03:12

1 GHz - 2 GHz (1.4 MHz, Middle Channel)

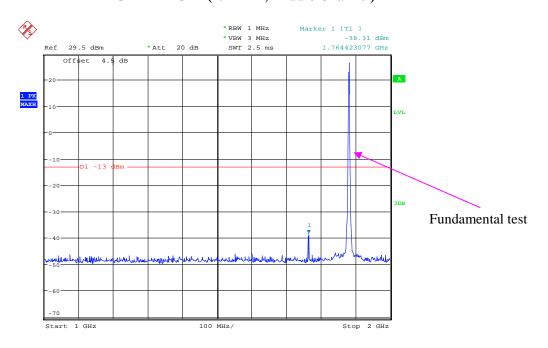


Date: 11.JAN.2018 17:25:13

2 GHz - 20 GHz (1.4 MHz, Middle Channel)

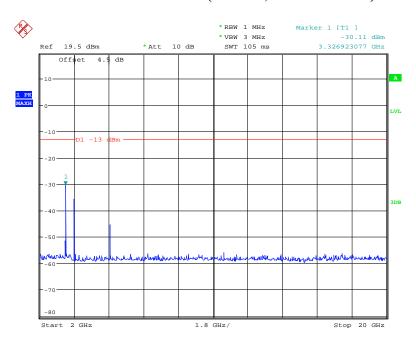


Date: 11.JAN.2018 17:16:26

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

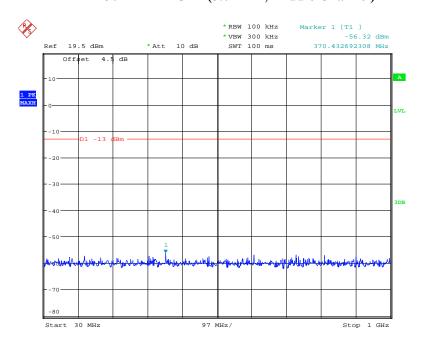


Date: 11.JAN.2018 17:03:39

1 GHz - 2 GHz (3.0 MHz, Middle Channel)

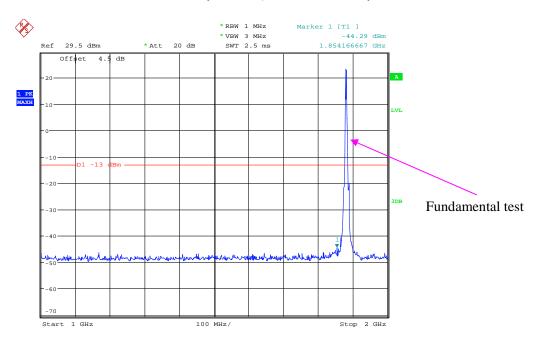


Date: 11.JAN.2018 17:25:38

2 GHz - 20 GHz (3.0 MHz, Middle Channel)

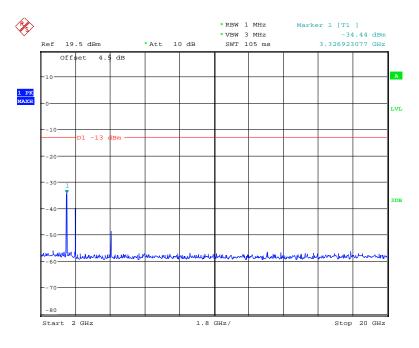


Date: 11.JAN.2018 17:16:12

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

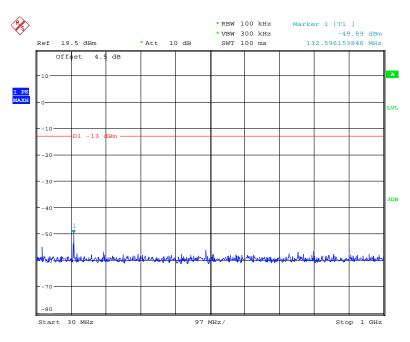


Date: 11.JAN.2018 17:03:55

1 GHz - 2 GHz (5.0 MHz, Middle Channel)

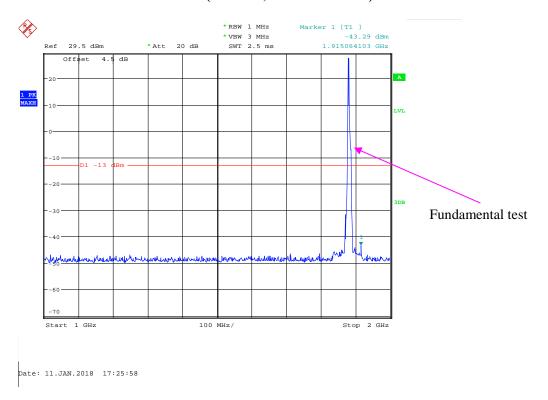


2 GHz - 20 GHz (5.0 MHz, Middle Channel)

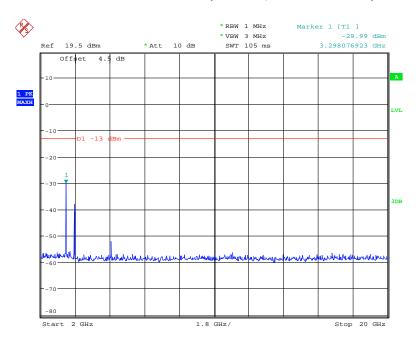


Date: 11.JAN.2018 17:15:57

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

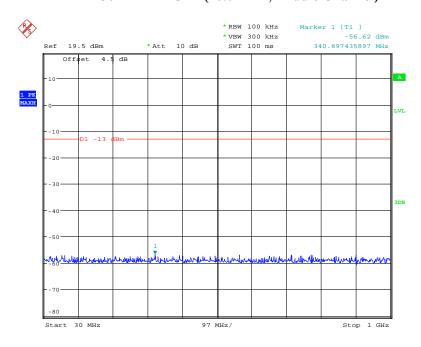


Date: 11.JAN.2018 17:04:29

1 GHz - 2 GHz (10.0 MHz, Middle Channel)

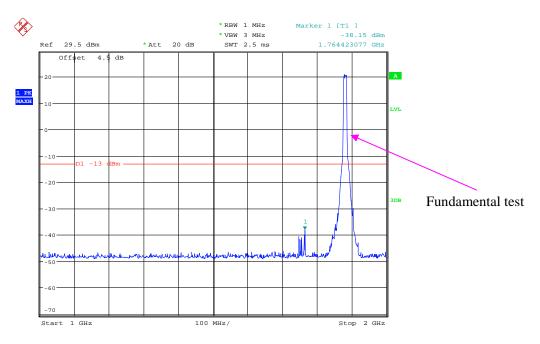


Date: 11.JAN.2018 17:26:34

2 GHz - 20 GHz (10.0 MHz, Middle Channel)

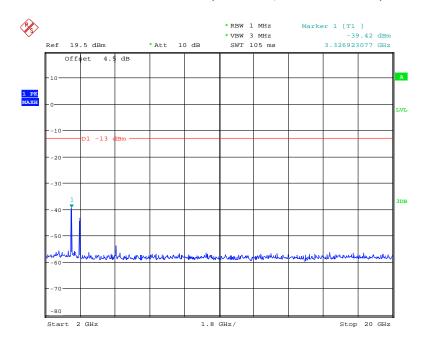


Date: 11.JAN.2018 17:15:42

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

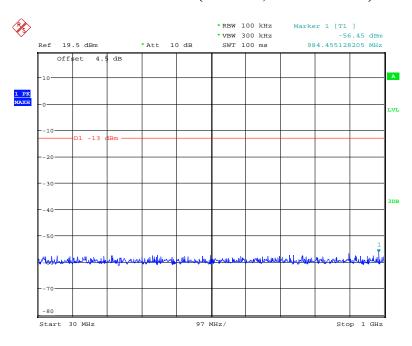


Date: 11.JAN.2018 17:04:45

1 GHz - 2 GHz (15.0 MHz, Middle Channel)

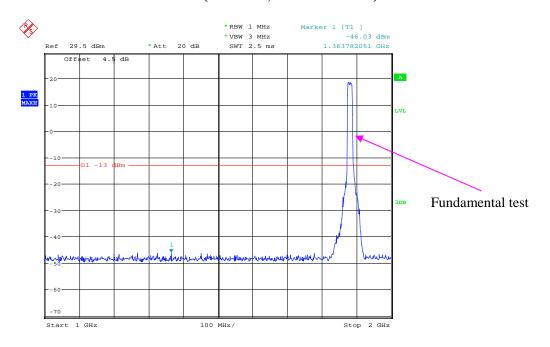


Date: 11.JAN.2018 17:27:02

2 GHz - 20 GHz (15.0 MHz, Middle Channel)

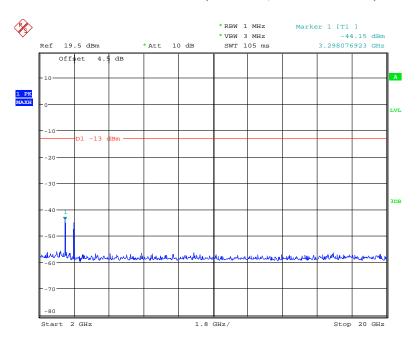


Date: 11.JAN.2018 17:15:27

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

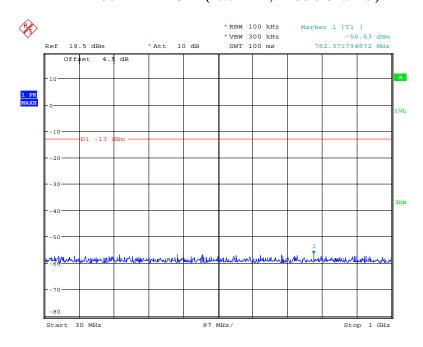


Date: 11.JAN.2018 17:05:10

1 GHz - 2 GHz (20.0 MHz, Middle Channel)

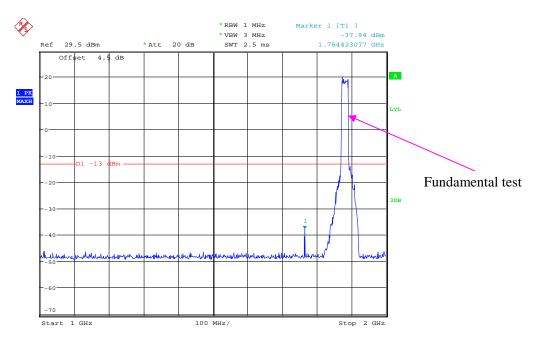

Date: 11.JAN.2018 17:27:31


2 GHz - 20 GHz (20.0 MHz, Middle Channel)

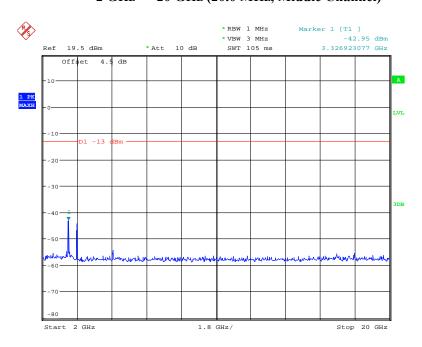

Date: 11.JAN.2018 17:15:11


LTE Band 4: (QPSK)

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

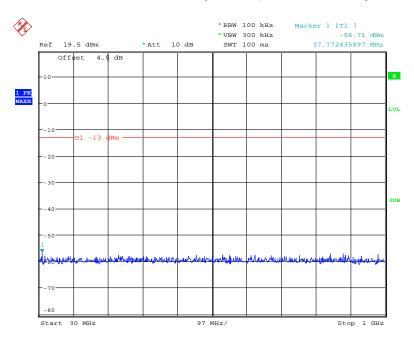


Date: 11.JAN.2018 17:07:09

1 GHz - 2 GHz (1.4 MHz, Middle Channel)

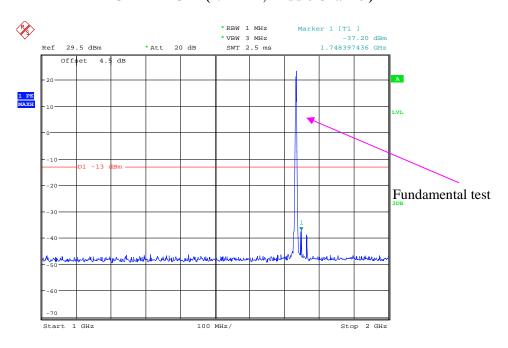


Date: 11.JAN.2018 17:24:44

2 GHz - 20 GHz (1.4 MHz, Middle Channel)

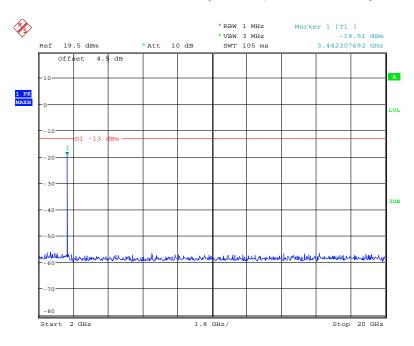


Date: 11.JAN.2018 17:16:46

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

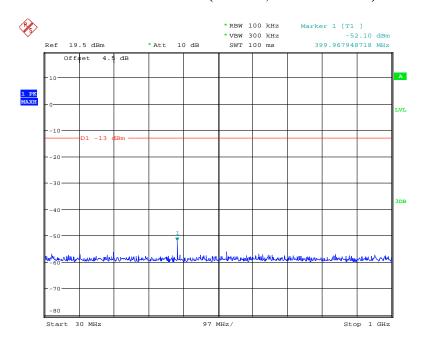


Date: 11.JAN.2018 17:06:54

1 GHz - 2 GHz (3.0 MHz, Middle Channel)

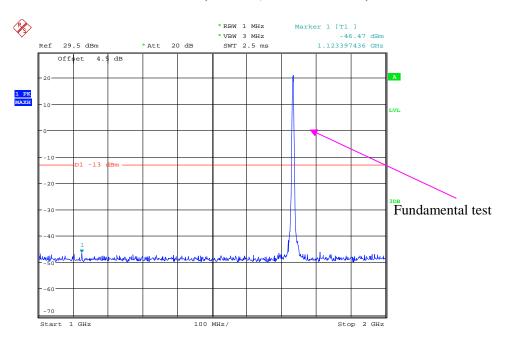


Date: 11.JAN.2018 17:24:09

2 GHz - 20 GHz (3.0 MHz, Middle Channel)

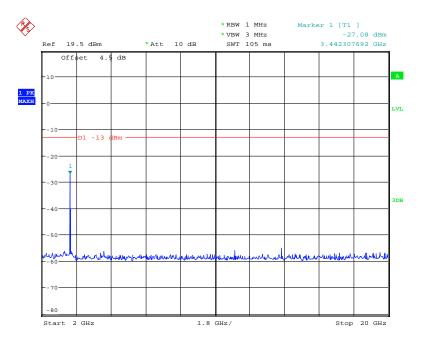


Date: 11.JAN.2018 17:17:01

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

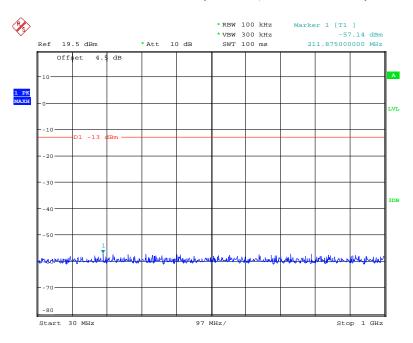


Date: 11.JAN.2018 17:06:31

1 GHz - 2 GHz (5.0 MHz, Middle Channel)

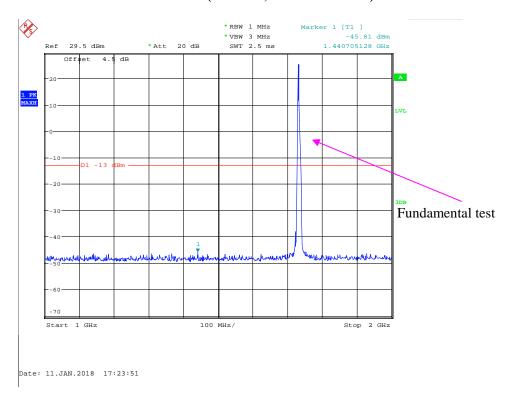


2 GHz - 20 GHz (5.0 MHz, Middle Channel)

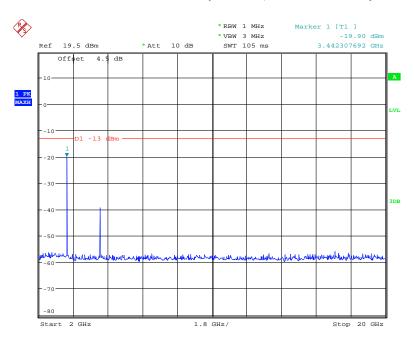


Date: 11.JAN.2018 17:17:14

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

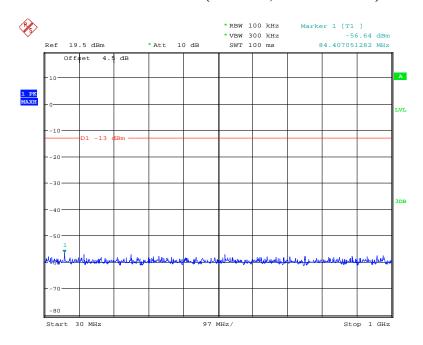


Date: 11.JAN.2018 17:06:17

1 GHz - 2 GHz (10.0 MHz, Middle Channel)

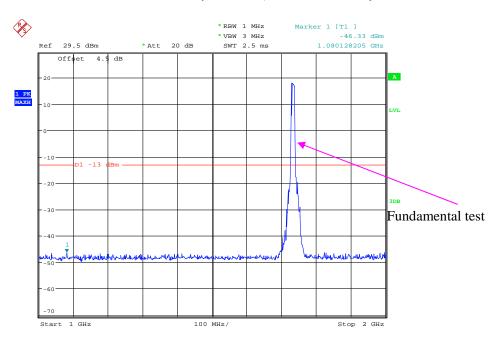


Date: 11.JAN.2018 17:23:26

2 GHz - 20 GHz (10.0 MHz, Middle Channel)

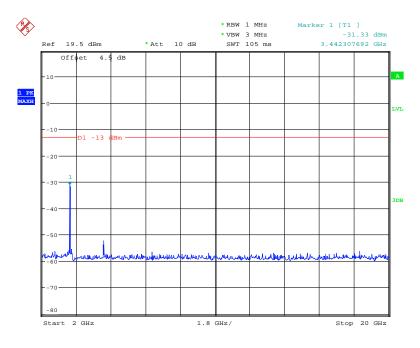


Date: 11.JAN.2018 17:17:28

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

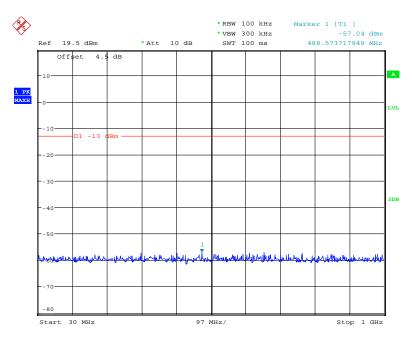


Date: 11.JAN.2018 17:06:04

1 GHz - 2 GHz (15.0 MHz, Middle Channel)

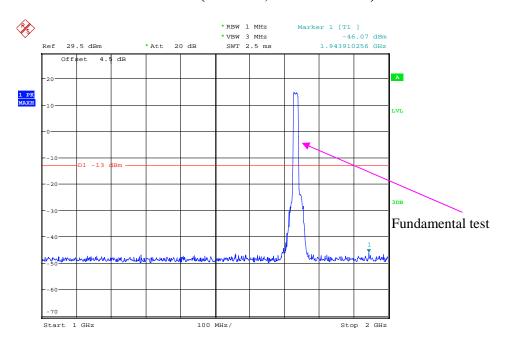


Date: 11.JAN.2018 17:22:54

2 GHz - 20 GHz (15.0 MHz, Middle Channel)

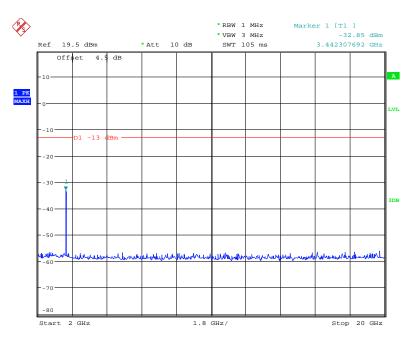


Date: 11.JAN.2018 17:17:41

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

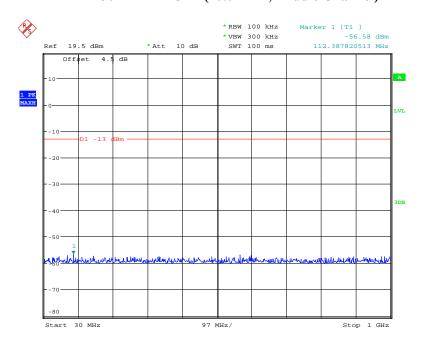


Date: 11.JAN.2018 17:05:46

1 GHz - 2 GHz (20.0 MHz, Middle Channel)

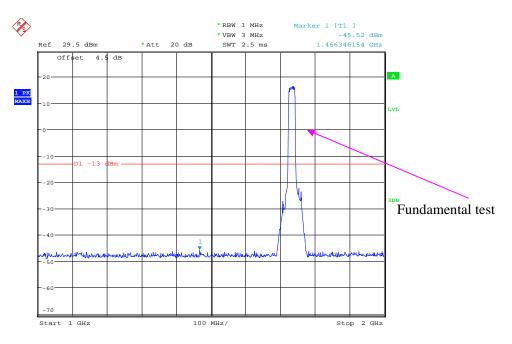

Date: 11.JAN.2018 17:22:28


2 GHz - 26 GHz (20.0 MHz, Middle Channel)

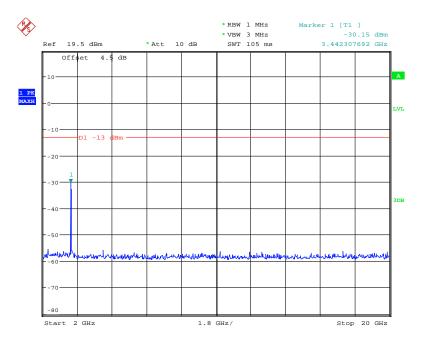

Date: 11.JAN.2018 17:17:56


LTE Band 7: (QPSK)

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

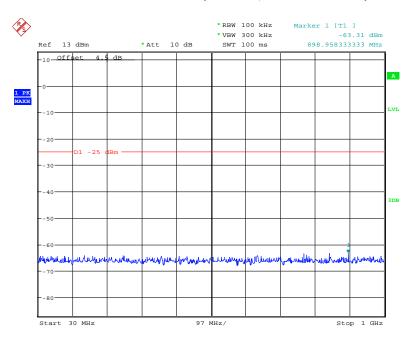


Date: 1.FEB.2018 13:36:27

1 GHz - 3 GHz (5.0 MHz, Middle Channel)

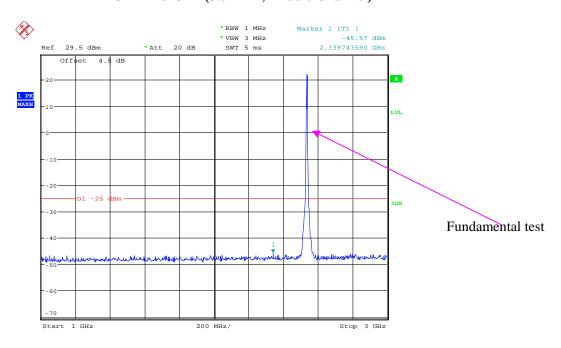


Date: 1.FEB.2018 13:41:32

3 GHz - 26 GHz (5.0 MHz, Middle Channel)

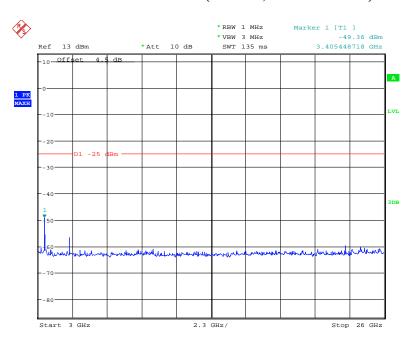


Date: 1.FEB.2018 13:40:31

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

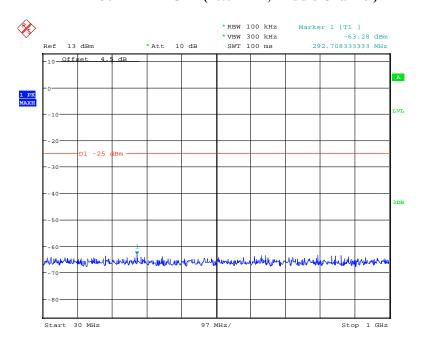


Date: 1.FEB.2018 13:36:36

1 GHz - 3 GHz (10.0 MHz, Middle Channel)

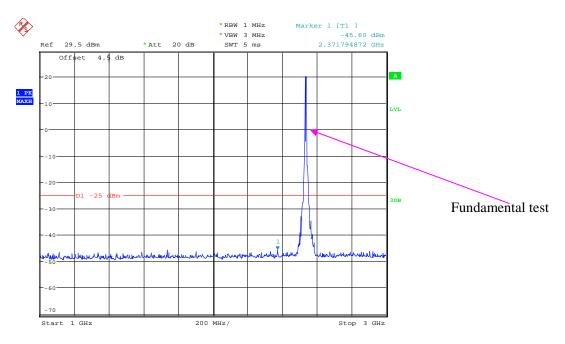


Date: 1.FEB.2018 13:46:31

3 GHz - 26 GHz (10.0 MHz, Middle Channel)

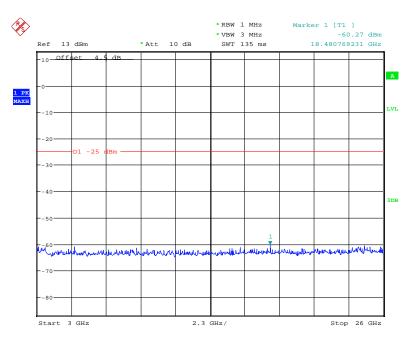


Date: 1.FEB.2018 13:39:57

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

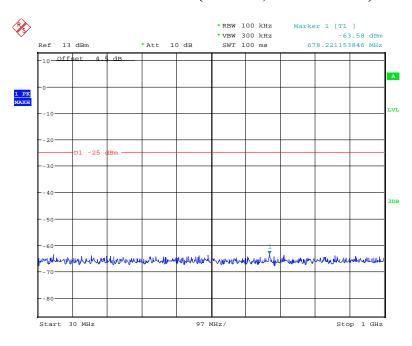


Date: 1.FEB.2018 13:36:50

1 GHz - 3 GHz (15.0 MHz, Middle Channel)

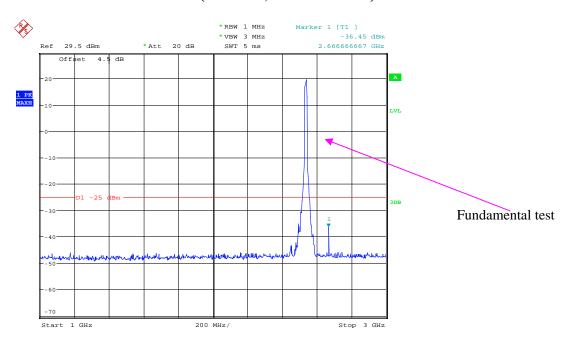


Date: 1.FEB.2018 13:47:25

3 GHz - 26 GHz (15.0 MHz, Middle Channel)

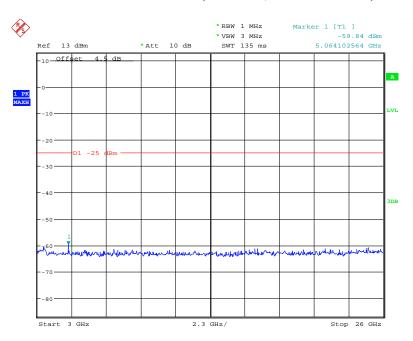


Date: 1.FEB.2018 13:39:35

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

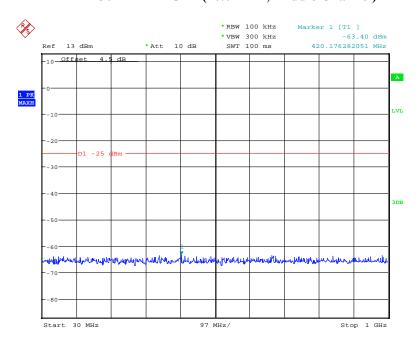


Date: 1.FEB.2018 13:37:04

1 GHz - 3 GHz (20.0 MHz, Middle Channel)

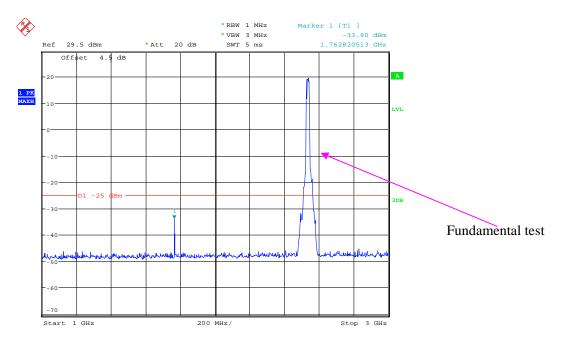

Date: 1.FEB.2018 13:47:56

3 GHz - 26 GHz (20.0 MHz, Middle Channel)

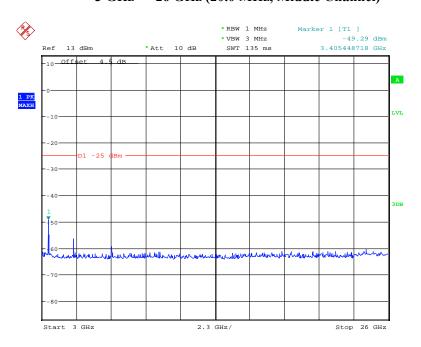

Date: 1.FEB.2018 13:39:16

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	24 ℃				
Relative Humidity:	48 %				
ATM Pressure:	110.0 kPa				

The testing was performed by Vincent Zheng on 2018-01-29.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

	Receiver Turntable		Rx Antenna		Substituted			Absolute	FCC Part 22H	
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
GSM Mode, Middle channel										
167.58	35.85	26	1.3	Н	-61.10	0.28	0	-61.38	-13	48.38
167.58	35.65	140	1.6	V	-61.30	0.28	0	-61.58	-13	48.58
1673.20	71.03	242	1.9	Н	-36.0	1.30	9.10	-28.20	-13	15.20
1673.20	62.39	76	2.2	V	-44.1	1.30	9.10	-36.30	-13	23.30
2509.80	55.42	254	1.9	Н	-48.1	2.60	9.30	-41.40	-13	28.40
2509.80	55.41	234	1.7	V	-47.5	2.60	9.30	-40.80	-13	27.80
WCDMA Mode, Middle channel										
167.58	35.78	319	1.6	Н	-61.20	0.28	0	-61.48	-13	48.48
167.58	38.04	257	1.2	V	-59.00	0.28	0	-59.28	-13	46.28
1673.20	45.39	339	2.1	Н	-61.7	1.30	9.10	-53.90	-13	40.90
1673.20	44.29	204	1.4	V	-62.2	1.30	9.10	-54.40	-13	41.40
2509.80	49.2	116	1.3	Н	-54.3	2.60	9.30	-47.60	-13	34.60
2509.80	48.26	46	1.2	V	-54.7	2.60	9.30	-48.00	-13	35.00

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

	Receiver	Turntable	Rx Antenna		Substituted			Absolute	FCC Part 24E	
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
GSM Mode, Middle channel										
167.58	35.71	343	1.4	Н	-61.30	0.28	0	-61.58	-13	48.58
167.58	36.88	128	1.8	V	-60.10	0.28	0	-60.38	-13	47.38
3760.00	57.53	53	2.4	Н	-43.7	1.50	9.70	-35.50	-13	22.50
3760.00	62.63	354	1.6	V	-38.1	1.50	9.70	-29.90	-13	16.90
WCDMA Mode, Middle channel										
167.58	35.88	224	1.4	Н	-61.10	0.28	0	-61.38	-13	48.38
167.58	35.46	296	1.9	V	-61.50	0.28	0	-61.78	-13	48.78
3760.00	48.75	67	1.2	Н	-52.5	1.50	9.70	-44.30	-13	31.30
3760.00	49.47	281	1.7	V	-51.3	1.50	9.70	-43.10	-13	30.10

LTE Band: (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Ant	tenna	Substituted			Absolute		
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	Band 2, Middle channel, QPSK, 1.4MHz									
Test frequency range: 30 MHz ~ 20 GHz										
167.58	35.71	211	2.5	Н	-61.30	0.28	0	-61.58	-13	48.58
167.58	37.54	69	2.0	V	-59.50	0.28	0	-59.78	-13	46.78
3760.00	36.24	253	1.4	Н	-50.8	1.90	9.90	-42.80	-13	29.80
3760.00	35.26	281	1.4	V	-51.4	1.90	9.90	-43.40	-13	30.40
Band 4, Middle channel, QPSK, 1.4MHz										
Test frequency range: 30 MHz ~ 18 GHz										
167.58	35.00	74	2.2	Н	-62.00	0.28	0	-62.28	-13	49.28
167.58	37.17	318	1.3	V	-59.80	0.28	0	-60.08	-13	47.08
3465.00	35.66	251	1.4	Н	-48.2	1.90	10.00	-40.10	-13	27.10
3465.00	34.68	118	2.4	V	-49.3	1.90	10.00	-41.20	-13	28.20
Band 7, Middle channel, QPSK, 5.0MHz										
Test frequency range: 30 MHz ~26 GHz										
167.58	35.74	196	2.0	Н	-61.30	0.28	0	-61.58	-25	36.58
167.58	38.61	248	1.0	V	-58.40	0.28	0	-58.68	-25	33.68
5070.00	34.56	46	2.0	Н	-49.5	2.30	10.10	-41.70	-25	16.70
5070.00	34.83	198	1.2	V	-48.5	2.30	10.10	-40.70	-25	15.70

Note:

¹⁾ Absolute Level = Substituted Level - Cable loss + Antenna Gain

²⁾ Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) \, dB$.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) dB$.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

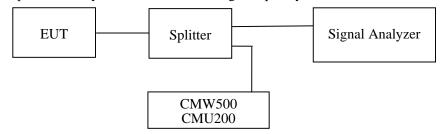

Test Data

Environmental Conditions


Temperature:	24~25 ℃
Relative Humidity:	48~50 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng from 2018-01-11 to 2018-01-27.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

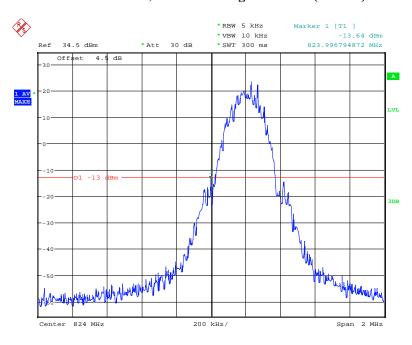


Date: 27.JAN.2018 16:35:13

Cellular Band, Right Band Edge for GSM (GMSK) Mode

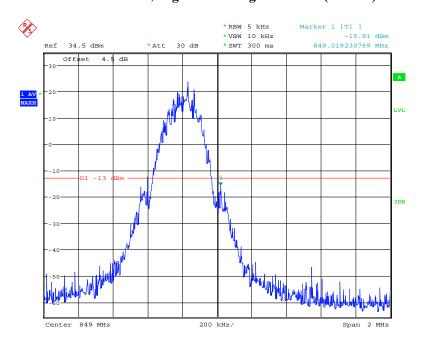


Date: 27.JAN.2018 16:36:02

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

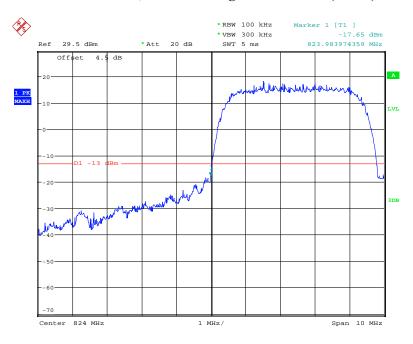


Date: 27.JAN.2018 17:07:12

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

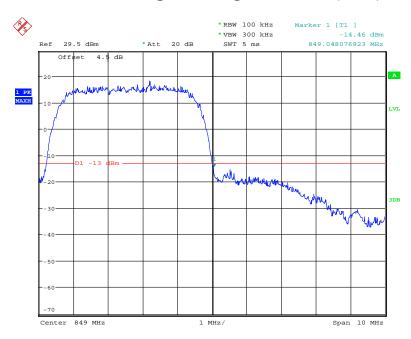


Date: 27.JAN.2018 17:07:57

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

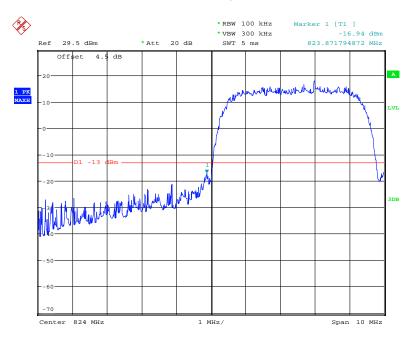


Date: 27.JAN.2018 17:10:45

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

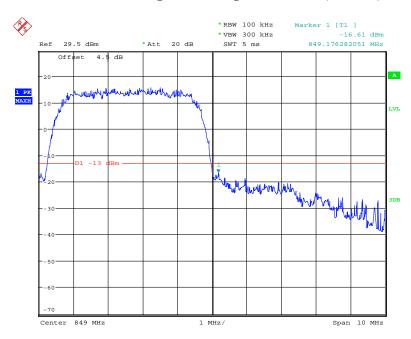


Date: 27.JAN.2018 17:10:16

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

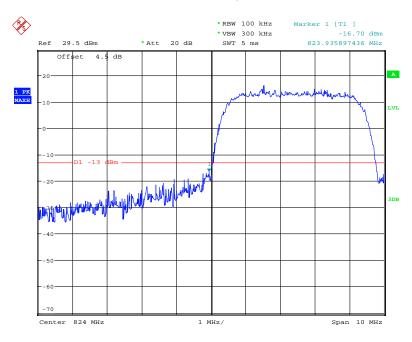


Date: 27.JAN.2018 17:21:10

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

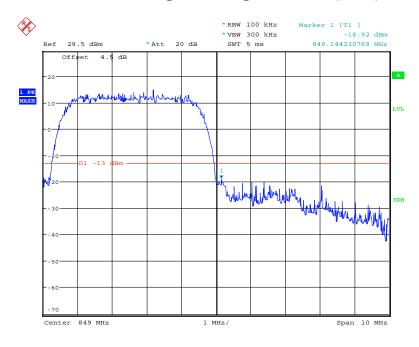


Date: 27.JAN.2018 17:21:34

PCS Band, Left Band Edge for GSM (GMSK) Mode

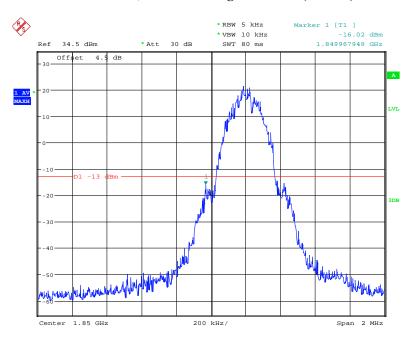


Date: 27.JAN.2018 16:47:13

PCS Band, Right Band Edge for GSM (GMSK) Mode

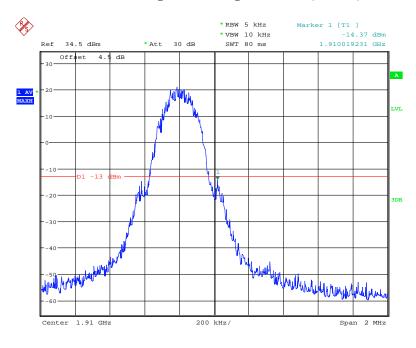


Date: 27.JAN.2018 16:47:43

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

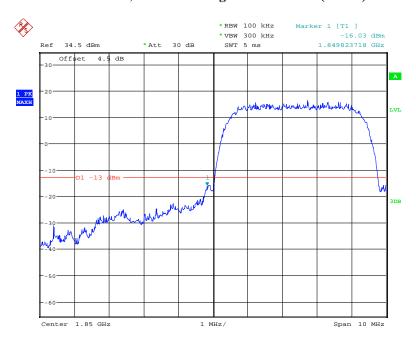


Date: 27.JAN.2018 16:59:04

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

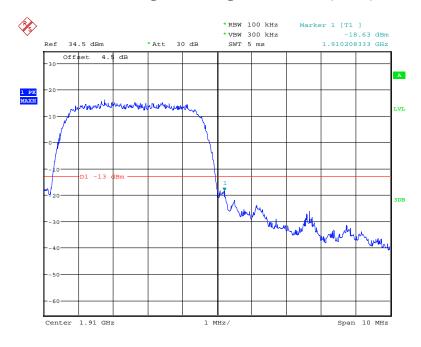


Date: 27.JAN.2018 16:59:52

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

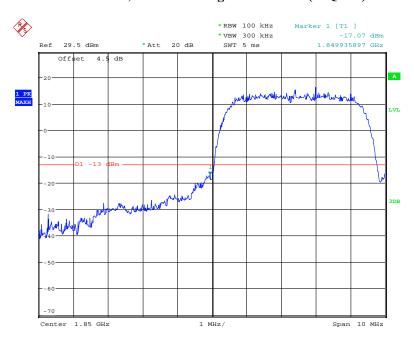


Date: 27.JAN.2018 17:14:11

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

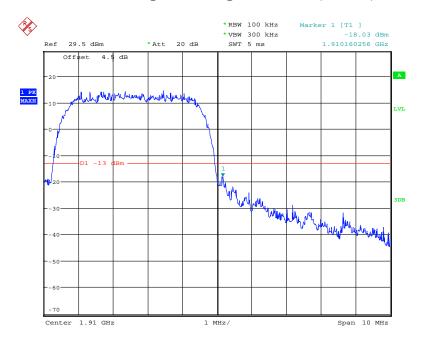


Date: 27.JAN.2018 17:14:46

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

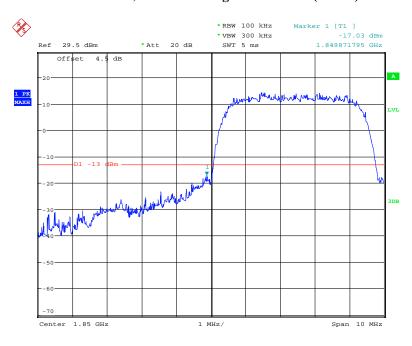

Date: 27.JAN.2018 17:17:30


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

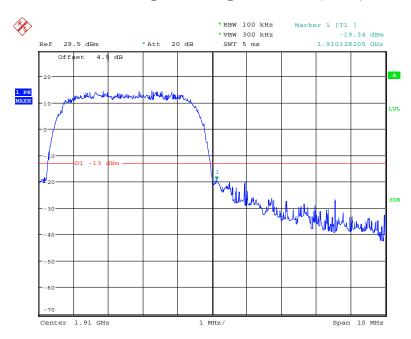

Date: 27.JAN.2018 17:16:55


LTE Band 2:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

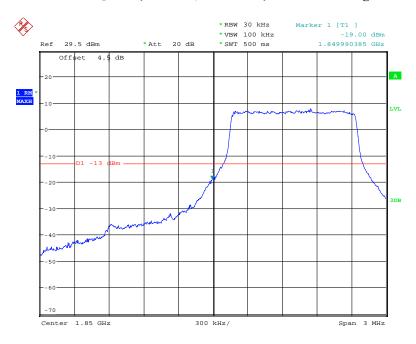


Date: 11.JAN.2018 13:13:43

QPSK (1.4 MHz, FULL RB) - Right Band Edge

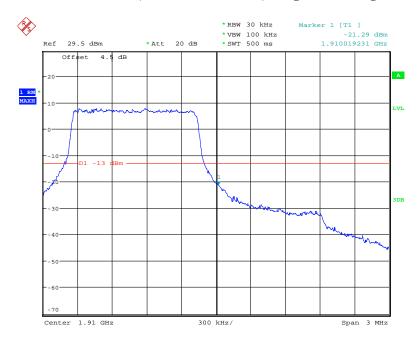


Date: 11.JAN.2018 13:16:55

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

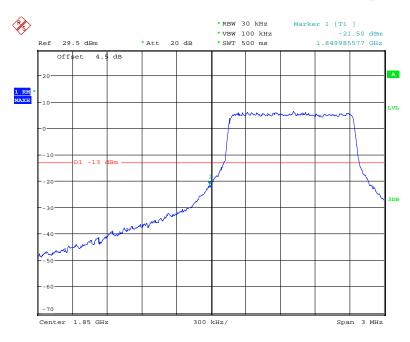


Date: 11.JAN.2018 13:14:46

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

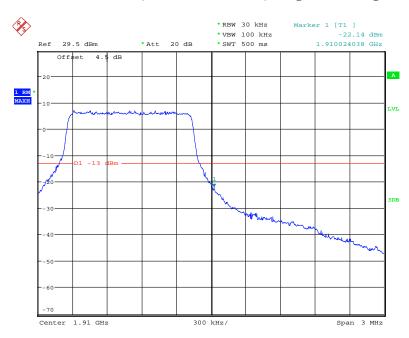


Date: 11.JAN.2018 13:16:34

QPSK (3.0 MHz, FULL RB) - Left Band Edge

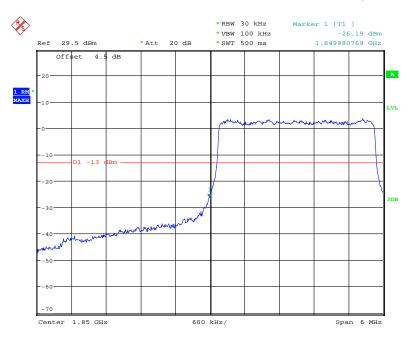


Date: 11.JAN.2018 13:20:30

QPSK (3.0 MHz, FULL RB) - Right Band Edge

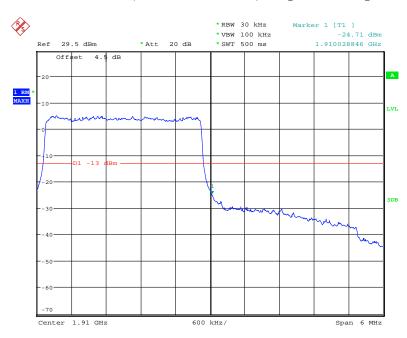


Date: 11.JAN.2018 13:18:52

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

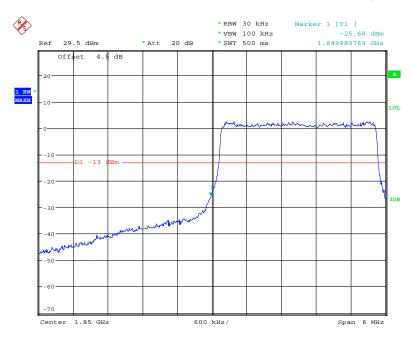


Date: 11.JAN.2018 13:20:07

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

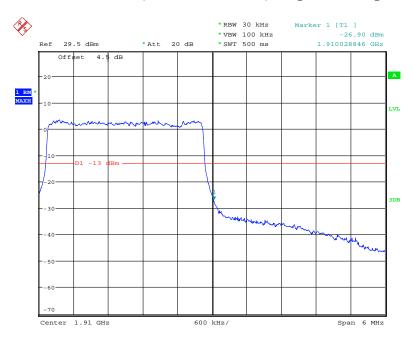


Date: 11.JAN.2018 13:19:23

QPSK (5.0 MHz, FULL RB) - Left Band Edge

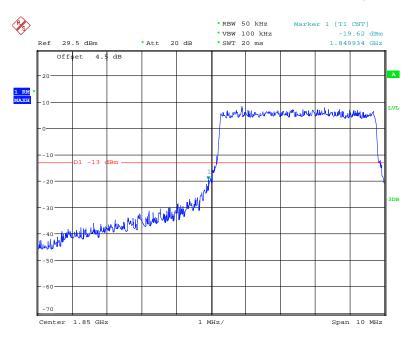


Date: 11.JAN.2018 15:10:24

QPSK (5.0 MHz, FULL RB) - Right Band Edge

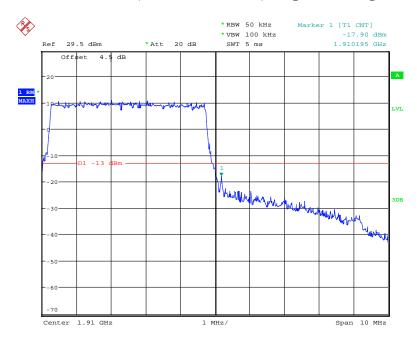


Date: 11.JAN.2018 15:07:22

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

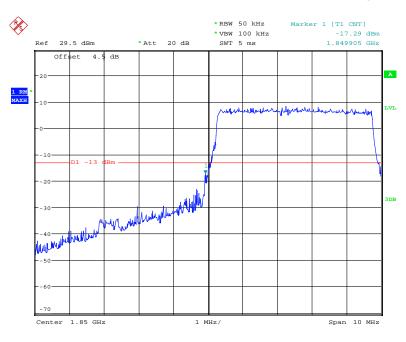


Date: 11.JAN.2018 15:08:50

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

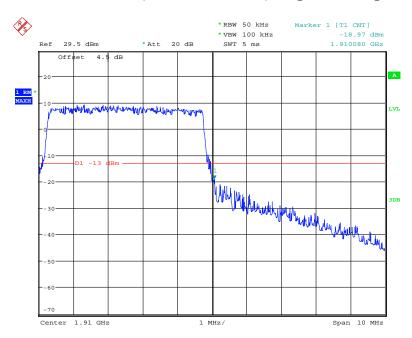


Date: 11.JAN.2018 15:07:55

QPSK (10.0 MHz, FULL RB) - Left Band Edge

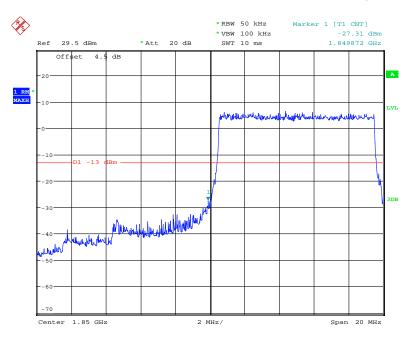


Date: 11.JAN.2018 15:04:36

QPSK (10.0 MHz, FULL RB) - Right Band Edge

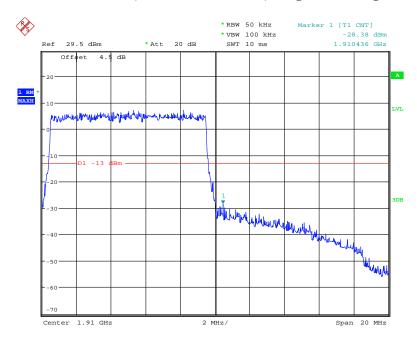


Date: 11.JAN.2018 15:06:30

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

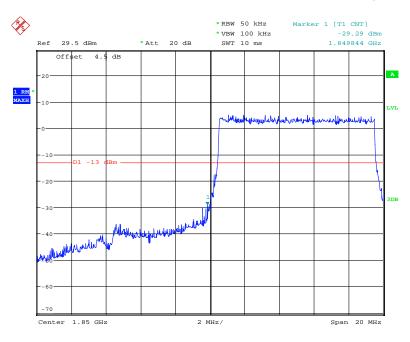


Date: 11.JAN.2018 15:05:05

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

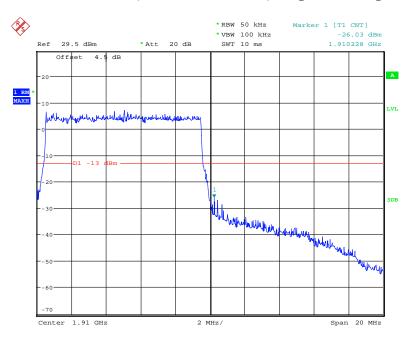


Date: 11.JAN.2018 15:06:10

QPSK (15.0 MHz, FULL RB) - Left Band Edge

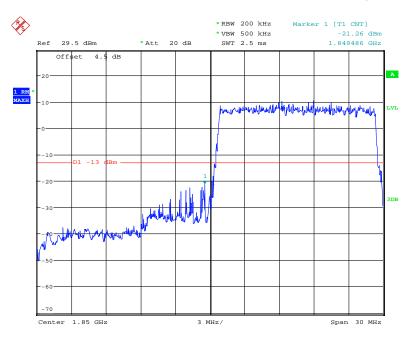


Date: 11.JAN.2018 15:03:03

QPSK (15.0 MHz, FULL RB) - Right Band Edge

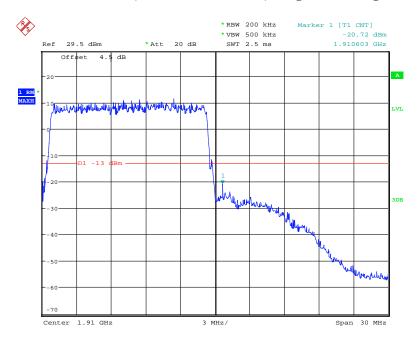


Date: 11.JAN.2018 15:01:07

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

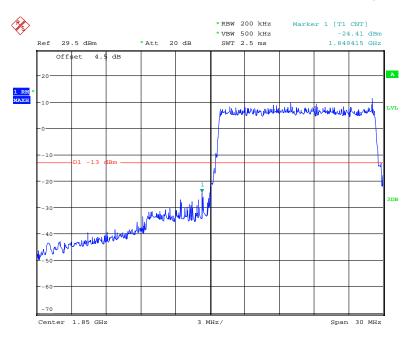


Date: 11.JAN.2018 15:02:11

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

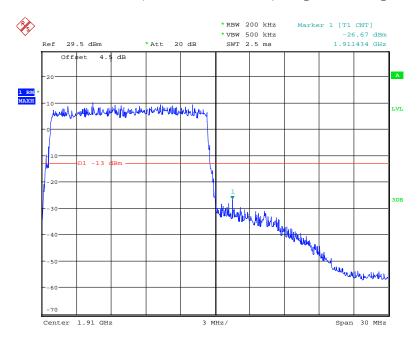


Date: 11.JAN.2018 15:01:28

QPSK (20.0 MHz, FULL RB) - Left Band Edge

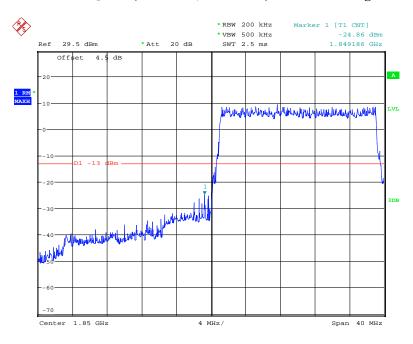


Date: 11.JAN.2018 14:58:11

QPSK (20.0 MHz, FULL RB) - Right Band Edge

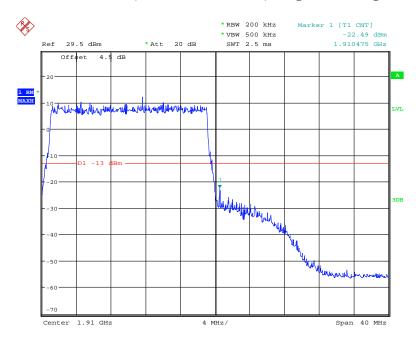


Date: 11.JAN.2018 14:59:57

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

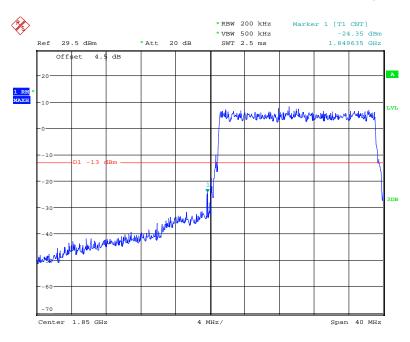

Date: 11.JAN.2018 14:58:45


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

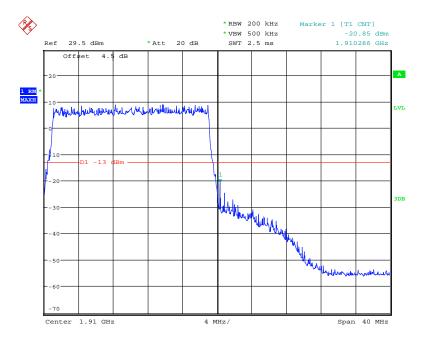

Date: 11.JAN.2018 14:59:27


LTE Band 4:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

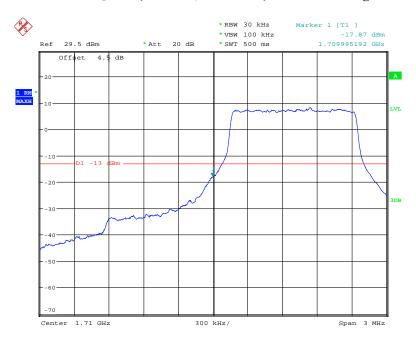


Date: 11.JAN.2018 13:45:06

QPSK (1.4 MHz, FULL RB) - Right Band Edge

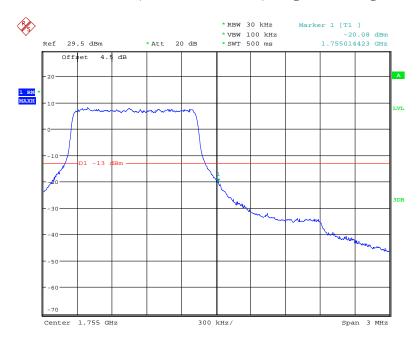


Date: 11.JAN.2018 13:42:23

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

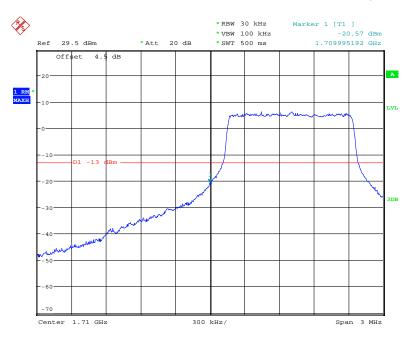


Date: 11.JAN.2018 13:43:50

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

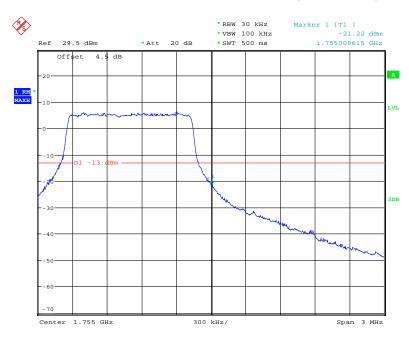


Date: 11.JAN.2018 13:42:54

QPSK (3.0 MHz, FULL RB) - Left Band Edge

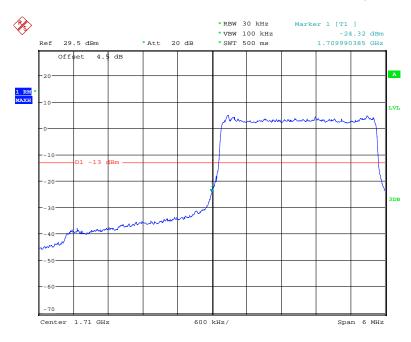


Date: 11.JAN.2018 13:39:51

QPSK (3.0 MHz, FULL RB) - Right Band Edge

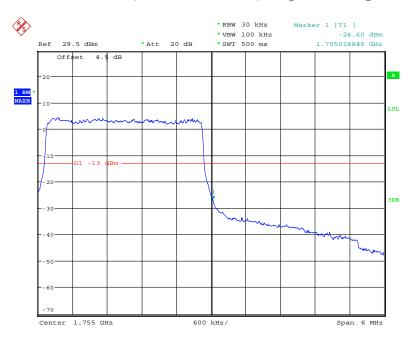


Date: 11.JAN.2018 13:41:39

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

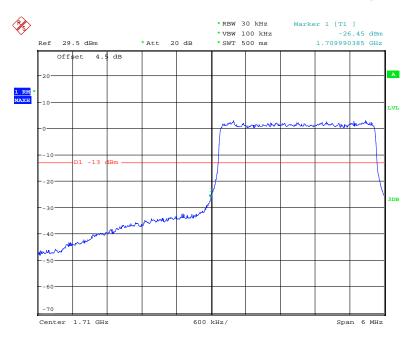


Date: 11.JAN.2018 13:40:24

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

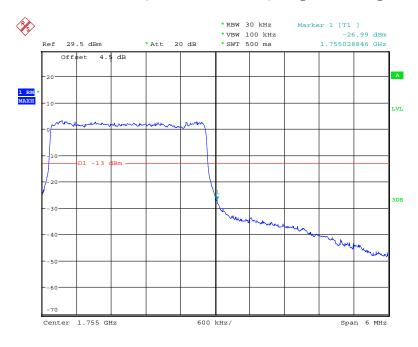


Date: 11.JAN.2018 13:41:12

QPSK (5.0 MHz, FULL RB) - Left Band Edge

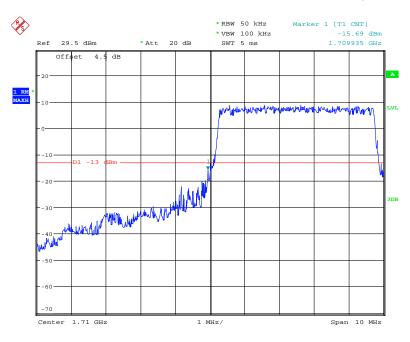


Date: 11.JAN.2018 14:42:57

QPSK (5.0 MHz, FULL RB) - Right Band Edge

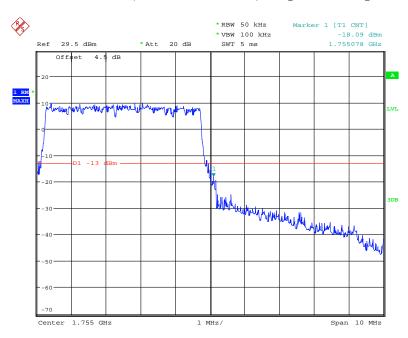


Date: 11.JAN.2018 14:45:53

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

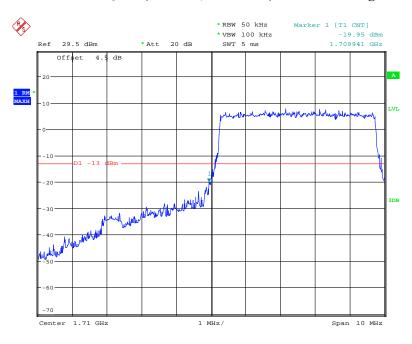


Date: 11.JAN.2018 14:43:30

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

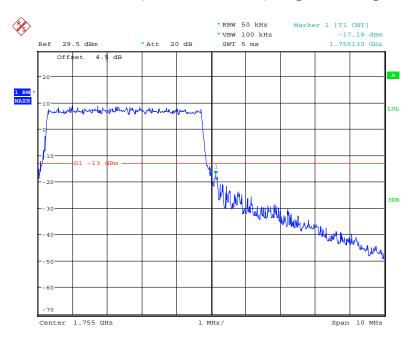


Date: 11.JAN.2018 14:45:16

QPSK (10.0 MHz, FULL RB) - Left Band Edge

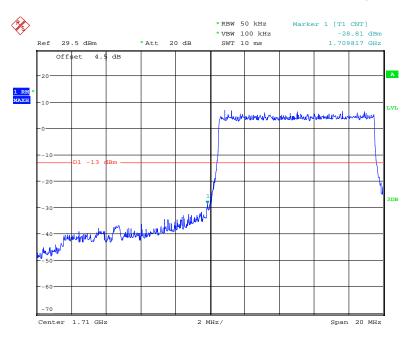


Date: 11.JAN.2018 14:49:31

QPSK (10.0 MHz, FULL RB) - Right Band Edge

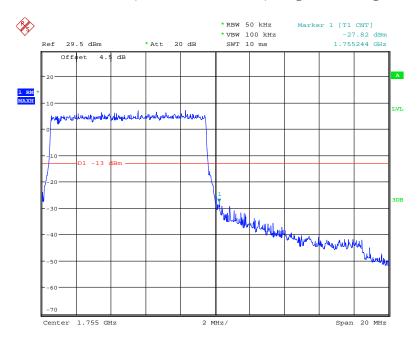


Date: 11.JAN.2018 14:47:03

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

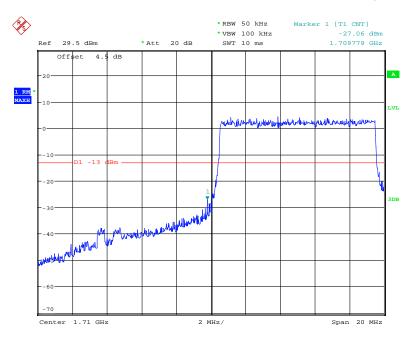


Date: 11.JAN.2018 14:48:23

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

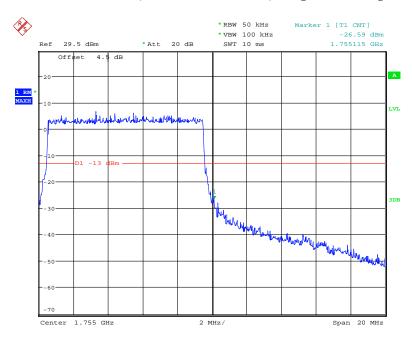


Date: 11.JAN.2018 14:47:35

QPSK (15.0 MHz, FULL RB) - Left Band Edge

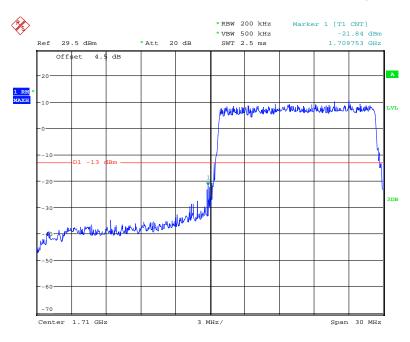


Date: 11.JAN.2018 14:51:06

QPSK (15.0 MHz, FULL RB) - Right Band Edge

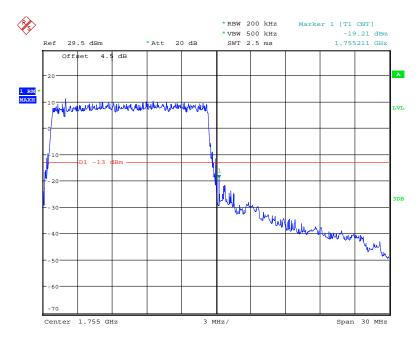


Date: 11.JAN.2018 14:52:29

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

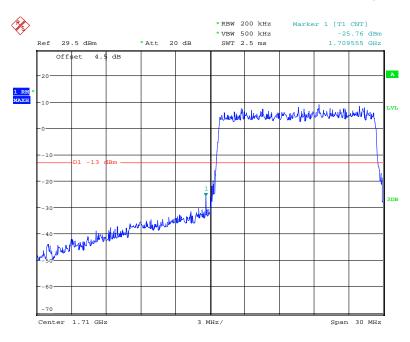


Date: 11.JAN.2018 14:51:27

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

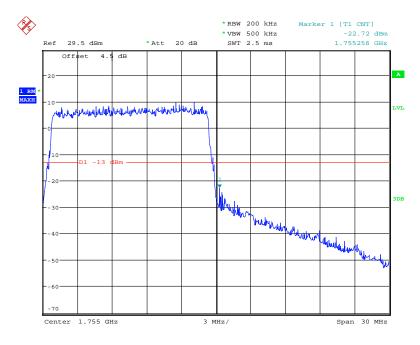


Date: 11.JAN.2018 14:52:06

QPSK (20.0 MHz, FULL RB) - Left Band Edge

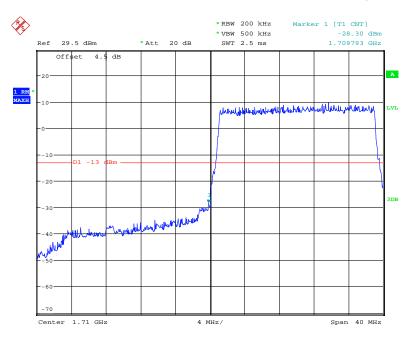


Date: 11.JAN.2018 14:56:14

QPSK (20.0 MHz, FULL RB) - Right Band Edge

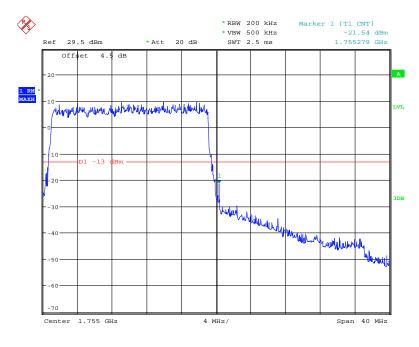


Date: 11.JAN.2018 14:53:47

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

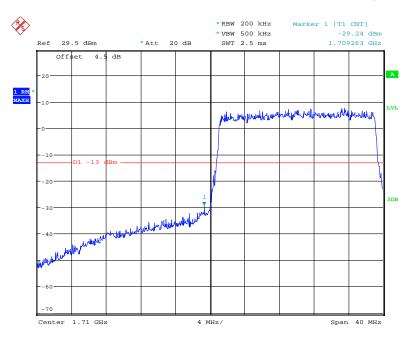

Date: 11.JAN.2018 14:55:31


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

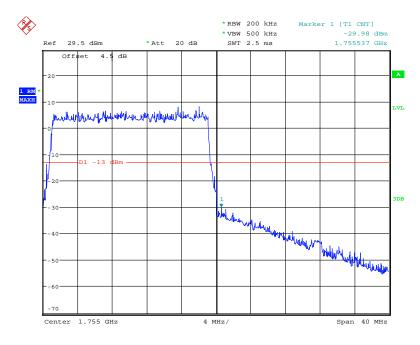

Date: 11.JAN.2018 14:54:16


LTE Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

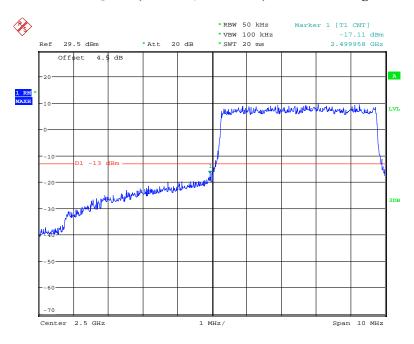


Date: 11.JAN.2018 14:41:11

QPSK (5.0 MHz, FULL RB) - Right Band Edge

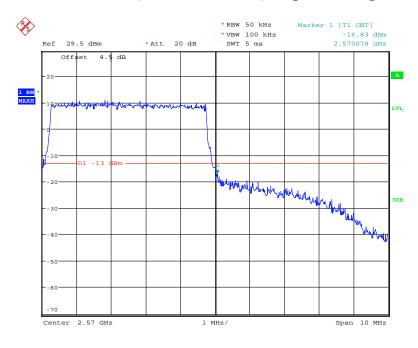


Date: 11.JAN.2018 14:37:53

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

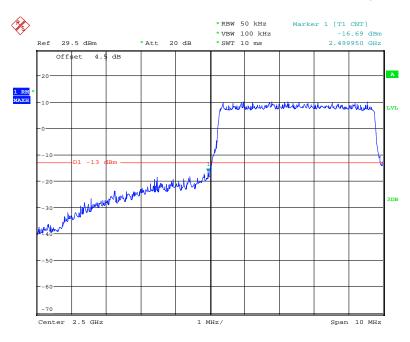


Date: 11.JAN.2018 14:40:15

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

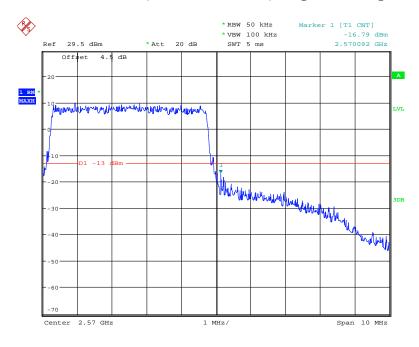


Date: 11.JAN.2018 14:38:19

QPSK (10.0 MHz, FULL RB) - Left Band Edge

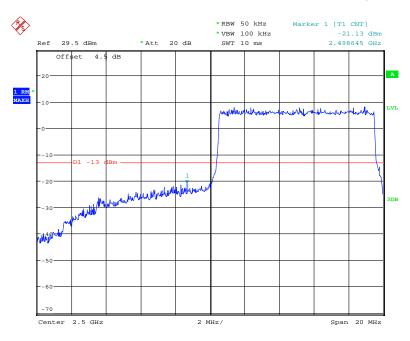


Date: 11.JAN.2018 14:35:03

QPSK (10.0 MHz, FULL RB) - Right Band Edge

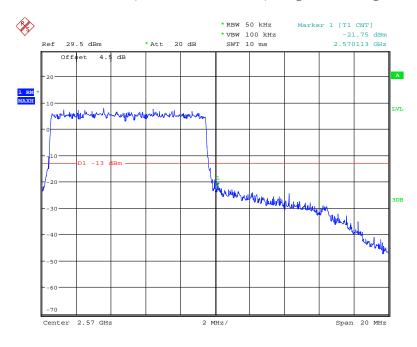


Date: 11.JAN.2018 14:36:55

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

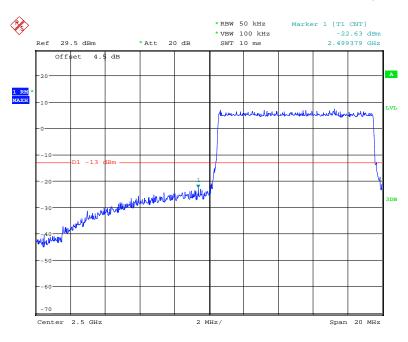


Date: 11.JAN.2018 14:35:37

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

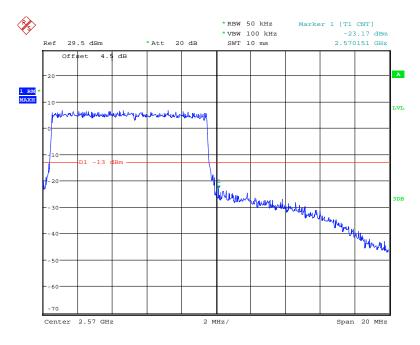


Date: 11.JAN.2018 14:36:31

QPSK (15.0 MHz, FULL RB) - Left Band Edge

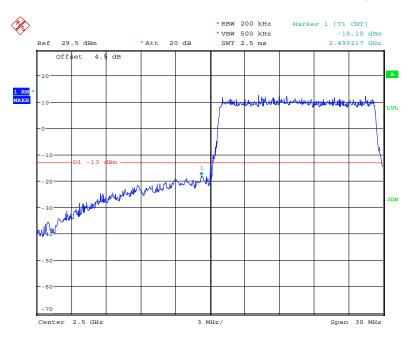


Date: 11.JAN.2018 14:34:06

QPSK (15.0 MHz, FULL RB) - Right Band Edge

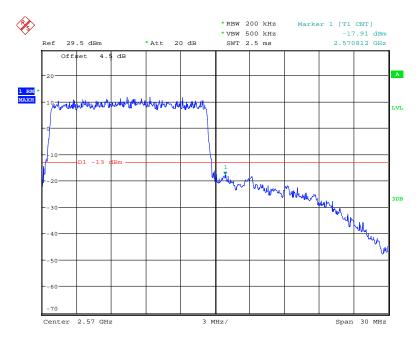


Date: 11.JAN.2018 14:31:26

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

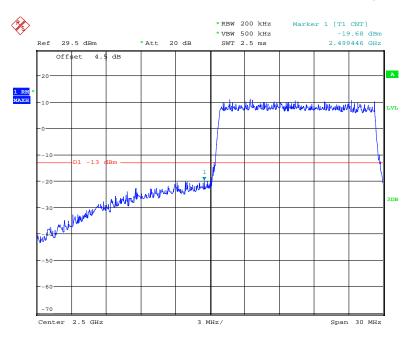


Date: 11.JAN.2018 14:33:32

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

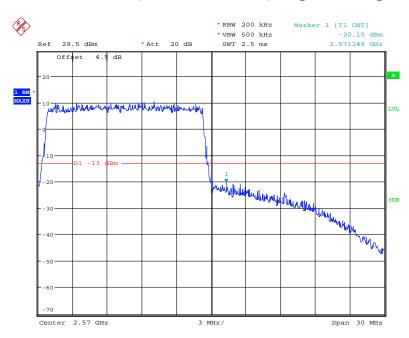


Date: 11.JAN.2018 14:32:07

QPSK (20.0 MHz, FULL RB) - Left Band Edge

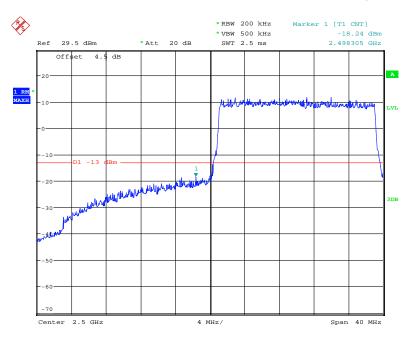


Date: 11.JAN.2018 14:15:07

QPSK (20.0 MHz, FULL RB) - Right Band Edge

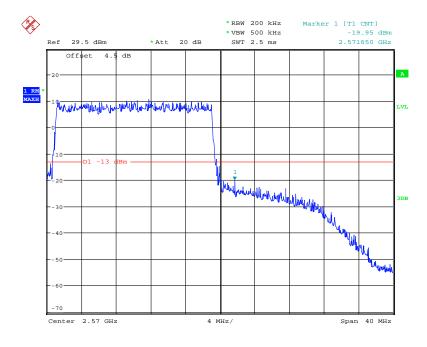


Date: 11.JAN.2018 14:17:32

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

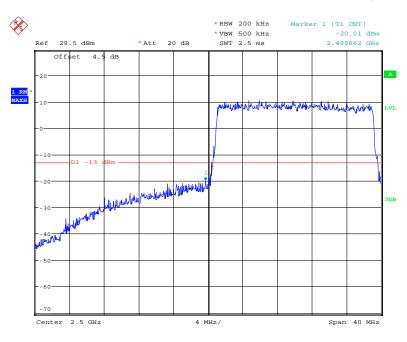

Date: 11.JAN.2018 14:16:00

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

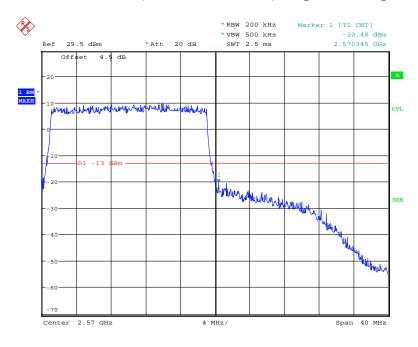

Date: 11.JAN.2018 14:17:03

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobil	obile Services
--	----------------

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

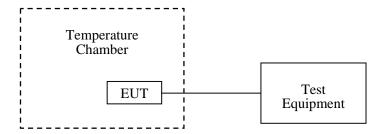

Test Data

Environmental Conditions

Temperature:	24 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2018-01-12.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, f ₀ =836.6MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		7	0.0084	2.5	
-20		11	0.0131	2.5	
-10		9	0.0108	2.5	
0	3.7	6	0.0072	2.5	
10		4	0.0048	2.5	
20		5	0.0060	2.5	
30		8	0.0096	2.5	
40		10	0.0120	2.5	
50		14	0.0167	2.5	
25	V min.= 3.5	12	0.0143	2.5	
25	V max.= 4.2	7	0.0084	2.5	

Middle Channel, f _o =836.6MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-30		4	0.0048	2.5	
-20		3	0.0036	2.5	
-10	3.7	-3	-0.0036	2.5	
0		4	0.0048	2.5	
10		4	0.0048	2.5	
20		5	0.0060	2.5	
30		2	0.0024	2.5	
40		-3	-0.0036	2.5	
50		4	0.0048	2.5	
25	V min.= 3.5	5	0.0060	2.5	
	V max.= 4.2	3	0.0036	2.5	

PCS Band (Part 24E)

GSM Mode

Middle Channel, f _o =1880.0 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		14	0.0074	pass	
-20		8	0.0043	pass	
-10	3.7	10	0.0053	pass	
0		8	0.0043	pass	
10		6	0.0032	pass	
20		17	0.0090	pass	
30		16	0.0085	pass	
40		8	0.0043	pass	
50		7	0.0037	pass	
25	V min.= 3.5	8	0.0043	pass	
	V max.= 4.2	11	0.0059	pass	

	Middle Channel, f _o =1880.0 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		7	0.0037	pass	
-20		5	0.0027	pass	
-10		4	0.0021	pass	
0		4	0.0021	pass	
10	3.7	-4	-0.0021	pass	
20		-1	-0.0005	pass	
30		1	0.0005	pass	
40		3	0.0016	pass	
50		6	0.0032	pass	
25	V min.= 3.5	6	0.0032	pass	
25	V max.= 4.2	4	0.0021	pass	

LTE: QPSK:

Band 2:

	20.0 MHz Middle Channel, f _o =1880 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-3.28	-0.00174	pass	
-20		-3	-0.0016	pass	
-10		-4.6	-0.00245	pass	
0		-8	-0.00426	pass	
10	3.7	-6	-0.00319	pass	
20		-8.87	-0.00472	pass	
30		-3	-0.0016	pass	
40		-2.4	-0.00128	pass	
50		-1.6	-0.00085	pass	
20	V min.= 3.5	-1	-0.00053	pass	
	V max.= 4.2	3	0.001596	pass	

20.0 MHz Middle Channel, f _o =1732.5 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-5.36	-0.00309	pass	
-20		-4.38	-0.00253	pass	
-10		-5	-0.00289	pass	
0		-3.66	-0.00211	pass	
10	3.7	-4	-0.00231	pass	
20		-3.12	-0.0018	pass	
30		-1.96	-0.00113	pass	
40		-1.62	-0.00094	pass	
50		-2.85	-0.00165	pass	
20	V min.= 3.5	2	0.001154	pass	
20	V max.= 4.2	-2	-0.00115	pass	

Band 7:

	20.0 MHz Middle Channel, f _o =2535 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-6.36	-0.00251	pass	
-20		-7	-0.00276	pass	
-10		-5.3	-0.00209	pass	
0		-3.4	-0.00134	pass	
10	3.7	-4.36	-0.00172	pass	
20		-0.44	-0.00017	pass	
30		-8.5	-0.00335	pass	
40		-1.8	-0.00071	pass	
50		-2.6	-0.00103	pass	
20	V min.= 3.5	-4	-0.00158	pass	
	V max.= 4.2	-5	-0.00197	pass	

LTE: 16QAM:

Band 2:

20.0 MHz Middle Channel, f _o =1880 MHz					
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-8.54	-0.00454	pass	
-20		-5.69	-0.00303	pass	
-10		-8	-0.00426	pass	
0		-4.67	-0.00248	pass	
10	3.7	-5.31	-0.00282	pass	
20		-6.35	-0.00338	pass	
30		-3.26	-0.00173	pass	
40		-4	-0.00213	pass	
50		-2.85	-0.00152	pass	
20	V min.= 3.5	-1	-0.00053	pass	
20	V max.= 4.2	2	0.001064	pass	

Band 4:

	20.0 MHz Middle Channel, f _o =1732.5 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30		-4.61	-0.00266	pass	
-20		-8.46	-0.00488	pass	
-10		-7.21	-0.00416	pass	
0		-5.17	-0.00298	pass	
10	3.7	-3.29	-0.0019	pass	
20		-1.26	-0.00073	pass	
30		2.31	0.001333	pass	
40		1.47	0.000848	pass	
50		1.96	0.001131	pass	
20	V min.= 3.5	-5	-0.00289	pass	
	V max.= 4.2	-1	-0.00058	pass	

20.0 MHz Middle Channel, f _o =2535 MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	5.39	0.002126	pass
-20		4.27	0.001684	pass
-10		6.29	0.002481	pass
0		8.47	0.003341	pass
10		1.55	0.000611	pass
20		2.31	0.000911	pass
30		3	0.001183	pass
40		8	0.003156	pass
50		6	0.002367	pass
20	V min.= 3.5	4	0.001578	pass
	V max.= 4.2	-1	-0.00039	pass

***** END OF REPORT *****