



Change

FCC Radio Test Report

FCC ID: 2AC23-WT38M2001

This report concerns (check o	one): ⊠Original Grant
Equipment : Test Model : Series Model : Applicant : Address :	1708C160A WIFI+BT Module WT38M2001T N/A Hui Zhou Gaoshengda Technology Co.,LTD NO.75 Zhongkai Development Area,Huizhou,Guangdong
Date of Test : Issued Date :	Oct. 11, 2017 Oct. 11, 2017 ~ Nov. 28, 2017 Nov. 29, 2017 BTL Inc.
Testing Engineer	: Paul Li (Paul Li)
Technical Manager	: Shawn Xiao (Shawn Xiao)
Authorized Signatory	David Mao

BTL INC.

(David Mao)

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Report No.: BTL-FCCP-2-1708C160A Page 1 of 71





Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCCP-2-1708C160A Page 2 of 71





Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TES	TED 12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE 4.1.3 DEVIATION FROM TEST STANDARD	13 13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS 4.1.7 TEST RESULTS	14 14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE 4.2.3 DEVIATION FROM TEST STANDARD	16 16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18 18
4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES / LIMIT	19
5.1.1 TEST PROCEDURE 5.1.2 DEVIATION FROM STANDARD	19 19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS 5.1.6 TEST RESULTS	19 19
6 . MAXIMUM OUTPUT POWER TEST	20

Report No.: BTL-FCCP-2-1708C160A





Table of Contents	Page
CAADDUED DOOCDUDES / LIMIT	20
6.1 APPLIED PROCEDURES / LIMIT 6.1.1 TEST PROCEDURE	20 20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7. ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP 7.1.4 EUT OPERATION CONDITIONS	21 21
7.1.4 EUT OPERATION CONDITIONS 7.1.5 EUT OPERATION CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS 8.1.5 EUT TEST CONDITIONS	22 22
8.1.6 TEST CONDITIONS 8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
APPENDIX A - CONDUCTED EMISSION	29
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	37
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	44
APPENDIX E - BANDWIDTH	57
APPENDIX F - MAXIMUM OUTPUT POWER TEST	60
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	62
APPENDIX H - POWER SPECTRAL DENSITY TEST	69

Report No.: BTL-FCCP-2-1708C160A





REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1708C160A	Original Issue.	Nov. 29, 2017

Report No.: BTL-FCCP-2-1708C160A Page 5 of 71





1. CERTIFICATION

Equipment : WIFI+BT Module

Brand Name: GSD

Test Model : WT38M2001T

Series Model: N/A

Applicant : Hui Zhou Gaoshengda Technology Co.,LTD Manufacturer : Hui Zhou Gaoshengda Technology Co.,LTD

Address : NO.75 Zhongkai Development Area, Huizhou, Guangdong

Factory: Hui Zhou Gaoshengda Technology Co.,LTD

Address : NO.75 Zhongkai Development Area, Huizhou, Guangdong

Date of Test : Oct. 11, 2017 ~ Nov. 28, 2017

Test Sample: Engineering Sample

Standard(s): FCC Part15, Subpart C (15.247)

ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1708C160A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCCP-2-1708C160A Page 6 of 71





2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C						
Standard(s) Section	Test Item	Judgment	Remark			
15.207	Conducted Emission	PASS				
15.247(d)	Antenna conducted Spurious Emission	PASS				
15.247(a)(2)	6dB Bandwidth	PASS				
15.247(b)(3)	Peak Output Power	PASS				
15.247(e)	Power Spectral Density	PASS				
15.203	Antenna Requirement	PASS				
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS				

NOTE:

(1)" N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-2-1708C160A Page 7 of 71





2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385 BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
		9KHz~30MHz	V	3.79
		9KHz~30MHz	Ι	3.57
		30MHz ~ 200MHz	V	3.82
	CISPR	30MHz ~ 200MHz	Ι	3.78
DG-CB03		200MHz ~ 1,000MHz	V	4.10
DG-CB03		200MHz ~ 1,000MHz	Н	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	Ι	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	Н	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Report No.: BTL-FCCP-2-1708C160A Page 8 of 71





3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI+BT Module		
Brand Name	GSD		
Test Model	WT38M2001T		
Series Model	N/A		
Model Difference	NA		
	Operation Frequency	2402~2480 MHz	
Product Description	Modulation Technology GFSK(1Mbps)		
Product Description	Bit Rate of Transmitter	GF3K(TWDPS)	
	Output Power (Max.) 1.86 dBm (1Mbps)		
Power Source	DC 5V		

Note:

1.	For a more detailed features description	n, please	refer to the	e manufacturer	's specifications	or the
	user's manual.	-			•	

Report No.: BTL-FCCP-2-1708C160A Page 9 of 71





2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Group 1

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	3.56

Group 2

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	3.56

Note:

Group 1 and Group 2 are same type antenna, Group 1 is recorded as the worst case since which gain is same as Group 2.

Report No.: BTL-FCCP-2-1708C160A





3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE


Test Software Version		MT7662UQA	
Frequency (MHz)	2402	2440	2480
BT LE	N/A	N/A	N/A

Report No.: BTL-FCCP-2-1708C160A Page 11 of 71





3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

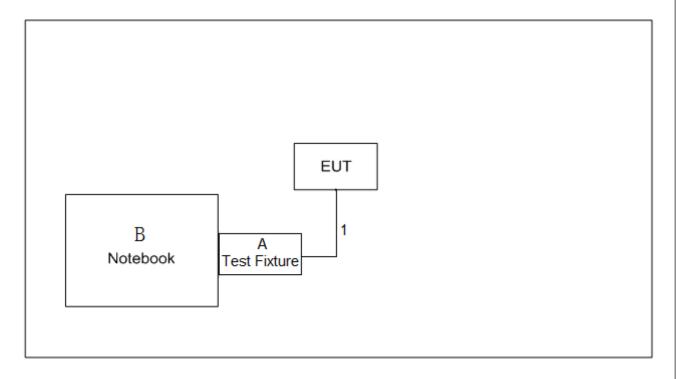

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
Α	Test Fixture	N/A	N/A	N/A	N/A
В	Notebook	Dell	DCSM	DOC	G7K832X

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	20cm	Data Cable

Report No.: BTL-FCCP-2-1708C160A Page 12 of 71





4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Fraguency of Emission (MHz)	Conducted Limit (dBµV)		
Frequency of Emission (MHz)	Quasi-peak	Average	
0.15 -0.5	66 to 56*	56 to 46*	
0.50 -5.0	56	46	
5.0 -30.0	□0	50	

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: BTL-FCCP-2-1708C160A Page 13 of 71





4.1.4 TEST SETUP

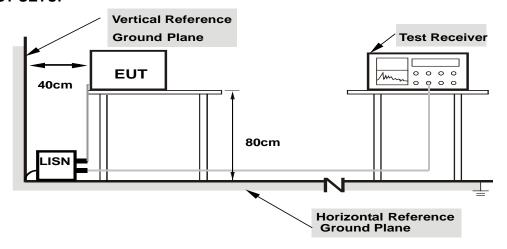

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note ... If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) "N/A" denotes test is not applicable to this device.

Report No.: BTL-FCCP-2-1708C160A





4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
Frequency (Miriz)	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Report No.: BTL-FCCP-2-1708C160A





Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW	RBW 1MHz VBW 3MHz peak detector for Pk value
(Emission in restricted band)	RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


Report No.: BTL-FCCP-2-1708C160A Page 16 of 71






4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

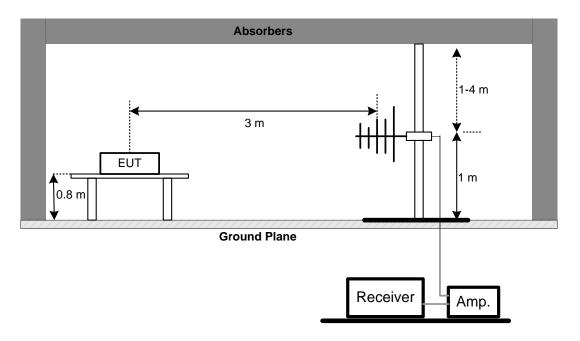

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

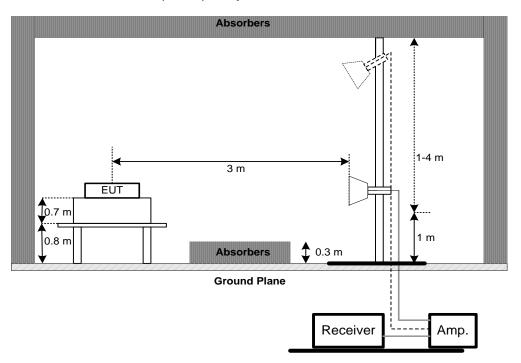


Report No.: BTL-FCCP-2-1708C160A Page 17 of 71





(C) For radiated emissions below 30MHz

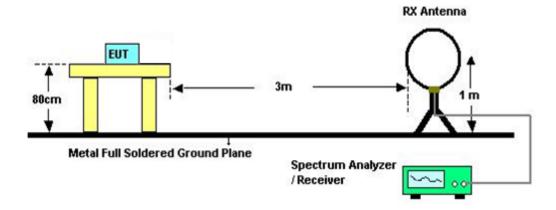

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 22°C Relative Humidity: 56% Test Voltage: AC 120V/60Hz

4.2.7TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

4.2.9TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Report No.: BTL-FCCP-2-1708C160A Page 18 of 71





5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section	Test Item	Frequency Range (MHz)	Result	
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

Report No.: BTL-FCCP-2-1708C160A Page 19 of 71





6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section	Test Item	Frequency Range (MHz)	Result	
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT	Power Meter
	1 ower weter

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

Report No.: BTL-FCCP-2-1708C160A Page 20 of 71





7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

EUT	•	SPECTRUM
		ANALYZER

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

Report No.: BTL-FCCP-2-1708C160A Page 21 of 71





8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

Report No.: BTL-FCCP-2-1708C160A Page 22 of 71





9. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018	
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018	
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018	
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018	
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	
6	Cable	N/A	RG223	12m	Oct. 19, 2018	

	Radiated Emission Below 1GHz					
Item	tem Kind of Equipment Manufacturer Type		Type No.	Serial No.	Calibrated until	
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018	
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018	
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018	
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	Jun. 26, 2018	
5	Controller	CT	SC100	N/A	N/A	
6	Controller	MF	MF-7802	MF780208416	N/A	
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	
8	Antenna	EM	EM-6876-1	230	Mar. 06, 2018	

Report No.: BTL-FCCP-2-1708C160A Page 23 of 71





	Radiated Emission Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018	
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018	
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018	
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018	
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018	
6	Antenna	EM	EM-6876-1	230	Mar. 06, 2018	
7	Controller	СТ	SC100	N/A	N/A	
8	Controller	MF	MF-7802	MF780208416	N/A	
9	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 26, 2018	
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A	

	6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018	

	Peak Output Power Measurement						
Item	Item Kind of Equipment Manufacturer Type No. Serial No. Calibrated until						
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 26, 2018		
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 26, 2018		

	Antenna Conducted Spurious Emission Measurement										
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until						
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018						

	Power Spectral Density Measurement									
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until					
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018					

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.

Report No.: BTL-FCCP-2-1708C160A Page 24 of 71





10. EUT TEST PHOTO








Report No.: BTL-FCCP-2-1708C160A Page 25 of 71






Radiated Measurement Photos

9KHz to 30MHz

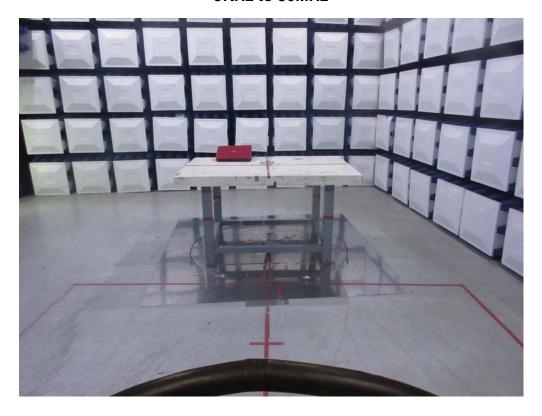

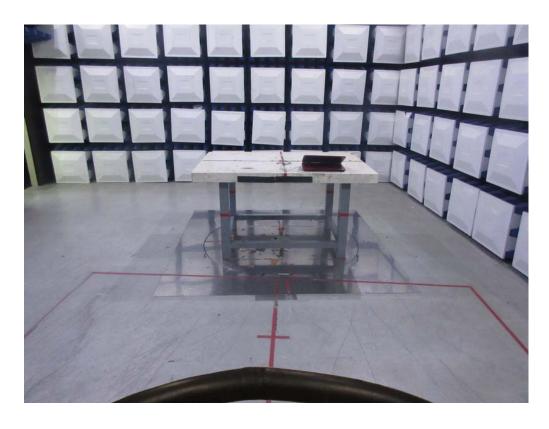

Report No.: BTL-FCCP-2-1708C160A Page 26 of 71





Radiated Measurement Photos

30MHz to 1000MHz





Report No.: BTL-FCCP-2-1708C160A Page 27 of 71





Radiated Measurement Photos

Above 1000MHz





Report No.: BTL-FCCP-2-1708C160A Page 28 of 71






APPENDIX A - CONDUCTED EMISSION

Report No.: BTL-FCCP-2-1708C160A Page 29 of 71





Line

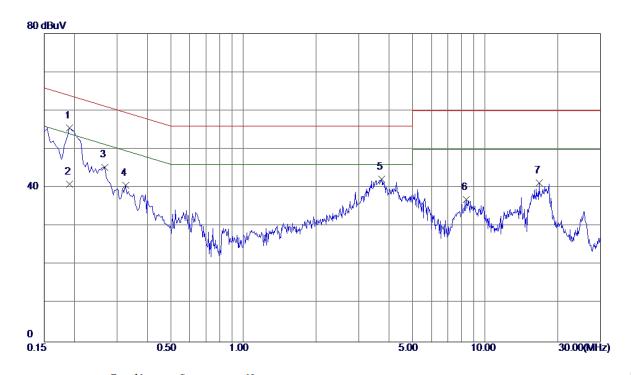


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0. 1905	45.86	9. 73	55. 59	64.01	-8.42	Peak	
2	0. 1905	31. 30	9. 73	41.03	54.01	-12. 98	AVG	
3	0. 2670	35. 64	9.72	45. 36	61.21	-15.85	Peak	
4	0. 3255	30. 92	9. 74	40.66	59. 57	-18. 91	Peak	
5	3.7275	32.43	9.86	42. 29	56.00	-13.71	Peak	
6	8. 3535	27.00	9. 99	36. 99	60.00	-23. 01	Peak	
7	16. 7460	30. 99	10. 26	41.25	60.00	-18. 75	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 30 of 71





Neutral

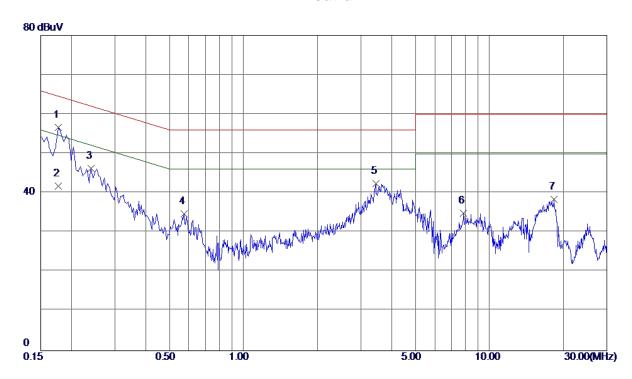

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0. 1770	47.06	9. 64	56. 70	64.63	-7. 93	Peak	
2	0.1770	32.06	9.64	41.70	54.63	-12.93	AVG	
3	0.2400	36. 55	9. 64	46. 19	62. 10	-15. 91	Peak	
4	0.5730	25.02	9. 66	34.68	56.00	-21.32	Peak	
5	3.4530	32.66	9. 77	42.43	56.00	-13. 57	Peak	
6	7.8540	25.02	9. 91	34.93	60.00	-25.07	Peak	
7	18. 2850	28. 07	10. 34	38. 41	60.00	-21.59	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 31 of 71






APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Report No.: BTL-FCCP-2-1708C160A Page 32 of 71





Ant 0°

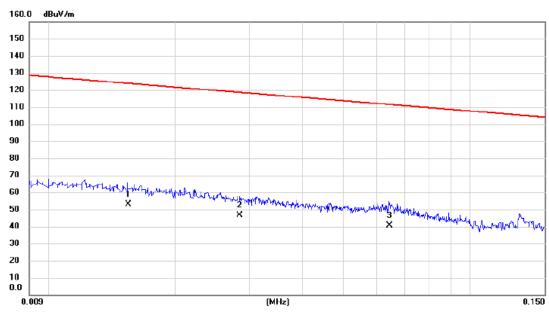


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.0155	33.00	20.20	53.20	123.80	-70.60	AVG	
2	0.0284	27.08	19.37	46.45	118.54	-72.09	AVG	
3	0.0643	22.06	18.44	40.50	111.44	-70.94	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 33 of 71





Ant 0°

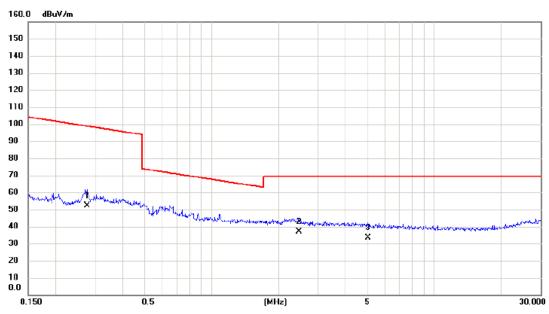


No. Mk.	Freq.			Measure- ment		Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.2760	35.40	16.64	52.04	98.79	-46.75	AVG	
2 *	2.4606	21.52	15.38	36.90	69.54	-32.64	QP	
3	5.0312	19.12	14.37	33.49	69.54	-36.05	QP	

Report No.: BTL-FCCP-2-1708C160A Page 34 of 71





Ant 90°

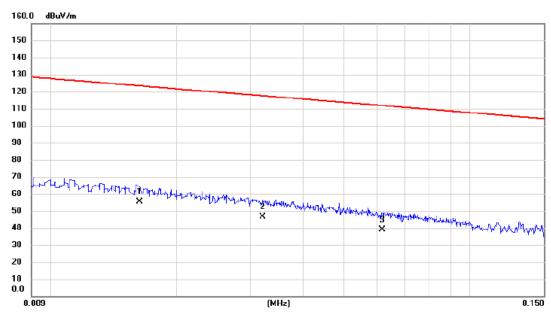


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.0163	35.50	20.10	55.60	123.36	-67.76	AVG	
2	0.0320	27.22	19.26	46.48	117.50	-71.02	AVG	
3	0.0618	20.59	18.49	39.08	111.79	-72.71	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 35 of 71





Ant 90°

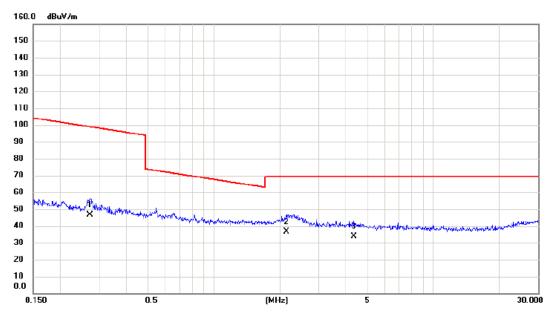

No. Mk.	Freq.			Measure- ment		Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.2730	29.99	16.64	46.63	98.88	-52.25	AVG	
2 *	2.1440	21.31	15.47	36.78	69.54	-32.76	QP	
3	4.3376	19.16	14.76	33.92	69.54	-35.62	QP	

Report No.: BTL-FCCP-2-1708C160A Page 36 of 71






APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Report No.: BTL-FCCP-2-1708C160A Page 37 of 71





Vertical

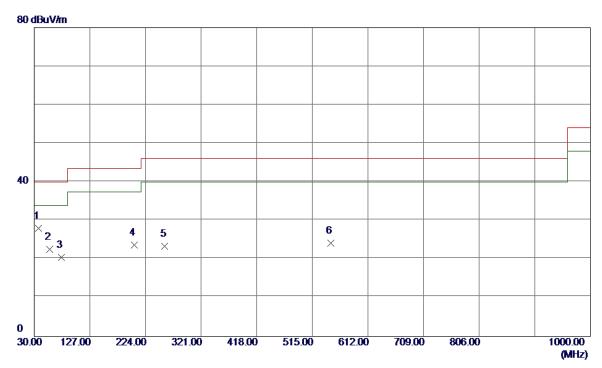


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	37.7599	42. 35	-14. 30	28.05	40.00	-11. 95	Peak	
2	57. 1600	36. 65	-14.04	22.61	40.00	-17.39	Peak	
3	77. 5300	38. 19	-17.67	20. 52	40.00	-19.48	Peak	
4	204.6000	37. 53	-13.85	23. 68	43.50	-19.82	Peak	
5	257.9500	38. 96	-15. 54	23.42	46.00	-22. 58	Peak	
6	547.0100	31. 99	-7.78	24. 21	46.00	-21.79	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 38 of 71





Horizontal

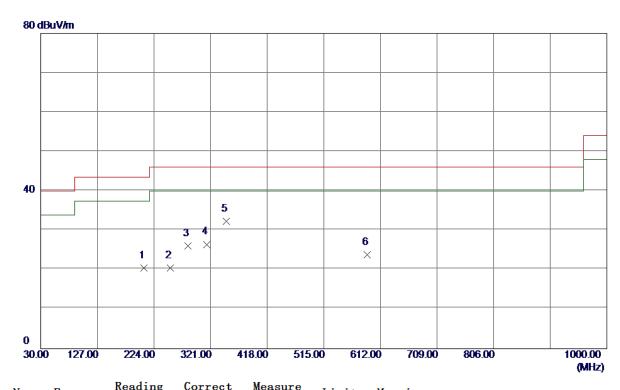


No.	Freq.	Level	Factor	measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	206. 5399	34. 32	-13. 90	20.42	43.50	-2 3. 0 8	Peak	
2	252. 1300	35. 60	−15. 06	20. 54	46.00	-25.46	Peak	
3	282. 2000	40.68	-14.65	26. 03	46.00	-19.97	Peak	
4	314. 2100	39. 06	-12. 58	26. 48	46.00	-19. 52	Peak	
5 *	348. 1600	44. 26	-11.99	32. 27	46.00	-13.73	Peak	
6	589. 6900	30. 46	-6. 69	23.77	46.00	-22. 23	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 39 of 71





Vertical

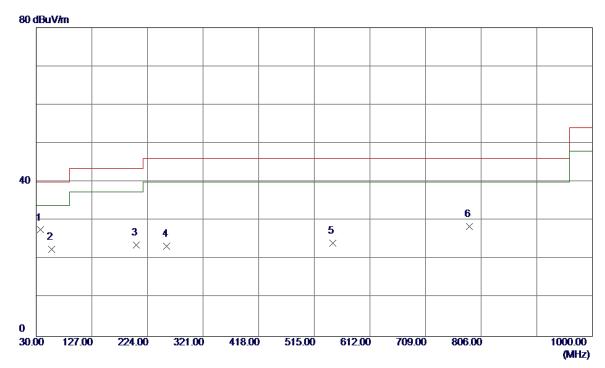


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	37.7599	41.90	-14.30	27.60	40.00	-12. 40	Peak	
2	57. 1600	36. 65	-14.04	22.61	40.00	-17.39	Peak	
3	204.6000	37. 53	-13.85	23. 68	43.50	-19.82	Peak	
4	257.9500	38. 96	-15.54	23. 42	46.00	-22. 58	Peak	
5	547.0100	31.99	-7. 78	24. 21	46.00	-21. 79	Peak	
6	785. 6300	30. 10	-1. 67	28. 43	46.00	-17.57	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 40 of 71





Horizontal

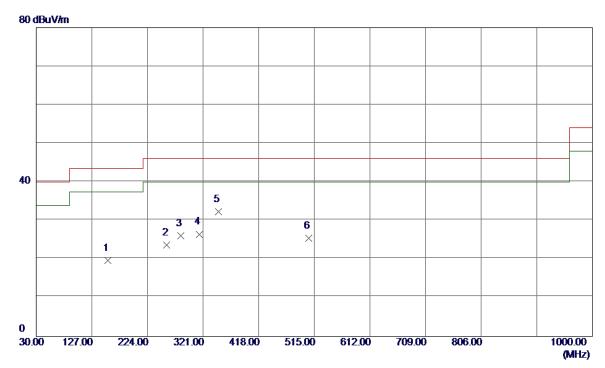


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	155. 1300	32. 93	-13. 22	19.71	43.50	-23.79	Peak	
2	257.9500	39. 25	−15. 54	23.71	46.00	-22. 29	Peak	
3	282. 2000	40.68	-14.65	26. 03	46.00	-19.97	Peak	
4	314. 2100	39. 06	-12. 58	26. 48	46.00	-19.52	Peak	
5 *	348. 1600	44. 26	-11. 99	32. 27	46.00	-13.73	Peak	
6	505. 3000	33. 99	-8. 61	25. 38	46.00	-20.62	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 41 of 71





Vertical

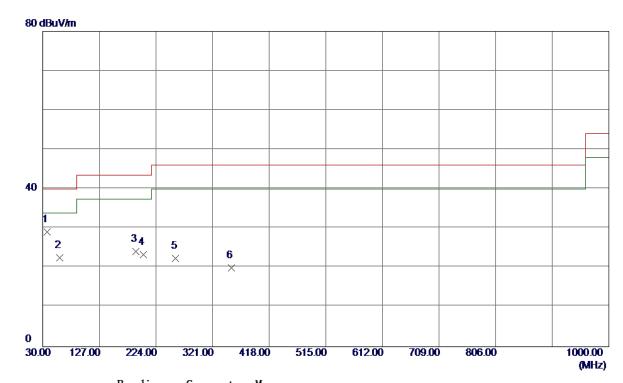


No.	Freq.	Keading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	37.7599	43.47	-14. 30	29. 17	40.00	-10.83	Peak	
2	59. 1000	36. 75	-14. 22	22. 53	40.00	-17.47	Peak	
3	189. 0800	36.88	-12.77	24. 11	43.50	-19.39	Peak	
4	202.6600	37. 22	-13.81	23.41	43.50	-20.09	Peak	
5	257. 9500	37.94	−15. 54	22.40	46.00	-23.60	Peak	
6	353. 0100	31.87	-11. 92	19. 95	46.00	-26.05	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 42 of 71





Horizontal

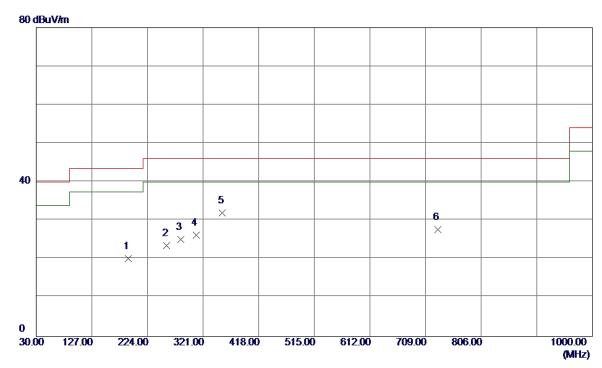

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	191.0200	33. 03	-12.94	20.09	43.50	-23.41	Peak	
2	257.9500	39.06	-15. 54	23. 52	46.00	-22.48	Peak	
3	282. 2000	39.72	-14.65	25. 07	46.00	-20.93	Peak	
4	309. 3599	38. 90	-12.67	26. 23	46.00	-19.77	Peak	
5 *	354.9500	43. 97	-11. 90	32. 07	46.00	-13.93	Peak	
6	730. 3400	30. 74	-3.03	27.71	46.00	-18. 29	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 43 of 71






APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Report No.: BTL-FCCP-2-1708C160A Page 44 of 71





Vertical

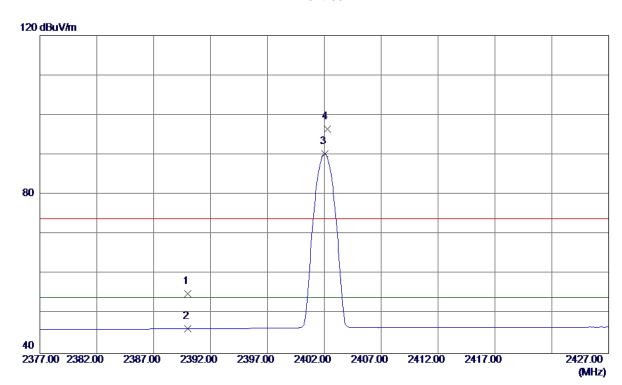


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	22. 01	33.06	55. 07	74.00	-18. 93	Peak	
2	2390.0000	13. 16	33.06	46. 22	54.00	-7. 78	AVG	
3 *	2402.0500	57. 18	33. 10	90. 28	54.00	36. 28	AVG	No Limit
4	2402. 2500	63. 30	33. 10	96. 40	74.00	22.40	Peak	No Limit

Report No.: BTL-FCCP-2-1708C160A Page 45 of 71





Vertical

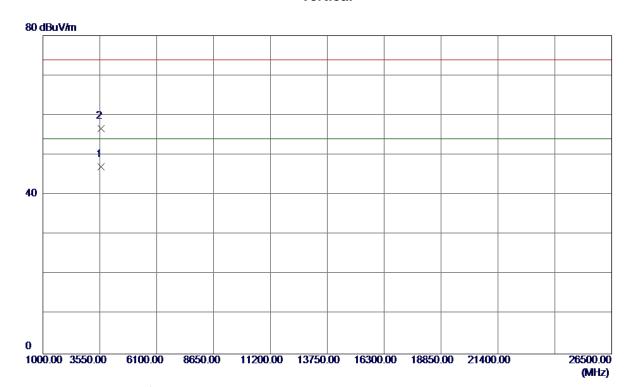


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3603.0480	44.07	2.95	47.02	54.00	-6. 98	AVG	
2	3603.0600	53. 64	2. 95	56. 59	74.00	-17.41	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 46 of 71





Horizontal

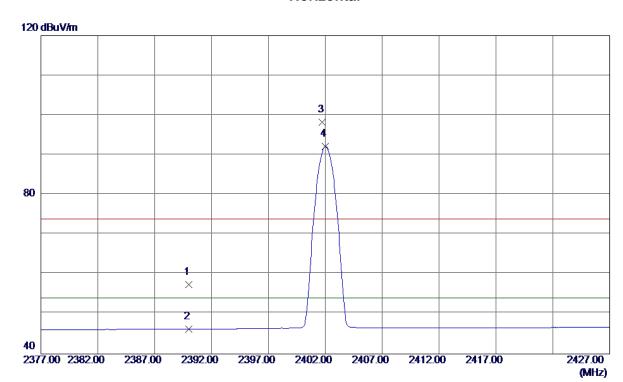


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	24.41	33. 06	57.47	74.00	-16. 53	Peak	
2	2390.0000	13. 17	33. 06	46. 23	54.00	-7.77	AVG	
3	2401.7500	65. 20	33. 10	98. 30	74.00	24.30	Peak	No Limit
4 *	2402. 0000	59. 03	33. 10	92. 13	54.00	38. 13	AVG	No Limit

Report No.: BTL-FCCP-2-1708C160A Page 47 of 71





Horizontal

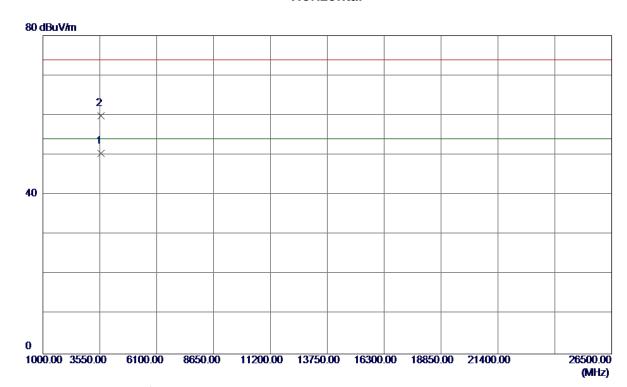


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3603.0000	47.53	2.95	50.48	54.00	-3.52	AVG	
2	3603. 0180	56. 94	2. 95	59. 89	74.00	-14.11	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 48 of 71





Vertical

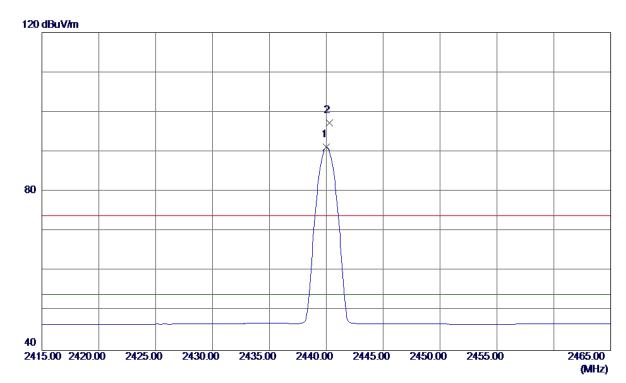


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2440.0000	57.88	33. 24	91. 12	54.00	37. 12	AVG	No Limit
2	2440. 2500	64. 03	33. 25	97. 28	74.00	23. 28	Peak	No Limit

Report No.: BTL-FCCP-2-1708C160A Page 49 of 71





Vertical

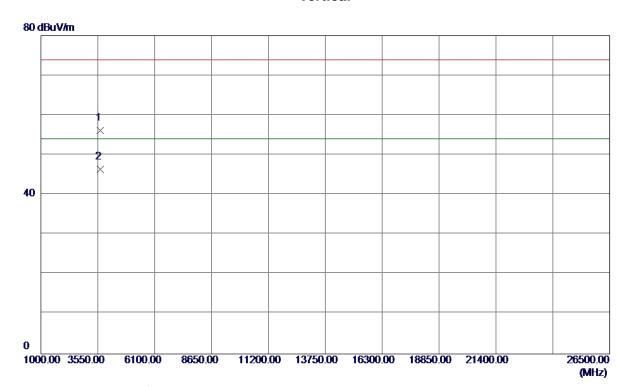


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3660.0240	53.08	3. 08	56. 16	74.00	-17.84	Peak	
2 *	3660. 0460	43. 26	3. 08	46. 34	54.00	-7. 66	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 50 of 71





Horizontal

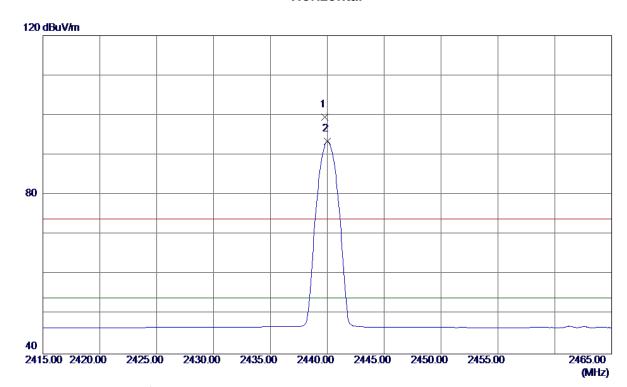


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2439.8000	66. 32	33. 24	99. 56	74.00	25. 56	Peak	No Limit
2 *	2440. 0000	60. 13	33. 24	93. 37	54.00	39. 37	AVG	No Limit

Report No.: BTL-FCCP-2-1708C160A Page 51 of 71





Horizontal

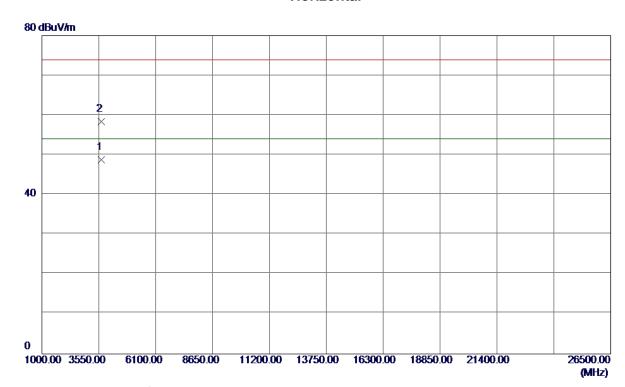


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3659.9640	45.69	3.08	48.77	54.00	-5. 23	AVG	
2	3659. 9680	55. 40	3. 08	58. 48	74.00	-15. 52	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 52 of 71





Vertical

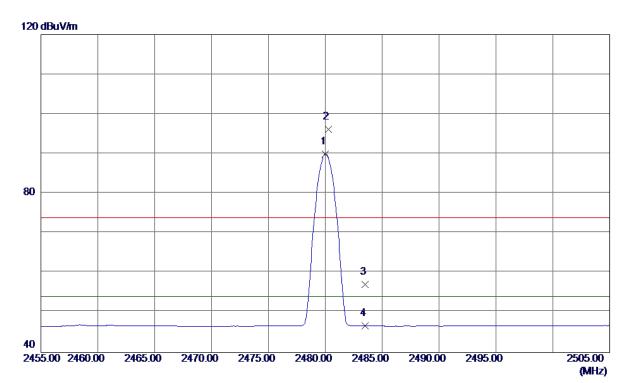


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2480.0000	56. 54	33. 39	89. 93	54.00	35. 93	AVG	No Limit
2	2480. 2500	62.70	33. 40	96. 10	74.00	22. 10	Peak	No Limit
3	2483. 5000	23. 69	33.41	57. 10	74.00	-16. 90	Peak	
4	2483. 5000	13. 26	33. 41	46. 67	54.00	-7. 33	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 53 of 71





Vertical

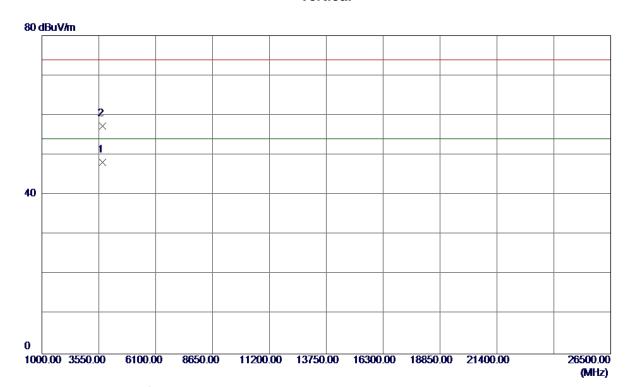


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3719.9920	44.95	3. 21	48. 16	54.00	-5.84	AVG	
2	3719. 9940	53. 99	3. 21	57. 20	74.00	-16.80	Peak	

Report No.: BTL-FCCP-2-1708C160A Page 54 of 71





Horizontal

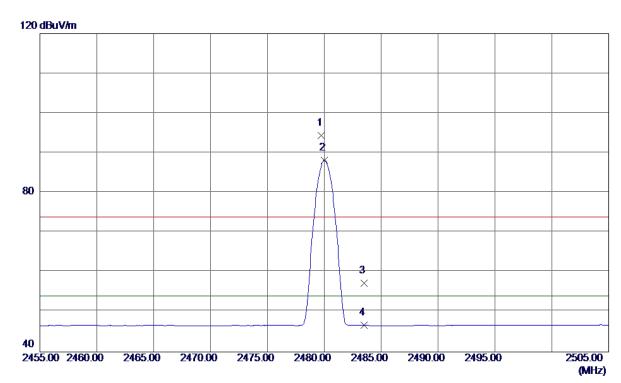


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.7500	60.96	33. 39	94. 35	74.00	20. 35	Peak	No Limit
2 *	2480.0000	54.75	33. 39	88. 14	54.00	34. 14	AVG	No Limit
3	2483. 5000	23. 86	33.41	57. 27	74.00	-16.73	Peak	
4	2483. 5000	13. 25	33. 41	46. 66	54.00	-7. 34	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 55 of 71





Horizontal

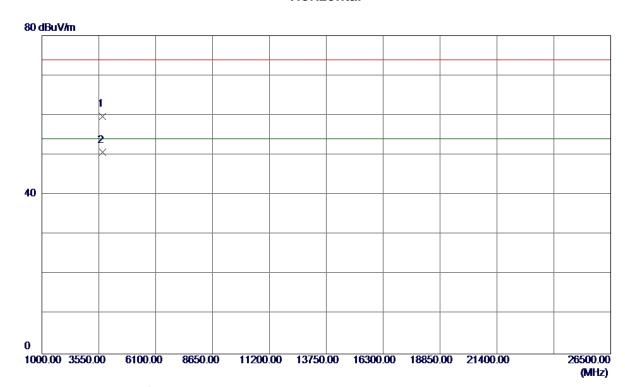

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3719.9420	56. 44	3. 21	59.65	74.00	-14.35	Peak	
2 *	3719. 9760	47.43	3. 21	50.64	54.00	-3. 36	AVG	

Report No.: BTL-FCCP-2-1708C160A Page 56 of 71





APPENDIX E - BANDWIDTH

Report No.: BTL-FCCP-2-1708C160A Page 57 of 71






Test Mode: TX Mode

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.652	1.068	500	Pass
2440	0.648	1.072	500	Pass
2480	0.642	1.068	500	Pass


TX CH00

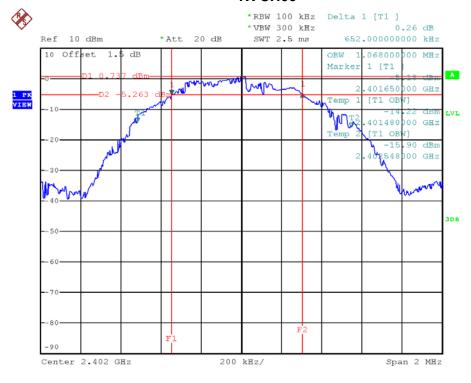


Date: 21.0CT.2017 14:01:08





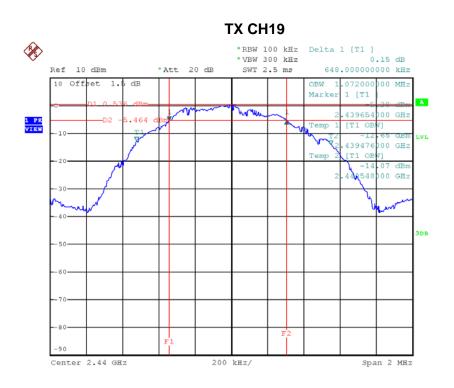

Date: 21.0CT.2017 14:02:30

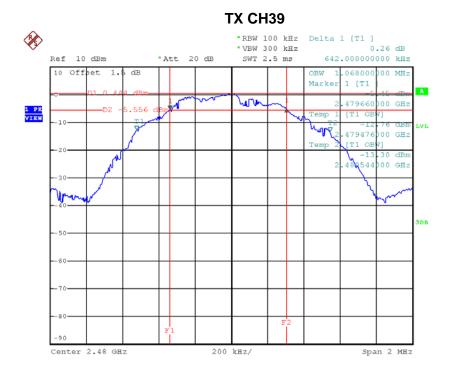

Date: 21.0CT.2017 14:03:42





APPENDIX F - MAXIMUM OUTPUT POWER TEST

Report No.: BTL-FCCP-2-1708C160A Page 60 of 71





Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	1.86	0.0015	30.00	1.00	Pass
2440	1.66	0.0015	30.00	1.00	Pass
2480	1.56	0.0014	30.00	1.00	Pass

Report No.: BTL-FCCP-2-1708C160A Page 61 of 71






APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION					


Report No.: BTL-FCCP-2-1708C160A Page 62 of 71








CH00 (Lower) - 1Mbps

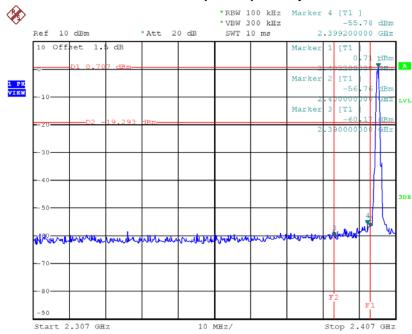

Date: 21.0CT.2017 14:01:16

CH39 (upper) - 1Mbps

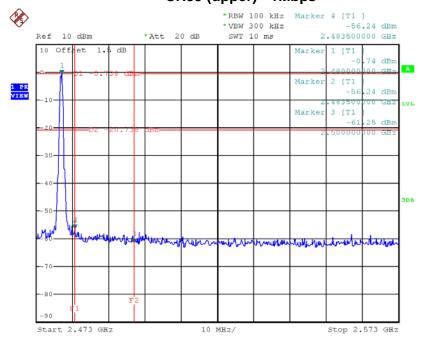


Date: 21.0CT.2017 14:03:50








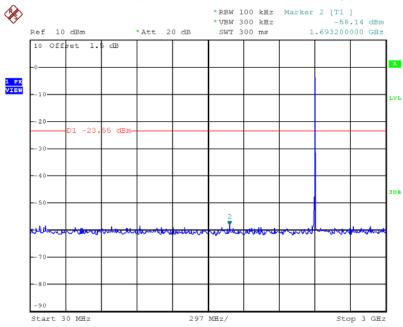

Date: 21.0CT.2017 14:01:30

CH00 (10 Harmonic of the frequency) 2

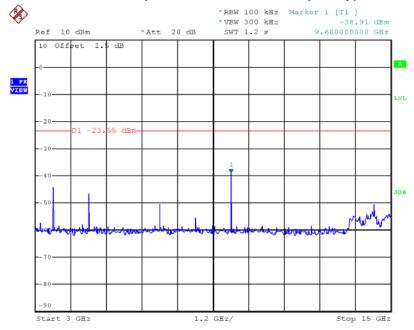


Date: 21.0CT.2017 14:01:38

Report No.: BTL-FCCP-2-1708C160A Page 64 of 71








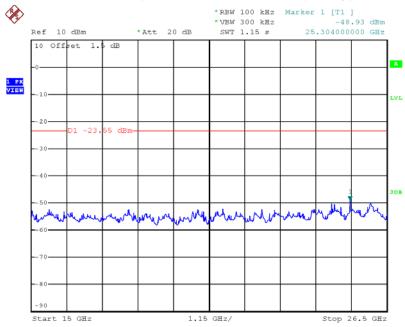

Date: 21.0CT.2017 14:01:46

CH19 (10 Harmonic of the frequency) 1

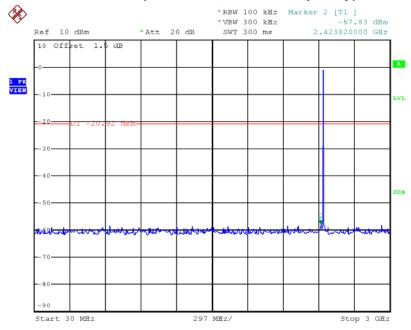


Date: 21.0CT.2017 14:02:44








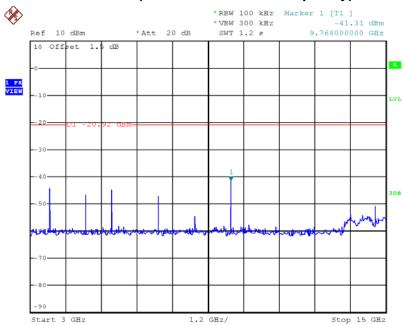

Date: 21.0CT.2017 14:02:52

CH19 (10 Harmonic of the frequency) 3

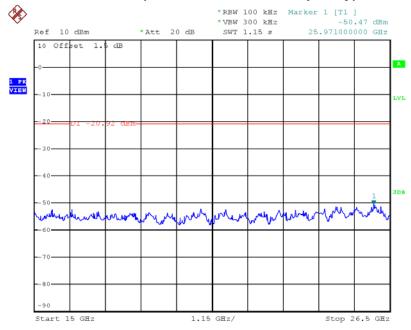


Date: 21.0CT.2017 14:03:00








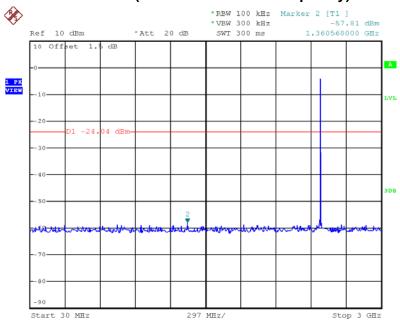

Date: 21.0CT.2017 14:04:04


CH39 (10 Harmonic of the frequency) 2

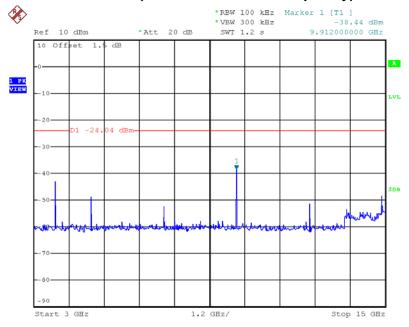


Date: 21.0CT.2017 14:04:12







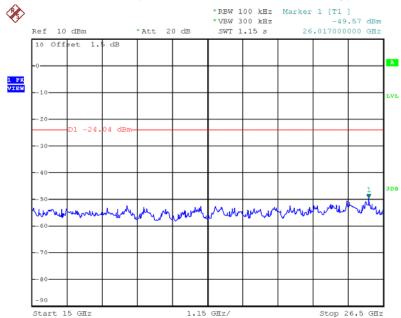

Date: 21.0CT.2017 14:04:20

Report No.: BTL-FCCP-2-1708C160A Page 68 of 71





APPENDIX H - POWER SPECTRAL DENSITY TEST					

Report No.: BTL-FCCP-2-1708C160A Page 69 of 71






Test Mode: CH00, CH19, CH39 - 1Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-5.380	0.290	8.00	Pass
2440	-5.560	0.278	8.00	Pass
2480	-5.680	0.270	8.00	Pass

TX CH00

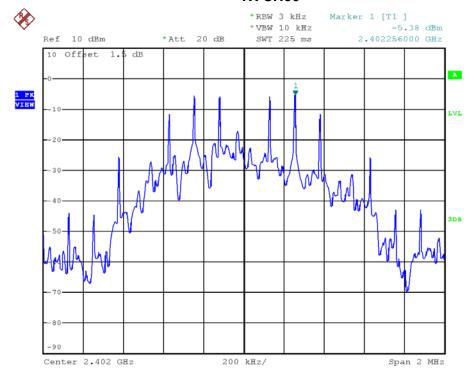


Date: 21.0CT.2017 14:01:52


Report No.: BTL-FCCP-2-1708C160A Page 70 of 71





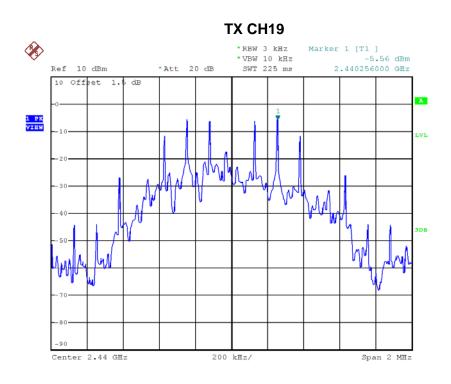

Date: 21.0CT.2017 14:03:07

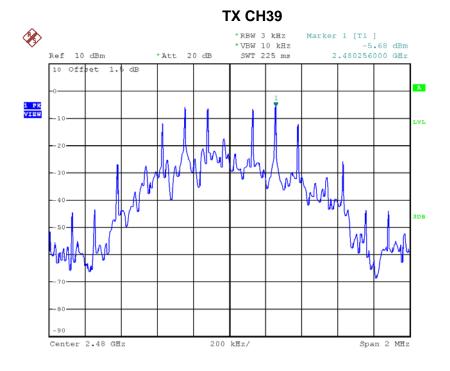

Date: 21.0CT.2017 14:04:27