



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1808D2TG
FCC ID : 2AFZZ-XMD2TG
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 30, 2018 and completely tested on Aug. 29, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sportun International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	10
1.8 Applicable Standards.....	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Test Mode	11
2.2 Connection Diagram of Test System.....	14
2.3 Support Unit used in test configuration and system	14
2.4 Measurement Results Explanation Example.....	14
2.5 Frequency List of Low/Middle/High Channels	15
3 CONDUCTED TEST ITEMS	18
3.1 Measuring Instruments	18
3.2 Test Setup	18
3.3 Test Result of Conducted Test	18
3.4 Conducted Output Power and ERP/EIRP	19
3.5 Peak-to-Average Ratio	20
3.6 Occupied Bandwidth.....	21
3.7 Conducted Band Edge	22
3.8 Conducted Spurious Emission	24
3.9 Frequency Stability	25
4 RADIATED TEST ITEMS	26
4.1 Measuring Instruments	26
4.2 Test Setup	26
4.3 Test Result of Radiated Test	26
4.4 Radiated Spurious Emission	27
5 LIST OF MEASURING EQUIPMENT	28
6 UNCERTAINTY OF EVALUATION	29
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7) (Band 38)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7) (Band 38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 27.44 dB at 7766.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7) (Band 38)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
Model Name	M1808D2TG
FCC ID	2AFZZ-XMD2TG
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth BR/EDR/LE
IMEI Code	Conducted: 869808030002634/869808030002642 for Band 2/4/5/7/38_CA 869808030002758/869808030002766 for Band 38 Radiation: 869808030002972/869808030002980 for Band 2/4/5/7/38 869808030001339/869808030001347 for Band 38_CA
HW Version	P2.0
SW Version	MIUI9
EUT Stage	Identical Prototype

Note: There are two types of EUT, the difference between two samples is for memory, the sample 1 is 6+128GB capacity and the sample 2 is 4+64GB capacity. According to the difference, we only choose sample 1 to perform full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.42 dBm LTE Band 4 : 22.14 dBm LTE Band 5 : 22.32 dBm LTE Band 7 : 22.52 dBm LTE Band 38 : 22.69 dBm / LTE Band 38_CA:22.46 dBm
Antenna Gain	LTE Band 2 : 1.10 dBi LTE Band 4 : 0.80 dBi LTE Band 5 : -3.40 dBi LTE Band 7 : 1.60 dBi LTE Band 38 : 1.60 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09G7D	-	0.2244	1M09W7D	-	0.1910
3	1851.5 ~ 1908.5	2M72G7D	-	0.2223	2M72W7D	-	0.1923
5	1852.5 ~ 1907.5	4M50G7D	-	0.2239	4M51W7D	-	0.1905
10	1855.0 ~ 1905.0	9M03G7D	0.0022	0.2239	9M05W7D	-	0.1914
15	1857.5 ~ 1902.5	13M5G7D	-	0.2223	13M5W7D	-	0.1905
20	1860.0 ~ 1900.0	18M4G7D	-	0.2249	18M2W7D	-	0.1884
LTE Band 2		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum EIRP(W)	
1.4	1850.7 ~ 1909.3	1M10W7D		-		0.1879	
3	1851.5 ~ 1908.5	2M74W7D		-		0.1866	
5	1852.5 ~ 1907.5	4M51W7D		-		0.1871	
10	1855.0 ~ 1905.0	9M07W7D		-		0.1871	
15	1857.5 ~ 1902.5	13M5W7D		-		0.1862	
20	1860.0 ~ 1900.0	18M4W7D		-		0.1858	
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.1941	1M10W7D	-	0.1936
3	1711.5 ~ 1753.5	2M73G7D	-	0.1928	2M72W7D	-	0.1629
5	1712.5 ~ 1752.5	4M51G7D	-	0.1945	4M50W7D	-	0.1633
10	1715.0 ~ 1750.0	9M05G7D	0.0027	0.1963	9M05W7D	-	0.1660
15	1717.5 ~ 1747.5	13M5G7D	-	0.1932	13M5W7D	-	0.1626
20	1720.0 ~ 1745.0	18M3G7D	-	0.1968	18M4W7D	-	0.1626
LTE Band 4		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum EIRP(W)	
1.4	1710.7 ~ 1754.3	1M09W7D		-		0.1600	



3	1711.5 ~ 1753.5	2M74W7D		-	0.1585		
5	1712.5 ~ 1752.5	4M50W7D		-	0.1614		
10	1715.0 ~ 1750.0	9M03W7D		-	0.1626		
15	1717.5 ~ 1747.5	13M4W7D		-	0.1603		
20	1720.0 ~ 1745.0	18M5W7D		-	0.1585		
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.0475	1M09W7D	-	0.0431
3	825.5 ~ 847.5	2M75G7D	-	0.0475	2M73W7D	-	0.0411
5	826.5 ~ 846.5	4M51G7D	-	0.0474	4M51W7D	-	0.0409
10	829.0 ~ 844.0	9M01G7D	0.0060	0.0475	9M03W7D	-	0.0409
LTE Band 5		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum ERP(W)	
1.4	824.7 ~ 848.3	1M09W7D		-		0.0390	
3	825.5 ~ 847.5	2M73W7D		-		0.0399	
5	826.5 ~ 846.5	4M50W7D		-		0.0401	
10	829.0 ~ 844.0	9M05W7D		-		0.0399	
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M50G7D	-	0.2472	4M51W7D	-	0.2153
10	2505.0 ~ 2565.0	9M07G7D	0.0021	0.2553	9M07W7D	-	0.2270
15	2507.5 ~ 2562.5	13M5G7D	-	0.2553	13M4W7D	-	0.2213
20	2510.0 ~ 2560.0	18M4G7D	-	0.2582	18M4W7D	-	0.2265
LTE Band 7		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		-		Maximum EIRP(W)	
5	2502.5 ~ 2567.5	4M51W7D		-		0.2070	
10	2505.0 ~ 2565.0	9M10W7D		-		0.2265	
15	2507.5 ~ 2562.5	13M5W7D		-		0.2133	
20	2510.0 ~ 2560.0	18M4W7D		-		0.2213	



LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M51G7D	-	0.2630	4M51W7D	-	0.2118
10	2575.0 ~ 2615.0	9M13G7D	0.0026	0.2606	9M07W7D	-	0.2138
15	2577.5 ~ 2612.5	13M5G7D	-	0.2685	13M5W7D	-	0.2153
20	2580.0 ~ 2610.0	18M4G7D	-	0.2606	18M5W7D	-	0.2133
LTE Band 38		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum EIRP(W)	
5	2572.5 ~ 2617.5	4M51W7D		-		0.2028	
10	2575.0 ~ 2615.0	9M03W7D		-		0.2014	
15	2577.5 ~ 2612.5	13M5W7D		-		0.2042	
20	2580.0 ~ 2610.0	18M4W7D		-		0.2084	

LTE Band 38 CA	QPSK			16QAM		
BW (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
15MHz+15MHz	28M7G7D	-	0.2500	28M7W7D	-	0.2128
20MHz+20MHz	37M8G7D	-	0.2547	37M9W7D	-	0.2178
LTE Band 38 CA	64QAM					
BW (MHz)	Emission Designator (99%OBW)		Frequency Tolerance (ppm)		Maximum EIRP(W)	
15MHz+15MHz	28M8W7D		-		0.0946	
20MHz+20MHz	38M0W7D		-		0.2153	



1.7 Testing Location

Sportun International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sportun International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sportun Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS 03CH06-KS	CN5013	630927

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v	v	v		v	v	v	v
	4						v	v	v	v	v		v	v	v	v
	5				v	-	-	v	v	v	v		v	v	v	v
	7	-	-				v	v	v	v	v		v	v	v	v
	38	-	-				v	v	v	v	v		v	v	v	v

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v




Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v	v		v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v		v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v		v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v		v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v		v	v	v
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	5				v	-	-	v					v		v	
	7	-	-	v				v					v		v	
	38	-	-	v				v					v		v	

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v	v	v		v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v		v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v		v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v		v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v		v	v	v
Radiated Spurious Emission	2	Worst Case													v	
	4	Worst Case													v	
	5	Worst Case													v	
	7	Worst Case													v	
	38	Worst Case													v	
Note	1.	The mark "v" means that this configuration is chosen for testing														
	2.	The mark "-" means that this bandwidth is not supported.														
	3.	The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														



Test Items	Band	Bandwidth (MHz)										Modulation			RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	38_CA	v	-	-	-	-	-	-	v	-	-	v	v	v	v	v	v	v	v	
26dB and 99% Bandwidth	38_CA	v	-	-	-	-	-	-	v	-	-	v	v	v		v	v	v	v	
Conducted Band Edge	38_CA	v	-	-	-	-	-	-	v	-	-	v	v	v	v	v	v	v	v	
Conducted Spurious Emission	38_CA	v	-	-	-	-	-	-	v	-	-	v	v	v		v	v	v	v	
E.I.R.P.	38_CA	v	-	-	-	-	-	-	v	-	-	v	v	v	v		v	v	v	
Radiated Spurious Emission	38_CA	v	-	-	-	-	-	-	v	-	-	v			v			v		
Radiated Spurious Emission	38_CA	Worst Case															v			
Note		1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																		

2.2 Connection Diagram of Test System

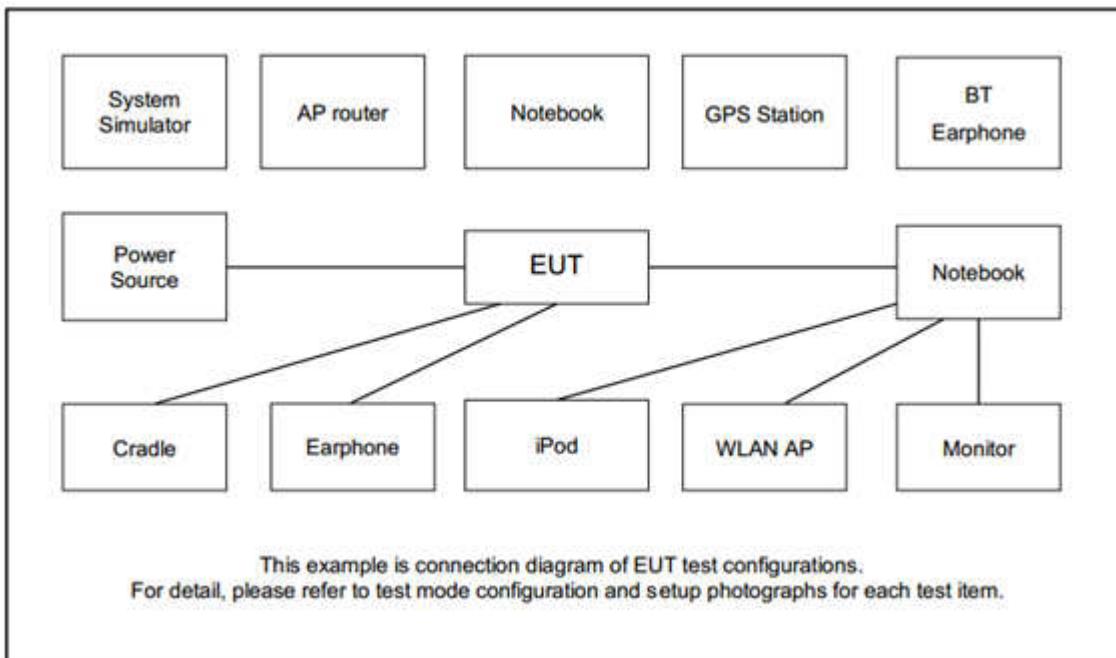

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.10 dB.

Example :

Offset(dB) = RF cable loss(dB).

$$= 5.10 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5



LTE Band 38 Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	37850	37901	37952
		Frequency	2580.0	2585.1	2590.2
	SCC	Channel	38048	38099	38150
		Frequency	2599.8	2604.9	2610.0
15+ 15	PCC	Channel	37825	37925	38025
		Frequency	2577.5	2587.5	2597.5
	SCC	Channel	37975	38075	38175
		Frequency	2592.5	2602.5	2612.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

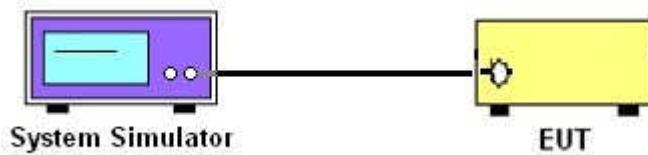

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

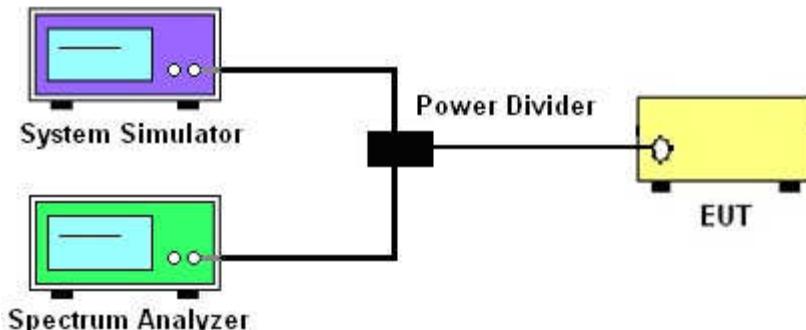

3.2.3 Frequency Stability

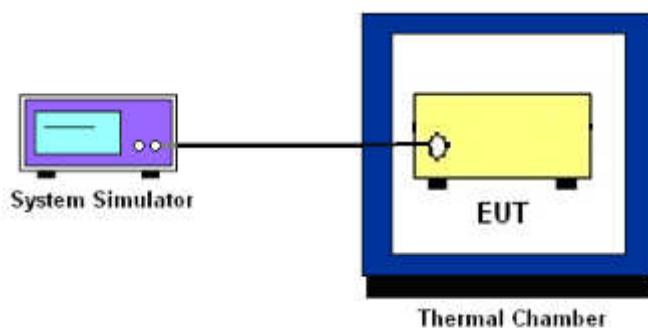

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7 and Band 38.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 38. Duty factor = $10 \log(1/x)$, where x is the measured duty cycle.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13 \text{ dBm}. \end{aligned}$$

10. For LTE Band 7, 38, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For Band 7,38:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for LTE Band 38. Duty factor = $10 \log(1/x)$, where x is the measured duty cycle
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
12. For Band 7, 38
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20 \pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

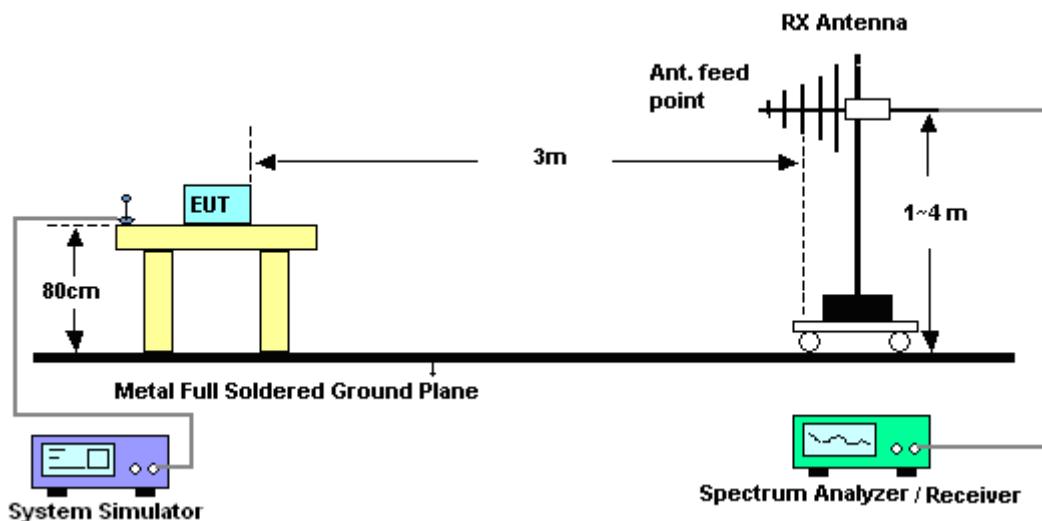

4.2.2 For radiated test above 1GHz

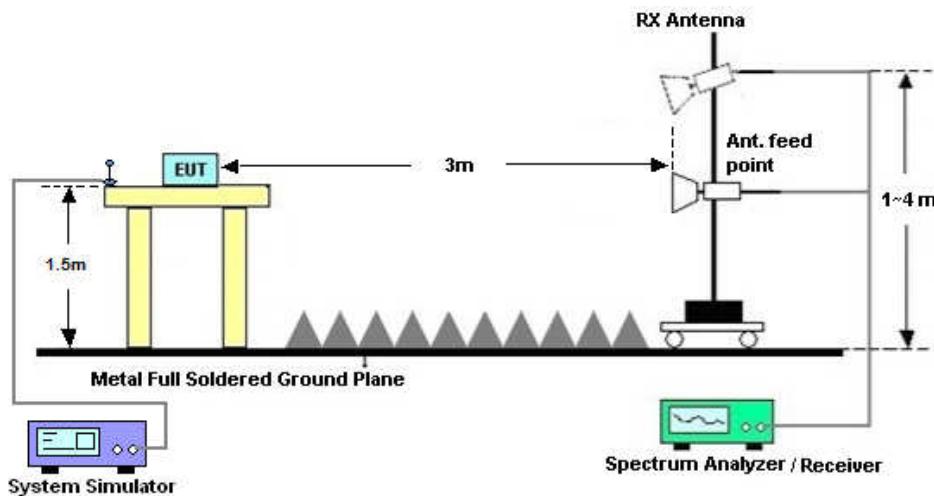

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For Band 7, 38

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log(P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (\text{dBm}) = S.G. \text{ Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $ERP (\text{dBm}) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$$

$$= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$$

$$= -13\text{dBm}.$$

13. For Band 7, 38:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Aug. 02, 2018~ Aug. 24, 2018	Apr. 18, 2019	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 12, 2017	Aug. 02, 2018~ Aug. 24, 2018	Oct. 11, 2018	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr. 17, 2018	Aug. 29, 2018	Apr. 16, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-2GHz	Jan. 29, 2018	Aug. 29, 2018	Jan. 28, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 21, 2017	Aug. 29, 2018	Oct. 20, 2018	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 OP	2025788	100MHz-18GHz	Apr. 17, 2018	Aug. 29, 2018	Apr. 16, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Aug. 29, 2018	Feb. 06, 2019	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2018	Aug. 29, 2018	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 12, 2017	Aug. 29, 2018	Oct. 11, 2018	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18~40GHz	Oct. 12, 2017	Aug. 29, 2018	Oct. 11, 2018	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 29, 2018	NCR	Radiation (03CH06-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 29, 2018	NCR	Radiation (03CH06-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 29, 2018	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.0 dB
--	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.42	22.30	22.24
	1	49		22.32	22.36	22.31
	1	99		22.14	22.29	22.26
	50	0		21.39	21.37	21.35
	50	24		21.38	21.35	21.35
	50	50		21.33	21.33	21.32
	100	0		21.39	21.38	21.35
20	1	0	16-QAM	21.62	21.62	21.54
	1	49		21.64	21.65	21.62
	1	99		21.51	21.61	21.54
	50	0		20.45	20.46	20.47
	50	24		20.51	20.49	20.48
	50	50		20.44	20.47	20.40
	100	0		20.40	20.45	20.41
20	1	0	64-QAM	21.54	21.52	21.44
	1	49		21.54	21.59	21.53
	1	99		21.39	21.51	21.44
	50	0		20.46	20.46	20.45
	50	24		20.44	20.47	20.45
	50	50		20.41	20.44	20.37
	100	0		20.46	20.47	20.41
15	1	0	QPSK	22.22	22.27	22.23
	1	37		22.11	22.37	22.31
	1	74		22.17	22.29	22.27
	36	0		21.29	21.36	21.37
	36	20		21.31	21.43	21.38
	36	39		21.27	21.34	21.32
	75	0		21.26	21.37	21.32



15	1	0	16-QAM	21.51	21.59	21.55
15	1	37		21.42	21.70	21.61
15	1	74		21.52	21.64	21.56
15	36	0		20.37	20.50	20.44
15	36	20		20.44	20.53	20.45
15	36	39		20.36	20.48	20.41
15	75	0		20.39	20.49	20.44
15	1	0		21.42	21.52	21.46
15	1	37	64-QAM	21.34	21.60	21.51
15	1	74		21.42	21.53	21.49
15	36	0		20.34	20.49	20.42
15	36	20		20.40	20.49	20.47
15	36	39		20.31	20.47	20.40
15	75	0		20.39	20.48	20.43



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.36	22.39	22.36
	1	25		22.17	22.40	22.34
	1	49		22.25	22.39	22.25
	25	0		21.32	21.41	21.37
	25	12		21.32	21.41	21.35
	25	25		21.28	21.37	21.33
	50	0		21.27	21.40	21.35
10	1	0	16-QAM	21.63	21.68	21.68
	1	25		21.48	21.72	21.63
	1	49		21.58	21.70	21.58
	25	0		20.39	20.50	20.43
	25	12		20.40	20.51	20.47
	25	25		20.36	20.47	20.38
	50	0		20.41	20.51	20.45
10	1	0	64-QAM	21.54	21.59	21.53
	1	25		21.35	21.61	21.52
	1	49		21.48	21.62	21.47
	25	0		20.42	20.49	20.46
	25	12		20.37	20.48	20.47
	25	25		20.33	20.47	20.38
	50	0		20.37	20.46	20.43
5	1	0	QPSK	22.39	22.25	22.32
	1	12		22.39	22.40	22.32
	1	24		22.22	22.36	22.26
	12	0		21.40	21.41	21.37
	12	7		21.40	21.41	21.38
	12	13		21.37	21.40	21.36
	25	0		21.38	21.36	21.33
5	1	0	16-QAM	21.60	21.59	21.59
	1	12		21.61	21.70	21.60
	1	24		21.48	21.62	21.55
	12	0		20.46	20.52	20.41
	12	7		20.47	20.53	20.45



5	12	13	64-QAM	20.43	20.49	20.42
5	25	0		20.46	20.47	20.44
5	1	0		21.54	21.49	21.49
5	1	12		21.54	21.62	21.50
5	1	24		21.43	21.53	21.47
5	12	0		20.45	20.48	20.39
5	12	7		20.45	20.52	20.44
5	12	13		20.42	20.44	20.40
5	25	0		20.45	20.47	20.44



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.35	22.32	22.28
	1	8		22.34	22.37	22.30
	1	14		22.33	22.35	22.27
	8	0		21.34	21.39	21.34
	8	4		21.39	21.41	21.35
	8	7		21.34	21.40	21.33
	15	0		21.37	21.39	21.33
3	1	0	16-QAM	21.60	21.63	21.58
	1	8		21.65	21.74	21.60
	1	14		21.60	21.67	21.59
	8	0		20.47	20.55	20.44
	8	4		20.51	20.55	20.47
	8	7		20.49	20.52	20.40
	15	0		20.60	20.49	20.44
3	1	0	64-QAM	21.53	21.59	21.48
	1	8		21.54	21.61	21.49
	1	14		21.50	21.54	21.48
	8	0		20.46	20.50	20.42
	8	4		20.45	20.51	20.44
	8	7		20.43	20.50	20.40
	15	0		20.43	20.48	20.42
1.4	1	0	QPSK	22.32	22.30	22.24
	1	3		22.35	22.39	22.32
	1	5		22.28	22.28	22.23
	3	0		22.32	22.34	22.26
	3	1		22.41	22.37	22.32
	3	3		22.34	22.34	22.27
	6	0		21.34	21.30	21.30
1.4	1	0	16-QAM	21.54	21.60	21.52
	1	3		21.59	21.71	21.58
	1	5		21.53	21.61	21.54
	3	0		21.39	21.43	21.31
	3	1		21.44	21.48	21.37



1.4	3	3	64-QAM	21.39	21.38	21.33
1.4	6	0		20.49	20.50	20.43
1.4	1	0		21.47	21.54	21.44
1.4	1	3		21.52	21.64	21.47
1.4	1	5		21.43	21.51	21.40
1.4	3	0		21.41	21.49	21.37
1.4	3	1		21.47	21.54	21.40
1.4	3	3		21.42	21.48	21.36
1.4	6	0		20.40	20.42	20.36



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.94	21.97	22.14
	1	49		21.94	22.00	21.88
	1	99		21.98	22.02	21.81
	50	0		21.00	21.14	21.11
	50	24		21.00	21.13	21.09
	50	50		21.10	21.08	21.05
	100	0		20.98	21.09	21.09
20	1	0	16-QAM	21.17	21.28	21.26
	1	49		21.27	21.25	21.04
	1	99		21.31	21.20	21.09
	50	0		20.09	20.24	20.17
	50	24		20.10	20.19	20.13
	50	50		20.20	20.15	20.10
	100	0		20.05	20.13	20.12
20	1	0	64QAM	21.12	21.16	21.15
	1	49		21.16	21.18	20.97
	1	99		21.20	21.11	20.98
	50	0		20.06	20.22	20.15
	50	24		20.07	20.17	20.15
	50	50		20.17	20.14	20.09
	100	0		20.06	20.13	20.11
15	1	0	QPSK	21.96	21.96	22.04
	1	37		21.96	22.05	21.89
	1	74		21.86	22.06	21.85
	36	0		20.87	21.12	21.08
	36	20		20.94	21.11	21.08
	36	39		20.87	21.07	21.04
	75	0		20.91	21.08	21.07
15	1	0	16-QAM	21.11	21.31	21.28
	1	37		21.19	21.29	21.09
	1	74		21.17	21.26	21.14
	36	0		19.97	20.23	20.11
	36	20		20.03	20.21	20.11



15	36	39	64QAM	19.97	20.12	20.08
15	75	0		19.97	20.16	20.07
15	1	0		21.04	21.25	21.24
15	1	37		21.12	21.22	21.02
15	1	74		21.11	21.19	21.03
15	36	0		19.97	20.22	20.11
15	36	20		20.01	20.20	20.12
15	36	39		19.97	20.11	20.05
15	75	0		19.96	20.17	20.09



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.95	22.13	21.97
	1	25		21.92	22.08	21.94
	1	49		21.85	22.02	21.87
	25	0		20.92	21.11	20.98
	25	12		20.93	21.15	21.11
	25	25		20.91	21.09	21.07
	50	0		20.93	21.10	21.10
10	1	0	16-QAM	21.17	21.40	21.14
	1	25		21.22	21.31	21.14
	1	49		21.22	21.18	21.20
	25	0		20.02	20.22	20.01
	25	12		20.03	20.18	20.13
	25	25		19.96	20.14	20.12
	50	0		20.01	20.17	20.14
10	1	0	64QAM	21.07	21.31	21.07
	1	25		21.12	21.23	21.04
	1	49		21.11	21.12	21.06
	25	0		19.99	20.21	20.02
	25	12		20.02	20.19	20.13
	25	25		19.95	20.14	20.12
	50	0		20.00	20.16	20.12
5	1	0	QPSK	21.90	22.09	21.91
	1	12		21.81	22.08	22.06
	1	24		21.88	22.04	21.88
	12	0		20.91	21.10	21.09
	12	7		20.95	21.14	21.09
	12	13		20.82	21.09	21.04
	25	0		20.92	21.11	21.08
5	1	0	16-QAM	21.14	21.33	21.14
	1	12		21.09	21.32	21.24
	1	24		21.16	21.24	21.12
	12	0		19.99	20.18	20.12
	12	7		20.00	20.20	20.14



5	12	13	64QAM	19.89	20.16	20.09
5	25	0		19.98	20.16	20.13
5	1	0		21.05	21.28	21.08
5	1	12		21.00	21.24	21.21
5	1	24		21.06	21.17	21.05
5	12	0		19.98	20.16	20.10
5	12	7		19.97	20.20	20.12
5	12	13		19.86	20.13	20.08
5	25	0		19.97	20.15	20.12



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.96	22.05	22.01
	1	8		21.88	22.03	21.93
	1	14		21.86	22.00	21.88
	8	0		20.98	21.07	21.07
	8	4		20.99	21.13	21.08
	8	7		20.88	21.10	20.92
	15	0		21.08	21.10	21.06
3	1	0	16-QAM	21.20	21.32	21.26
	1	8		21.16	21.32	21.19
	1	14		21.10	21.25	21.12
	8	0		20.06	20.19	20.14
	8	4		20.12	20.19	20.19
	8	7		19.98	20.16	20.01
	15	0		20.08	20.17	20.16
3	1	0	64QAM	21.06	21.18	21.16
	1	8		21.06	21.20	21.11
	1	14		21.01	21.14	21.07
	8	0		20.05	20.16	20.10
	8	4		20.07	20.15	20.15
	8	7		19.95	20.12	19.95
	15	0		20.05	20.15	20.14
1.4	1	0	QPSK	22.04	22.06	21.79
	1	3		21.96	21.97	21.79
	1	5		21.89	21.89	21.90
	3	0		21.98	21.85	21.87
	3	1		22.08	21.90	21.92
	3	3		21.98	21.82	21.88
	6	0		22.02	21.87	21.88
1.4	1	0	16-QAM	22.07	21.92	21.90
	1	3		22.04	21.88	21.98
	1	5		22.01	21.88	21.99
	3	0		21.22	21.10	20.90
	3	1		21.33	21.18	20.97



1.4	3	3	64QAM	21.23	21.09	20.93
1.4	6	0		21.04	20.90	21.00
1.4	1	0		21.10	20.97	21.00
1.4	1	3		21.02	20.93	21.05
1.4	1	5		21.17	21.00	20.99
1.4	3	0		21.16	21.00	20.94
1.4	3	1		21.24	21.05	20.99
1.4	3	3		21.13	20.99	20.94
1.4	6	0		21.10	20.94	20.94



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.02	22.10	22.15
	1	25		22.11	22.19	22.32
	1	49		22.16	22.22	22.27
	25	0		21.17	21.25	21.31
	25	12		21.33	21.26	21.38
	25	25		21.27	21.23	21.36
	50	0		21.26	21.23	21.30
10	1	0	16-QAM	21.38	21.53	21.51
	1	25		21.48	21.61	21.65
	1	49		21.61	21.59	21.67
	25	0		20.31	20.38	20.41
	25	12		20.39	20.37	20.50
	25	25		20.35	20.34	20.44
	50	0		20.38	20.35	20.38
10	1	0	64QAM	21.25	21.42	21.39
	1	25		21.39	21.48	21.56
	1	49		21.48	21.47	21.54
	25	0		20.28	20.35	20.41
	25	12		20.38	20.39	20.50
	25	25		20.36	20.33	20.44
	50	0		20.38	20.34	20.37
5	1	0	QPSK	22.06	22.21	22.31
	1	12		22.13	22.19	22.27
	1	24		22.14	22.14	22.26
	12	0		21.12	21.25	21.37
	12	7		21.27	21.27	21.41
	12	13		21.20	21.25	21.37
	25	0		21.19	21.22	21.33
5	1	0	16-QAM	21.38	21.63	21.65
	1	12		21.50	21.58	21.67
	1	24		21.48	21.52	21.64
	12	0		20.19	20.37	20.49
	12	7		20.35	20.39	20.52



5	12	13	64QAM	20.31	20.37	20.48
5	25	0		20.30	20.34	20.46
5	1	0		21.29	21.50	21.58
5	1	12		21.38	21.45	21.54
5	1	24		21.35	21.38	21.49
5	12	0		20.19	20.35	20.47
5	12	7		20.32	20.36	20.50
5	12	13		20.30	20.34	20.45
5	25	0		20.30	20.35	20.45



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.08	22.20	22.30
	1	8		22.06	22.18	22.32
	1	14		22.13	22.19	22.29
	8	0		21.14	21.21	21.33
	8	4		21.13	21.28	21.18
	8	7		21.17	21.20	21.34
	15	0		21.20	21.23	21.33
3	1	0	16-QAM	21.40	21.55	21.69
	1	8		21.41	21.52	21.68
	1	14		21.46	21.48	21.62
	8	0		20.26	20.41	20.48
	8	4		20.30	20.43	20.55
	8	7		20.34	20.38	20.49
	15	0		20.31	20.33	20.47
3	1	0	64QAM	21.30	21.42	21.55
	1	8		21.32	21.45	21.56
	1	14		21.33	21.41	21.53
	8	0		20.19	20.37	20.44
	8	4		20.25	20.38	20.51
	8	7		20.29	20.36	20.44
	15	0		20.07	20.31	20.44
1.4	1	0	QPSK	22.08	22.15	22.29
	1	3		22.16	22.17	22.27
	1	5		22.03	22.10	22.21
	3	0		22.14	22.13	22.26
	3	1		22.08	22.27	22.27
	3	3		22.08	22.22	22.32
	6	0		21.13	21.11	21.29
1.4	1	0	16-QAM	21.45	21.50	21.54
	1	3		21.49	21.89	21.65
	1	5		21.47	21.48	21.49
	3	0		21.19	21.37	21.51
	3	1		21.28	21.40	21.53



1.4	3	3	64QAM	21.18	21.34	21.45
1.4	6	0		20.37	20.38	20.46
1.4	1	0		21.12	21.38	21.43
1.4	1	3		21.28	21.40	21.34
1.4	1	5		21.17	21.37	21.19
1.4	3	0		21.15	21.45	21.38
1.4	3	1		21.02	21.46	21.40
1.4	3	3		21.03	21.38	21.42
1.4	6	0		20.18	20.29	20.38



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.46	22.49	22.48
20	1	49		22.42	22.48	22.46
20	1	99		22.39	22.52	22.41
20	50	0		21.38	21.47	21.25
20	50	24		21.41	21.44	21.32
20	50	50		21.45	21.50	21.37
20	100	0		21.43	21.44	21.33
20	1	0		21.87	21.62	21.52
20	1	49	16-QAM	21.77	21.53	21.67
20	1	99		21.95	21.58	21.61
20	50	0		20.46	20.50	20.40
20	50	24		20.52	20.57	20.38
20	50	50		20.63	20.49	20.54
20	100	0		20.59	20.54	20.39
20	1	0		21.85	21.65	21.56
20	1	49		21.47	21.54	21.71
20	1	99	64QAM	21.75	21.67	21.74
20	50	0		20.41	20.46	20.38
20	50	24		20.42	20.58	20.36
20	50	50		20.58	20.45	20.54
20	100	0		20.53	20.53	20.39
15	1	0	QPSK	22.40	22.43	22.31
15	1	37		22.41	22.42	22.45
15	1	74		22.47	22.46	22.34
15	36	0		21.44	21.44	21.27
15	36	20		21.49	21.55	21.44
15	36	39		21.45	21.47	21.44
15	75	0		21.49	21.46	21.31
15	1	0		21.57	21.61	21.85
15	1	37	16-QAM	21.51	21.61	21.63
15	1	74		21.65	21.63	21.75
15	36	0		20.44	20.55	20.39
15	36	20		20.51	20.57	20.46
15	36	39		20.56	20.49	20.49



15	75	0	64QAM	20.56	20.53	20.38
15	1	0		21.47	21.41	21.48
15	1	37		21.33	21.32	21.45
15	1	74		21.61	21.44	21.69
15	36	0		20.41	20.51	20.40
15	36	20		20.49	20.59	20.48
15	36	39		20.43	20.46	20.50
15	75	0		20.46	20.52	20.34



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.41	22.41	22.40
	1	25		22.31	22.44	22.29
	1	49		22.31	22.47	22.22
	25	0		21.30	21.36	21.25
	25	12		21.34	21.37	21.30
	25	25		21.35	21.34	21.40
	50	0		21.35	21.42	21.34
10	1	0	16-QAM	21.90	21.91	21.47
	1	25		21.80	21.96	21.56
	1	49		21.81	21.90	21.60
	25	0		20.40	20.55	20.44
	25	12		20.43	20.57	20.41
	25	25		20.46	20.64	20.42
	50	0		20.44	20.61	20.43
10	1	0	64QAM	21.86	21.88	21.57
	1	25		21.88	21.95	21.54
	1	49		21.90	21.90	21.47
	25	0		20.39	20.49	20.47
	25	12		20.43	20.56	20.43
	25	25		20.44	20.53	20.36
	50	0		20.41	20.53	20.36
5	1	0	QPSK	22.25	22.25	22.28
	1	12		22.20	22.19	22.19
	1	24		22.18	22.27	22.33
	12	0		21.30	21.34	21.21
	12	7		21.33	21.35	21.24
	12	13		21.29	21.33	21.23
	25	0		21.27	21.39	21.28
5	1	0	16-QAM	21.63	21.59	21.66
	1	12		21.63	21.56	21.73
	1	24		21.49	21.60	21.68
	12	0		20.27	20.35	20.28
	12	7		20.31	20.35	20.36



5	12	13	64QAM	20.28	20.33	20.35
5	25	0		20.40	20.45	20.29
5	1	0		21.28	21.24	21.51
5	1	12		21.19	21.54	21.56
5	1	24		21.17	21.48	21.48
5	12	0		20.44	20.45	20.36
5	12	7		20.48	20.44	20.40
5	12	13		20.54	20.42	20.39
5	25	0		20.41	20.46	20.32



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.45	22.55	22.40
	1	49		22.42	22.47	22.29
	1	99		22.54	22.56	22.41
	50	0		21.57	21.44	21.56
	50	24		21.58	21.52	21.45
	50	50		21.67	21.72	21.51
	100	0		21.56	21.60	21.60
20	1	0	16-QAM	21.63	21.59	21.60
	1	49		21.38	21.58	21.30
	1	99		21.69	21.56	21.50
	50	0		20.77	20.68	20.42
	50	24		20.67	20.57	20.40
	50	50		20.67	20.49	20.55
	100	0		20.55	20.76	20.65
20	1	0	64-QAM	21.53	21.56	21.22
	1	49		21.19	21.36	21.09
	1	99		21.59	21.35	21.21
	50	0		20.74	20.64	20.47
	50	24		20.63	20.53	20.25
	50	50		20.65	20.64	20.50
	100	0		20.82	20.81	20.50
15	1	0	QPSK	22.63	22.69	22.21
	1	37		22.59	22.59	22.25
	1	74		22.63	22.63	22.34
	36	0		21.69	21.63	21.25
	36	20		21.67	21.42	21.39
	36	39		21.48	21.63	21.45
	75	0		21.55	21.60	21.38
15	1	0	16-QAM	21.51	21.58	21.33
	1	37		21.73	21.67	21.24
	1	74		21.61	21.71	21.43
	36	0		20.77	20.53	20.34
	36	20		20.76	20.52	20.30



15	36	39	64-QAM	20.78	20.63	20.37
15	75	0		20.80	20.55	20.33
15	1	0		21.28	21.47	21.04
15	1	37		21.50	21.36	21.13
15	1	74		21.46	21.40	21.22
15	36	0		20.81	20.67	20.39
15	36	20		20.79	20.75	20.34
15	36	39		20.71	20.56	20.50
15	75	0		20.79	20.74	20.43



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.50	22.56	22.23
	1	25		22.53	22.56	22.20
	1	49		22.40	22.50	22.34
	25	0		21.41	21.69	21.36
	25	12		21.63	21.61	21.27
	25	25		21.54	21.62	21.35
	50	0		21.68	21.58	21.42
10	1	0	16-QAM	21.68	21.66	21.34
	1	25		21.70	21.66	21.30
	1	49		21.52	21.57	21.42
	25	0		20.66	20.75	20.32
	25	12		20.58	20.57	20.33
	25	25		20.69	20.58	20.40
	50	0		20.64	20.62	20.46
10	1	0	64-QAM	21.43	21.44	21.04
	1	25		21.27	21.34	21.00
	1	49		21.20	21.35	21.22
	25	0		20.61	20.50	20.28
	25	12		20.73	20.72	20.28
	25	25		20.64	20.63	20.45
	50	0		20.76	20.67	20.41
5	1	0	QPSK	22.60	22.39	22.20
	1	12		22.39	22.57	22.25
	1	24		22.58	22.46	22.27
	12	0		21.41	21.43	21.26
	12	7		21.63	21.55	21.36
	12	13		21.55	21.65	21.35
	25	0		21.47	21.58	21.29
5	1	0	16-QAM	21.64	21.64	21.28
	1	12		21.47	21.66	21.17
	1	24		21.51	21.60	21.42
	12	0		20.60	20.52	20.35
	12	7		20.63	20.55	20.36



5	12	13	64-QAM	20.64	20.65	20.35
5	25	0		20.63	20.65	20.45
5	1	0		21.44	21.45	21.10
5	1	12		21.43	21.26	21.06
5	1	24		21.28	21.47	21.04
5	12	0		20.60	20.61	20.24
5	12	7		20.63	20.56	20.37
5	12	13		20.63	20.56	20.45
5	25	0		20.67	20.59	20.49

**CA Power**

CA_38C								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Measured Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	0	0	1	99	1	22.35
			1	0	0	0	1	22.38
			100	0	0	0	100	21.51
			100	0	100	0	200	20.4
			1	0	1	99	2	14.14
			1	0	1	0	2	18.26
			1	99	1	0	2	22.37
			100	0	1	99	101	20.32
		16QAM	0	0	1	99	1	21.45
			1	0	0	0	1	21.63
			100	0	0	0	100	20.75
			100	0	100	0	200	19.63
			1	0	1	99	2	14.25
			1	0	1	0	2	18.32
			1	99	1	0	2	21.68
			100	0	1	99	101	19.06
		64QAM	0	0	1	99	1	21.56
			1	0	0	0	1	21.41
			100	0	0	0	100	20.43
			100	0	100	0	200	19.58
			1	0	1	99	2	13.92
			1	0	1	0	2	18.1
			1	99	1	0	2	21.38
			100	0	1	99	101	18.92



37901	38099	QPSK	0	0	1	99	1	22.23
			1	0	0	0	1	22.46
			100	0	0	0	100	21.36
			100	0	100	0	200	20.35
			1	0	1	99	2	14.32
			1	0	1	0	2	18.21
			1	99	1	0	2	22.31
			100	0	1	99	101	20.35
		16QAM	0	0	1	99	1	21.41
			1	0	0	0	1	21.6
			100	0	0	0	100	20.78
			100	0	100	0	200	19.64
			1	0	1	99	2	14.28
			1	0	1	0	2	18.12
			1	99	1	0	2	21.58
			100	0	1	99	101	19.16
		64QAM	0	0	1	99	1	21.73
			1	0	0	0	1	21.49
			100	0	0	0	100	20.42
			100	0	100	0	200	19.63
			1	0	1	99	2	14.01
			1	0	1	0	2	18.05
			1	99	1	0	2	21.12
			100	0	1	99	101	19.05



37952	38150	QPSK	0	0	1	99	1	22.21
			1	0	0	0	1	22.29
			100	0	0	0	100	21.68
			100	0	100	0	200	20.75
			1	0	1	99	2	14.03
			1	0	1	0	2	18.02
			1	99	1	0	2	22.18
			100	0	1	99	101	20.05
37952	38150	16QAM	0	0	1	99	1	21.63
			1	0	0	0	1	21.78
			100	0	0	0	100	20.61
			100	0	100	0	200	19.72
			1	0	1	99	2	14.15
			1	0	1	0	2	18.22
			1	99	1	0	2	21.61
			100	0	1	99	101	19.23
37952	38150	64QAM	0	0	1	99	1	21.58
			1	0	0	0	1	21.63
			100	0	0	0	100	20.66
			100	0	100	0	200	19.58
			1	0	1	99	2	14.12
			1	0	1	0	2	18.06
			1	99	1	0	2	21.18
			100	0	1	99	101	19.23



CA_38C								
Combination 15MHz+15MHz (75RB+75RB)								
PCC	SCC	Modulation	PCC		SCC		Measured Power (dBm)	
Channel	Channel		RB Size	RB offset	RB Size	RB offset		
37825	37975	QPSK	75	0	75	0	150	20.68
		QPSK	1	0	1	74	2	14.02
		QPSK	1	74	1	0	2	22.38
		16QAM	75	0	75	0	150	19.63
		16QAM	1	0	1	74	2	14.16
		16QAM	1	74	1	0	2	21.68
		64QAM	75	0	75	0	150	19.63
		64QAM	1	0	1	74	2	14.16
		64QAM	1	74	1	0	2	19.71
37925	38075	QPSK	75	0	75	0	150	20.38
		QPSK	1	0	1	74	2	14.15
		QPSK	1	74	1	0	2	22.25
		16QAM	75	0	75	0	150	19.36
		16QAM	1	0	1	74	2	14.26
		16QAM	1	74	1	0	2	21.35
		64QAM	75	0	75	0	150	19.73
		64QAM	1	0	1	74	2	14.25
		64QAM	1	74	1	0	2	19.76
38025	38175	QPSK	75	0	75	0	150	20.61
		QPSK	1	0	1	74	2	14.08
		QPSK	1	74	1	0	2	22.31
		16QAM	75	0	75	0	150	19.58
		16QAM	1	0	1	74	2	14.13
		16QAM	1	74	1	0	2	21.62
		64QAM	75	0	75	0	150	19.66
		64QAM	1	0	1	74	2	14.23
		64QAM	1	74	1	0	2	19.62

**ERP/EIRP**

LTE Band 2 (GT - LC = 1.10 dBi) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	22.41	22.37	22.32	22.34	22.37	22.30	22.39	22.40	22.32
Conducted Power (Watts)	0.1742	0.1726	0.1706	0.1714	0.1726	0.1698	0.1734	0.1738	0.1706
EIRP(dBm)	23.51	23.47	23.42	23.44	23.47	23.40	23.49	23.50	23.42
EIRP(Watts)	0.2244	0.2223	0.2198	0.2208	0.2223	0.2188	0.2234	0.2239	0.2198

LTE Band 2 (GT - LC = 1.10 dBi) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	22.17	22.40	22.34	22.11	22.37	22.31	22.42	22.30	22.24
Conducted Power (Watts)	0.1648	0.1738	0.1714	0.1626	0.1726	0.1702	0.1746	0.1698	0.1675
EIRP(dBm)	23.27	23.50	23.44	23.21	23.47	23.41	23.52	23.40	23.34
EIRP(Watts)	0.2123	0.2239	0.2208	0.2094	0.2223	0.2193	0.2249	0.2188	0.2158



LTE Band 2 (GT - LC = 1.10 dBi) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607 (Low)	18900 (Mid)	19193 (High)	18615 (Low)	18900 (Mid)	19185 (High)	18625 (Low)	18900 (Mid)	19175 (High)
	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	21.59	21.71	21.58	21.65	21.74	21.60	21.61	21.70	21.60
Conducted Power (Watts)	0.1442	0.1483	0.1439	0.1462	0.1493	0.1445	0.1449	0.1479	0.1445
EIRP(dBm)	22.69	22.81	22.68	22.75	22.84	22.70	22.71	22.80	22.70
EIRP(Watts)	0.1858	0.1910	0.1854	0.1884	0.1923	0.1862	0.1866	0.1905	0.1862

LTE Band 2 (GT - LC = 1.10 dBi) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650 (Low)	18900 (Mid)	19150 (High)	18675 (Low)	18900 (Mid)	19125 (High)	18650 (Low)	18900 (Mid)	19100 (High)
	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	21.48	21.72	21.63	21.42	21.70	21.61	21.64	21.65	21.62
Conducted Power (Watts)	0.1406	0.1486	0.1455	0.1387	0.1479	0.1449	0.1459	0.1462	0.1452
EIRP(dBm)	22.58	22.82	22.73	22.52	22.80	22.71	22.74	22.75	22.72
EIRP(Watts)	0.1811	0.1914	0.1875	0.1786	0.1905	0.1866	0.1879	0.1884	0.1871



LTE Band 2 (GT - LC = 1.10 dBi) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607 (Low)	18900 (Mid)	19193 (High)	18615 (Low)	18900 (Mid)	19185 (High)	18625 (Low)	18900 (Mid)	19175 (High)
	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	21.52	21.64	21.47	21.54	21.61	21.49	21.54	21.62	21.50
Conducted Power (Watts)	0.1419	0.1459	0.1403	0.1426	0.1449	0.1409	0.1426	0.1452	0.1413
EIRP(dBm)	22.62	22.74	22.57	22.64	22.71	22.59	22.64	22.72	22.60
EIRP(Watts)	0.1828	0.1879	0.1807	0.1837	0.1866	0.1816	0.1837	0.1871	0.1820

LTE Band 2 (GT - LC = 1.10 dBi) 64QAM									
Bandwidth	10M			15M			20M		
Channel	18650 (Low)	18900 (Mid)	19150 (High)	18675 (Low)	18900 (Mid)	19125 (High)	18650 (Low)	18900 (Mid)	19100 (High)
	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	21.48	21.62	21.47	21.34	21.60	21.51	21.54	21.59	21.53
Conducted Power (Watts)	0.1406	0.1452	0.1403	0.1361	0.1445	0.1416	0.1426	0.1442	0.1422
EIRP(dBm)	22.58	22.72	22.57	22.44	22.70	22.61	22.64	22.69	22.63
EIRP(Watts)	0.1811	0.1871	0.1807	0.1754	0.1862	0.1824	0.1837	0.1858	0.1832



LTE Band 4 (GT - LC = 0.80 dBi) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.08	21.90	21.92	21.96	22.05	22.01	21.90	22.09	21.91
Conducted Power (Watts)	0.1614	0.1549	0.1556	0.1570	0.1603	0.1589	0.1549	0.1618	0.1552
EIRP(dBm)	22.88	22.70	22.72	22.76	22.85	22.81	22.70	22.89	22.71
EIRP(Watts)	0.1941	0.1862	0.1871	0.1888	0.1928	0.1910	0.1862	0.1945	0.1866

LTE Band 4 (GT - LC = 0.80 dBi) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	21.95	22.13	21.97	21.86	22.06	21.85	21.94	21.97	22.14
Conducted Power (Watts)	0.1567	0.1633	0.1574	0.1535	0.1607	0.1531	0.1563	0.1574	0.1637
EIRP(dBm)	22.75	22.93	22.77	22.66	22.86	22.65	22.74	22.77	22.94
EIRP(Watts)	0.1884	0.1963	0.1892	0.1845	0.1932	0.1841	0.1879	0.1892	0.1968



LTE Band 4 (GT - LC = 0.80dBi) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.07	21.92	21.90	21.20	21.32	21.26	21.14	21.33	21.14
Conducted Power (Watts)	0.1611	0.1556	0.1549	0.1318	0.1355	0.1337	0.1300	0.1358	0.1300
EIRP(dBm)	22.87	22.72	22.70	22.00	22.12	22.06	21.94	22.13	21.94
EIRP(Watts)	0.1936	0.1871	0.1862	0.1585	0.1629	0.1607	0.1563	0.1633	0.1563

LTE Band 4 (GT - LC = 0.80 dBi) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	21.17	21.40	21.14	21.11	21.31	21.28	21.31	21.20	21.09
Conducted Power (Watts)	0.1309	0.1380	0.1300	0.1291	0.1352	0.1343	0.1352	0.1318	0.1285
EIRP(dBm)	21.97	22.20	21.94	21.91	22.11	22.08	22.11	22.00	21.89
EIRP(Watts)	0.1574	0.1660	0.1563	0.1552	0.1626	0.1614	0.1626	0.1585	0.1545



LTE Band 4 ($G_T - L_c = 0.80 \text{ dBi}$) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	21.24	21.05	20.99	21.06	21.20	21.11	21.05	21.28	21.08
Conducted Power (Watts)	0.1330	0.1274	0.1256	0.1276	0.1318	0.1291	0.1274	0.1343	0.1282
EIRP(dBm)	22.04	21.85	21.79	21.86	22.00	21.91	21.85	22.08	21.88
EIRP(Watts)	0.1600	0.1531	0.1510	0.1535	0.1585	0.1552	0.1531	0.1614	0.1542

LTE Band 4 ($G_T - L_c = 0.80 \text{ dBi}$) 64QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	21.07	21.31	21.07	21.04	21.25	21.24	21.20	21.11	20.98
Conducted Power (Watts)	0.1279	0.1352	0.1279	0.1271	0.1334	0.1330	0.1318	0.1291	0.1253
EIRP(dBm)	21.87	22.11	21.87	21.84	22.05	22.04	22.00	21.91	21.78
EIRP(Watts)	0.1538	0.1626	0.1538	0.1528	0.1603	0.1600	0.1585	0.1552	0.1507



LTE Band 5 (GT - LC = -3.40 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.08	22.22	22.32	22.06	22.18	22.32	22.06	22.21	22.31
Conducted Power (Watts)	0.1614	0.1667	0.1706	0.1607	0.1652	0.1706	0.1607	0.1663	0.1702
ERP(dBm)	16.53	16.67	16.77	16.51	16.63	16.77	16.51	16.66	16.76
ERP(Watts)	0.0450	0.0465	0.0475	0.0448	0.0460	0.0475	0.0448	0.0463	0.0474

LTE Band 5 (GT - LC = -3.40 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.11	22.19	22.32
Conducted Power (Watts)	0.1626	0.1656	0.1706
ERP(dBm)	16.56	16.64	16.77
ERP(Watts)	0.0453	0.0461	0.0475



LTE Band 5 (GT - LC = -3.40 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	21.49	21.89	21.65	21.40	21.55	21.69	21.50	21.58	21.67
Conducted Power (Watts)	0.1409	0.1545	0.1462	0.1380	0.1429	0.1476	0.1413	0.1439	0.1469
ERP(dBm)	15.94	16.34	16.10	15.85	16.00	16.14	15.95	16.03	16.12
ERP(Watts)	0.0393	0.0431	0.0407	0.0385	0.0398	0.0411	0.0394	0.0401	0.0409

LTE Band 5 (GT - LC = -3.40 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	21.61	21.59	21.67
Conducted Power (Watts)	0.1449	0.1442	0.1469
ERP(dBm)	16.06	16.04	16.12
ERP(Watts)	0.0404	0.0402	0.0409



LTE Band 5 ($G_T - L_c = -3.40 \text{ dBi}$) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	21.02	21.46	21.40	21.32	21.45	21.56	21.29	21.50	21.58
Conducted Power (Watts)	0.1265	0.1400	0.1380	0.1355	0.1396	0.1432	0.1346	0.1413	0.1439
ERP(dBm)	15.47	15.91	15.85	15.77	15.90	16.01	15.74	15.95	16.03
ERP(Watts)	0.0352	0.0390	0.0385	0.0378	0.0389	0.0399	0.0375	0.0394	0.0401

LTE Band 5 ($G_T - L_c = -3.40 \text{ dBi}$) 64QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	21.39	21.48	21.56
Conducted Power (Watts)	0.1377	0.1406	0.1432
ERP(dBm)	15.84	15.93	16.01
ERP(Watts)	0.0384	0.0392	0.0399



LTE Band 7 (GT - LC = 1.60 dBi) QPSK					
Bandwidth	5M				
Channel	20775		21100		21425
	(Low)		(Mid)		(High)
Frequency (MHz)	2502.5		2535		2567.5
Conducted Power (dBm)	22.18		22.27		22.33
Conducted Power (Watts)	0.1652		0.1687		0.1710
EIRP(dBm)	23.78		23.87		23.93
EIRP(Watts)	0.2388		0.2438		0.2472

LTE Band 7 (GT - LC = 1.60 dBi) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
Conducted Power (dBm)	22.31	22.47	22.22	22.47	22.46	22.34	22.39	22.52	22.41
Conducted Power (Watts)	0.1702	0.1766	0.1667	0.1766	0.1762	0.1714	0.1734	0.1786	0.1742
EIRP(dBm)	23.91	24.07	23.82	24.07	24.06	23.94	23.99	24.12	24.01
EIRP(Watts)	0.2460	0.2553	0.2410	0.2553	0.2547	0.2477	0.2506	0.2582	0.2518



LTE Band 7 (GT - LC = 1.60 dBi) 16QAM				
Bandwidth	5M			
Channel	20775 (Low)	21100 (Mid)	21425 (High)	
	2502.5	2535	2567.5	
Conducted Power (dBm)	21.63	21.56	21.73	
Conducted Power (Watts)	0.1455	0.1432	0.1489	
EIRP(dBm)	23.23	23.16	23.33	
EIRP(Watts)	0.2104	0.2070	0.2153	

LTE Band 7 (GT - LC = 1.60 dBi) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800 (Low)	21100 (Mid)	21400 (High)	20825 (Low)	21100 (Mid)	21375 (High)	20850 (Low)	21100 (Mid)	21350 (High)
	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
Conducted Power (dBm)	21.80	21.96	21.56	21.57	21.61	21.85	21.95	21.58	21.61
Conducted Power (Watts)	0.1514	0.1570	0.1432	0.1435	0.1449	0.1531	0.1567	0.1439	0.1449
EIRP(dBm)	23.40	23.56	23.16	23.17	23.21	23.45	23.55	23.18	23.21
EIRP(Watts)	0.2188	0.2270	0.2070	0.2075	0.2094	0.2213	0.2265	0.2080	0.2094



LTE Band 7 ($G_T - L_c = 1.60 \text{ dBi}$) 64QAM			
Bandwidth	5M		
Channel	20775 (Low)	21100 (Mid)	21425 (High)
	2502.5	2535	2567.5
Conducted Power (dBm)	21.19	21.54	21.56
Conducted Power (Watts)	0.1315	0.1426	0.1432
EIRP(dBm)	22.79	23.14	23.16
EIRP(Watts)	0.1901	0.2061	0.2070

LTE Band 7 ($G_T - L_c = 1.60 \text{ dBi}$) 64QAM									
Bandwidth	10M			15M			20M		
Channel	20800 (Low)	21100 (Mid)	21400 (High)	20825 (Low)	21100 (Mid)	21375 (High)	20850 (Low)	21100 (Mid)	21350 (High)
	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
Conducted Power (dBm)	21.88	21.95	21.54	21.61	21.44	21.69	21.85	21.65	21.56
Conducted Power (Watts)	0.1542	0.1567	0.1426	0.1449	0.1393	0.1476	0.1531	0.1462	0.1432
EIRP(dBm)	23.48	23.55	23.14	23.21	23.04	23.29	23.45	23.25	23.16
EIRP(Watts)	0.2228	0.2265	0.2061	0.2094	0.2014	0.2133	0.2213	0.2113	0.2070



LTE Band 38 (GT - LC = 1.60 dB) QPSK					
Bandwidth	5M				
Channel	37775		38000		38225
	(Low)		(Mid)		(High)
Frequency (MHz)	2572.5		2595		2617.5
Conducted Power (dBm)	22.60		22.39		22.20
Conducted Power (Watts)	0.1820		0.1734		0.1660
EIRP(dBm)	24.20		23.99		23.80
EIRP(Watts)	0.2630		0.2506		0.2399

LTE Band 38 (GT - LC = 1.60 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
Conducted Power (dBm)	22.53	22.56	22.20	22.63	22.69	22.21	22.54	22.56	22.41
Conducted Power (Watts)	0.1791	0.1803	0.1660	0.1832	0.1858	0.1663	0.1795	0.1803	0.1742
EIRP(dBm)	24.13	24.16	23.80	24.23	24.29	23.81	24.14	24.16	24.01
EIRP(Watts)	0.2588	0.2606	0.2399	0.2649	0.2685	0.2404	0.2594	0.2606	0.2518



LTE Band 38 (GT - LC = 1.60 dBi) 16QAM					
Bandwidth	5M				
Channel	37775		38000		38225
	(Low)		(Mid)		(High)
Frequency (MHz)	2572.5		2595		2617.5
Conducted Power (dBm)	21.47		21.66		21.17
Conducted Power (Watts)	0.1403		0.1466		0.1309
EIRP(dBm)	23.07		23.26		22.77
EIRP(Watts)	0.2028		0.2118		0.1892

LTE Band 38 (GT - LC = 1.60 dBi) 16QAM									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
Conducted Power (dBm)	21.70	21.66	21.30	21.73	21.67	21.24	21.69	21.56	21.50
Conducted Power (Watts)	0.1479	0.1466	0.1349	0.1489	0.1469	0.1330	0.1476	0.1432	0.1413
EIRP(dBm)	23.30	23.26	22.90	23.33	23.27	22.84	23.29	23.16	23.10
EIRP(Watts)	0.2138	0.2118	0.1950	0.2153	0.2123	0.1923	0.2133	0.2070	0.2042



LTE Band 38 (GT - LC = 1.60 dBi) 64QAM					
Bandwidth	5M				
Channel	37775		38000		38225
	(Low)		(Mid)		(High)
Frequency (MHz)	2572.5		2595		2617.5
	21.28		21.47		21.04
Conducted Power (dBm)	0.1343		0.1403		0.1271
EIRP(dBm)	22.88		23.07		22.64
EIRP(Watts)	0.1941		0.2028		0.1837

LTE Band 38 (GT - LC = 1.60 dBi) 64QAM									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
	21.43	21.44	21.04	21.50	21.36	21.13	21.59	21.35	21.21
Conducted Power (dBm)	0.1390	0.1393	0.1271	0.1413	0.1368	0.1297	0.1442	0.1365	0.1321
EIRP(dBm)	23.03	23.04	22.64	23.10	22.96	22.73	23.19	22.95	22.81
EIRP(Watts)	0.2009	0.2014	0.1837	0.2042	0.1977	0.1875	0.2084	0.1972	0.1910

**CA EIRP**

LTE Band 38 CA (GT - LC = 1.60 dB) QPSK						
Bandwidth	15M + 15M			20M+20M		
Channel PCC	37825 (Low)	37925 (Mid)	38025 (High)	37850 (Low)	37901 (Mid)	37952 (High)
	37975 (Low)	38075 (Mid)	38175 (High)	38048 (Low)	38099 (Mid)	38150 (High)
Conducted Power (dBm)	22.38	22.25	22.31	22.38	22.46	22.29
Conducted Power (Watts)	0.1730	0.1679	0.1702	0.1730	0.1762	0.1694
EIRP(dBm)	23.98	23.85	23.91	23.98	24.06	23.89
EIRP(Watts)	0.2500	0.2427	0.2460	0.2500	0.2547	0.2449

LTE Band 38 CA (GT - LC = 1.60 dB) 16QAM						
Bandwidth	15M + 15M			20M+20M		
Channel PCC	37825 (Low)	37925 (Mid)	38025 (High)	37850 (Low)	37901 (Mid)	37952 (High)
	37975 (Low)	38075 (Mid)	38175 (High)	38048 (Low)	38099 (Mid)	38150 (High)
Conducted Power (dBm)	21.68	21.35	21.62	21.68	21.6	21.78
Conducted Power (Watts)	0.1472	0.1365	0.1452	0.1472	0.1445	0.1507
EIRP(dBm)	23.28	22.95	23.22	23.28	23.20	23.38
EIRP(Watts)	0.2128	0.1972	0.2099	0.2128	0.2089	0.2178



LTE Band 38 CA (GT - LC = 1.60 dB) 64QAM						
Bandwidth	15M + 15M			20M+20M		
Channel PCC	37825 (Low)	37925 (Mid)	38025 (High)	37850 (Low)	37901 (Mid)	37952 (High)
	37975 (Low)	38075 (Mid)	38175 (High)	38048 (Low)	38099 (Mid)	38150 (High)
Conducted Power (dBm)	19.63	19.76	19.66	21.56	21.73	21.63
Conducted Power (Watts)	0.0918	0.0946	0.0925	0.1432	0.1489	0.1455
EIRP(dBm)	19.71	19.76	19.62	23.16	23.33	23.23
EIRP(Watts)	0.0935	0.0946	0.0916	0.2070	0.2153	0.2104



Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.28	4.49	4.9	5.8	PASS
Middle CH	3.45	4.55	5.3	5.94	
Highest CH	3.39	4.58	5.25	5.91	

Mode	LTE Band 2 / 20MHz			
Mod.	64QAM		Limit: 13dB	
RB Size	1RB	Full RB	Result	
Lowest CH	4.90	5.74	PASS	
Middle CH	5.36	5.83		
Highest CH	5.30	5.83		

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.19	4.55	4.29	5.91	PASS
Middle CH	3.54	4.2	5.1	5.54	
Highest CH	2.96	4.14	4.46	5.33	

Mod.	64QAM			
RB Size	1RB	Full RB	Result	
Lowest CH	4.49	5.83	PASS	
Middle CH	5.3	5.48		
Highest CH	4.35	5.33		


Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.62	4.64	4.9	5.83	PASS
Middle CH	3.59	4.7	5.28	5.97	
Highest CH	3.57	4.52	4.99	5.71	


Mod.	64QAM			
RB Size	1RB	Full RB	Result	
Lowest CH	5.45	5.8	PASS	
Middle CH	5.22	5.97		
Highest CH	5.28	5.62		




Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.51	4.41	5.04	5.77	PASS
Middle CH	3.36	4.29	5.13	5.51	
Highest CH	3.59	4.38	5.07	5.65	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	5.16	5.68	PASS		
Middle CH	4.84	5.45			
Highest CH	5.28	5.68			

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.45	4.72	5.1	5.8	PASS
Middle CH	4.41	4.41	5.28	6.2	
Highest CH	3.74	4.75	6.06	5.51	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	6.29	5.77	PASS		
Middle CH	5.13	5.65			
Highest CH	5.88	5.45			

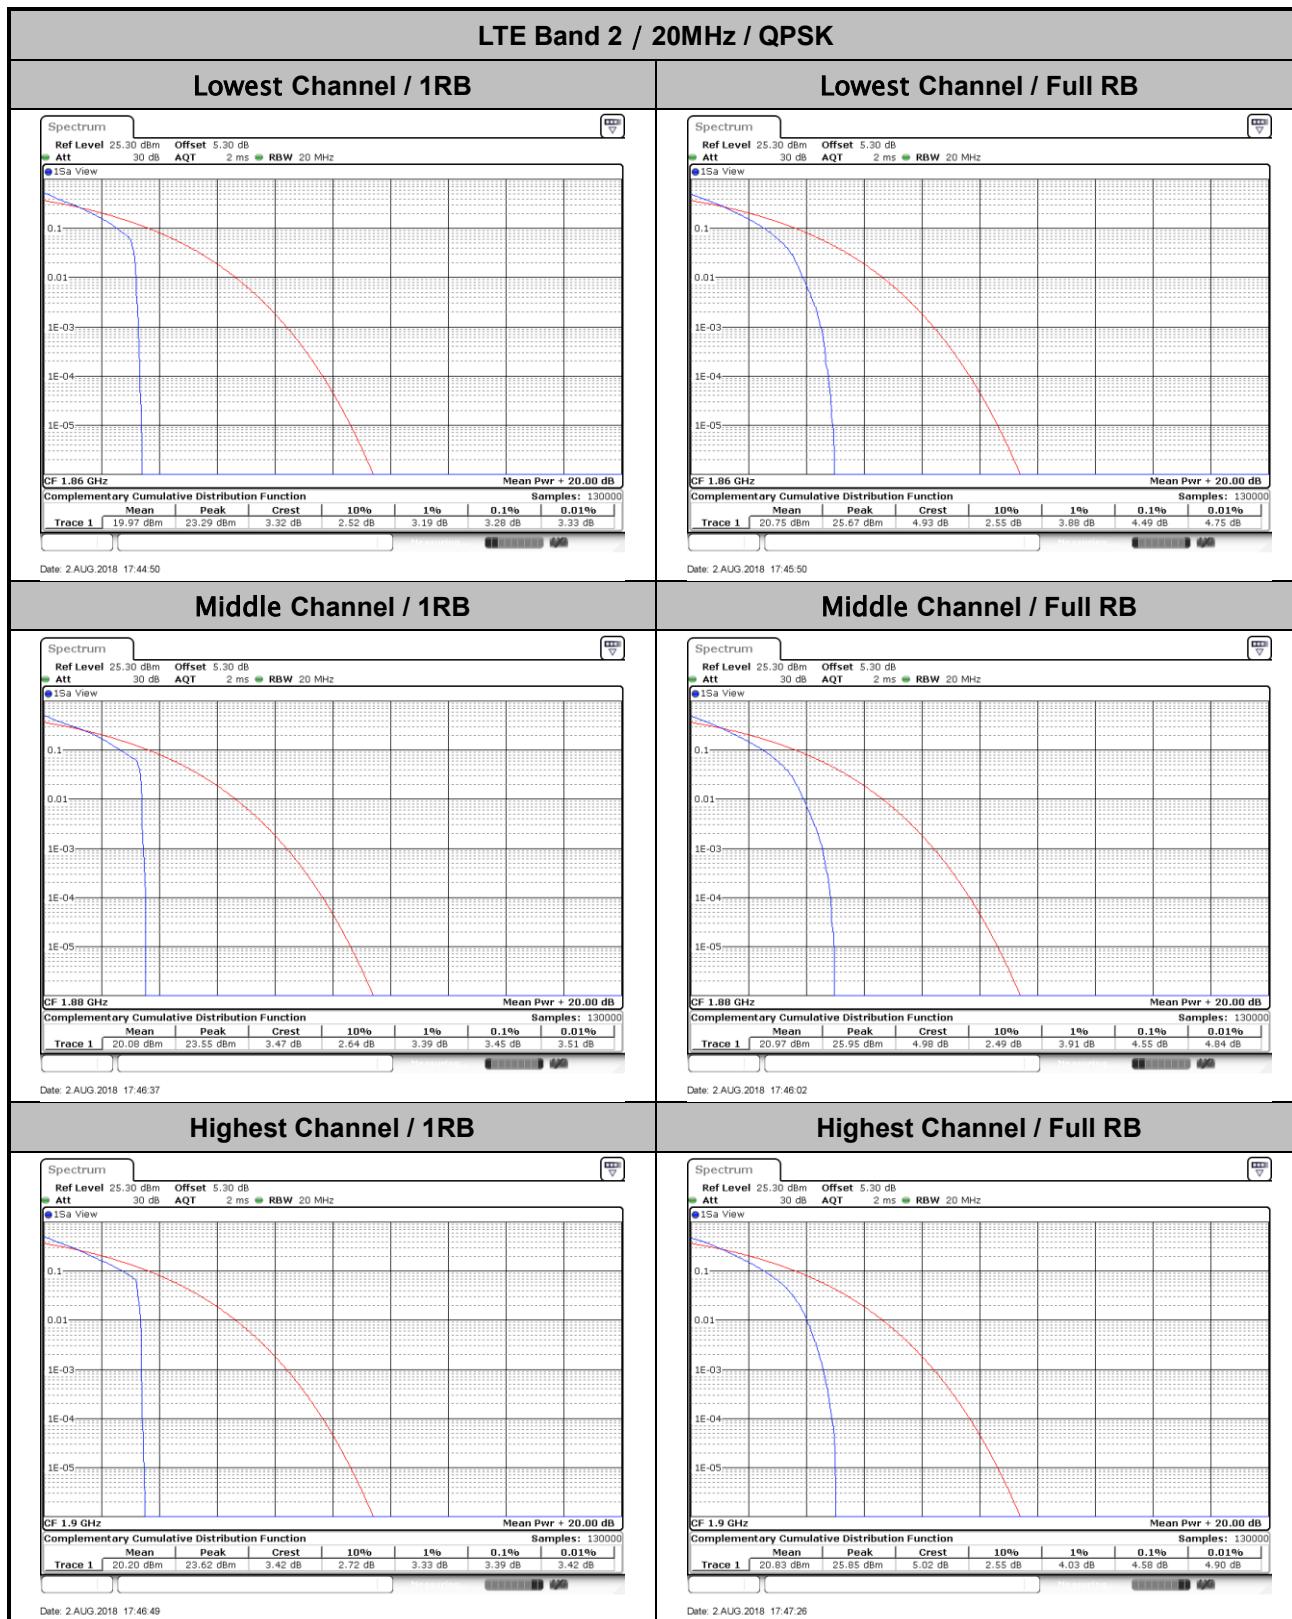

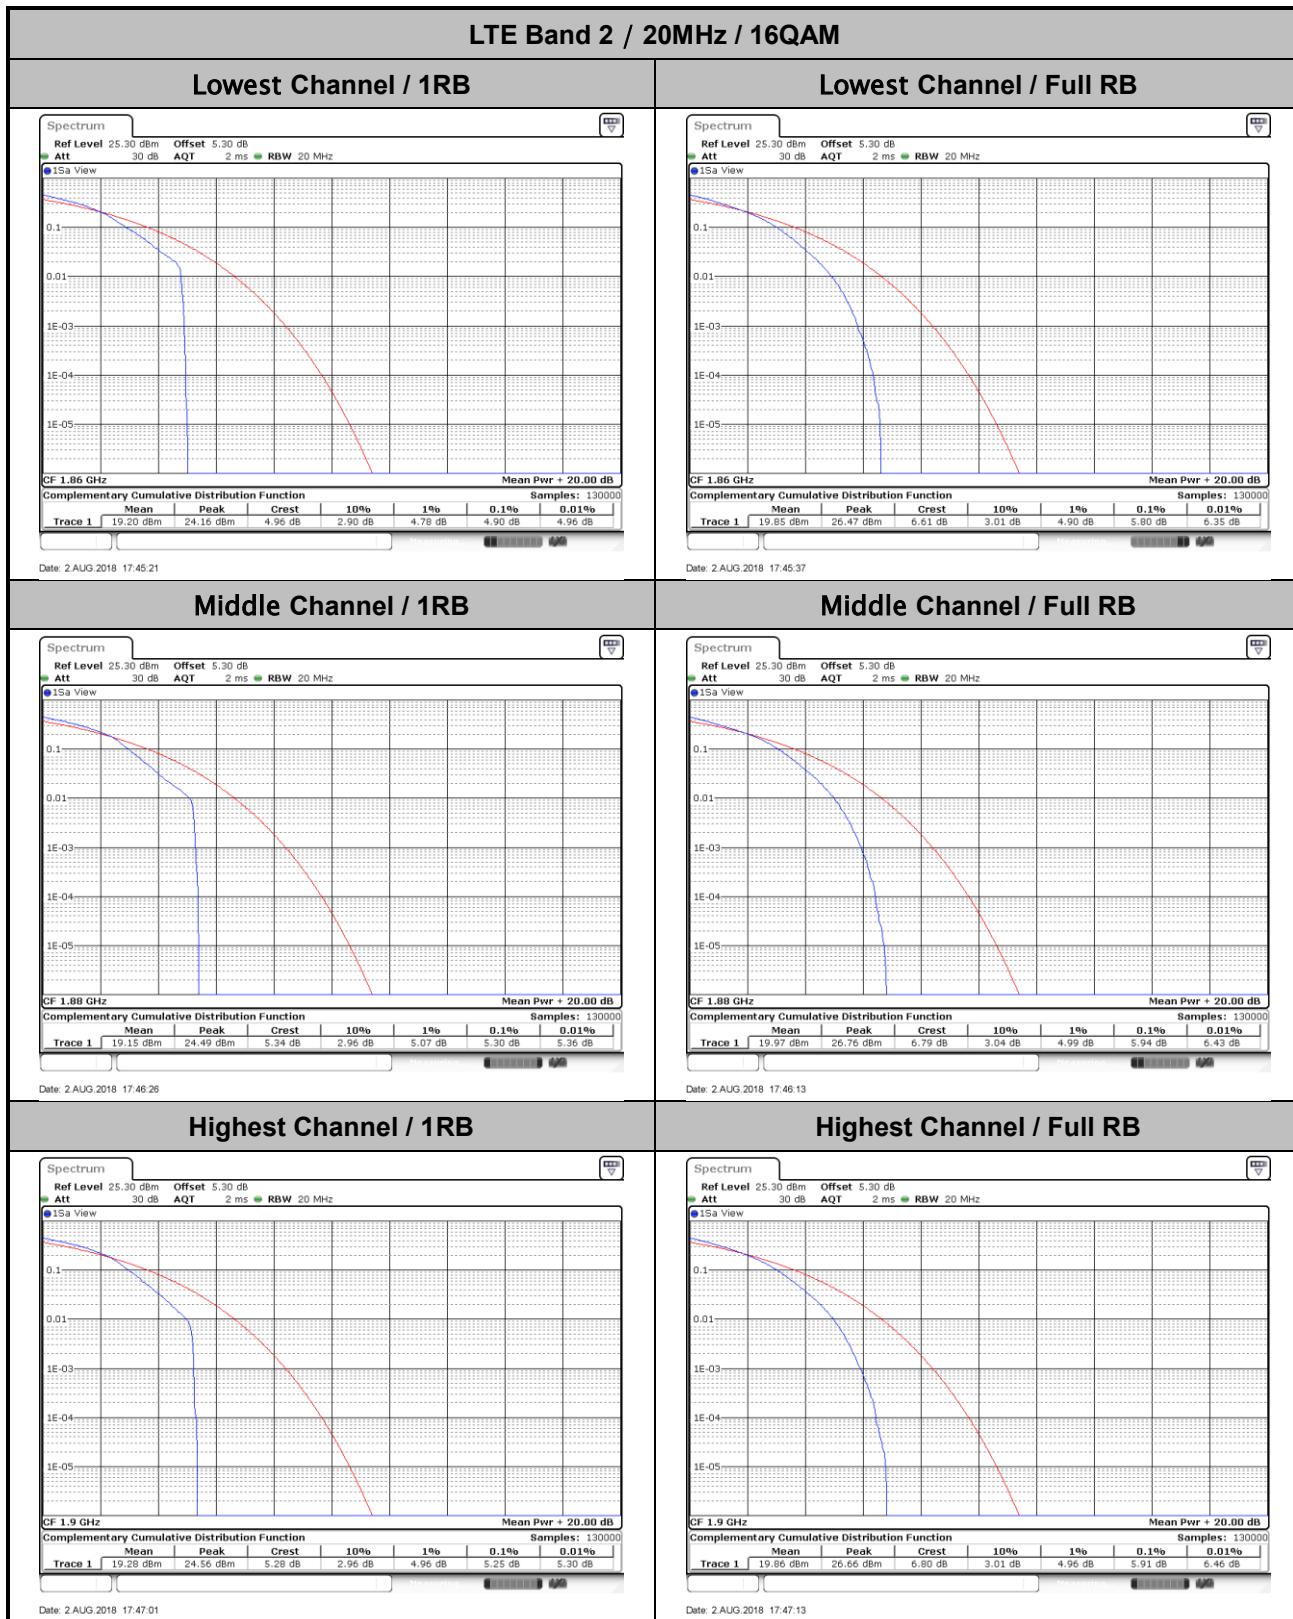


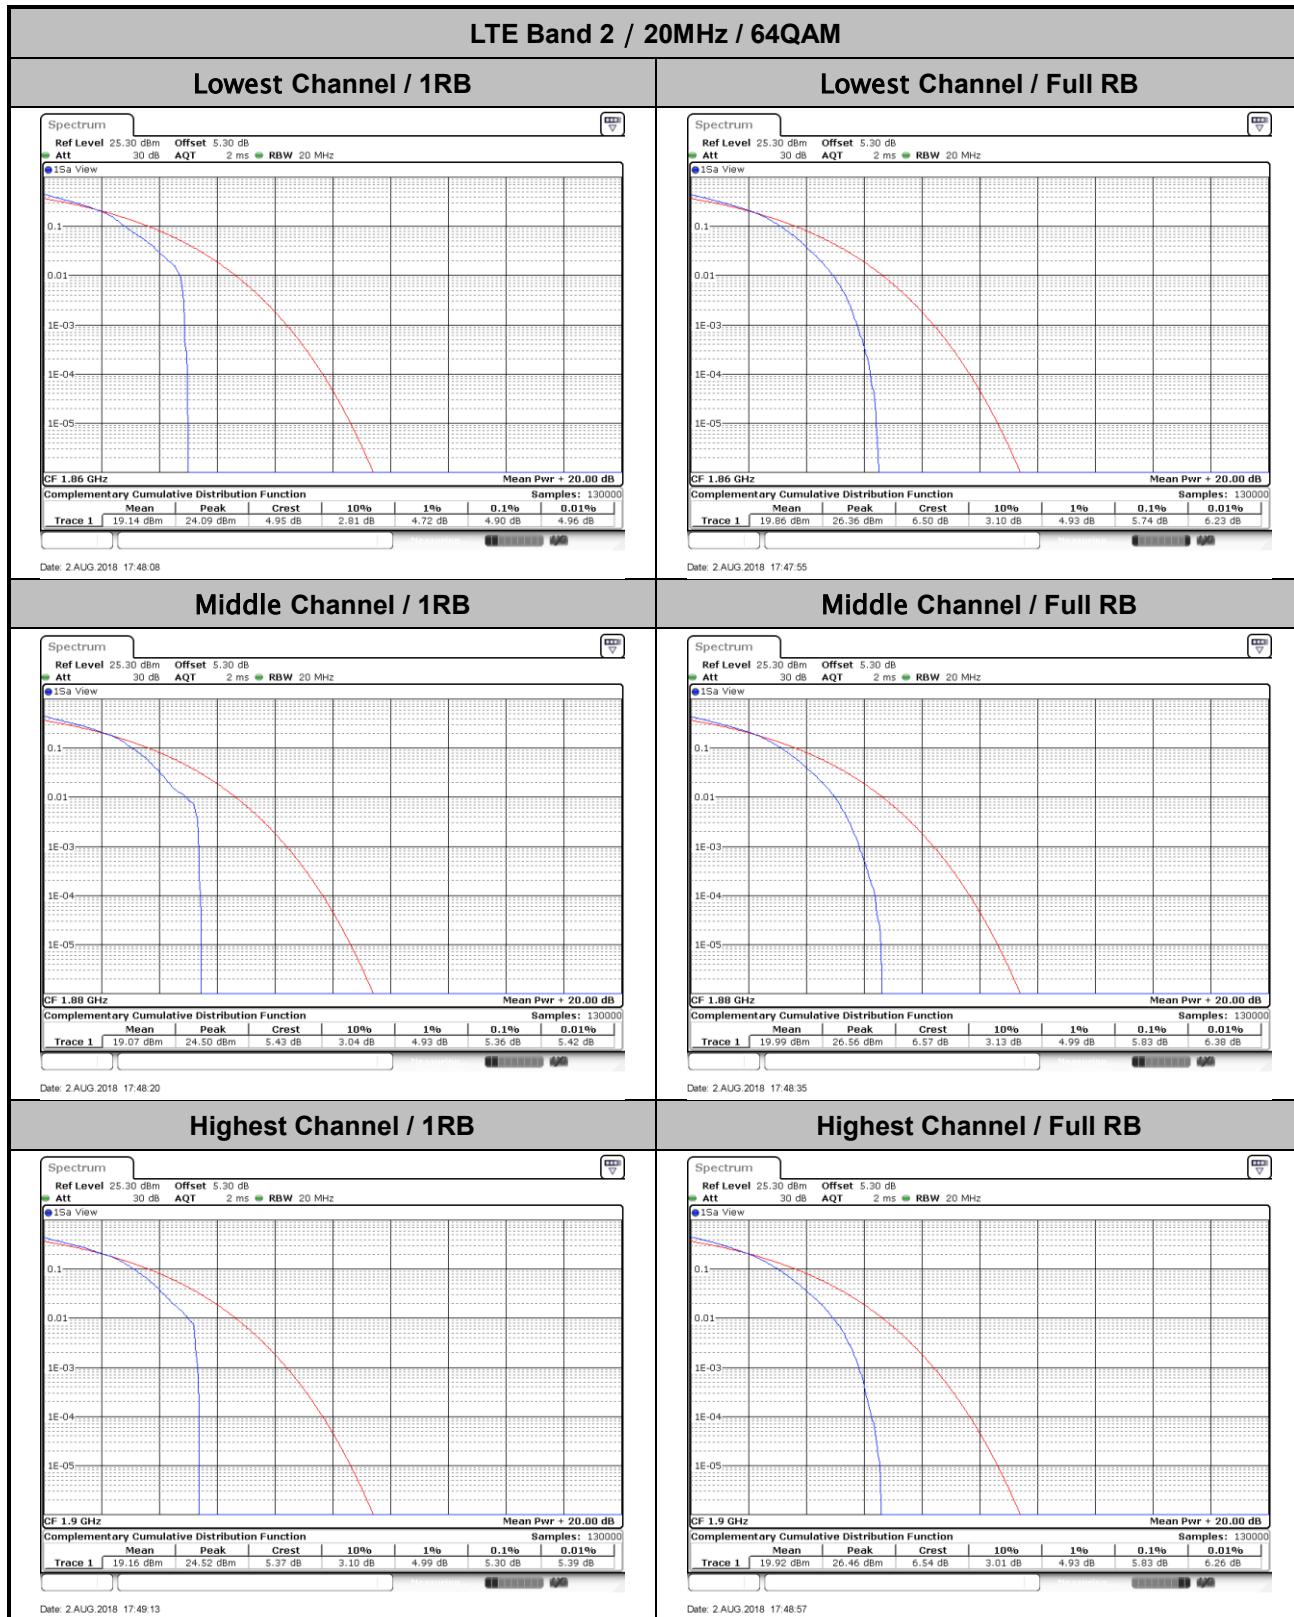




LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

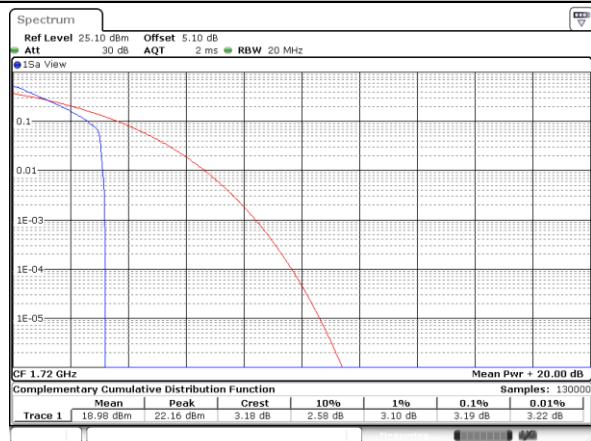


Date: 3 AUG 2018 12:35:02

Lowest Channel / Full RB

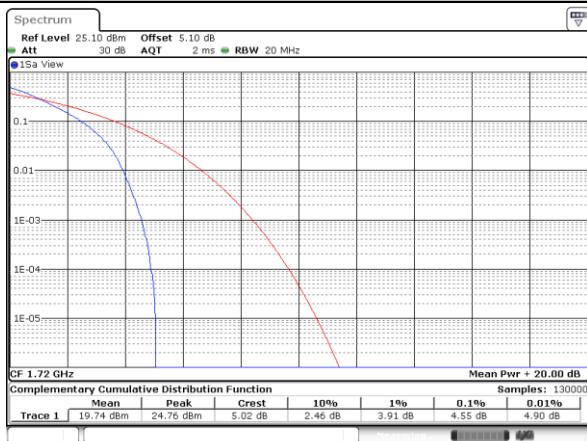


Date: 3 AUG 2018 12:34:52

Middle Channel / 1RB

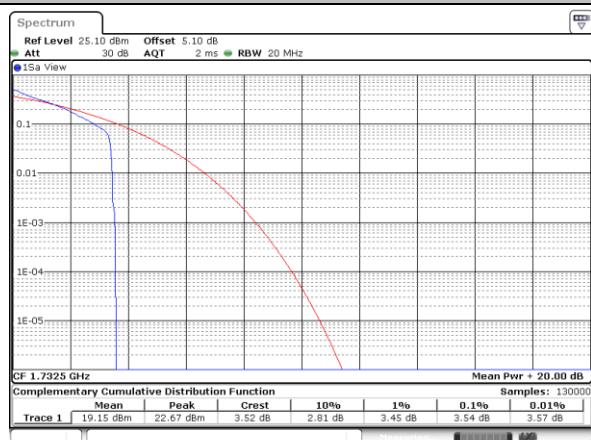


Date: 3 AUG 2018 12:35:14

Middle Channel / Full RB

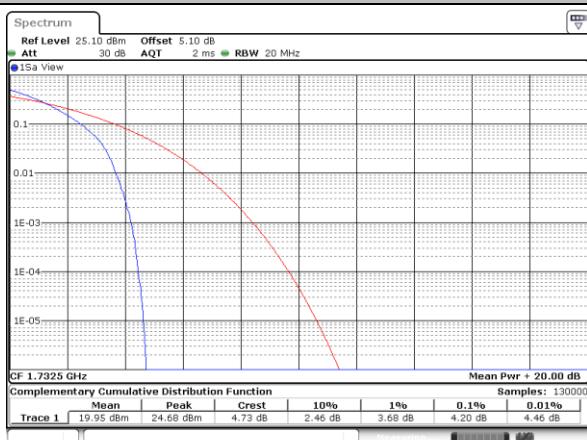


Date: 3 AUG 2018 12:35:26

Highest Channel / 1RB

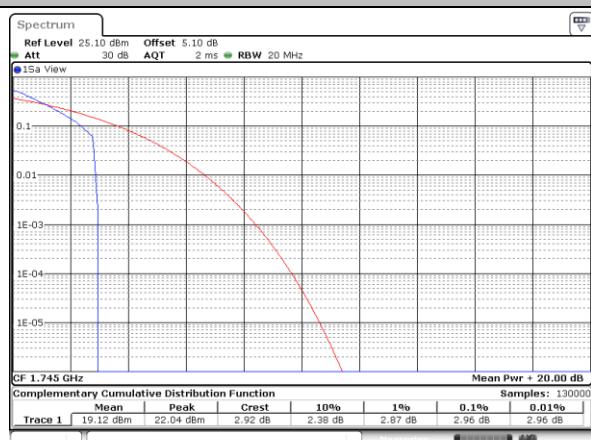



Date: 3 AUG 2018 12:35:49

Highest Channel / Full RB

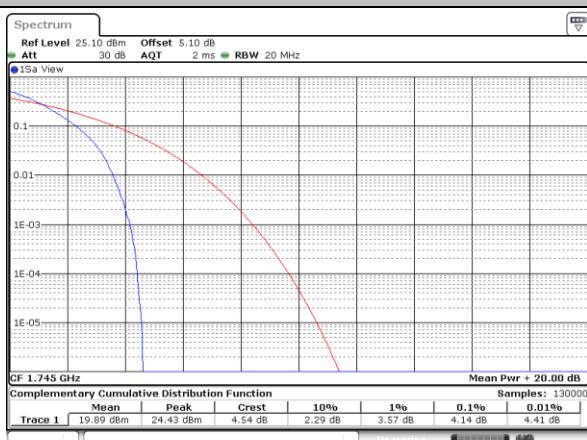

Date: 3 AUG 2018 12:35:38

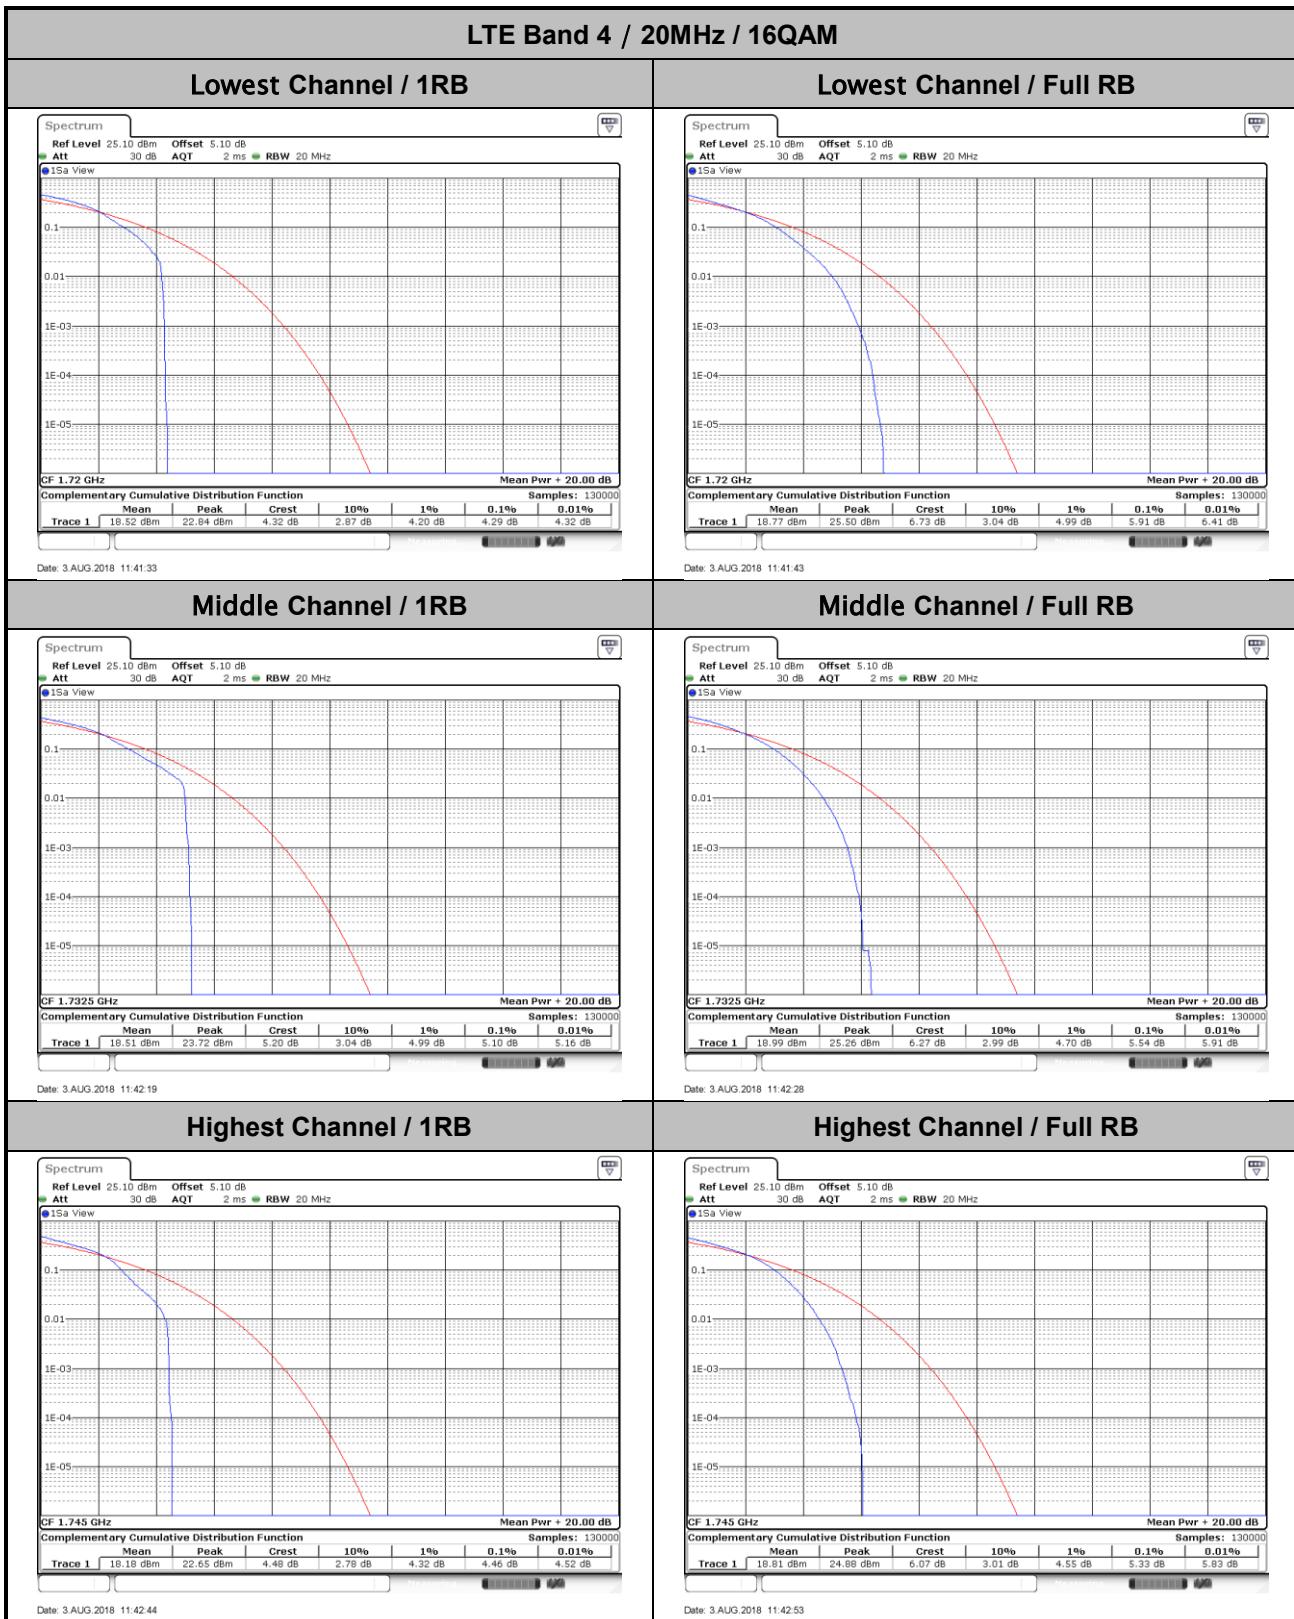

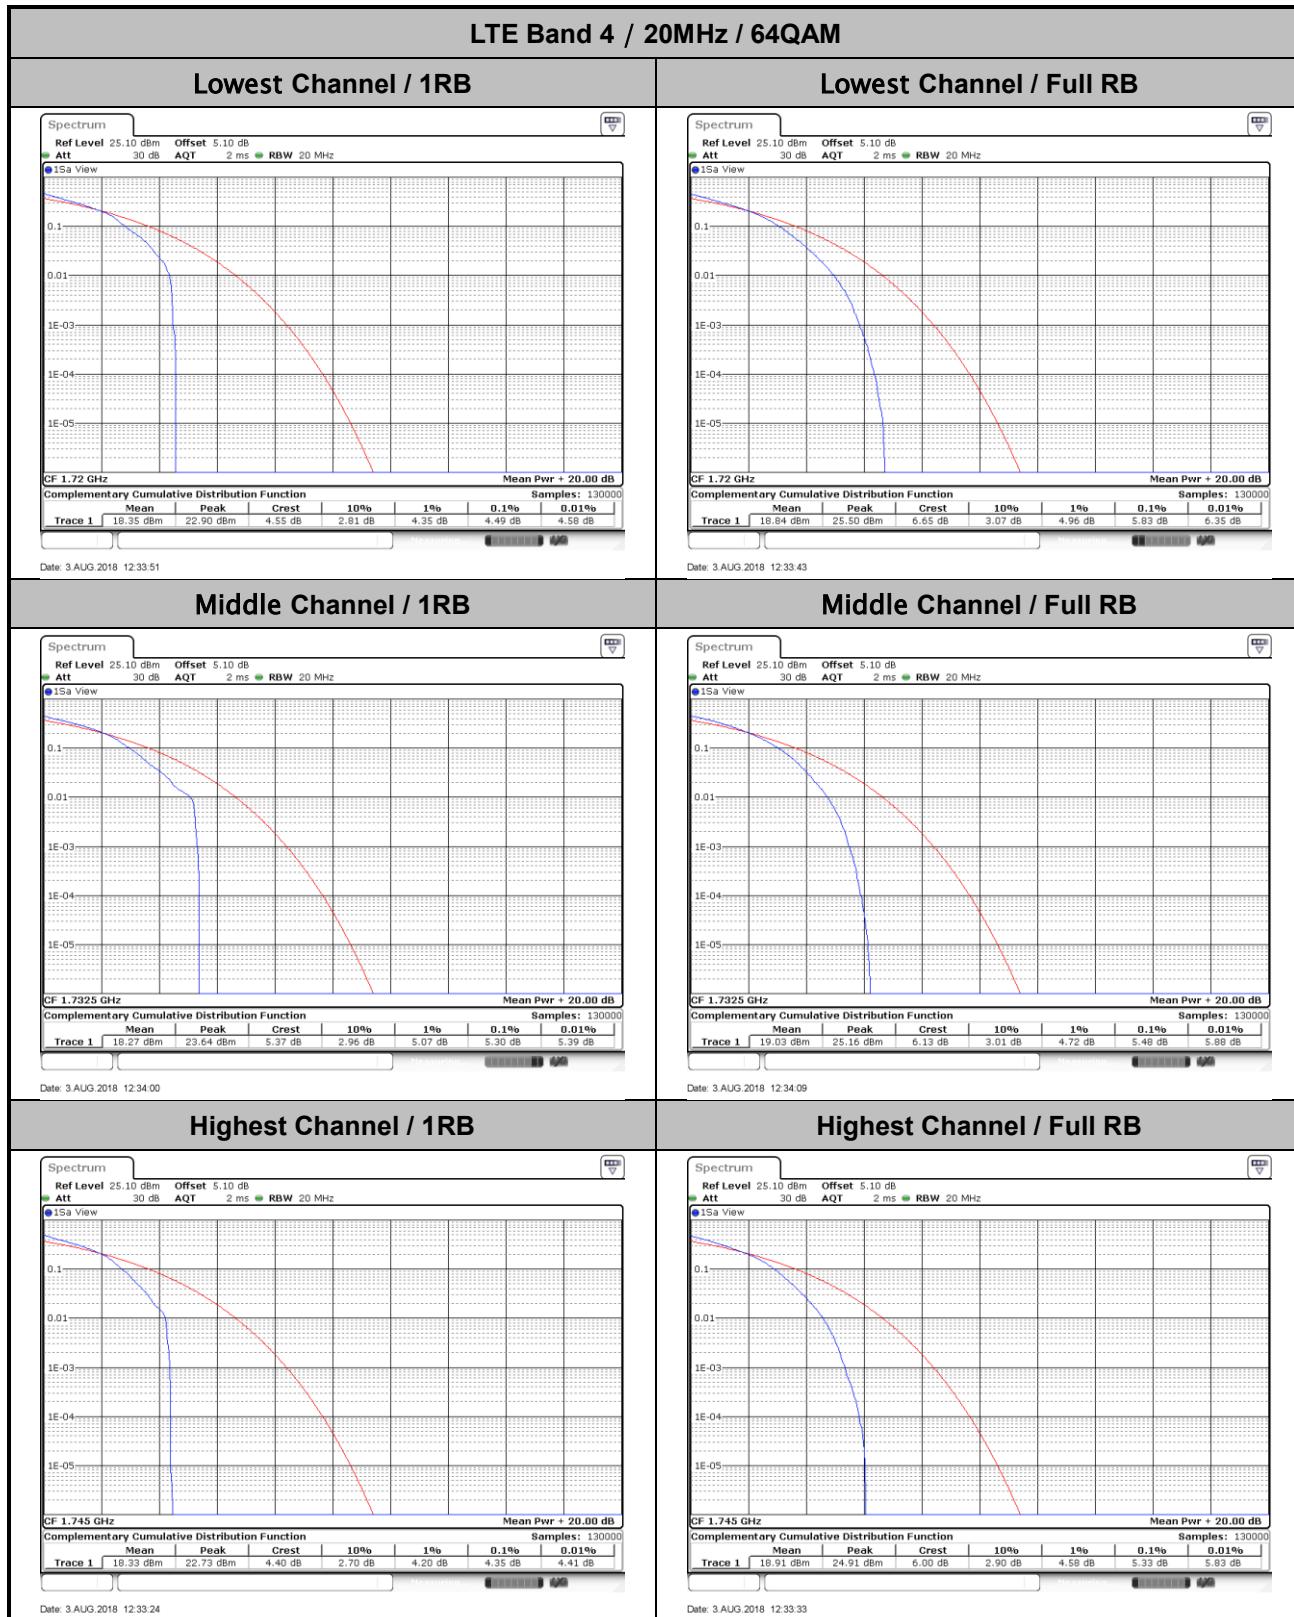




LTE Band 5 / 10MHz / QPSK


Lowest Channel / 1RB




Lowest Channel / Full RB

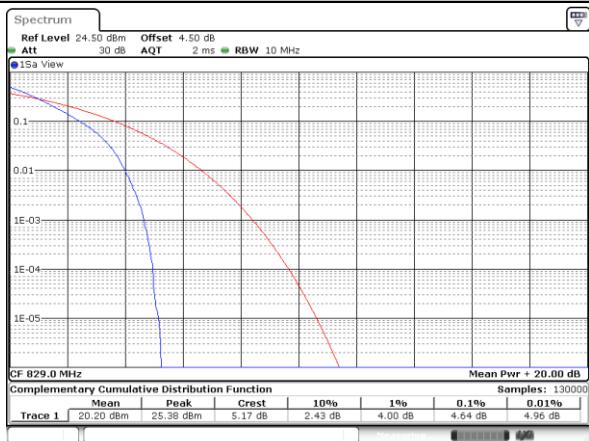

Middle Channel / 1RB

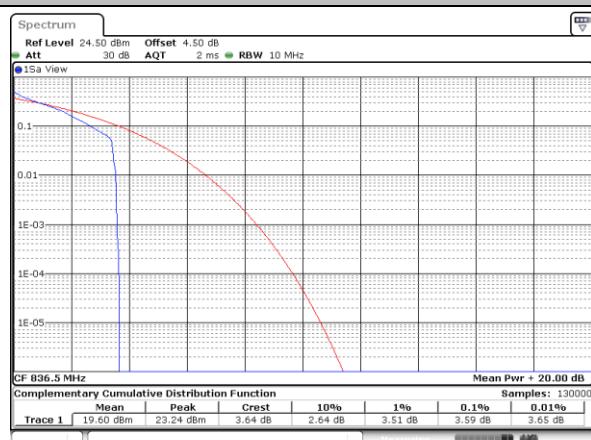

Middle Channel / Full RB

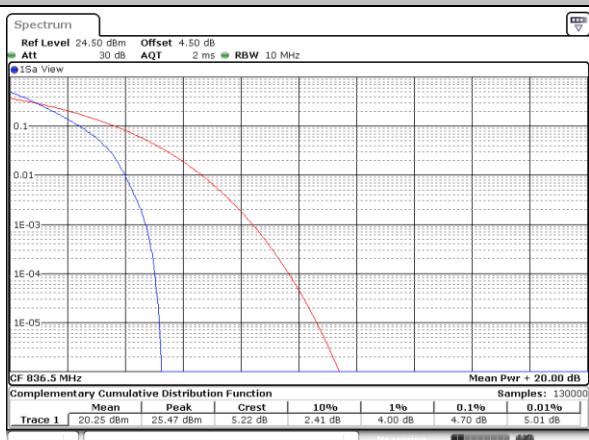



Highest Channel / 1RB



Highest Channel / Full RB



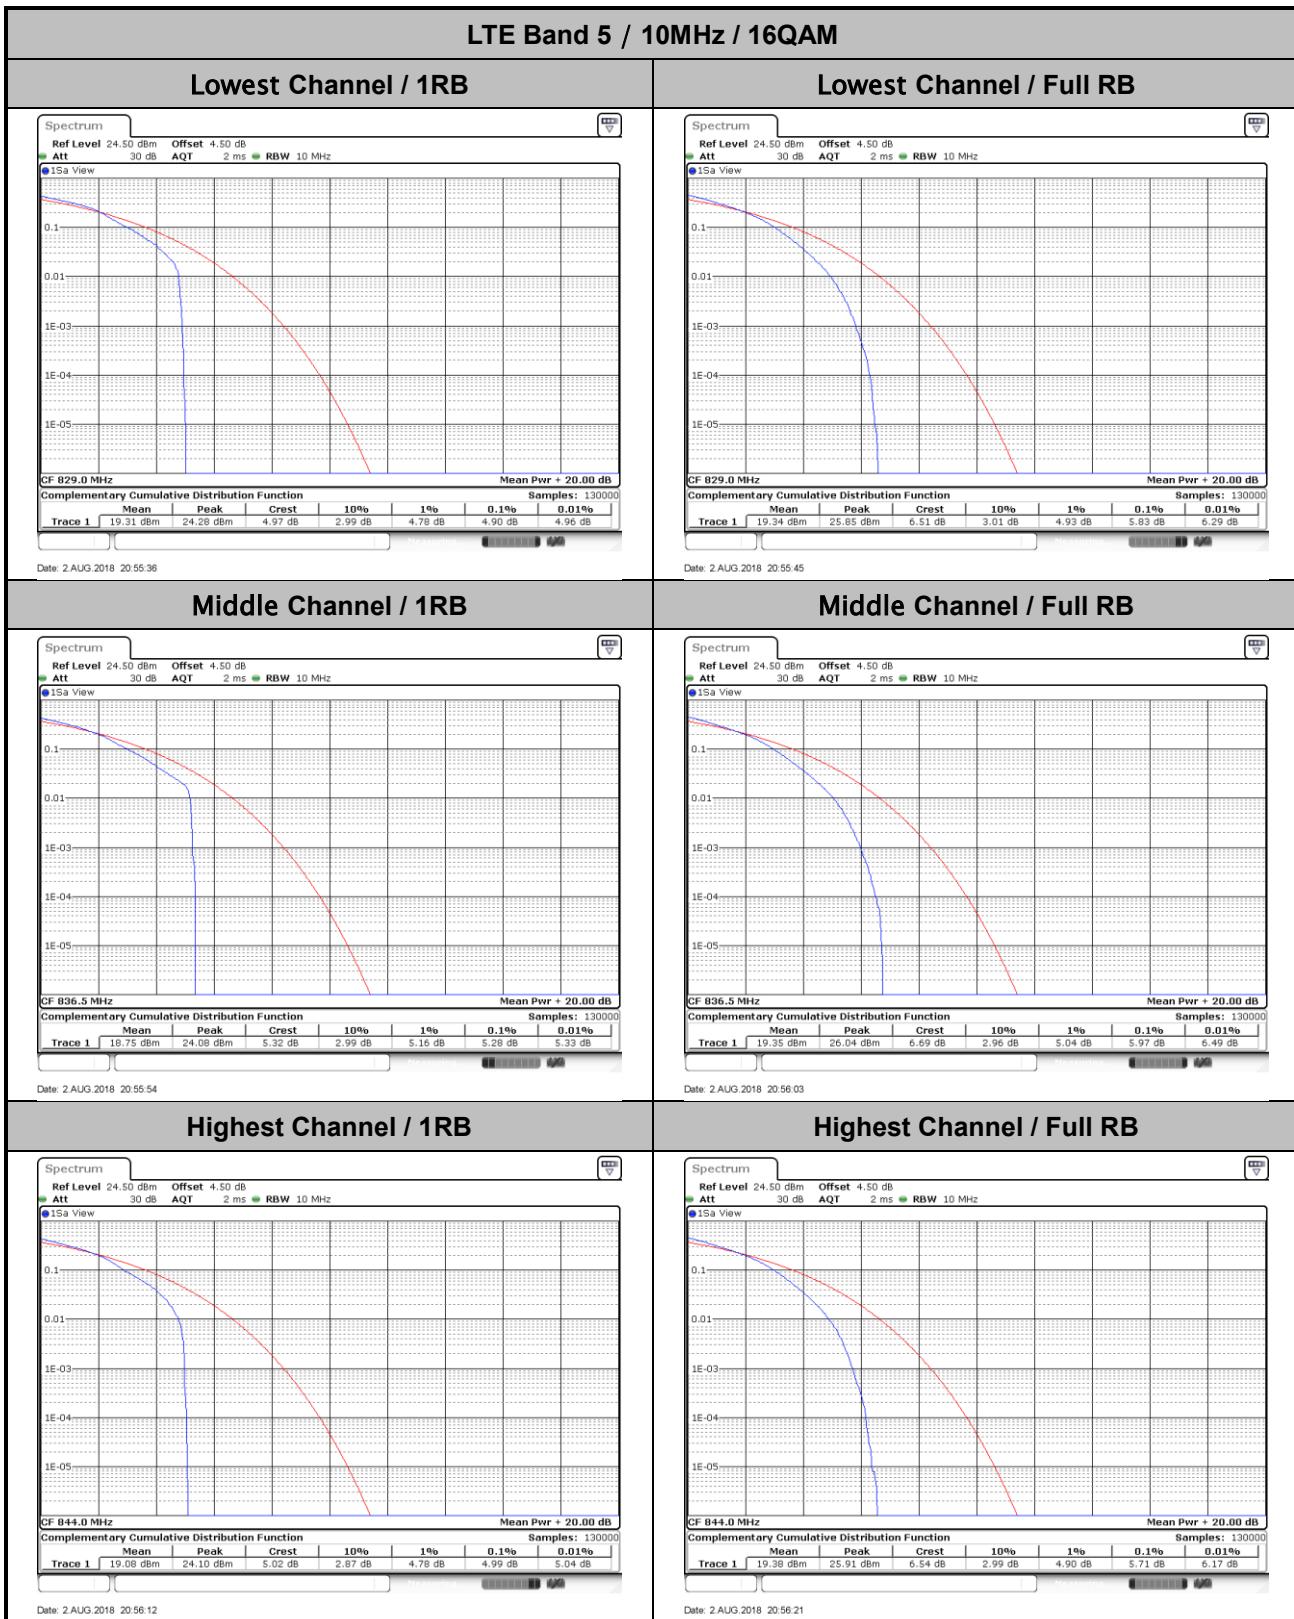

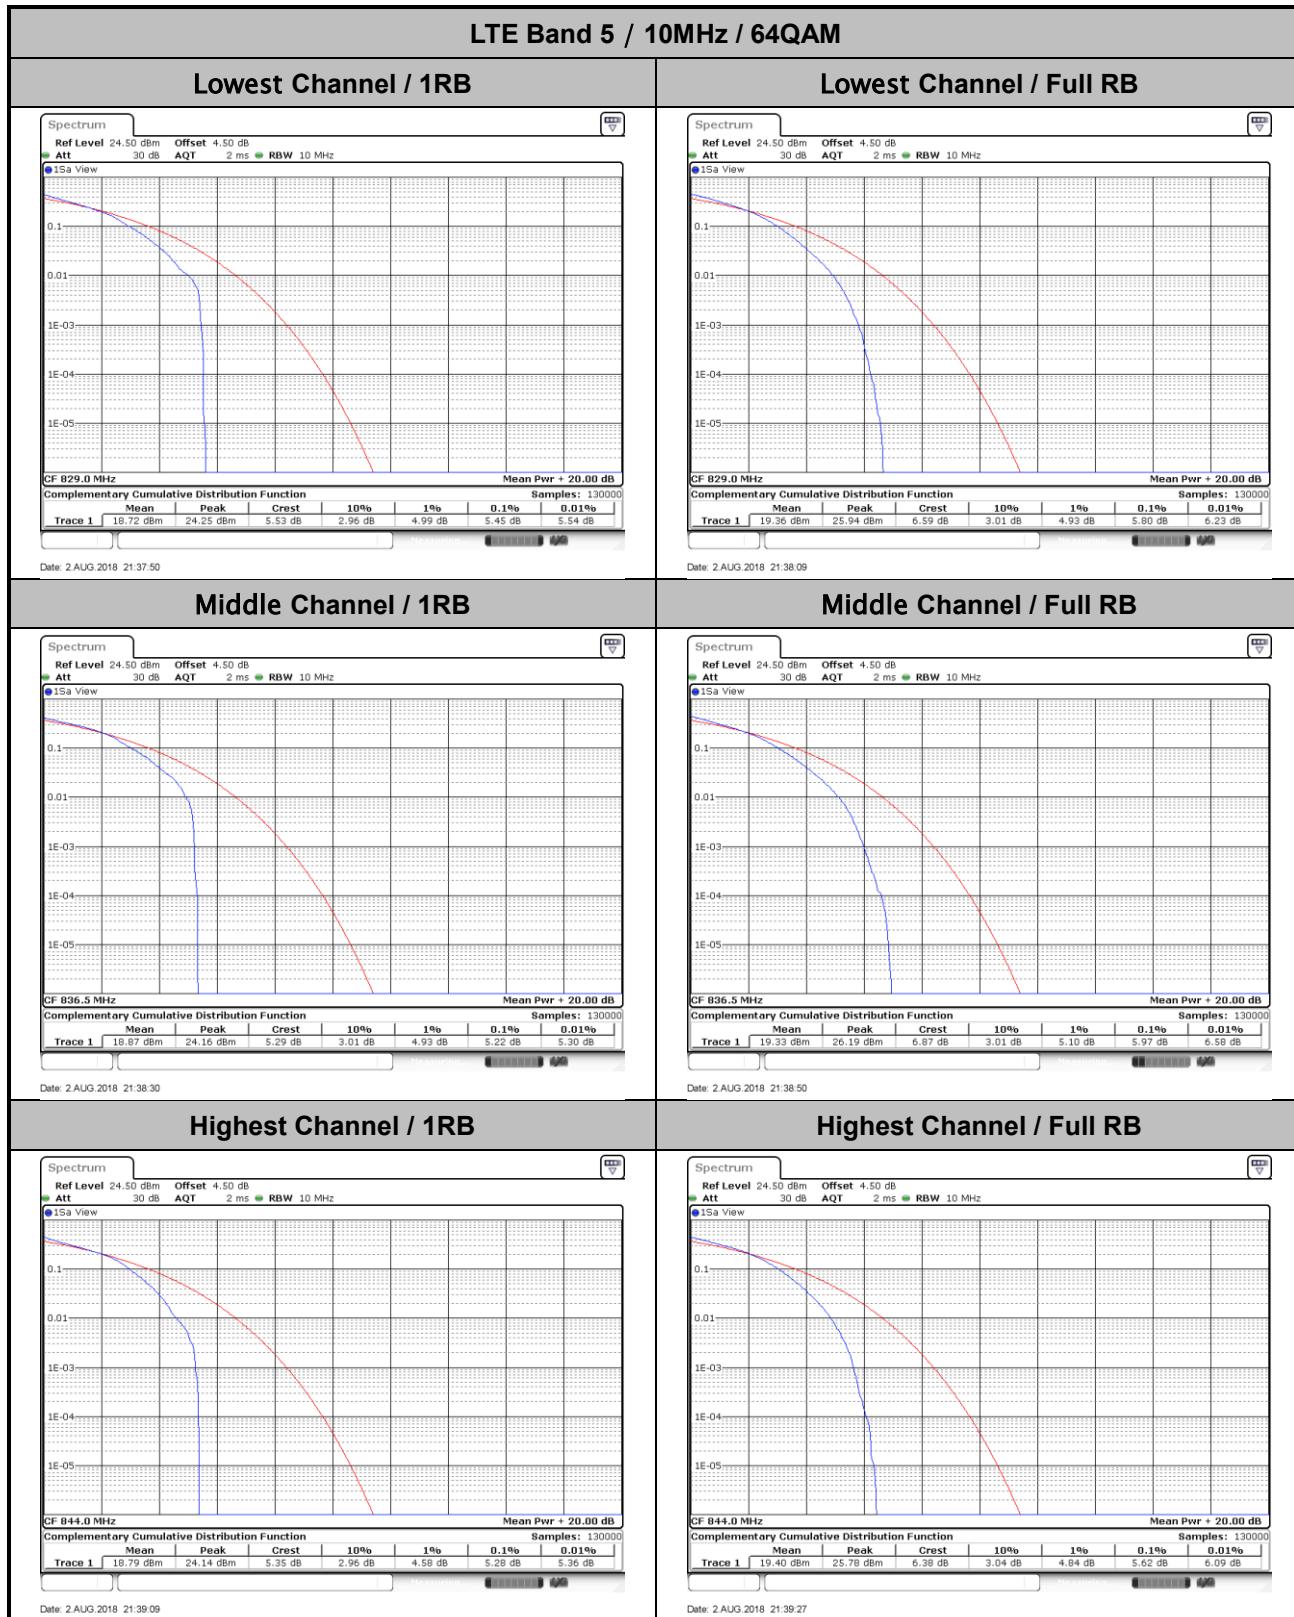



LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB




Date: 3 AUG 2018 14:51:06

Lowest Channel / Full RB



Date: 3 AUG 2018 14:51:33

Middle Channel / 1RB

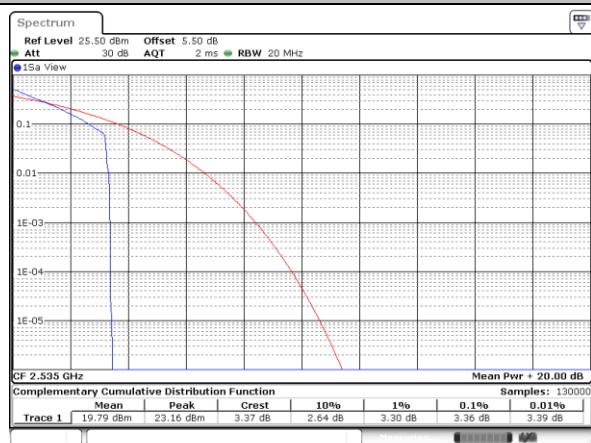


Date: 3 AUG 2018 14:52:10

Middle Channel / Full RB



Date: 3 AUG 2018 14:51:42

Highest Channel / 1RB

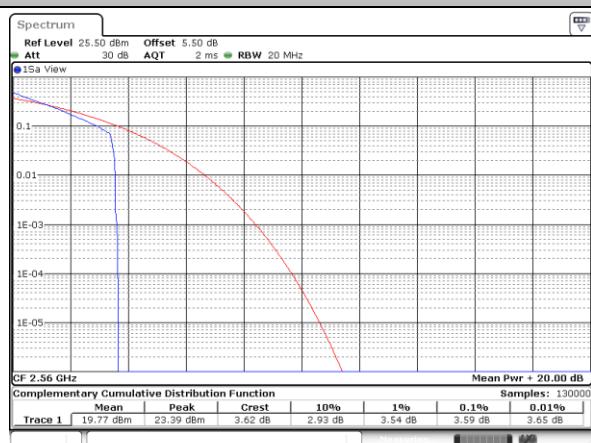



Date: 3 AUG 2018 14:52:20

Highest Channel / Full RB



Date: 3 AUG 2018 14:52:54

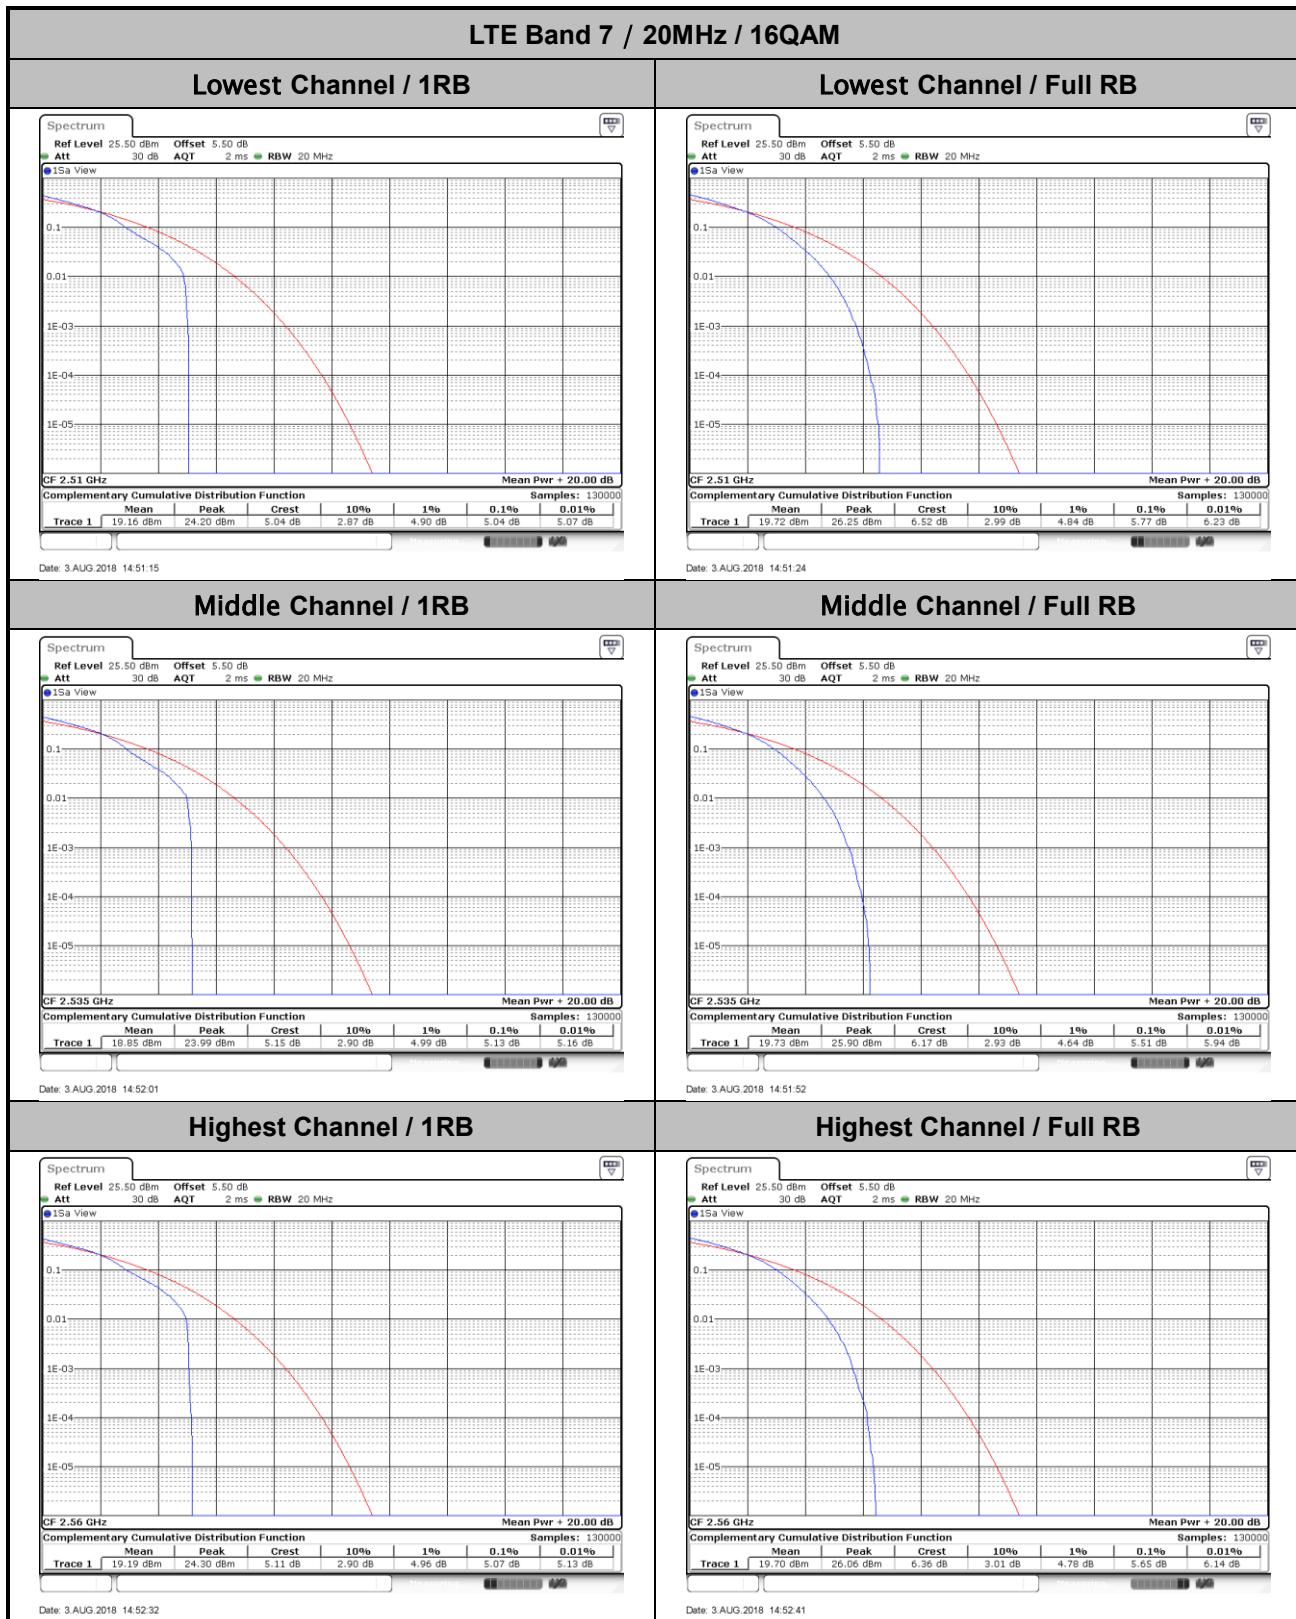


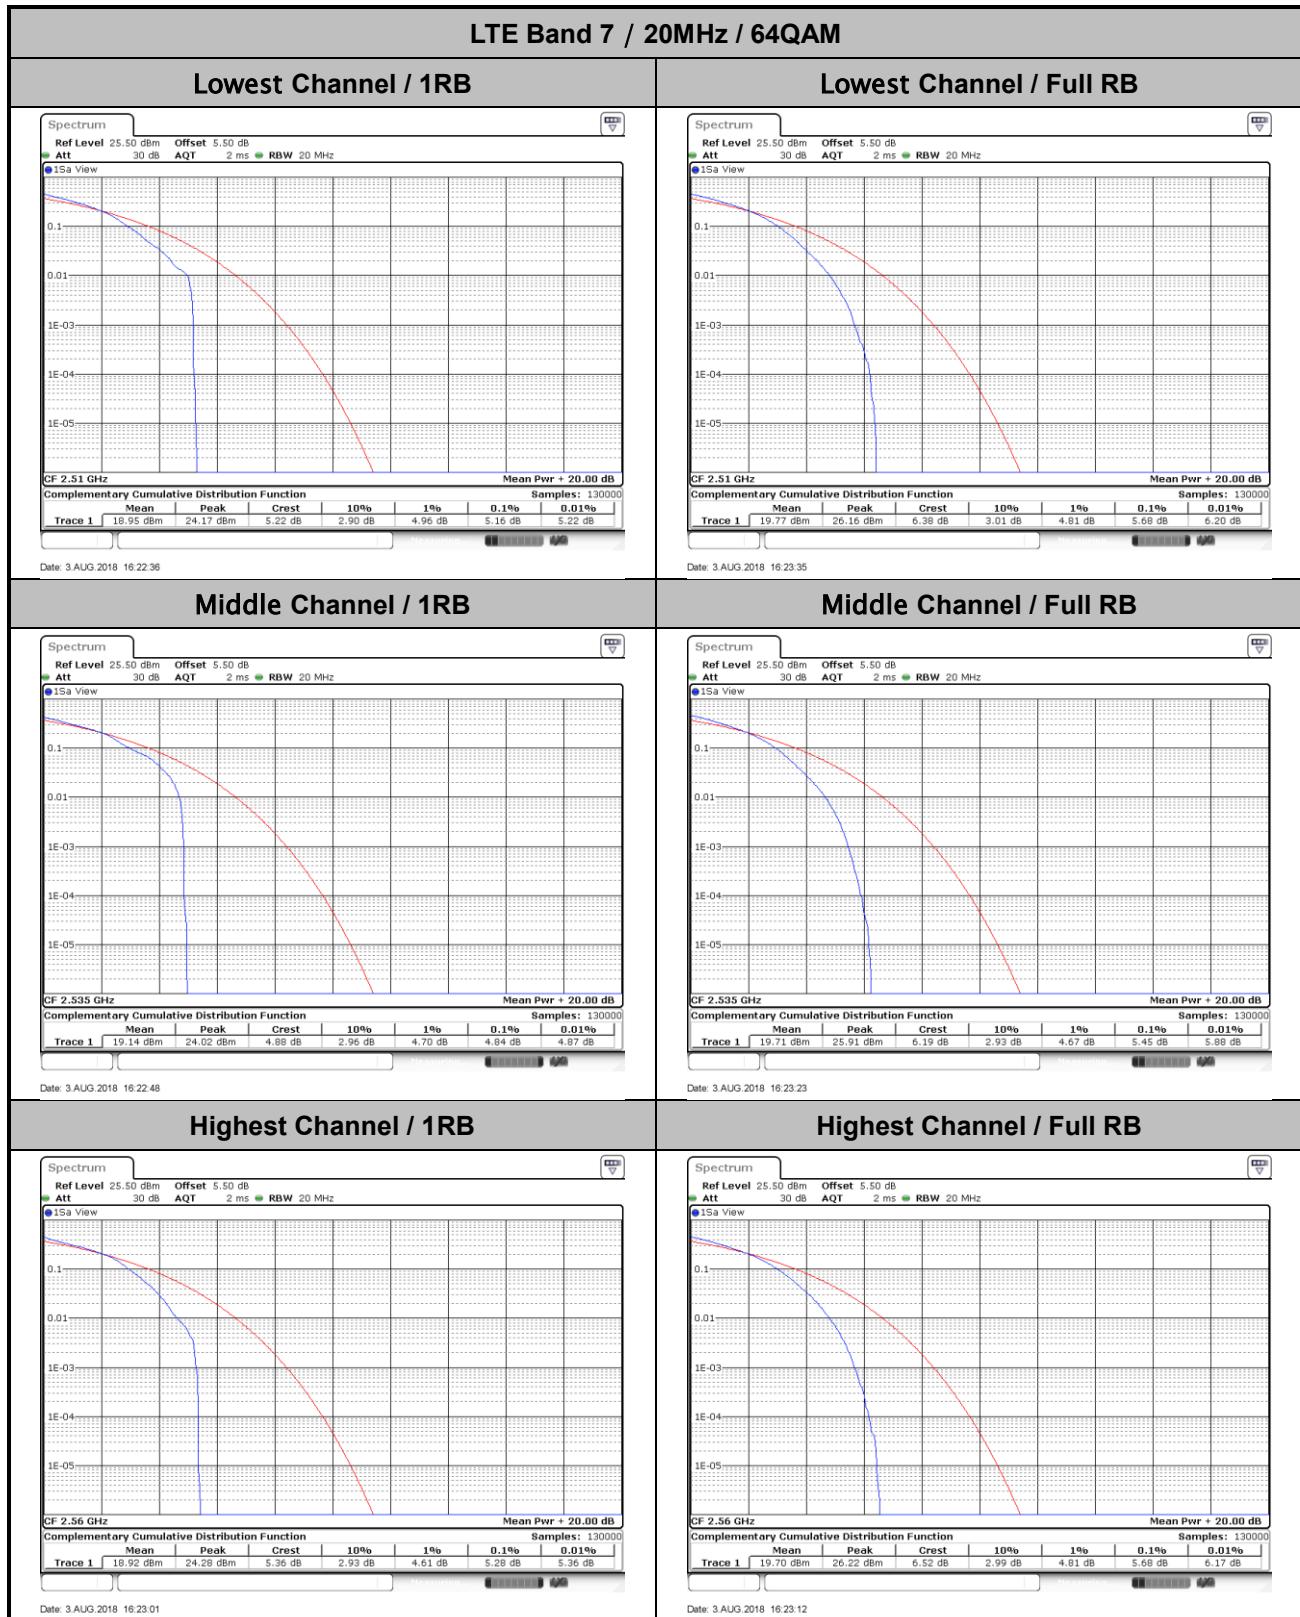




LTE Band 38 / 20MHz / QPSK


Lowest Channel / 1RB

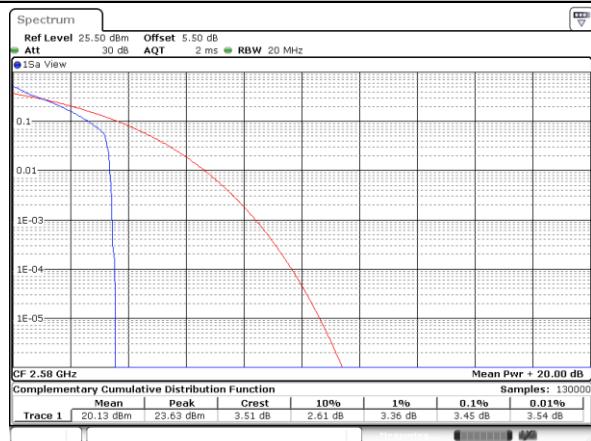


Lowest Channel / Full RB

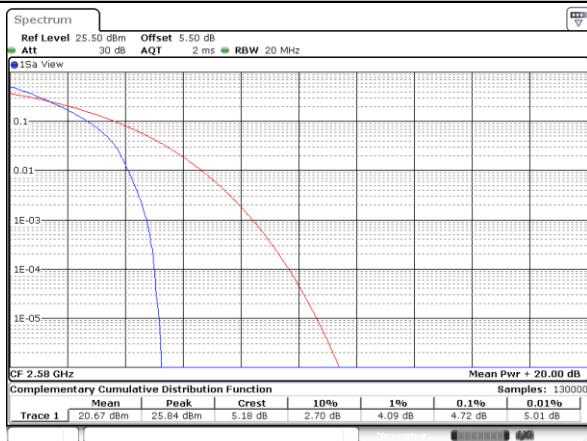


Middle Channel / 1RB

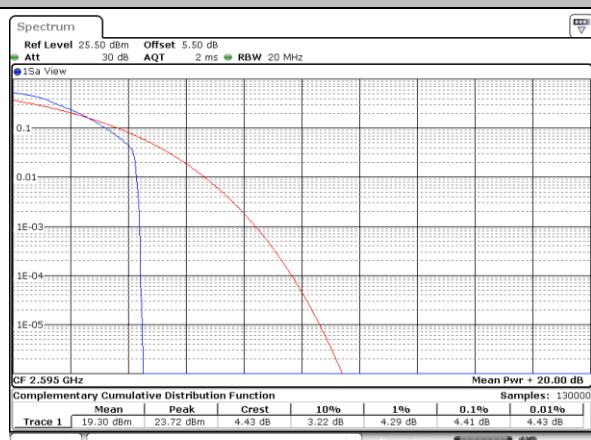

Middle Channel / Full RB

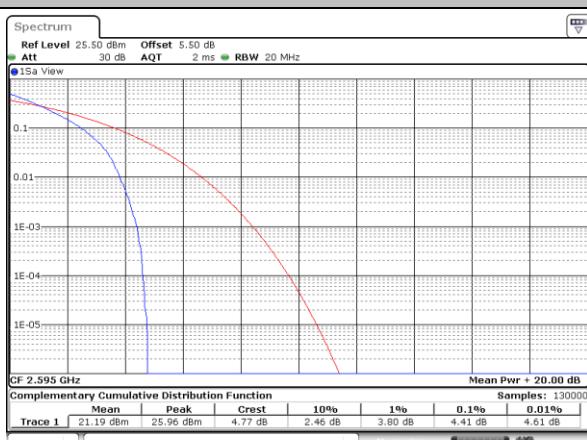


Highest Channel / 1RB

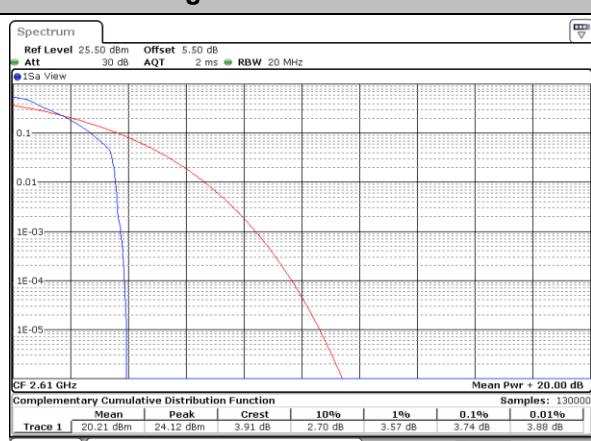

Highest Channel / Full RB




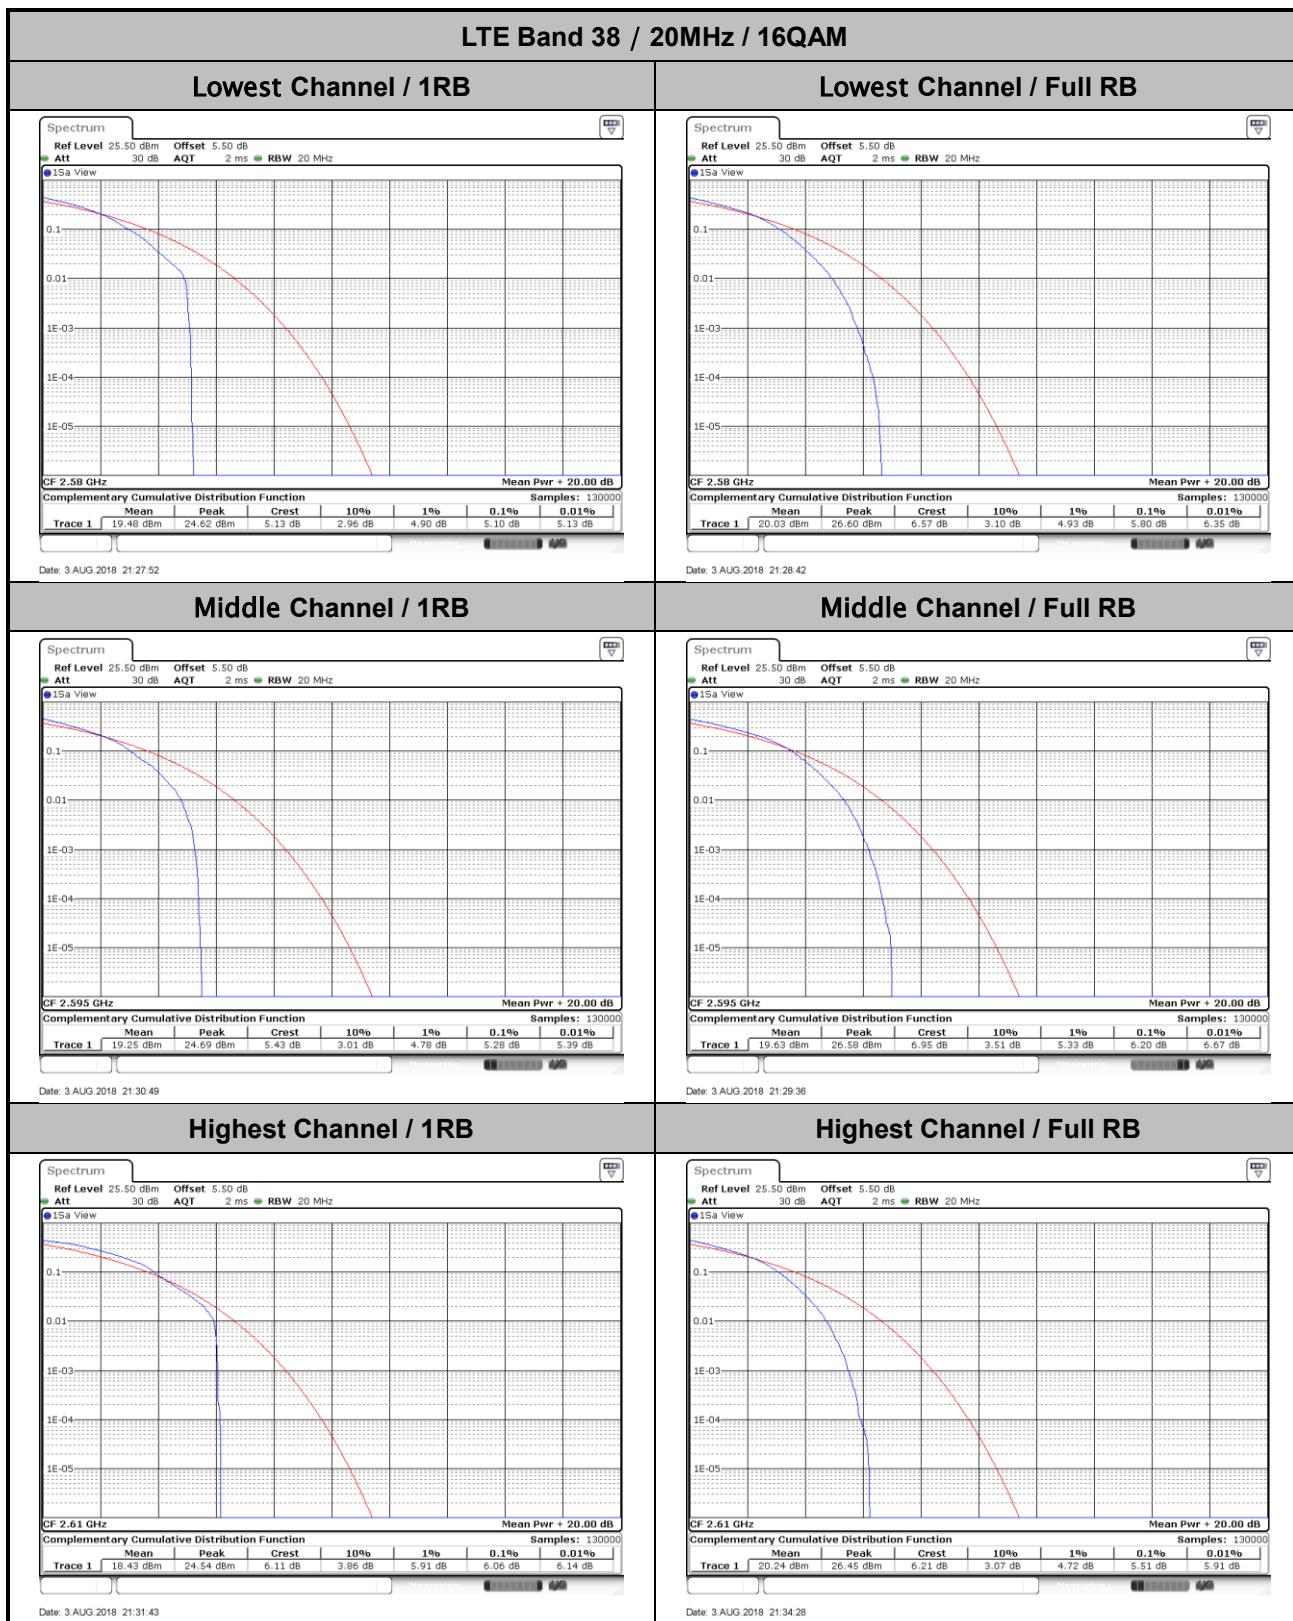



LTE Band 38 / 20MHz / 64QAM

Lowest Channel / 1RB

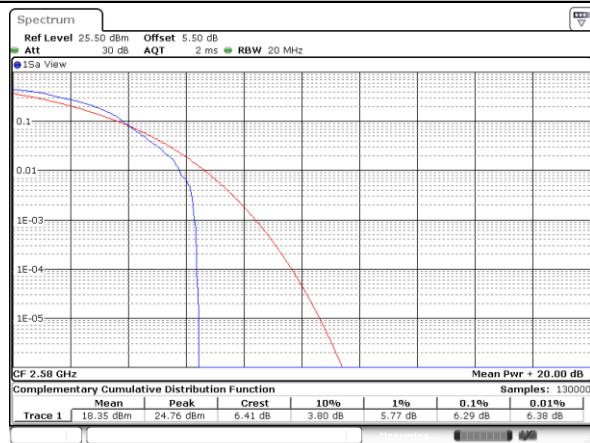


Date: 3 AUG 2018 21:28:06

Lowest Channel / Full RB



Date: 3 AUG 2018 21:28:24

Middle Channel / 1RB

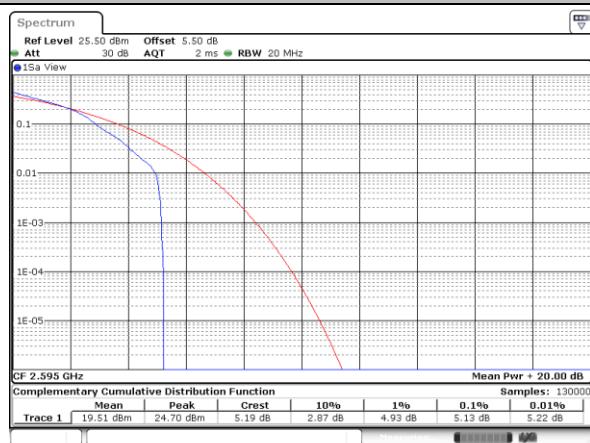


Date: 3 AUG 2018 21:30:30

Middle Channel / Full RB




Date: 3 AUG 2018 21:30:55

Highest Channel / 1RB

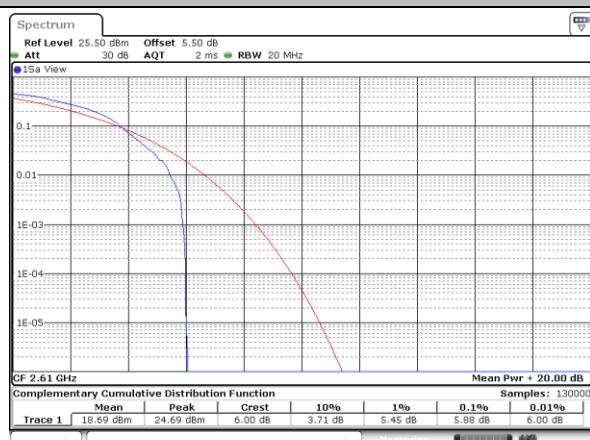

Date: 3 AUG 2018 21:33:44

Highest Channel / Full RB

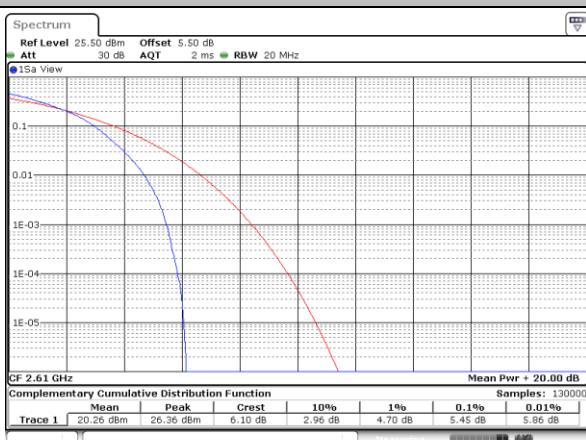

Date: 3 AUG 2018 21:34:09

**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.222	1.225	3.039	3.033	4.935	4.865	9.75	9.79	14.386	14.505	20.22	20.18
Middle CH	1.222	1.236	3.039	3.009	4.965	4.885	9.69	9.85	14.236	14.416	20.14	20.34
Highest CH	1.231	1.228	3.063	3.009	4.885	4.875	9.75	9.71	14.326	14.326	20.18	20.1
Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.2196		3.0629		4.805		9.87		14.236		20.18	
Middle CH	1.2448		2.967		4.935		9.69		14.565		20.18	
Highest CH	1.214		3.0869		4.895		9.79		14.416		20.22	

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.225	1.222	3.027	3.003	4.925	4.905	9.95	9.75	14.176	14.356	20.18	20.22
Middle CH	1.225	1.231	3.033	3.009	4.855	4.905	9.95	9.79	14.236	14.296	20.14	20.1
Highest CH	1.242	1.234	3.057	3.045	4.925	4.965	9.65	9.83	14.505	14.296	20.26	20.1
Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.231		2.955		4.855		9.89		14.236		20.22	
Middle CH	1.234		3.039		4.865		9.69		14.236		20.1	
Highest CH	1.228		2.997		4.935		9.75		14.356		20.26	



Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz					
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM				
Lowest CH	1.225	1.214	2.985	3.015	4.945	4.855	9.81	9.61	-	-	-	-
Middle CH	1.231	1.217	3.039	3.039	4.945	4.945	9.69	9.85	-	-	-	-
Highest CH	1.242	1.225	3.009	2.973	4.955	4.895	9.73	9.77	-	-	-	-

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz					
Mod.	64QAM		64QAM		64QAM		64QAM					
Lowest CH	1.22		3.021		4.865		9.83		-	-	-	-
Middle CH	1.231		3.033		4.865		9.89		-	-	-	-
Highest CH	1.242		3.009		4.935		9.75		-	-	-	-

Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.835	4.905	9.71	9.73	14.326	14.356	20.18	20.02
Middle CH	-	-	-	-	4.925	4.925	9.79	9.79	14.505	14.446	20.38	20.1
Highest CH	-	-	-	-	4.865	4.885	9.83	9.91	14.505	14.176	20.18	20.34

Mode	LTE Band 7 : 26dB BW(MHz)											
BW					5MHz		10MHz		15MHz		20MHz	
Mod.					64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.925		9.93		14.266		20.26	
Middle CH	-	-	-	-	4.785		9.83		14.326		20.22	
Highest CH	-	-	-	-	4.955		9.75		14.446		19.98	

Mode	LTE Band 38 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.855	4.865	9.67	9.77	14.146	14.296	20.14	20.22
Middle CH	-	-	-	-	4.835	4.885	9.63	9.67	14.386	14.446	20.02	20.26
Highest CH	-	-	-	-	4.945	4.925	9.83	9.65	14.386	14.446	20.26	20.1

Mode	LTE Band 38 : 26dB BW(MHz)											
BW					5MHz		10MHz		15MHz		20MHz	
Mod.					64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.855		9.65		14.386		20.14	
Middle CH	-	-	-	-	4.885		9.83		14.176		20.10	
Highest CH	-	-	-	-	4.885		9.69		14.146		20.18	



For CA

Mode	LTE Band 38 : 26dB BW(MHz)			
Mod.	QPSK		16QAM	
BW	15MHz+15MHz	20MHz+20MHz	15MHz+15MHz	20MHz+20MHz
Lowest CH	30.869	40.12	30.698	40.12
Middle CH	30.869	40.12	30.749	40.04
Highest CH	30.929	40.2	30.749	40.28
Mode	LTE Band 38 : 26dB BW(MHz)			
Mod.	64QAM		-	
BW	15MHz+15MHz	20MHz+20MHz	-	-
Lowest CH	30.809	40.2	-	-
Middle CH	30.749	40.04	-	-
Highest CH	30.749	40.04	-	-