

FCC Test Report

Report No.: AGC02294180604FE08

FCC ID : 2AJGM-BFC3

PRODUCT DESIGNATION: Two way radio

BRAND NAME : BAOFENG

MODEL NAME : C3, C6, C9

CLIENT PO FUNG ELECTRONIC(HK) INTERNATIOANL

GROUP COMPANY

DATE OF ISSUE : Jun. 28, 2018

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context

AGC B



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 2 of 28

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	plience / ® Mile	Jun. 28, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Report No.: AGC02294180604FE08 Page 3 of 28

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. PRODUCT INFORMATION	5
3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	6
4. SUPPORT EQUIPMENT LIST	7
4. SUPPORT EQUIPMENT LIST	7
6. SUMMARY OF TEST RESULTS	8
7. FCC RADIATED EMISSION TEST	9
7.1. TEST EQUIPMENT OF RADIATED EMISSION	
7.2. LIMITS OF RADIATED EMISSION TEST	9
7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST	6
7.4 PROCEDURE OF RADIATED EMISSION TEST	11
7.5 TEST RESULT OF RADIATED EMISSION TEST	
8. CONDUCTED EMISSION TEST	14
8.1 PROVISIONS APPLICABLE	
8.2 MEASUREMENT PROCEDURE	14
8.3 TEST SETUP BLOCK DIAGRAM	15
8.4 TEST RESULT	16
9. ANTENNA CONDUCTED POWER FOR RECEIVERSAPPENDIX 1 PHOTOGRAPHS OF TEST SETUP	18
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	21
ADDENDIV 2 BUOTOCDADUS OF EUT	Agrana 22

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 4 of 28

1. VERIFICATION OF COMPLIANCE

Applicant	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY				
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong				
Manufacturer	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY				
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong				
Product Designation	Two way radio				
Brand name	BAOFENG				
Test Model	C3				
Serial Model	C6, C9				
Serial Model Difference	All the same except for the model name and front appearance				
Hardware Version	BF-V1-VER08				
Software Version	C3				
Measurement Procedure	ANSI C63.4: 2014				
Date of test:	Jun. 20, 2018 to Jun. 28, 2018				
Deviation:	None				
Condition of Test Sample	Normal				
A *					

The above equipment was tested by Attestation Of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Steven Zhou (Zhou Pengyun) Jun. 28, 2018

Reviewed By

Bart Xie(Xie Xiaobin) Jun. 28, 2018

Approved By

Forrest Lei(Lei Yonggang) Authorized Officer

Jun. 28, 2018

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by QC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.



Page 5 of 28

2. PRODUCT INFORMATION

The EUT is a Two way radio designed for voice communication. It is designed by way of utilizing the F3E modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM S S S S S S S S S S S S S S S S S S S
RX Frequency Range	Rx: 400MHz -480MHz
Emission Type	F3E
Antenna Designation	Detachable
Antenna Gain	2.15dBi
Power Supply	DC 3.7V 1500mAh, charging with DC 4.2V.
	INPUT: DC 5V
Charger Parameter	OUTPUT:DC 4.2V 0.5A

I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT					
I/O Port Type	Q'TY	Cable	Tested with		
DC Input Port	1 60	1.14m, Unshielded	1		
Antenna Connect Port	1	0 kg	The off plants		

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 6 of 28

3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

	Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
70.	Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012			
	NVLAP LAB CODE	600153-0			
A	Designation Number	CN5028			
	FCC Test Firm Registration Number	682566			
	Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0			

List Of Test Equipment:

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	100096	Jun. 12, 2018	Jun. 11, 2019
AMN/LISN	R&S	ESH2-Z5	100086	Aug. 24, 2017	Aug. 23, 2018
TEST SOFTWARE	FR	EZ-EMC	AGC-CON03	The accomplance	Manufacture of School Compilarity

TEST EQUIPMENT OF RADIATED EMISSION TEST

- 4. 10.70	W 10"				
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2018	Jun. 11, 2019
ANTENNA	SCHWARZBECK	VULB9168	494	Sep. 27, 2017	Sep. 28, 2019
TEST RECEIVER	R&S	ESCI	100694	Jun. 12, 2018	Jun. 11, 2019
AMPLIFIER	Schwarzbeck	BBV 9718	9718-205	Jun. 12, 2018	Jun. 11, 2019
POSITIONING CONTROLLER	MF	MF-7802	MF780208285	Mana Galant Compiles	
HORN ANTENNA	ETS LINDGREN	3117	00034609	May. 17, 2017	May. 18, 2019

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 7 of 28

4. SUPPORT EQUIPMENT LIST

1	Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
C	Adapter	KUANTEN	KT05W050050USU		-	E

5. SYSTEM DESCRIPTION

EUT test procedure:

- 1. Connect EUT and peripheral devices.
- 2. Power on the EUT, the EUT begins to work.
- 3. Make sure the EUT normal working.

EMC TEST MODES

原 等	No.	ublisi	TEST MODES	
Altesta	1		Scanning mode	® ##
1111 - 11	2	6	Scanning stopped/Receiving	G Aller

Note: Only the result of the worst case was recorded in the report.

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (C), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 8 of 28

6. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant
§15.111	Antenna Conducted Power for receivers	Compliant

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 9 of 28

7. FCC RADIATED EMISSION TEST

7.1. TEST EQUIPMENT OF RADIATED EMISSION


7.2. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3-0	41.0
88~216	3	45.0
216~960	3 1	48.0
960~2000	® ## 3°	53.5

^{**}Note: The lower limit shall apply at the transition frequency. Because the EUT RX frequency range up to 480 MHz, so the upper the frequency range up to 2 GHz.

7.3 BLOCK DIAGRAM OF RADIATED EMISSION TEST

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

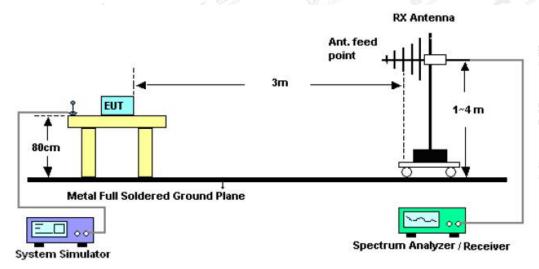


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.



Report No.: AGC02294180604FE08 Page 10 of 28

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

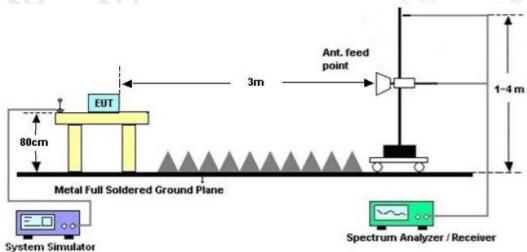

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.



Page 11 of 28

7.4 PROCEDURE OF RADIATED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received power by AC 120V/60Hz.
- 5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The test mode(s) were scanned during the test:
- 8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
 - 9) For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
 - 10) When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
 - 11)If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
 - 12) For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
 - 13) In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
 - 14) The test data of the worst case condition (mode 1) was reported on the following Data page


The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 12 of 28

7.5 TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test -Horizontal -3m Below 1G

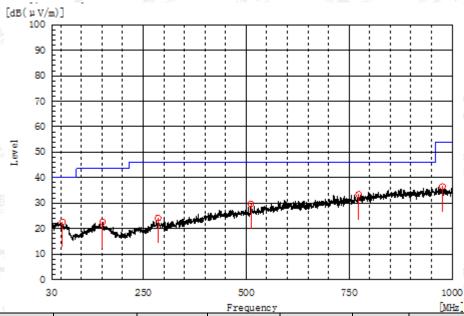


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
54.250	H M	5.8	16.8	22.6	40.0	17.4	Pass	200.0	253.5
151.735	® Habitan of Glov	5.9	16.6	22.5	43.5	21.0	Pass	200.0	179.9
286.565	Н	6.4	17.7	24.1	46.0	21.9	Pass	150.0	71.5
511.605	H.	6.6	23.1	29.7	46.0	16.3	Pass	100.0	91.6
773.020	nor Global Com	5.3	28.1	33.4	46.0	12.6	Pass	150.0	180.1
976.720	H	5.6	30.9	36.5	54.0	17.5	Pass	200.0	71.3

RESULT: PASS

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 13 of 28

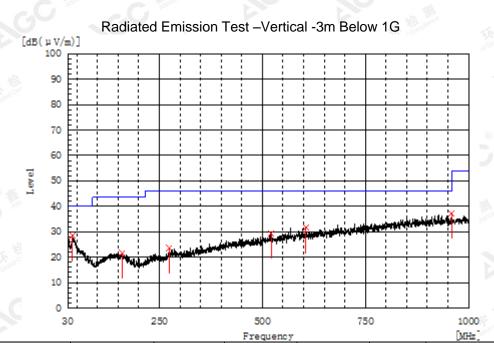

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
39.700	V	11.0	17.4	28.4	40.0	11.6	Pass	200.0	57.7
159.495	V	5.0	16.6	21.6	43.5	21.9	Pass	150.0	289.2
274.440	V	6.1	17.4	23.5	46.0	22.5	Pass	150.0	143.7
521.305	V	6.1	23.3	29.4	46.0	16.6	Pass	150.0	143.7
605.695	V	6.5	25.0	31.5	46.0	14.5	Pass	100.0	252.3
958.775	V C	6.5	30.7	37.2	46.0	8.8	Pass	100.0	71.6

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Emissions range from 1GHz to 2GHz have 20dB margin. No recording in the test report.
- 4. Only the data of the worst case would be record in this test report.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

GC



Page 14 of 28

8. CONDUCTED EMISSION TEST

8.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)			
rioquerioy of Ermodion (Win2)	Quasi-Peak	Average		
0.15 – 0.5	66 to 56 *	56 to 46 *		
0.5 – 5	56	46		
	60	50		

^{*} Decreases with the logarithm of the frequency.

8.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


During the above scans, the emissions were maximized by cable manipulation

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.



Page 15 of 28

8.3 TEST SETUP BLOCK DIAGRAM

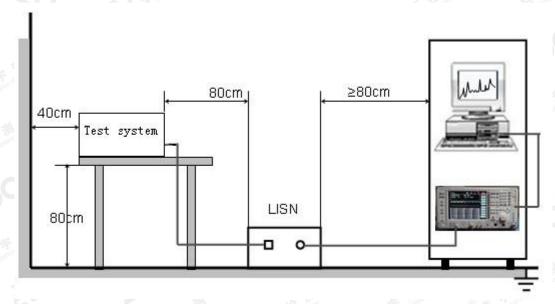


The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.cett.com.



Page 16 of 28

8.4 TEST RESULT

CONDUCTED EMISSION TEST - LINE L

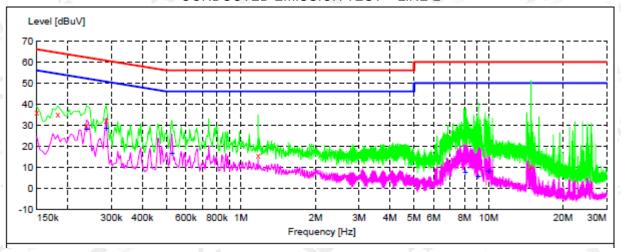

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	36.00	10.0	66	30.0	QP	L1	FLO
0.182000	35.20	10.0	64	29.2	QP	L1	FLO
0.238000	30.00	10.1	62	32.2	QP	L1	FLO
0.286000	32.10	10.1	61	28.5	QP	L1	FLO
1.174000	15.80	10.1	56	40.2	QP	L1	FLO
14.834000	10.50	9.5	60	49.5	QP	L1	FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.238000 0.286000 0.526000 8.042000 9.094000 10.002000	27.80 28.40 16.70 7.40 5.70 7.80	10.1 10.1 9.9 10.1 10.3	52 51 46 50 50	24.4 22.2 29.3 42.6 44.3 42.2	AV AV AV	L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC02294180604FE08 Page 17 of 28

CONDUCTED EMISSION TEST - LINE N

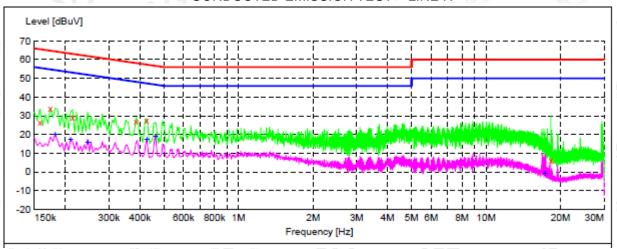

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.158000	26.70	10.0	66	38.9	QP	N	FLO
0.174000	33.80	10.0	65	31.0	QP	N	FLO
0.214000	29.40	10.1	63	33.6	QP	N	FLO
0.386000	27.00	10.0	58	31.1	QP	N	FLO
0.426000	27.60	10.0	57	29.7	QP	N	FLO
18.290000	5.90	9.4	60	54.1	OP	N	FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.182000 0.210000	20.00 17.60	10.0	54 53	34.4 35.6		N N	FLO FLO
0.246000	15.70	10.1	52	36.2	AV	N	FLO
0.426000	17.40	10.0	47	29.9	AV	N	FLO
0.462000	18.90	10.0	47	27.8	AV	N	FLO
17.270000	-1.00	9.5	50	51.0	AV	N	FLO

RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.



Page 18 of 28

9. ANTENNA CONDUCTED POWER FOR RECEIVERS

LIMIT

The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables

	2 20 20 20 20 20 20 20 20 20 20 20 20 20
Frequency Range	9 KHz to 2GHz
Timit (1)	2.0 nW (57 dDm)
Limit	2.0 nW (-57 dBm)

TEST CONFIGURATION

EUT	Spectrum Analyzer

TEST PROCEDURE

- 1. The receiver antenna terminal connected to a spectrum analyzer.
- 2. The test data of the worst case condition (mode 1) was reported on the following Data page.

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.


Report No.: AGC02294180604FE08 Page 19 of 28

TEST RESULTS

Conducted Measurement (9 KHz to 150 KHz)






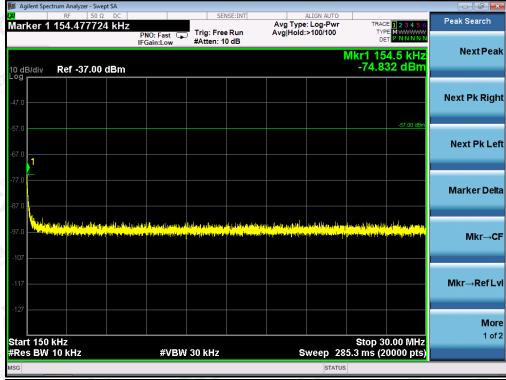


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true;//www.agc.gett.com.

Report No.: AGC02294180604FE08 Page 20 of 28



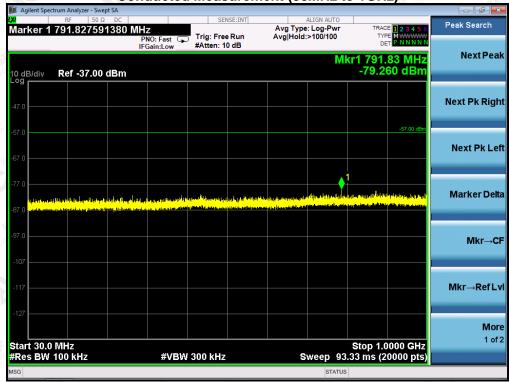



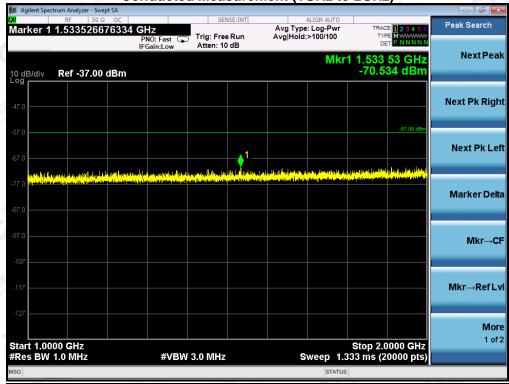

PASS

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.




Page 21 of 28

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION TEST SETUP



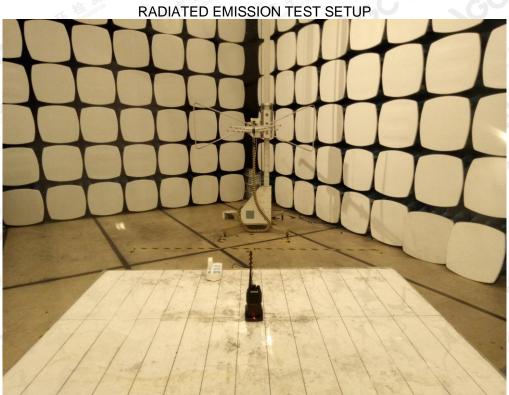

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



Page 22 of 28

APPENDIX 2 PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



Page 23 of 28

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results shown the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Report No.: AGC02294180604FE08 Page 24 of 28

BACK VIEW OF EUT



LEFT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Page 25 of 28

RIGHT VIEW OF EUT



OPEN VIEW-1 OF EUT



The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance




Report No.: AGC02294180604FE08 Page 26 of 28

INTERNAL VIEW-1 OF EUT



INTERNAL VIEW-2 OF EUT

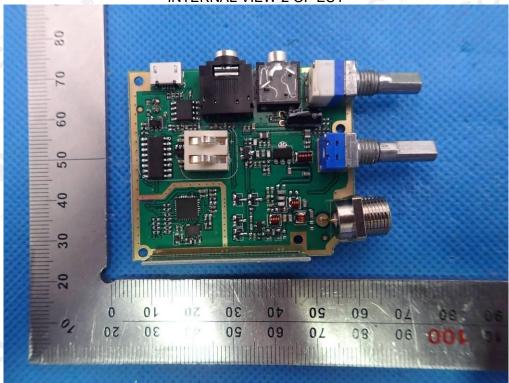


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.goalt.com.




Report No.: AGC02294180604FE08 Page 27 of 28

INTERNAL VIEW-3 OF EUT

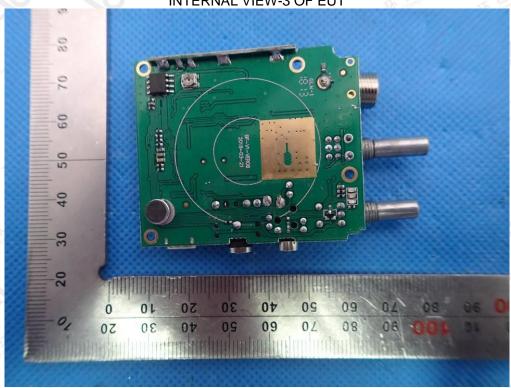



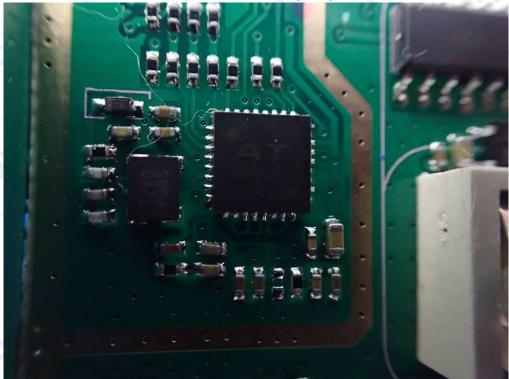


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.

Attestation of Global Compliance



Report No.: AGC02294180604FE08 Page 28 of 28

INTERNAL VIEW-5 OF EUT

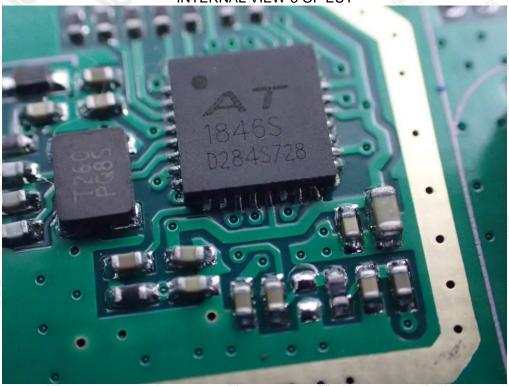

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.