


## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Result

Site: AC1	Time: 2016/08/10 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0	

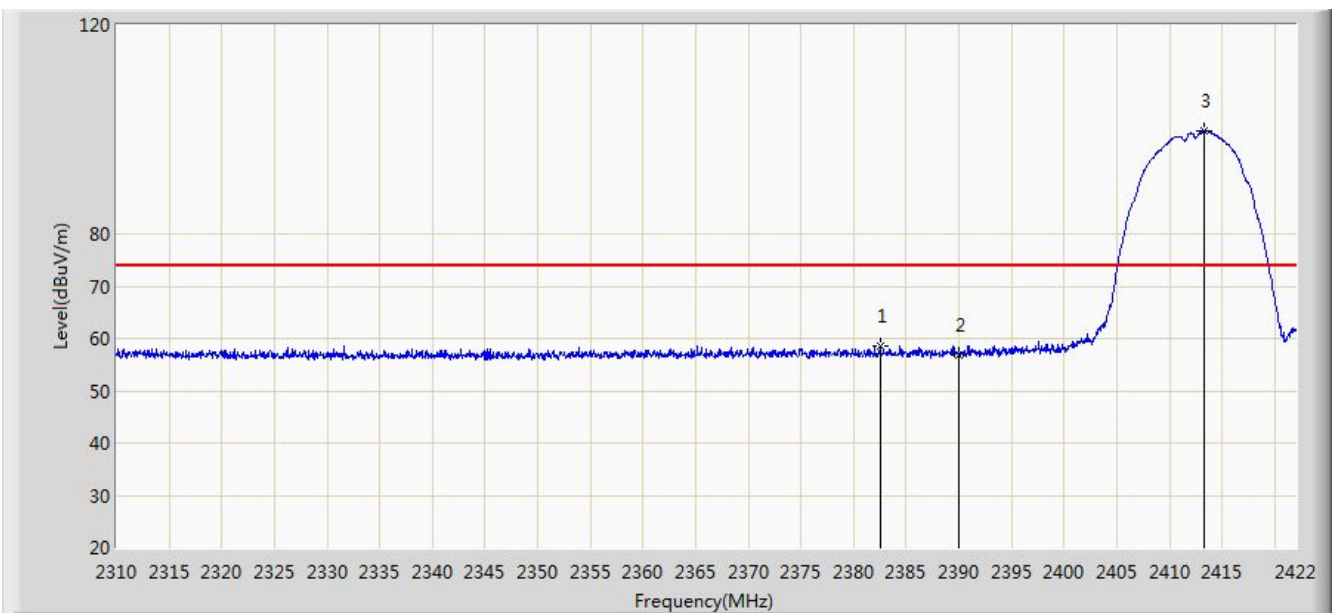


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.520	58.635	27.419	-15.365	74.000	31.216	PK
2			2390.000	56.949	25.746	-17.051	74.000	31.203	PK
3		*	2413.264	99.678	68.511	N/A	N/A	31.167	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0	

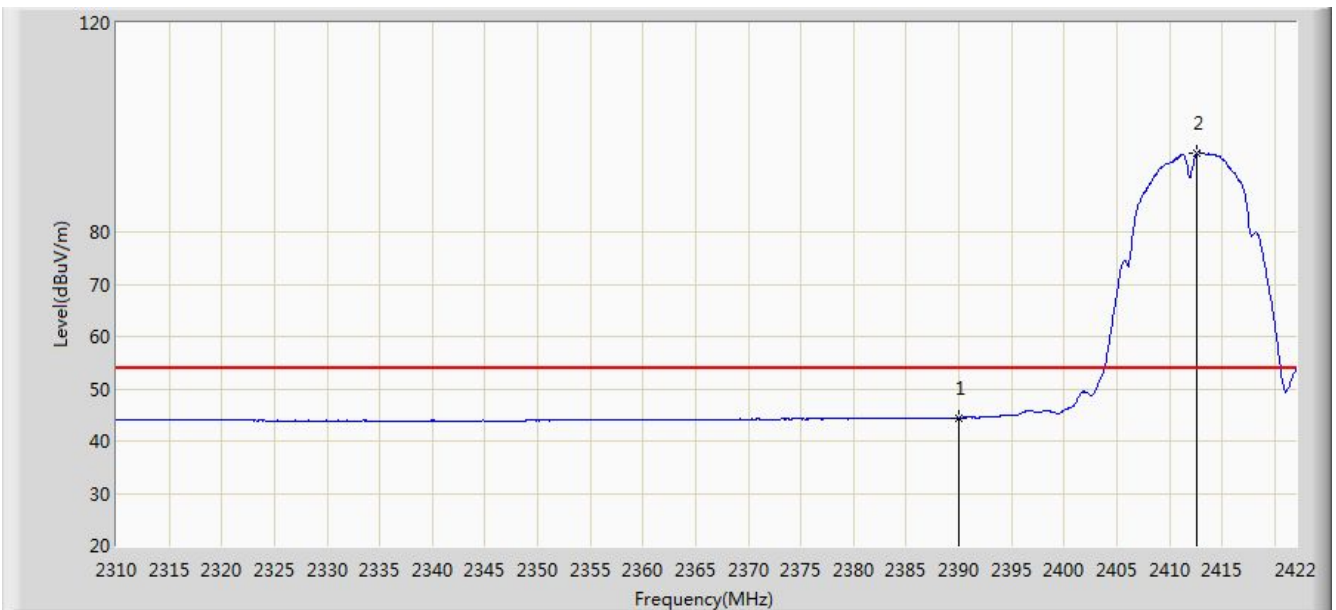


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.466	13.263	-9.534	54.000	31.203	AV
2		*	2412.648	95.144	63.976	N/A	N/A	31.168	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0	

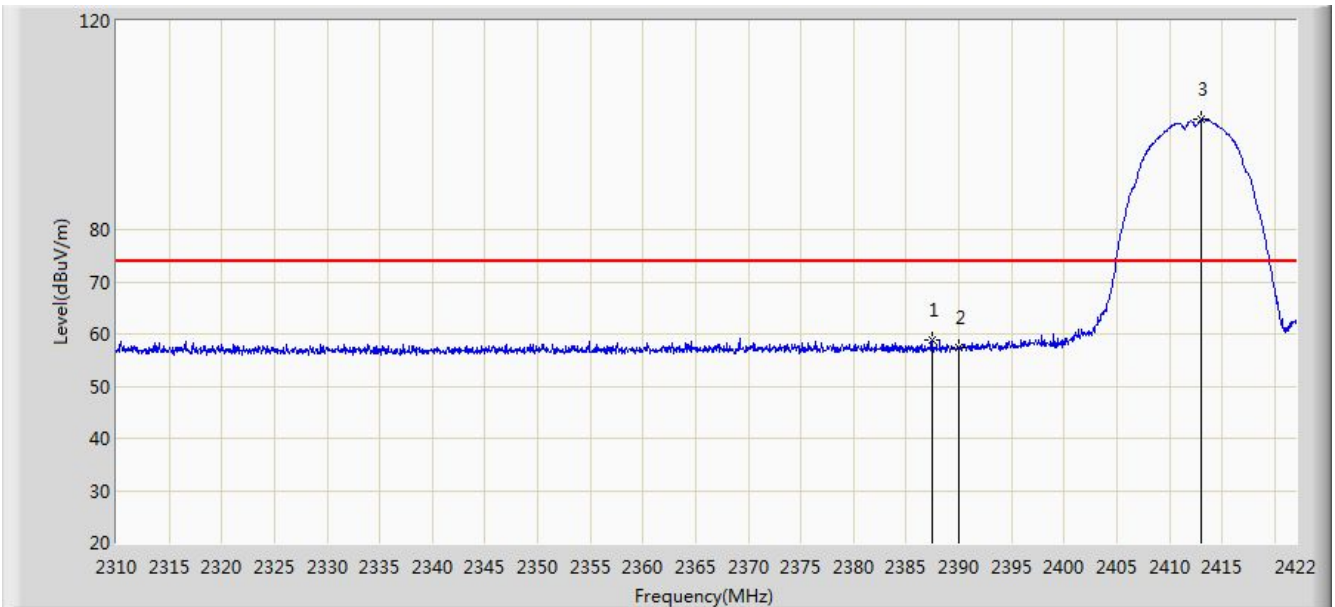


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.448	58.791	27.584	-15.209	74.000	31.207	PK
2			2390.000	57.247	26.044	-16.753	74.000	31.203	PK
3		*	2413.040	101.016	69.848	N/A	N/A	31.167	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0	

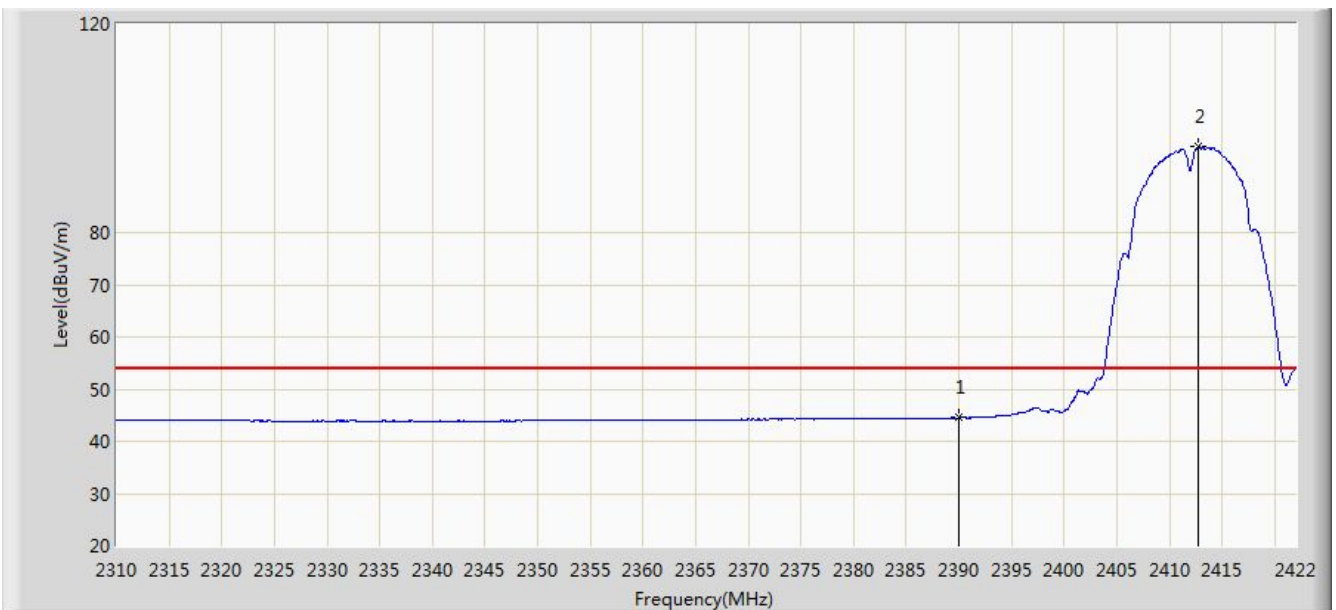


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.502	13.299	-9.498	54.000	31.203	AV
2		*	2412.704	96.394	65.226	N/A	N/A	31.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0	

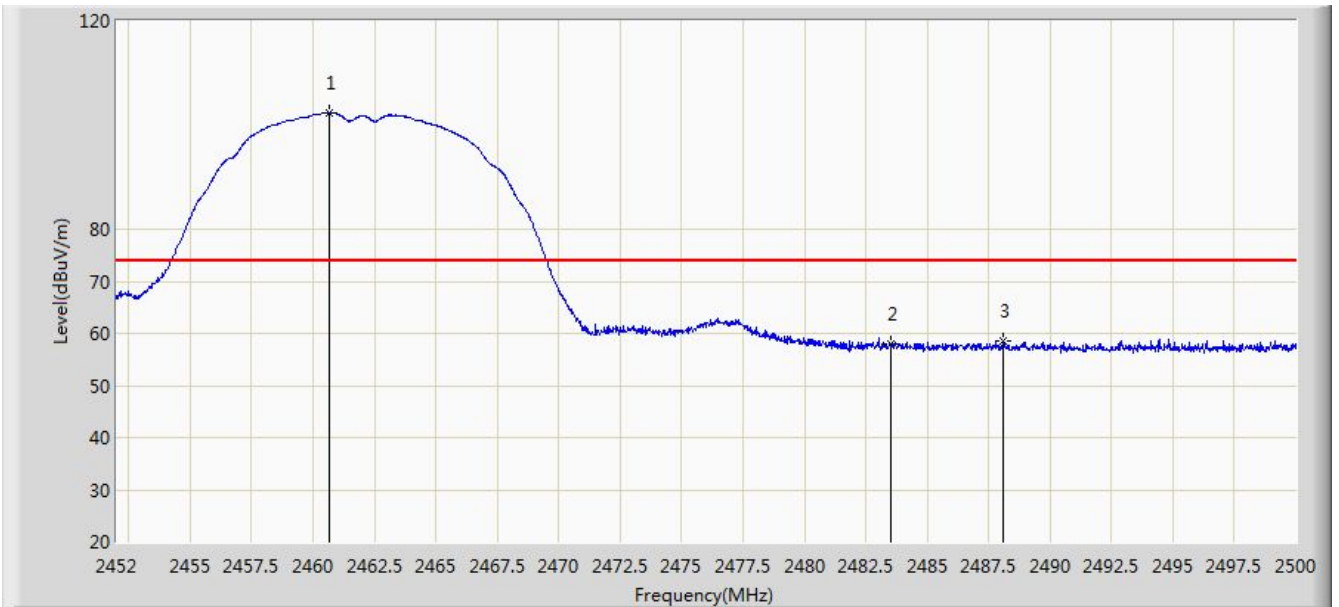

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.640	102.340	71.207	N/A	N/A	31.133	PK
2			2483.500	57.934	26.741	-16.066	74.000	31.194	PK
3			2488.072	58.603	27.398	-15.397	74.000	31.205	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	97.796	66.662	N/A	N/A	31.134	AV
2			2483.500	45.325	14.132	-8.675	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 14:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0	

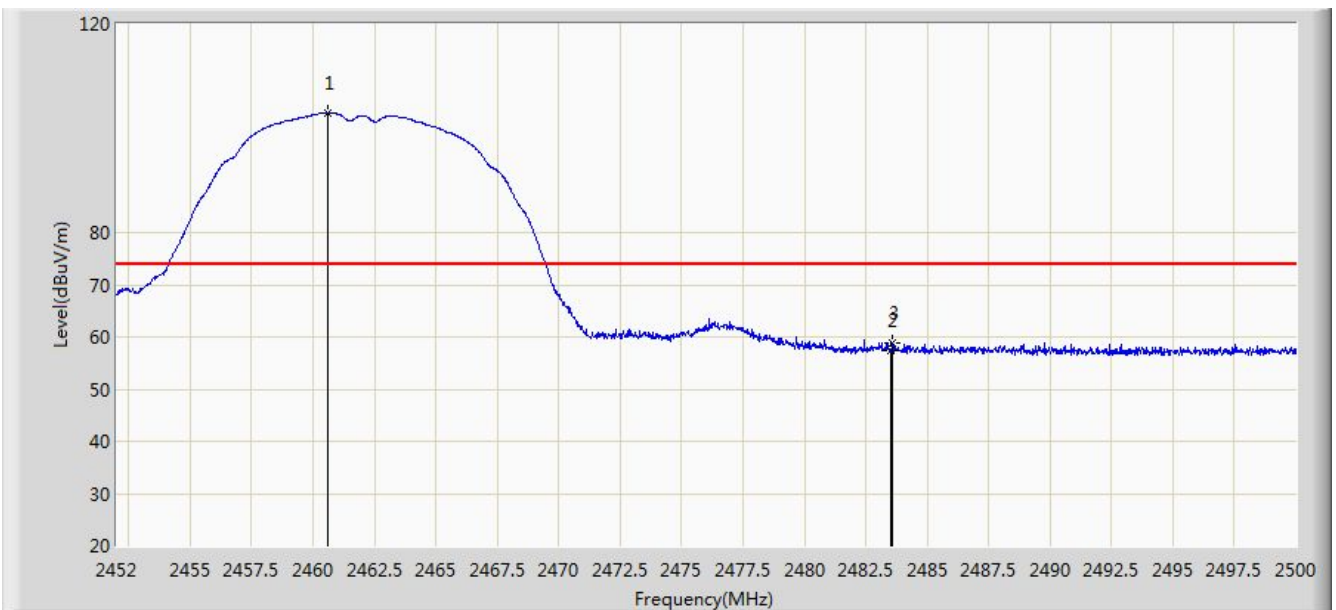


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.592	102.900	71.767	N/A	N/A	31.133	PK
2			2483.500	57.312	26.119	-16.688	74.000	31.194	PK
3			2483.608	58.981	27.787	-15.019	74.000	31.194	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0	

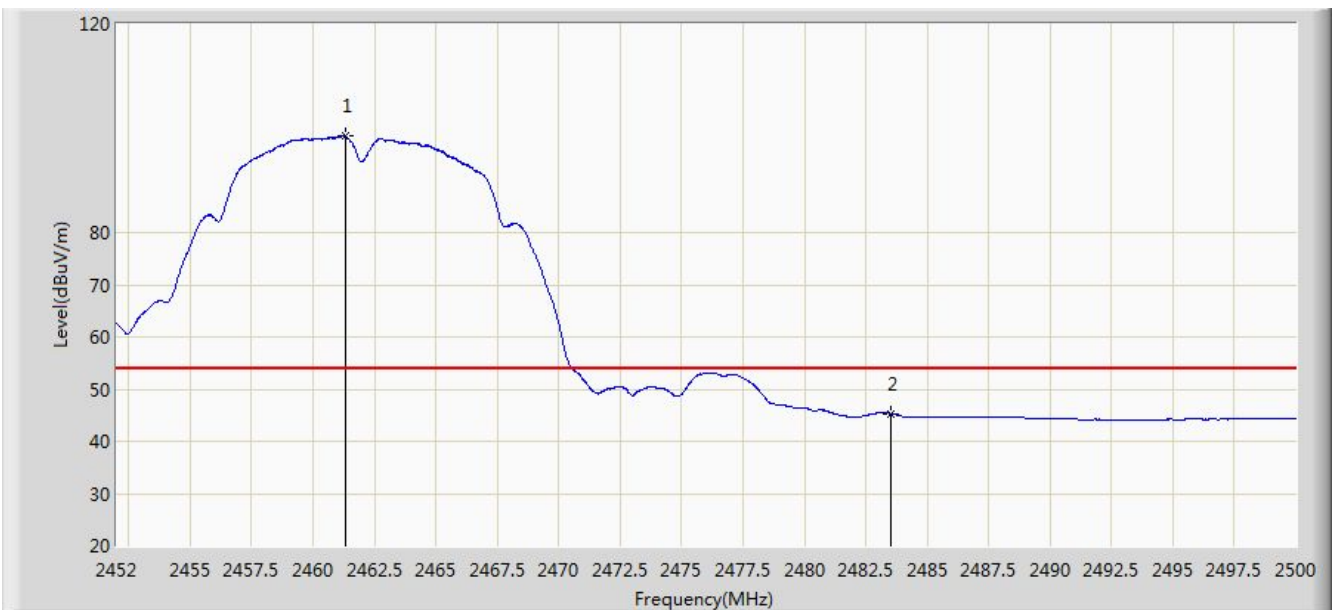


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.336	98.441	67.307	N/A	N/A	31.134	AV
2			2483.500	45.332	14.139	-8.668	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 15:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0	

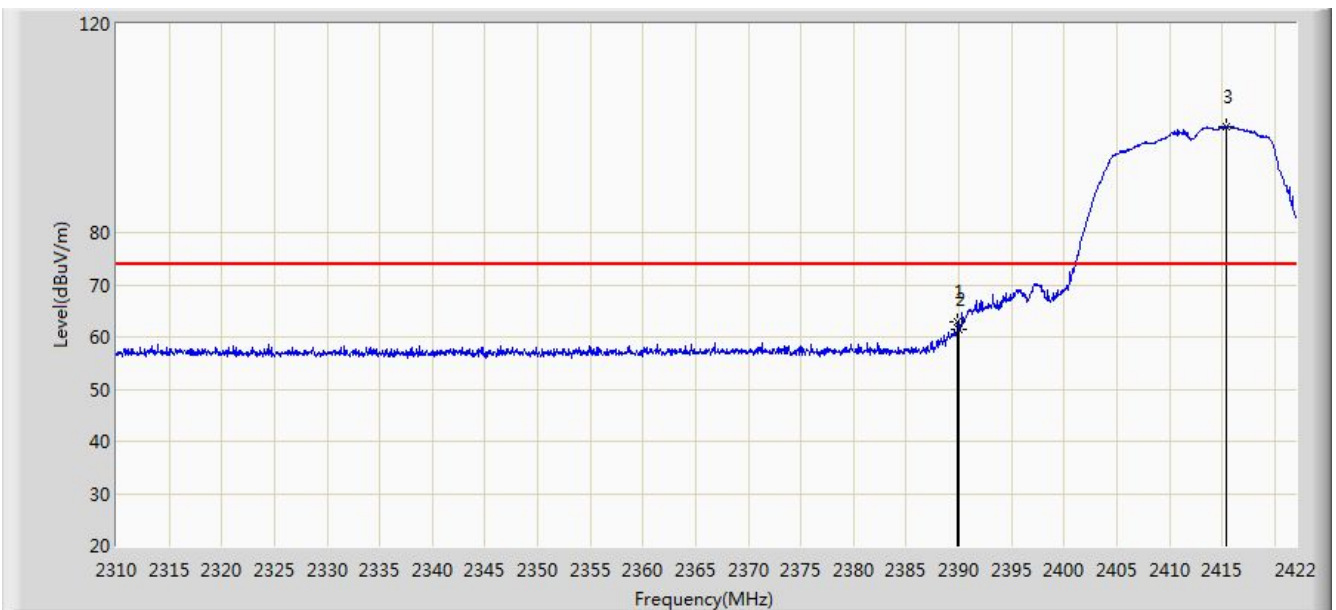


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	62.795	31.592	-11.205	74.000	31.203	PK
2			2390.000	61.565	30.362	-12.435	74.000	31.203	PK
3		*	2415.336	100.288	69.124	N/A	N/A	31.164	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0	

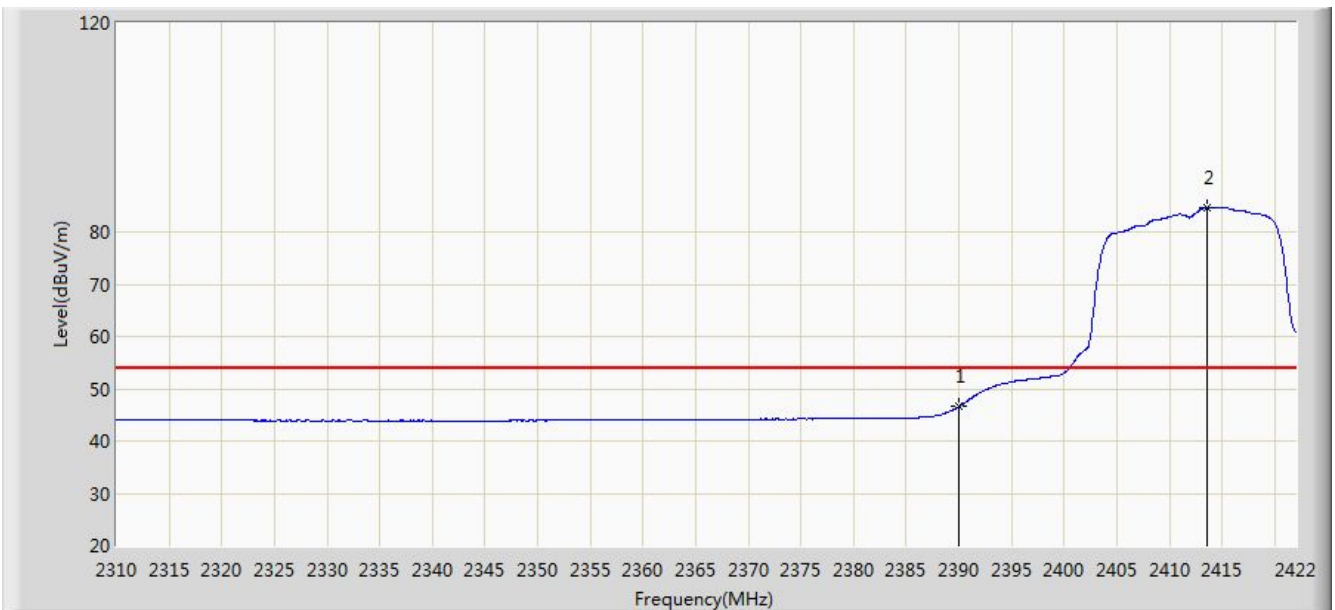


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.547	15.344	-7.453	54.000	31.203	AV
2		*	2413.600	84.639	53.472	N/A	N/A	31.167	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0	

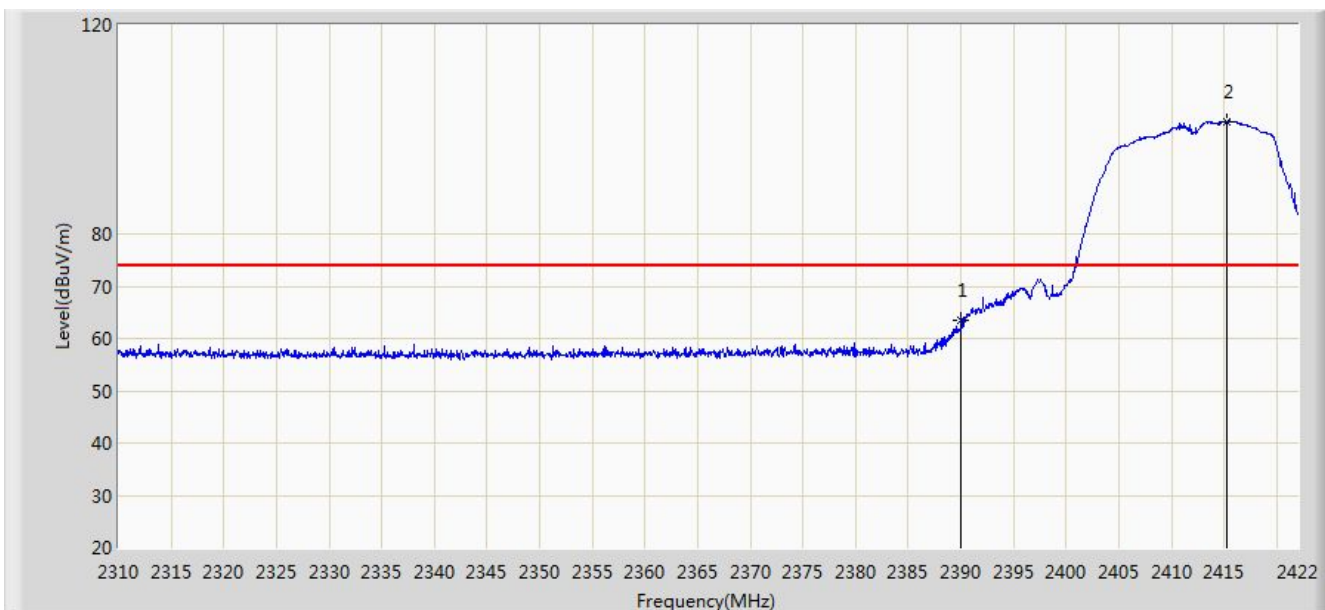


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.511	32.308	-10.489	74.000	31.203	PK
2		*	2415.280	101.545	70.381	N/A	N/A	31.164	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0	

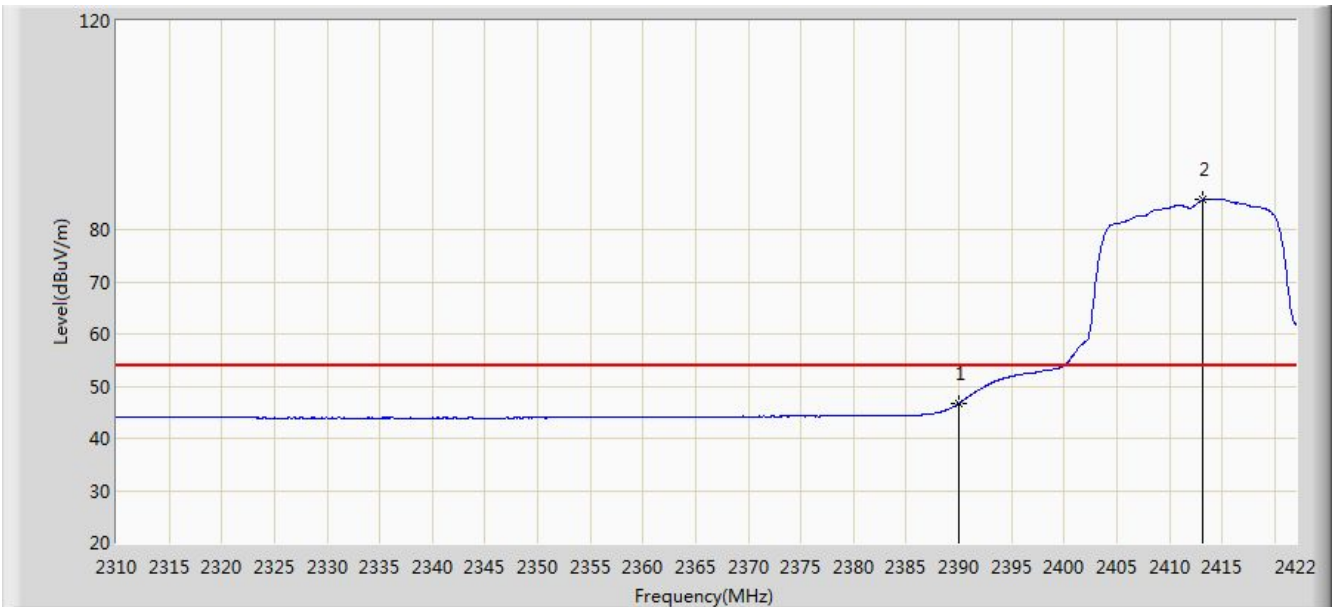


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.655	15.452	-7.345	54.000	31.203	AV
2		*	2413.208	85.708	54.541	N/A	N/A	31.167	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0	

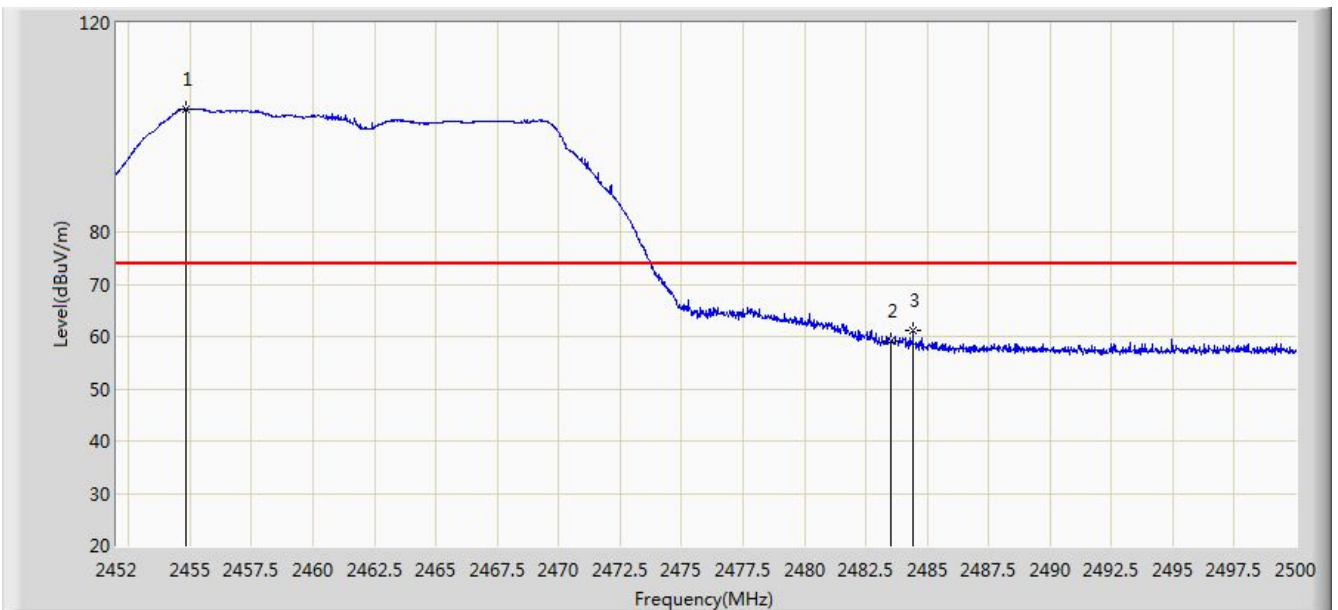

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.808	103.519	72.396	N/A	N/A	31.123	PK
2			2483.500	59.198	28.005	-14.802	74.000	31.194	PK
3			2484.424	61.041	29.845	-12.959	74.000	31.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.664	87.393	56.271	N/A	N/A	31.123	AV
2			2483.500	45.159	13.966	-8.841	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0	

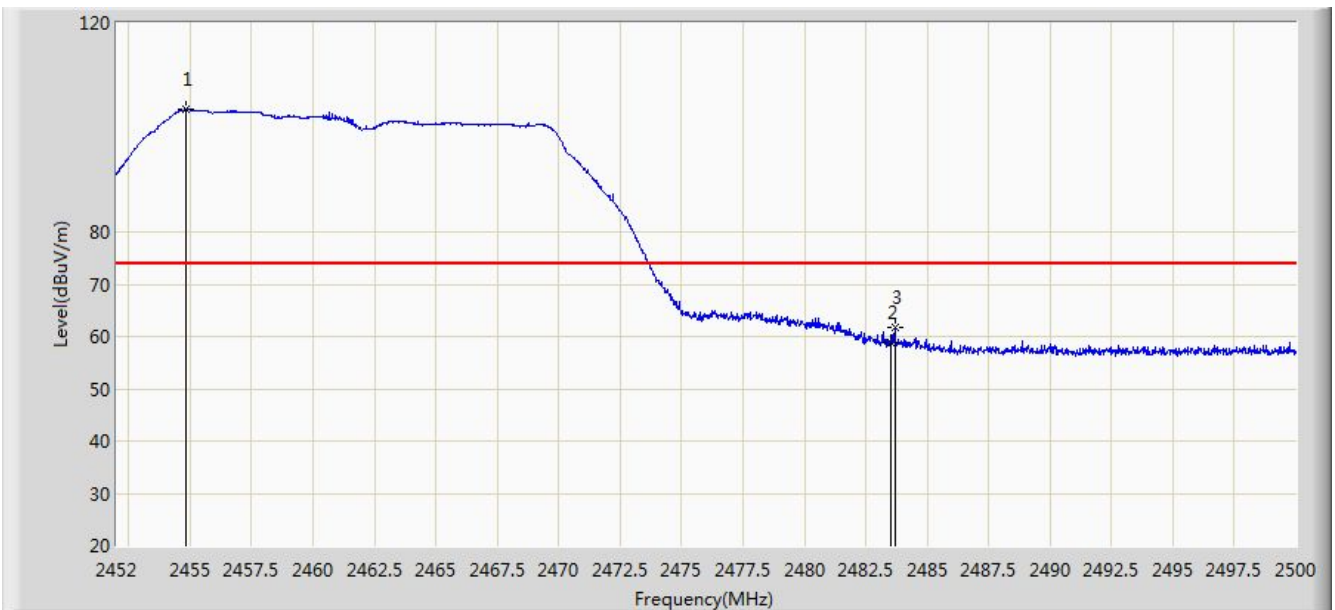

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.808	103.392	72.269	N/A	N/A	31.123	PK
2			2483.500	58.790	27.597	-15.210	74.000	31.194	PK
3			2483.704	61.726	30.532	-12.274	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.520	87.595	56.473	N/A	N/A	31.122	AV
2			2483.500	45.408	14.215	-8.592	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 15:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0	

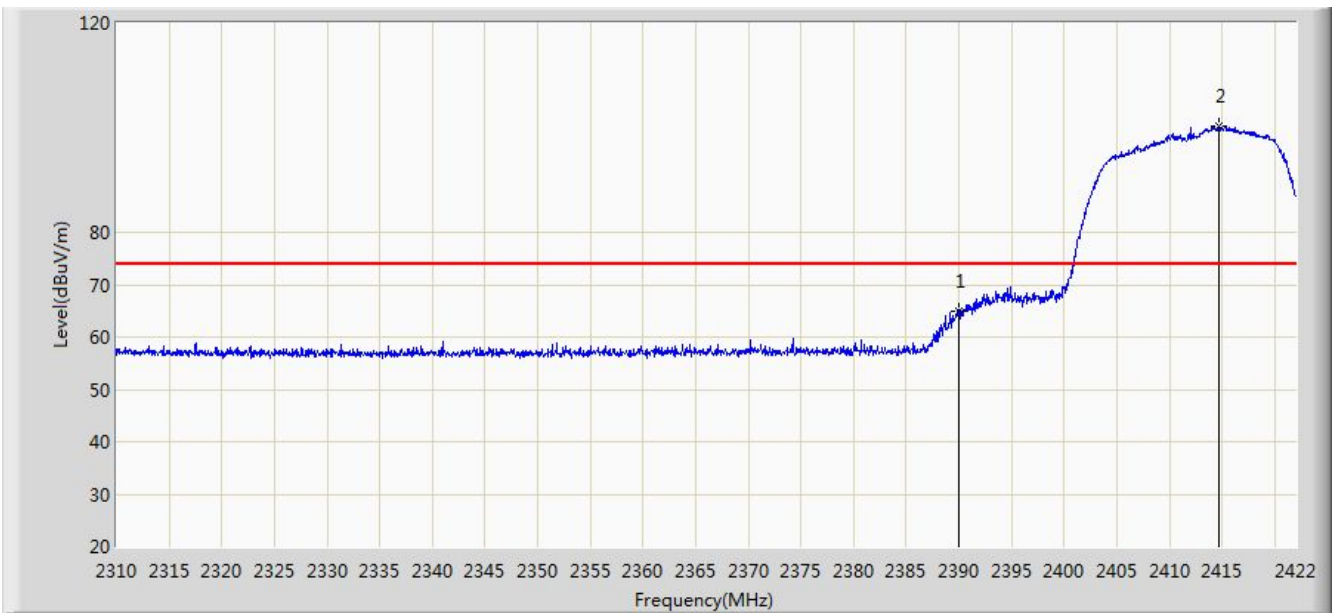


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.064	33.861	-8.936	74.000	31.203	PK
2		*	2414.720	100.286	69.121	N/A	N/A	31.164	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0	

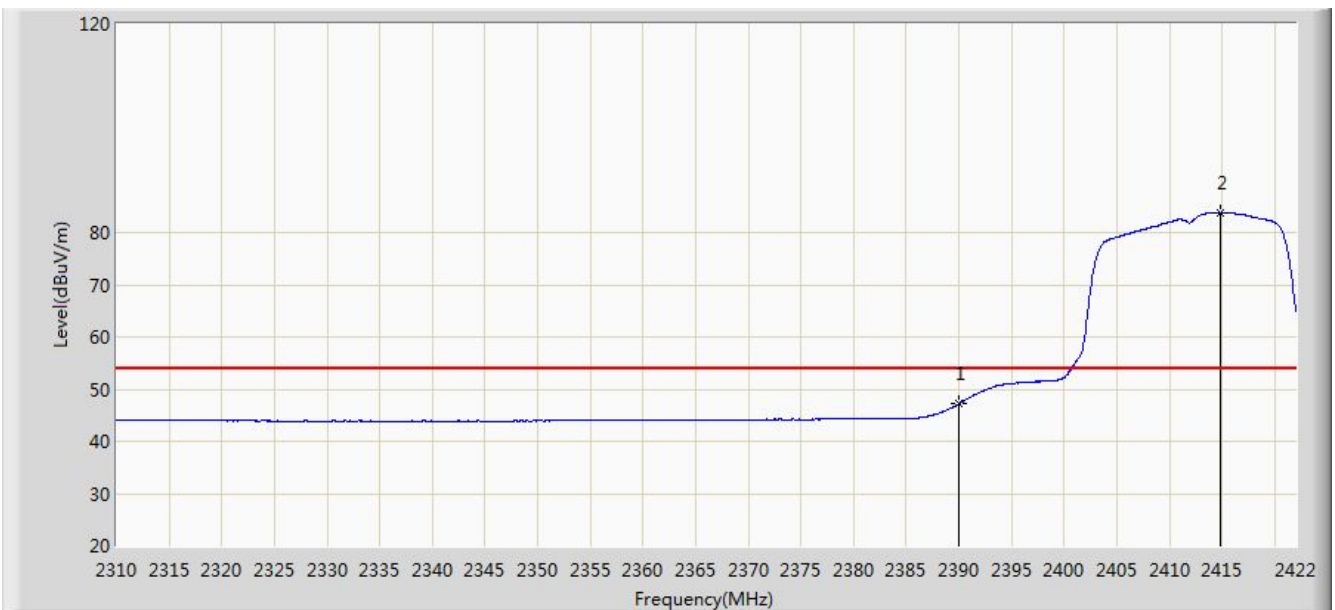

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.177	15.974	-6.823	54.000	31.203	AV
2		*	2414.776	83.907	52.742	N/A	N/A	31.164	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.008	31.805	-10.992	74.000	31.203	PK
2		*	2413.936	100.795	69.629	N/A	N/A	31.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0	

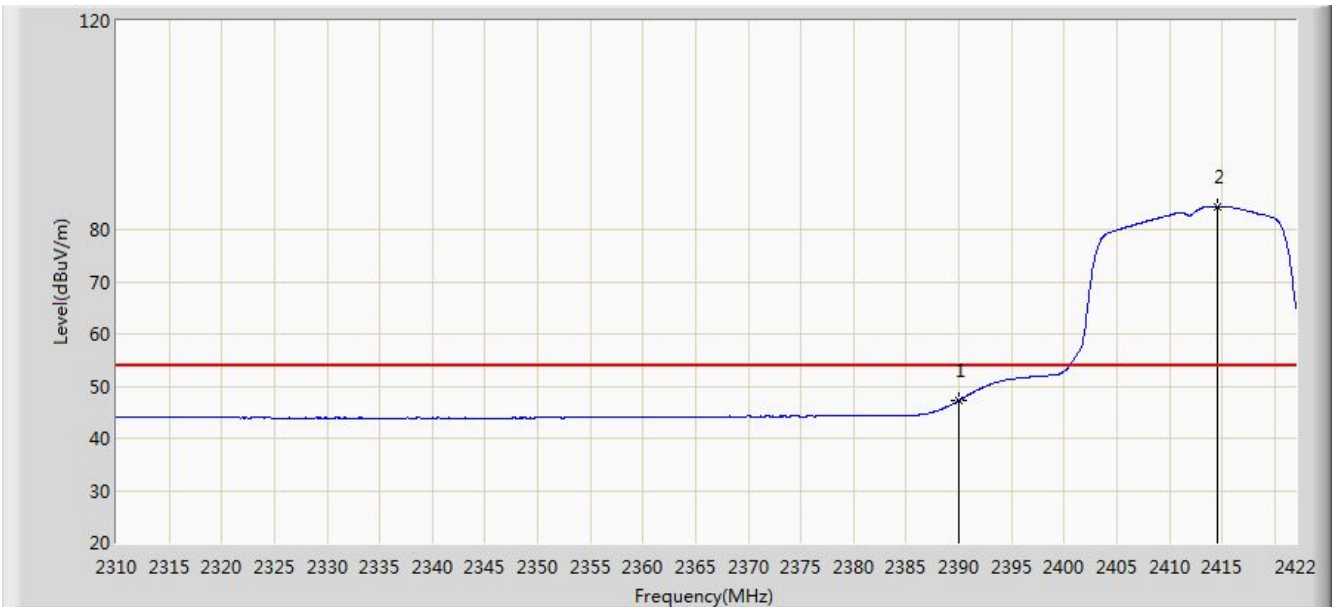


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.265	16.062	-6.735	54.000	31.203	AV
2		*	2414.552	84.459	53.294	N/A	N/A	31.165	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0	

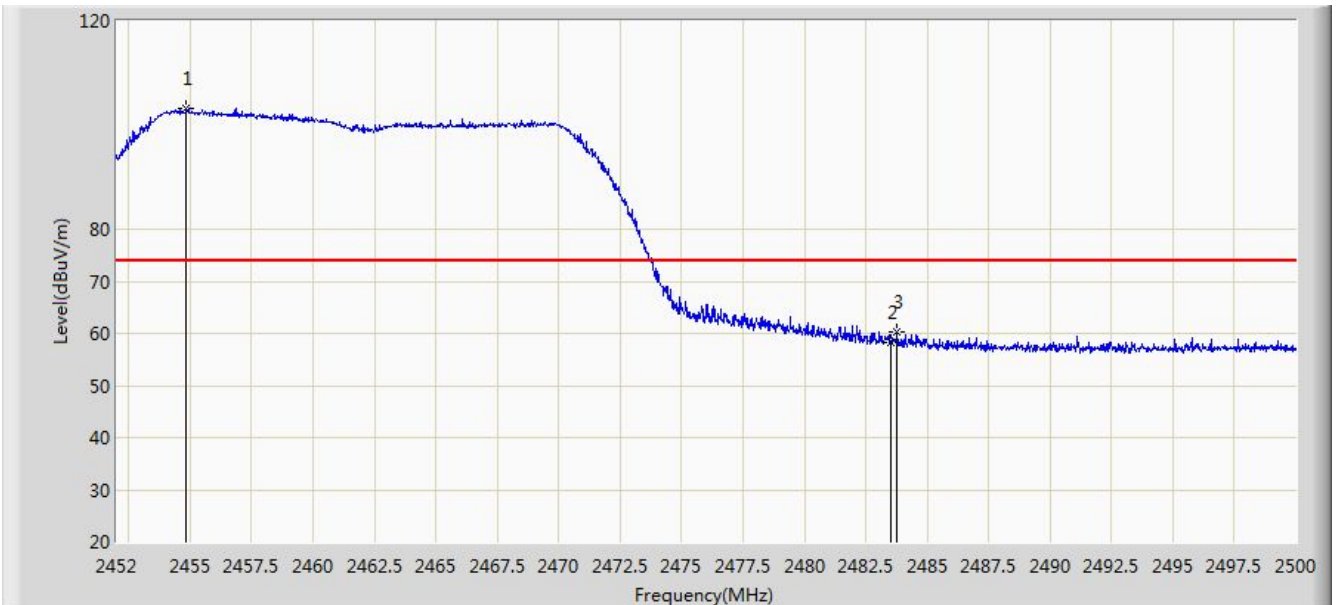


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.856	103.254	72.131	N/A	N/A	31.123	PK
2			2483.500	58.120	26.927	-15.880	74.000	31.194	PK
3			2483.776	60.252	29.058	-13.748	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0	

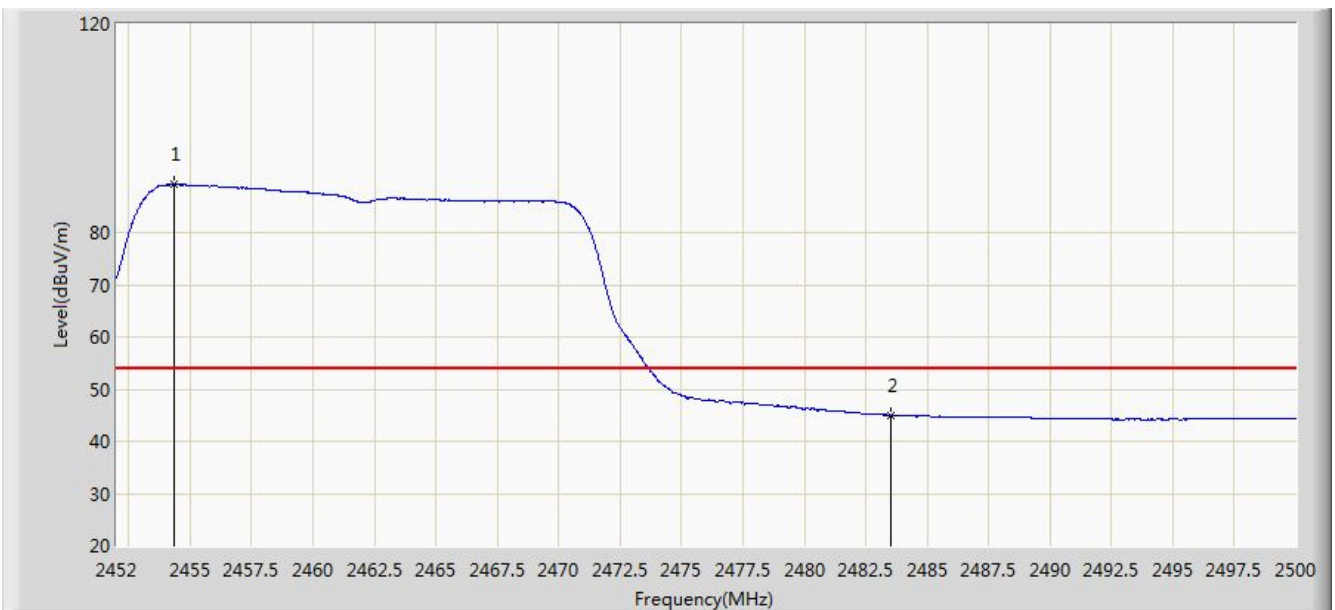


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.352	89.185	58.063	N/A	N/A	31.121	AV
2			2483.500	44.936	13.743	-9.064	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0	

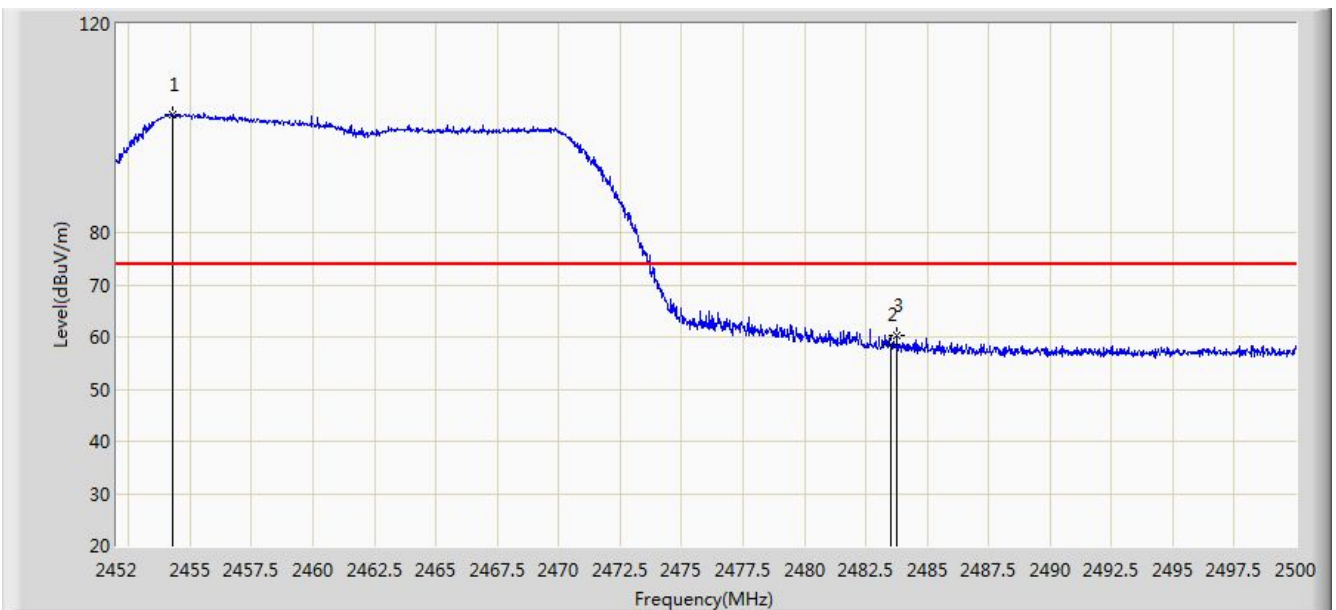


a	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.280	102.633	71.511	N/A	N/A	31.121	PK
2			2483.500	58.676	27.483	-15.324	74.000	31.194	PK
3			2483.776	60.192	28.998	-13.808	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0	

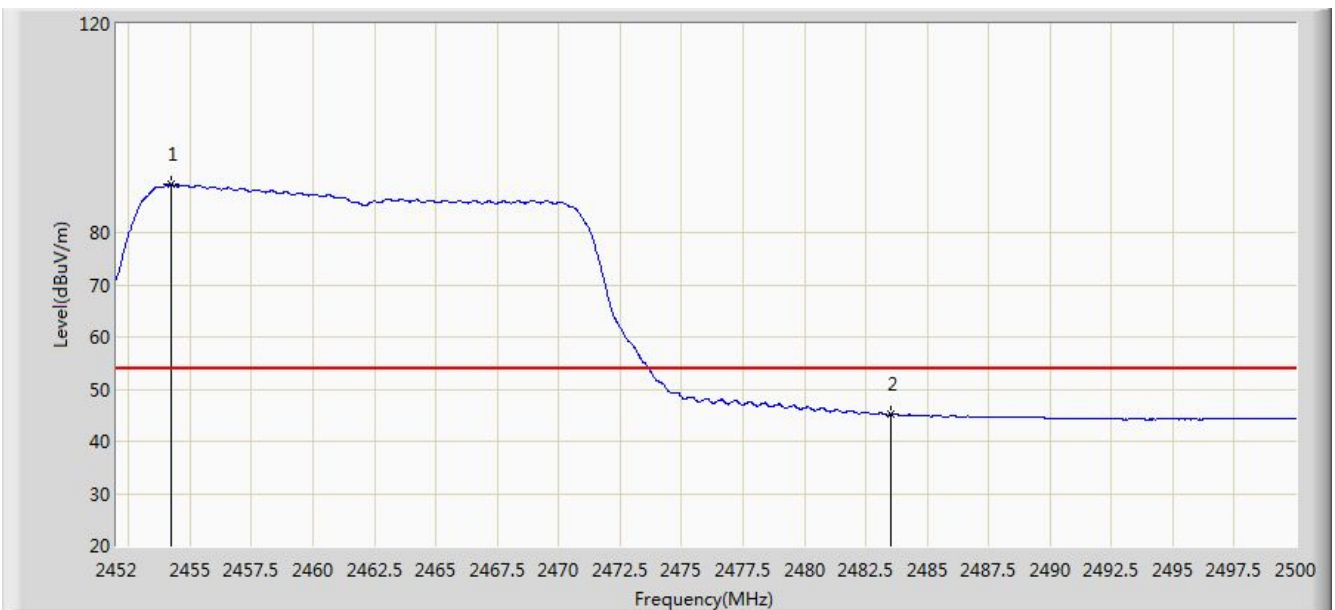


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.208	89.238	58.117	N/A	N/A	31.121	AV
2			2483.500	45.116	13.923	-8.884	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 15:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 1	

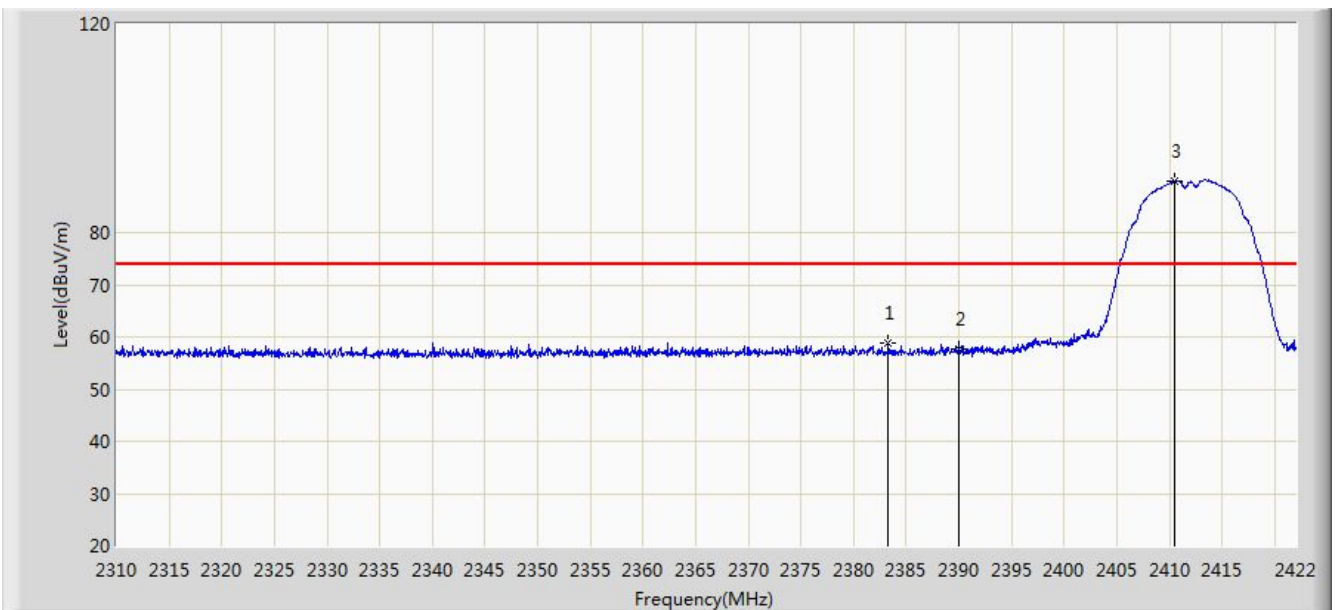


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.304	58.834	27.619	-15.166	74.000	31.215	PK
2			2390.000	57.704	26.501	-16.296	74.000	31.203	PK
3		*	2410.464	89.826	58.654	N/A	N/A	31.172	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 1	

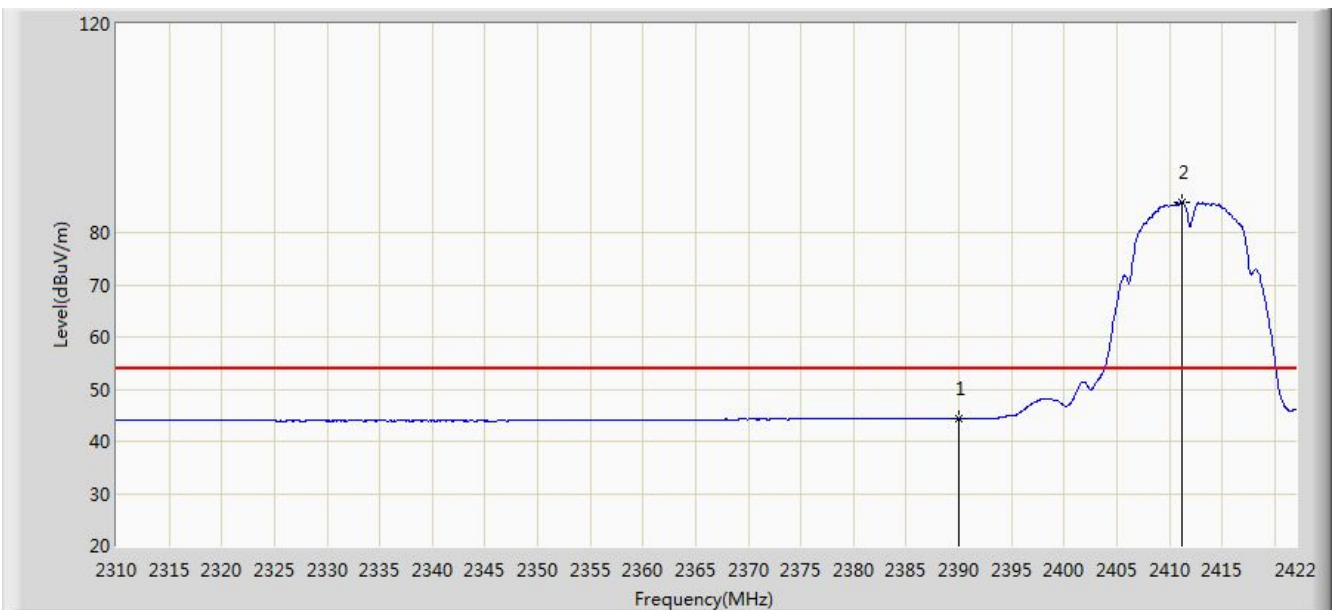


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.415	13.212	-9.585	54.000	31.203	AV
2		*	2411.136	85.753	54.582	N/A	N/A	31.171	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

aSite: AC1	Time: 2016/08/10 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 1	

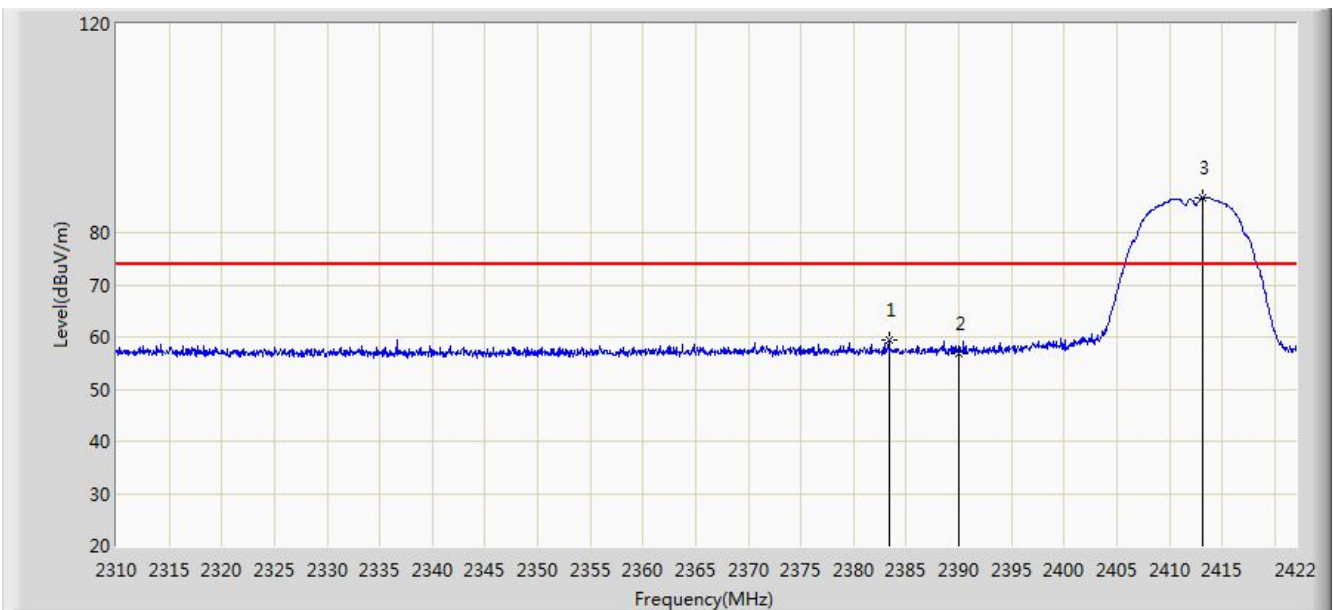


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.360	59.319	28.104	-14.681	74.000	31.215	PK
2			2390.000	56.947	25.744	-17.053	74.000	31.203	PK
3		*	2413.208	86.651	55.484	N/A	N/A	31.167	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 1	

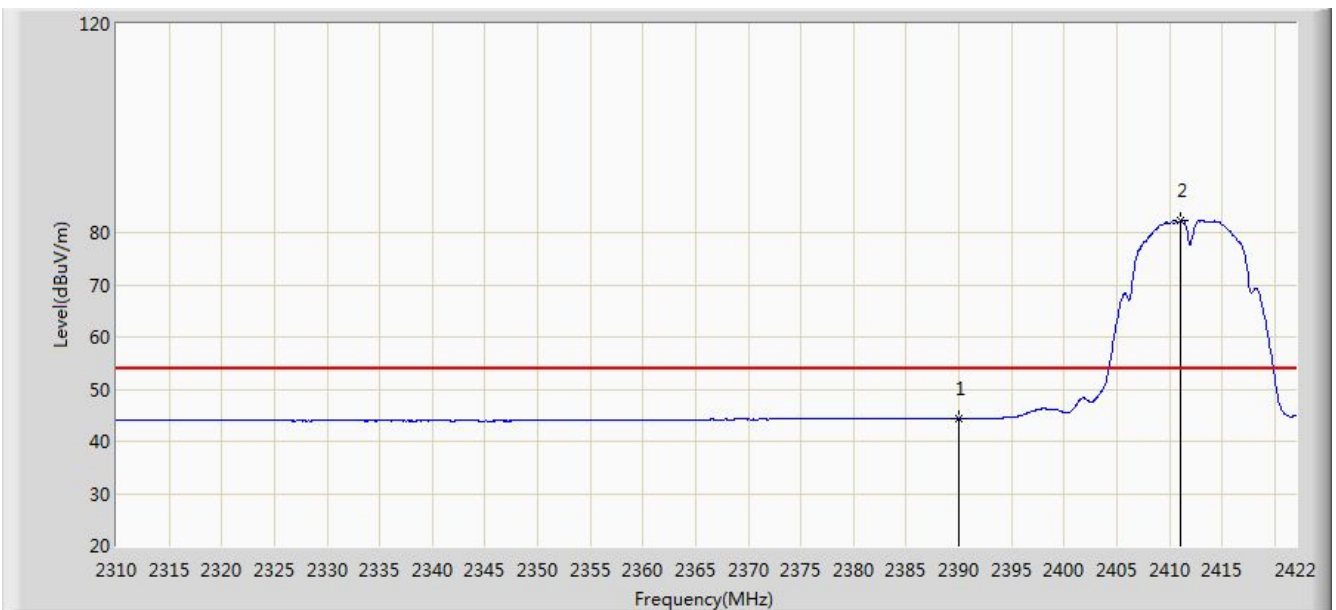


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.412	13.209	-9.588	54.000	31.203	AV
2		*	2411.080	82.303	51.132	N/A	N/A	31.171	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

aSite: AC1	Time: 2016/08/10 - 15:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 1	

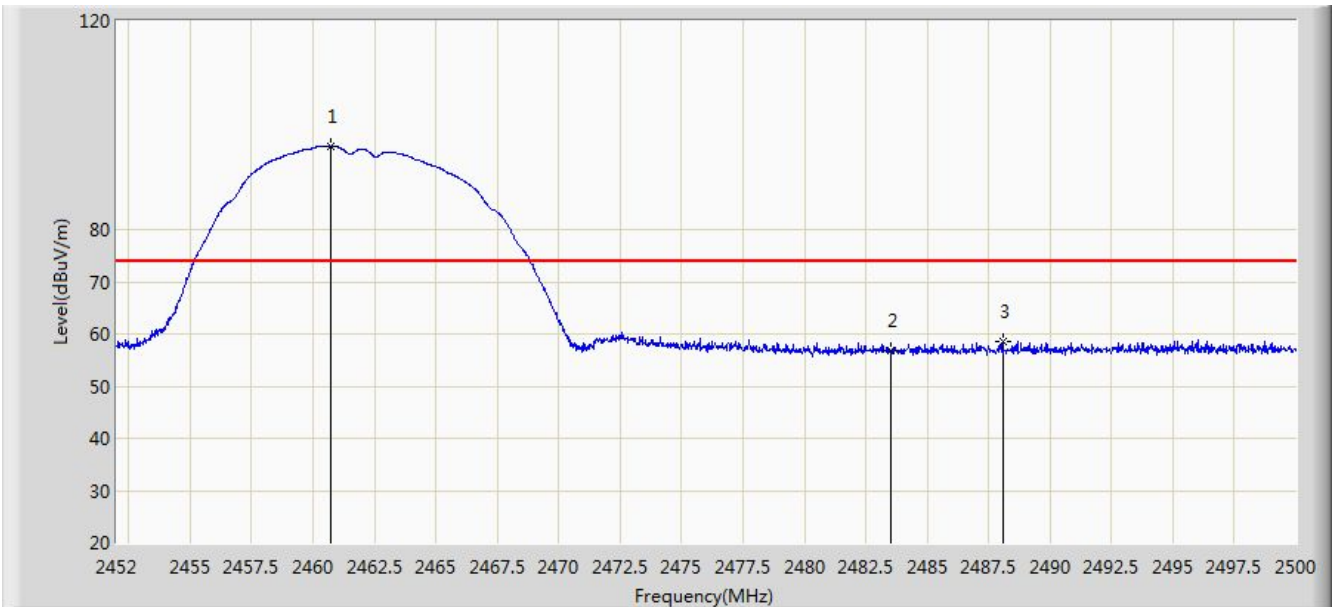

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.712	95.990	64.857	N/A	N/A	31.133	PK
2			2483.500	56.677	25.484	-17.323	74.000	31.194	PK
3			2488.072	58.422	27.217	-15.578	74.000	31.205	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	91.901	60.767	N/A	N/A	31.134	AV
2			2483.500	44.258	13.065	-9.742	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 1	

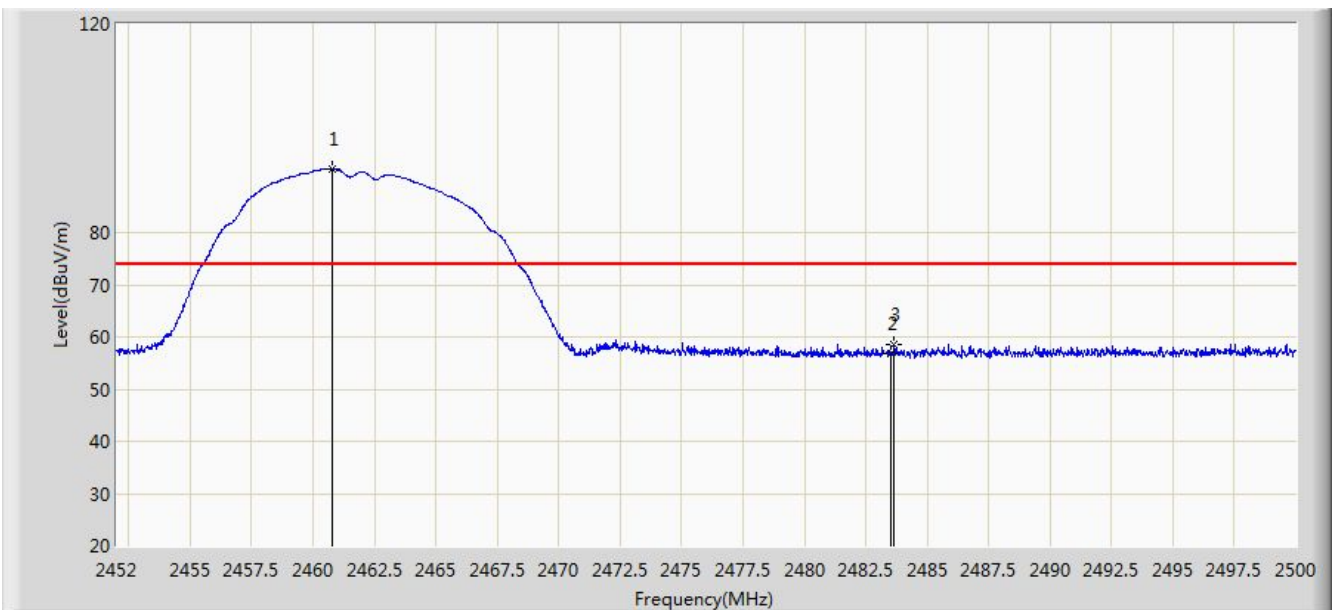

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.784	92.108	60.975	N/A	N/A	31.133	PK
2			2483.500	56.879	25.686	-17.121	74.000	31.194	PK
3			2483.656	58.545	27.351	-15.455	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 15:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.264	87.912	56.778	N/A	N/A	31.134	AV
2			2483.500	44.131	12.938	-9.869	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 1	

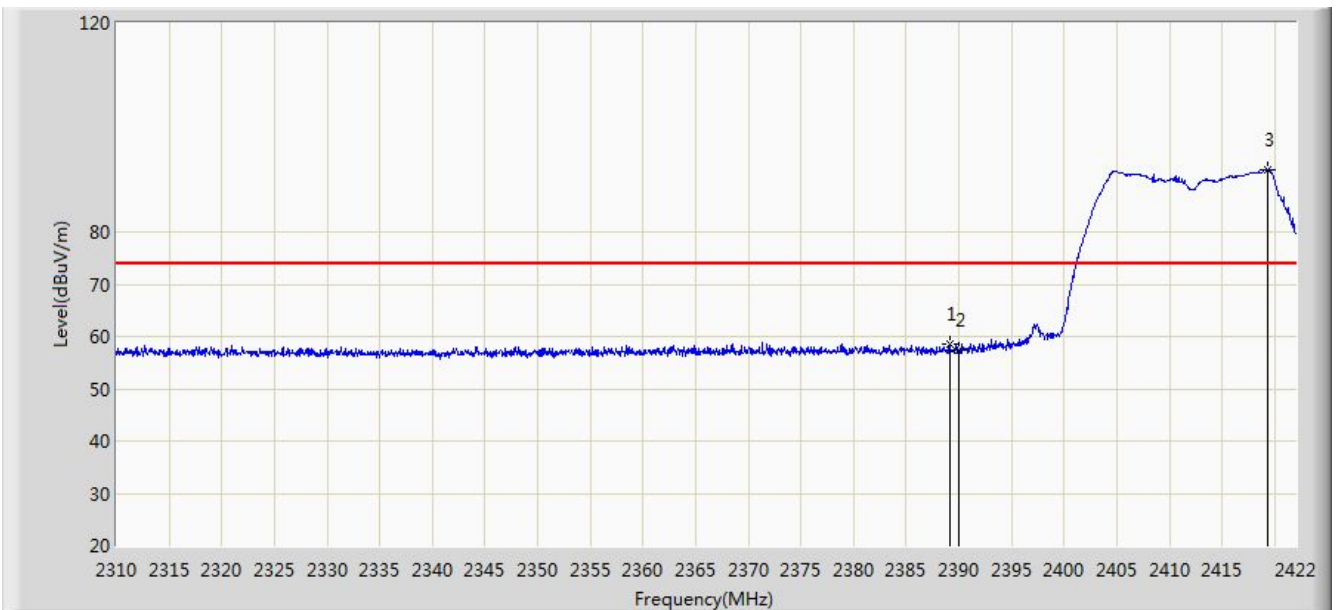


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.128	58.584	27.380	-15.416	74.000	31.204	PK
2			2390.000	57.381	26.178	-16.619	74.000	31.203	PK
3		*	2419.312	91.981	60.824	N/A	N/A	31.157	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 1	

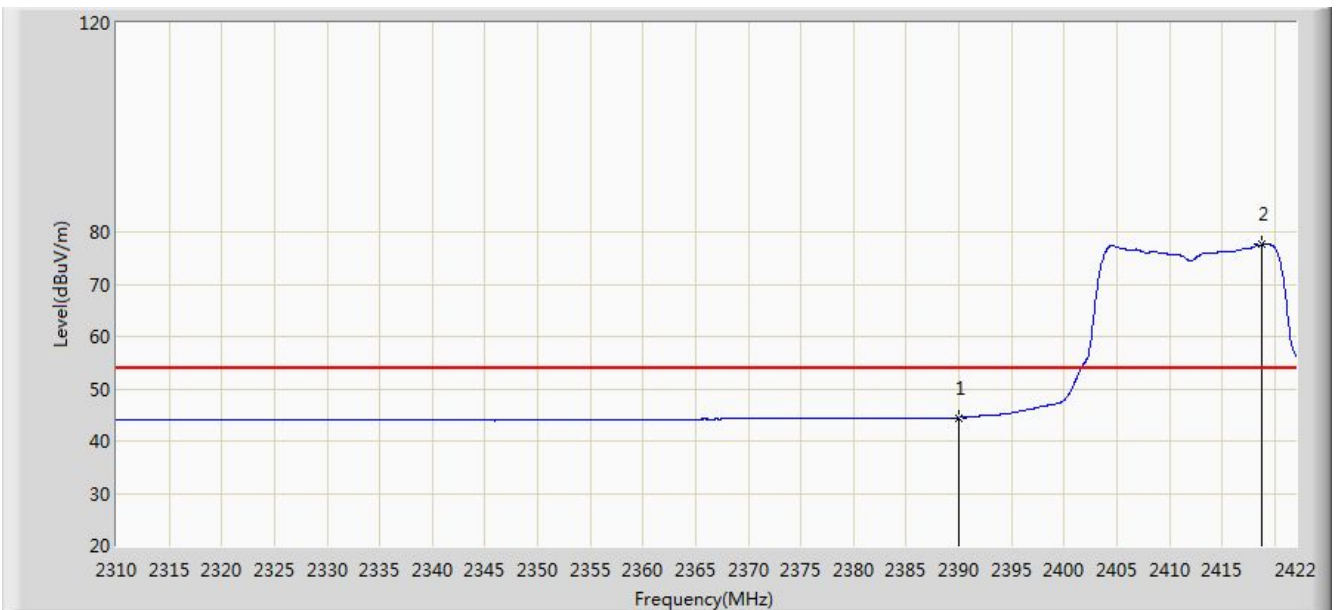


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.483	13.280	-9.517	54.000	31.203	AV
2		*	2418.808	77.570	46.412	N/A	N/A	31.158	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 1	

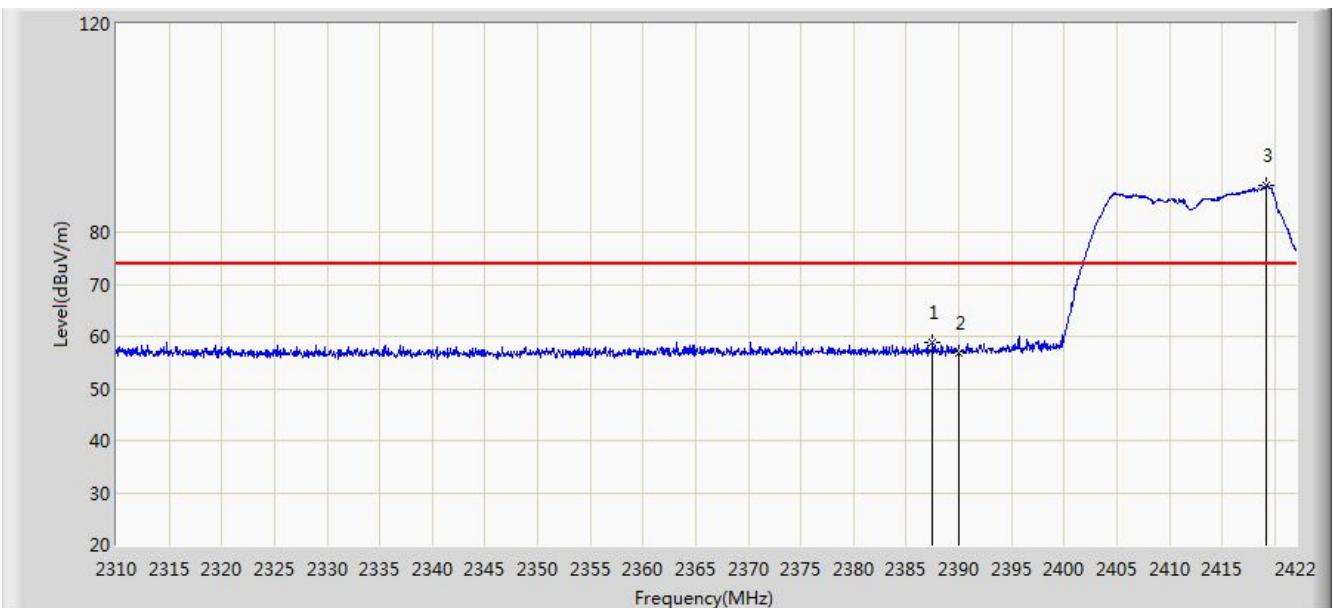


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.504	58.833	27.626	-15.167	74.000	31.207	PK
2			2390.000	56.880	25.677	-17.120	74.000	31.203	PK
3		*	2419.144	88.909	57.752	N/A	N/A	31.157	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 1	

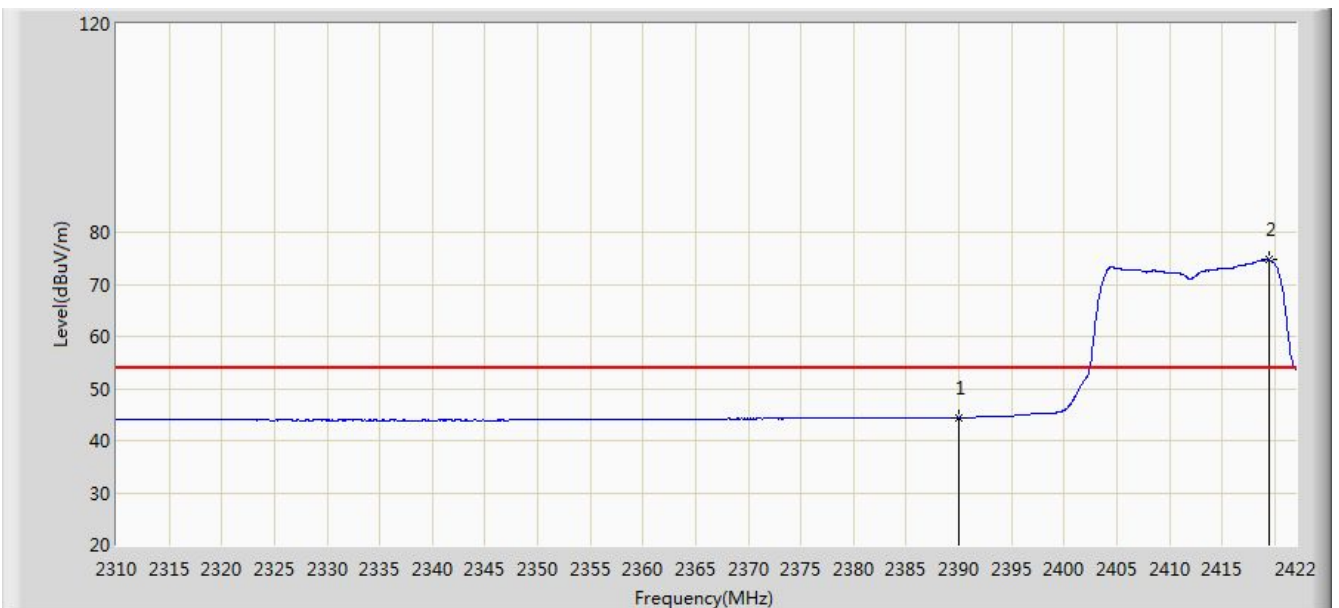


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.405	13.202	-9.595	54.000	31.203	AV
2		*	2419.480	74.644	43.487	N/A	N/A	31.156	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 1	

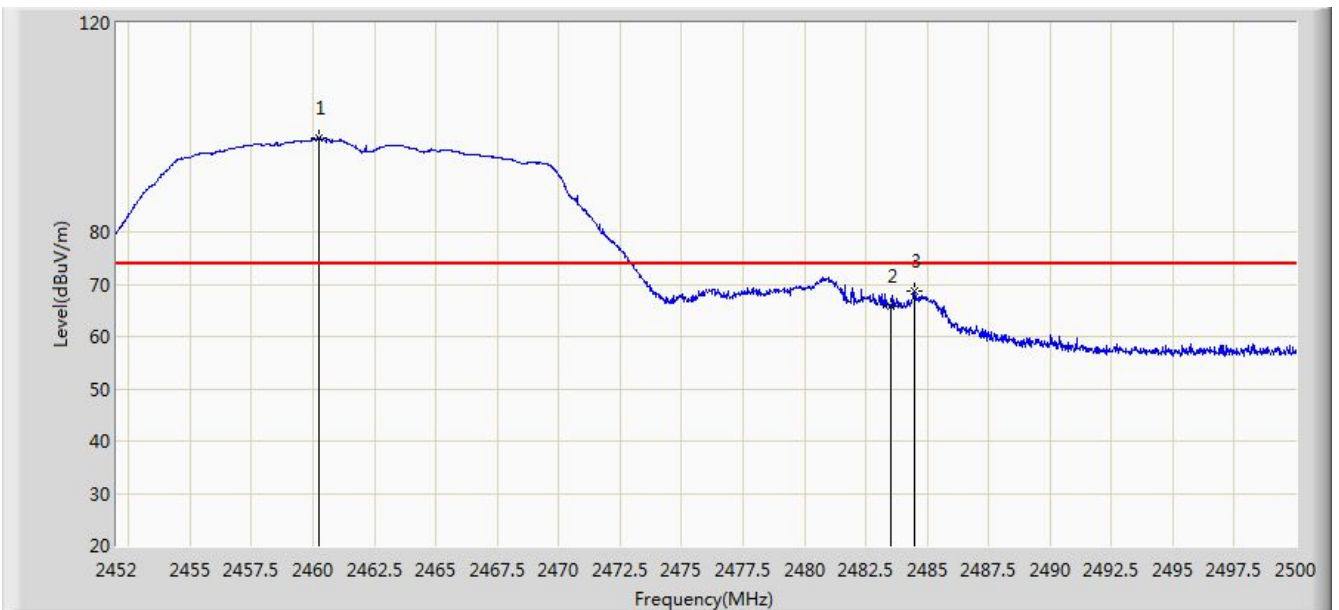

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.256	97.875	66.743	N/A	N/A	31.132	PK
2			2483.500	65.740	34.547	-8.260	74.000	31.194	PK
3			2484.472	68.644	37.448	-5.356	74.000	31.196	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 1	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.640	82.324	51.191	N/A	N/A	31.133	AV
2			2483.500	51.059	19.866	-2.941	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 1	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.520	94.771	63.638	N/A	N/A	31.133	PK
2			2483.500	62.006	30.813	-11.994	74.000	31.194	PK
3			2484.736	64.184	32.987	-9.816	74.000	31.197	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.112	78.741	47.609	N/A	N/A	31.132	AV
2			2483.500	47.170	15.977	-6.830	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 1	

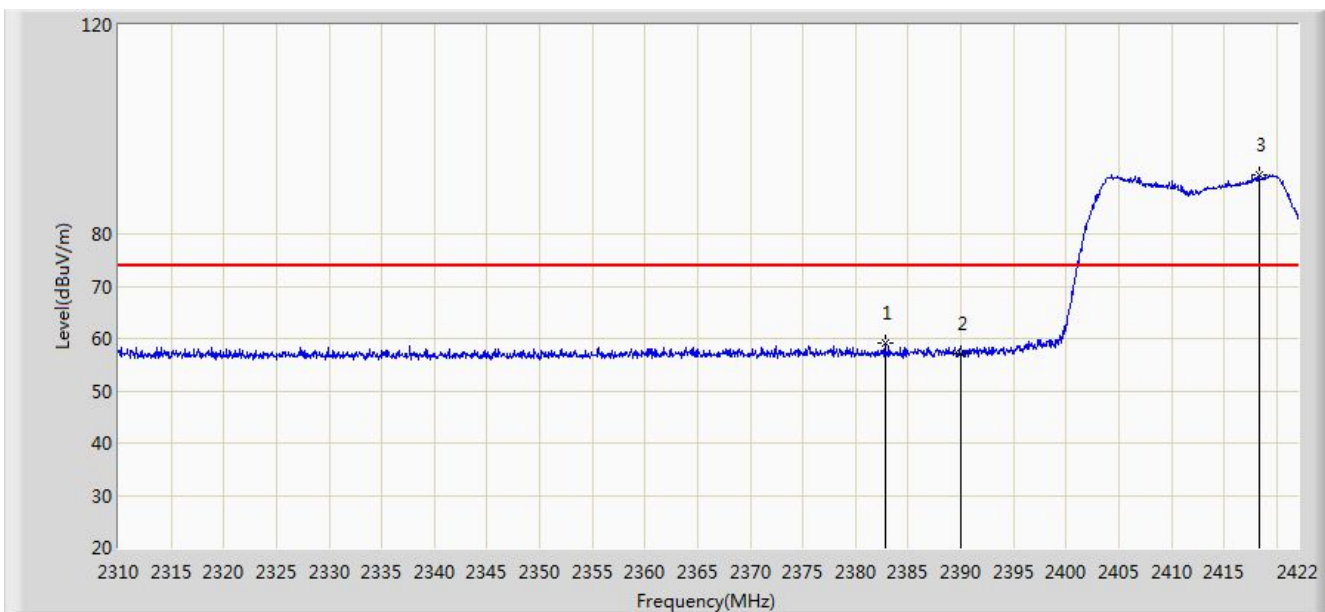


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.800	59.031	27.815	-14.969	74.000	31.216	PK
2			2390.000	57.127	25.924	-16.873	74.000	31.203	PK
3		*	2418.304	91.348	60.189	N/A	N/A	31.159	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 1	

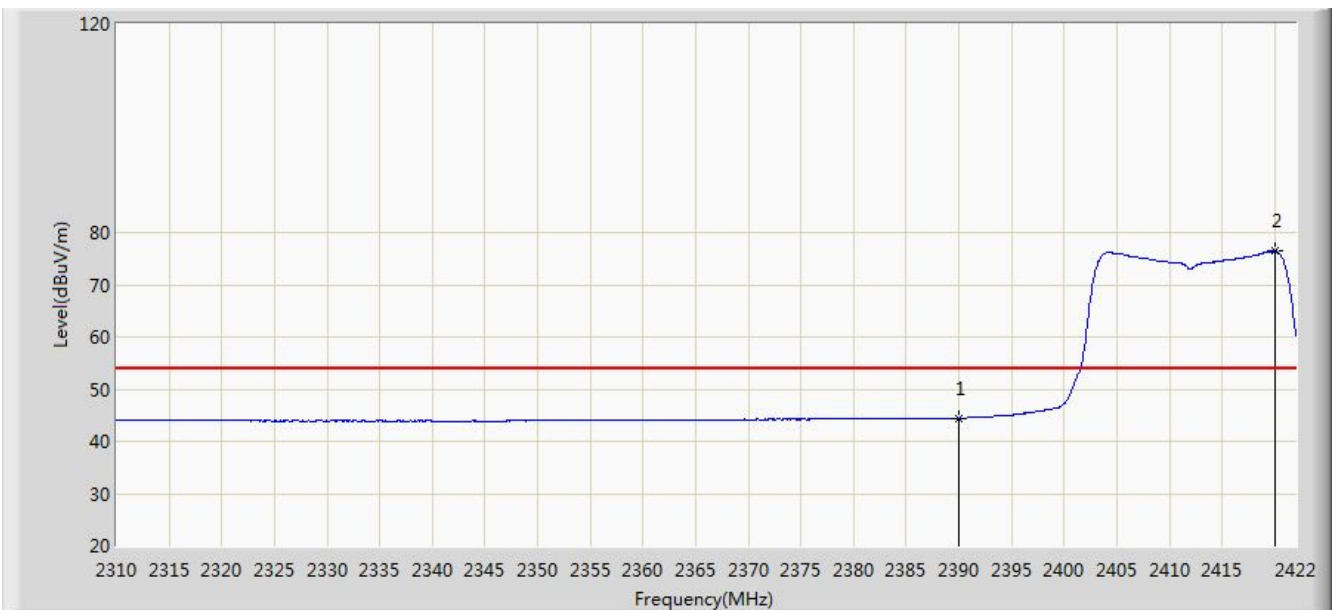


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.399	13.196	-9.601	54.000	31.203	AV
2		*	2420.040	76.442	45.286	N/A	N/A	31.156	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 1	

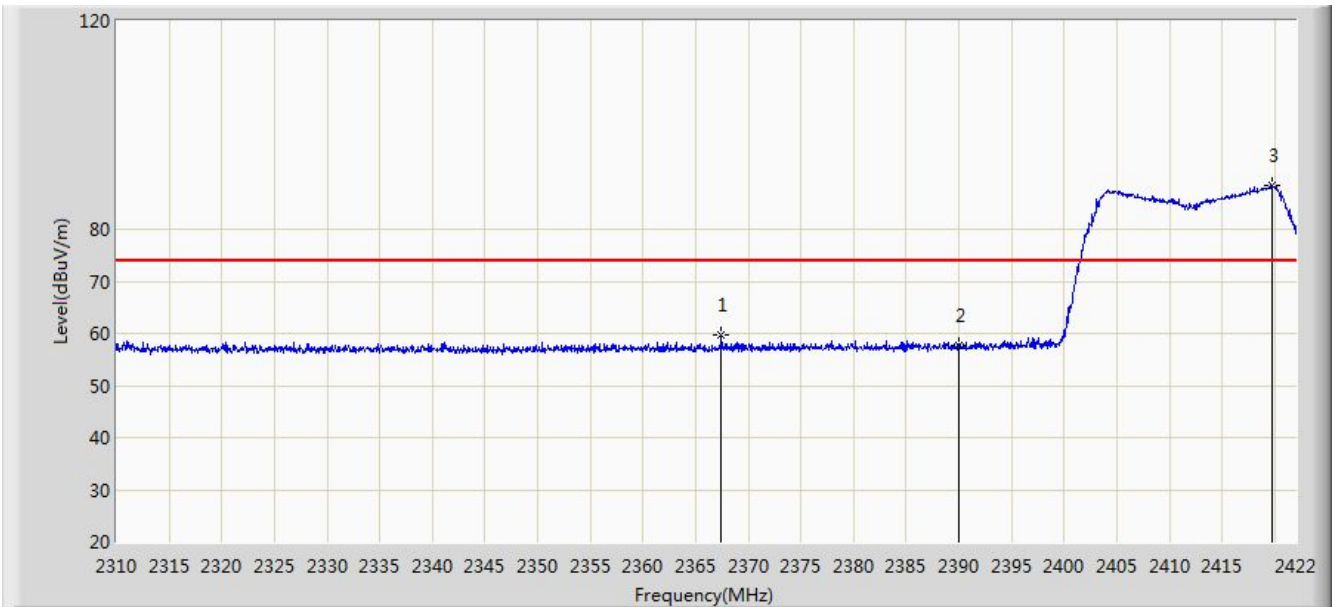


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.456	59.755	28.510	-14.245	74.000	31.244	PK
2			2390.000	57.569	26.366	-16.431	74.000	31.203	PK
3		*	2419.816	88.297	57.141	N/A	N/A	31.156	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 1	

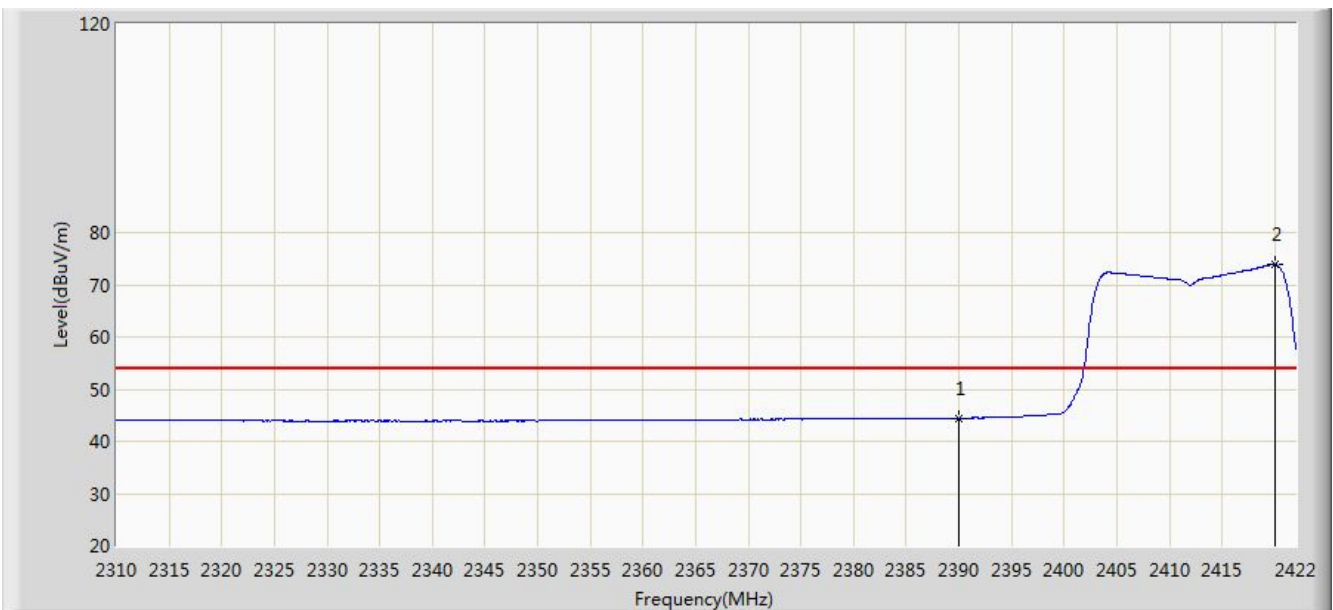


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.402	13.199	-9.598	54.000	31.203	AV
2		*	2420.040	73.845	42.689	N/A	N/A	31.156	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 1	

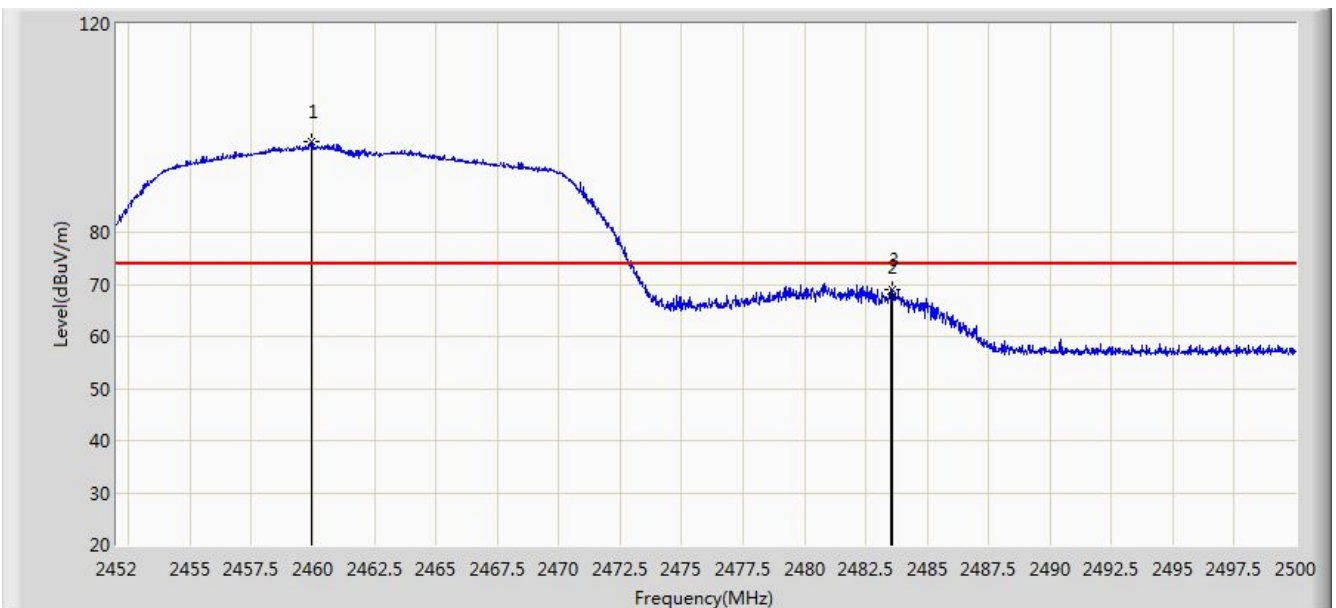


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.920	97.326	66.194	N/A	N/A	31.131	PK
2			2483.500	67.623	36.430	-6.377	74.000	31.194	PK
3			2483.584	69.075	37.881	-4.925	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 1	

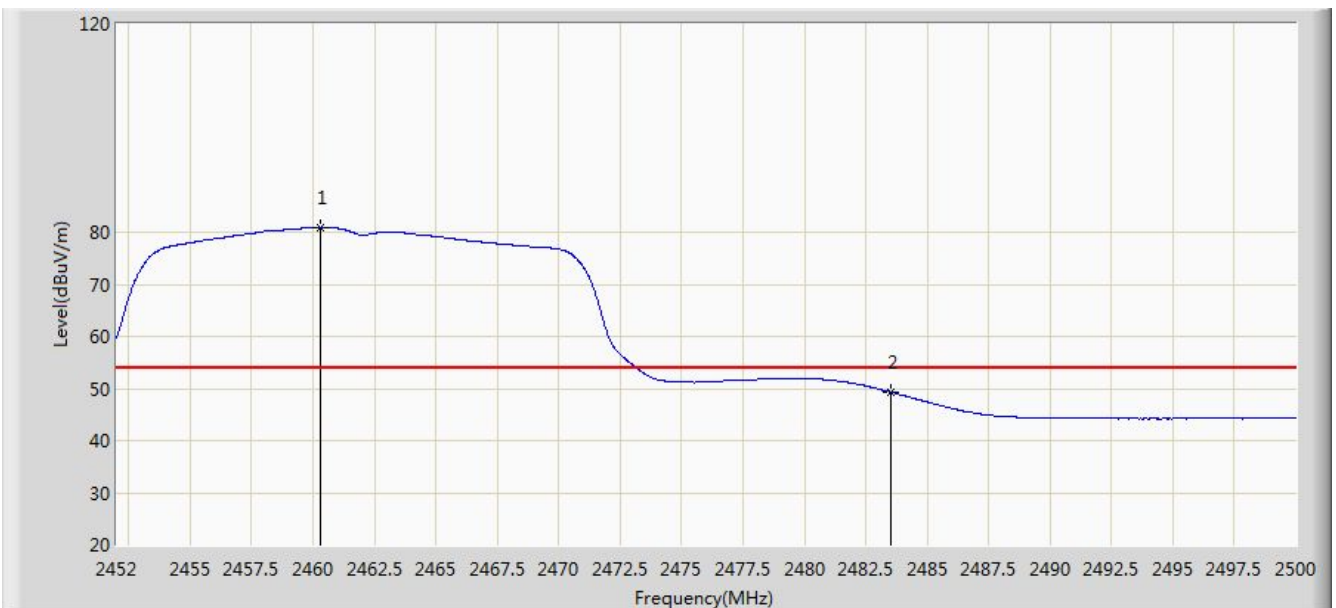


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.328	80.814	49.682	N/A	N/A	31.133	AV
2			2483.500	49.326	18.133	-4.674	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 1	

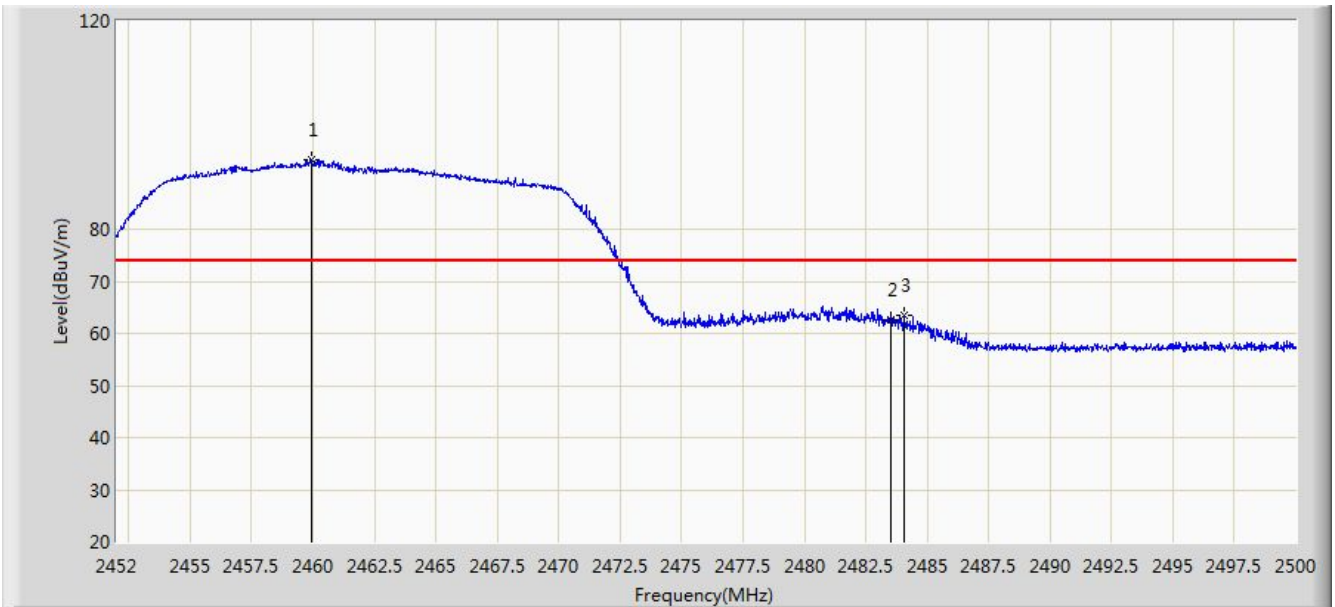

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.944	93.293	62.161	N/A	N/A	31.132	PK
2			2483.500	62.479	31.286	-11.521	74.000	31.194	PK
3			2484.040	63.399	32.204	-10.601	74.000	31.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.496	76.853	45.720	N/A	N/A	31.133	AV
2			2483.500	45.817	14.624	-8.183	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC1	Time: 2016/08/10 - 16:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

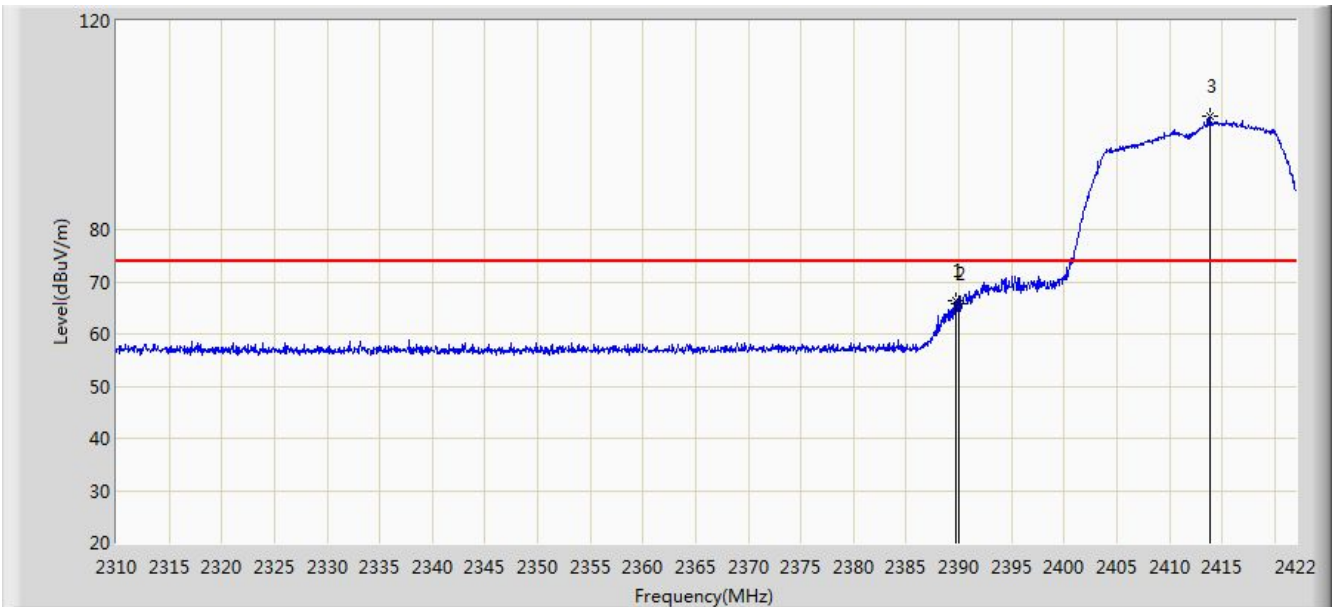


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.744	66.356	35.153	-7.644	74.000	31.203	PK
2			2390.000	65.657	34.454	-8.343	74.000	31.203	PK
3		*	2413.824	101.677	70.511	N/A	N/A	31.167	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

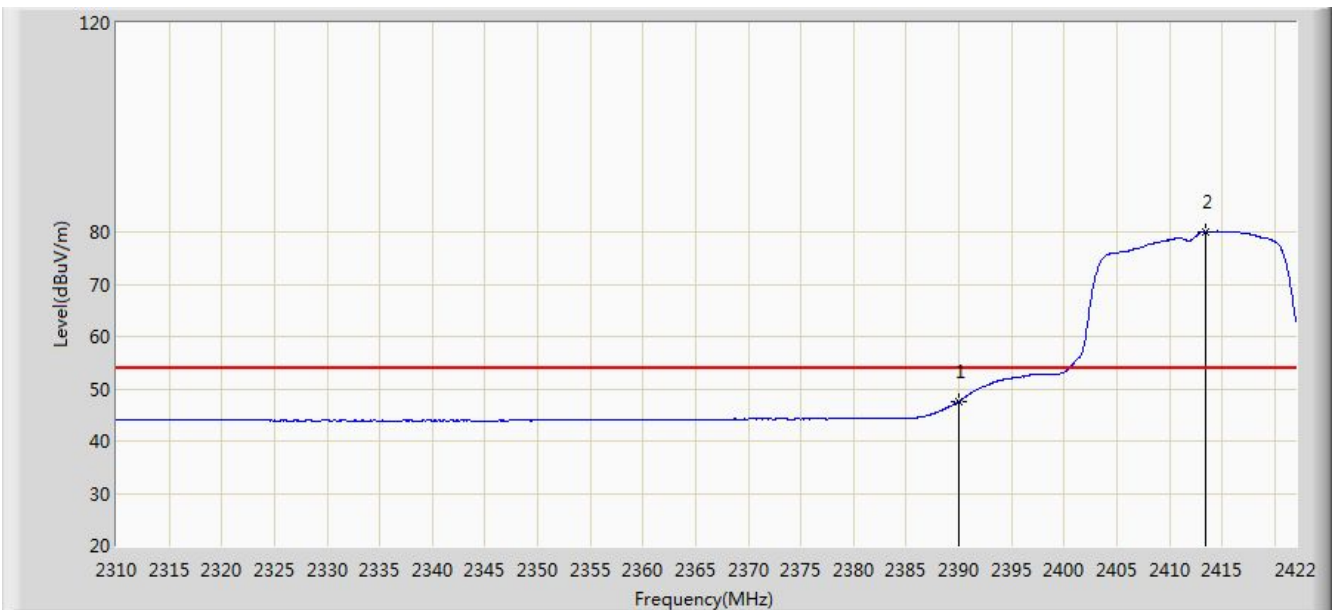


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.572	16.369	-6.428	54.000	31.203	AV
2		*	2413.488	80.106	48.939	N/A	N/A	31.167	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

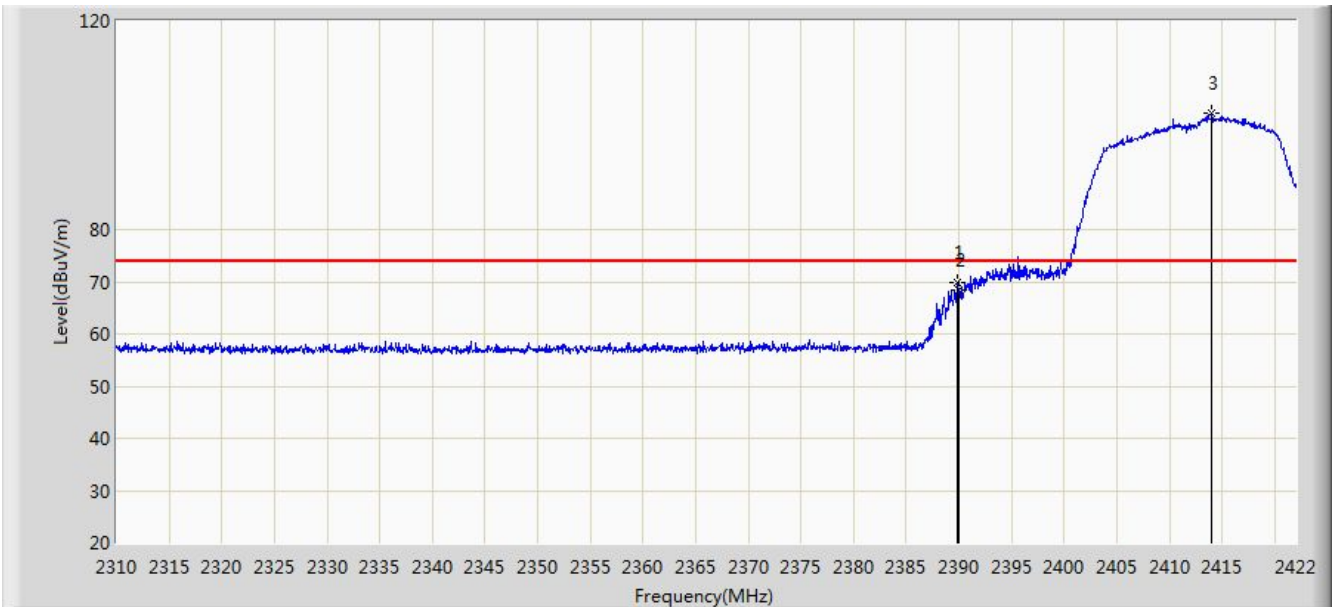


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	69.803	38.600	-4.197	74.000	31.203	PK
2			2390.000	68.326	37.123	-5.674	74.000	31.203	PK
3		*	2413.992	102.234	71.068	N/A	N/A	31.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

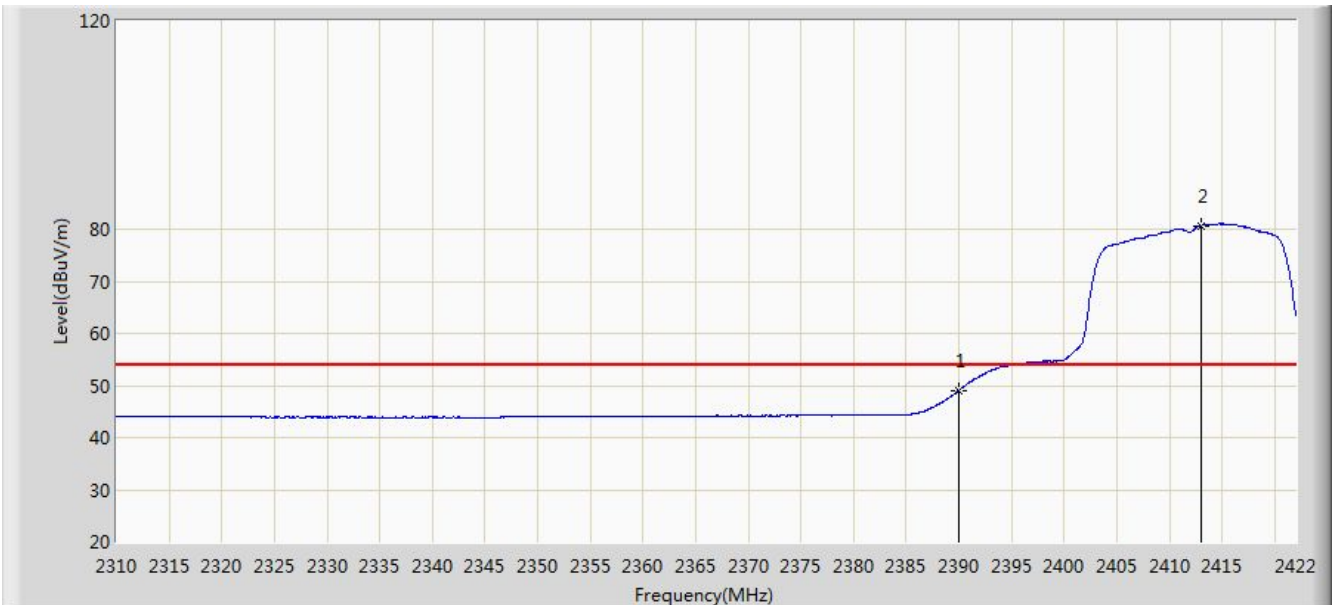


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.044	17.841	-4.956	54.000	31.203	AV
2		*	2412.984	80.721	49.553	N/A	N/A	31.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

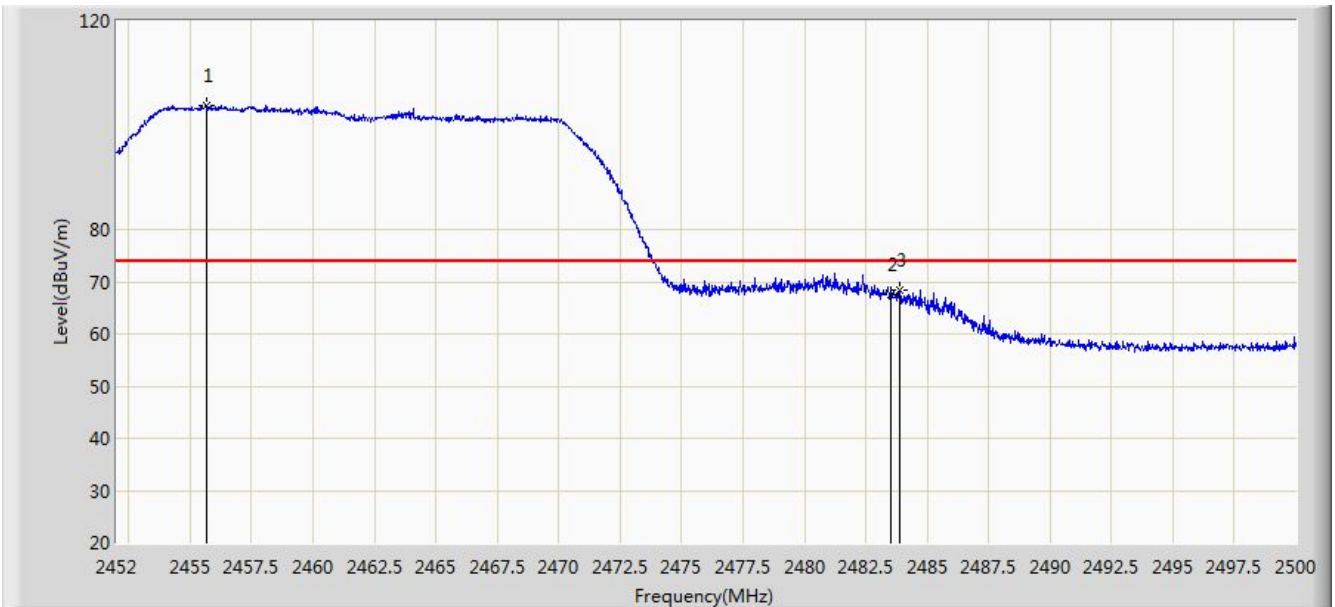

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.696	103.762	72.638	N/A	N/A	31.124	PK
2			2483.500	67.571	36.378	-6.429	74.000	31.194	PK
3			2483.896	68.481	37.287	-5.519	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.280	86.330	55.203	N/A	N/A	31.127	AV
2			2483.500	48.764	17.571	-5.236	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

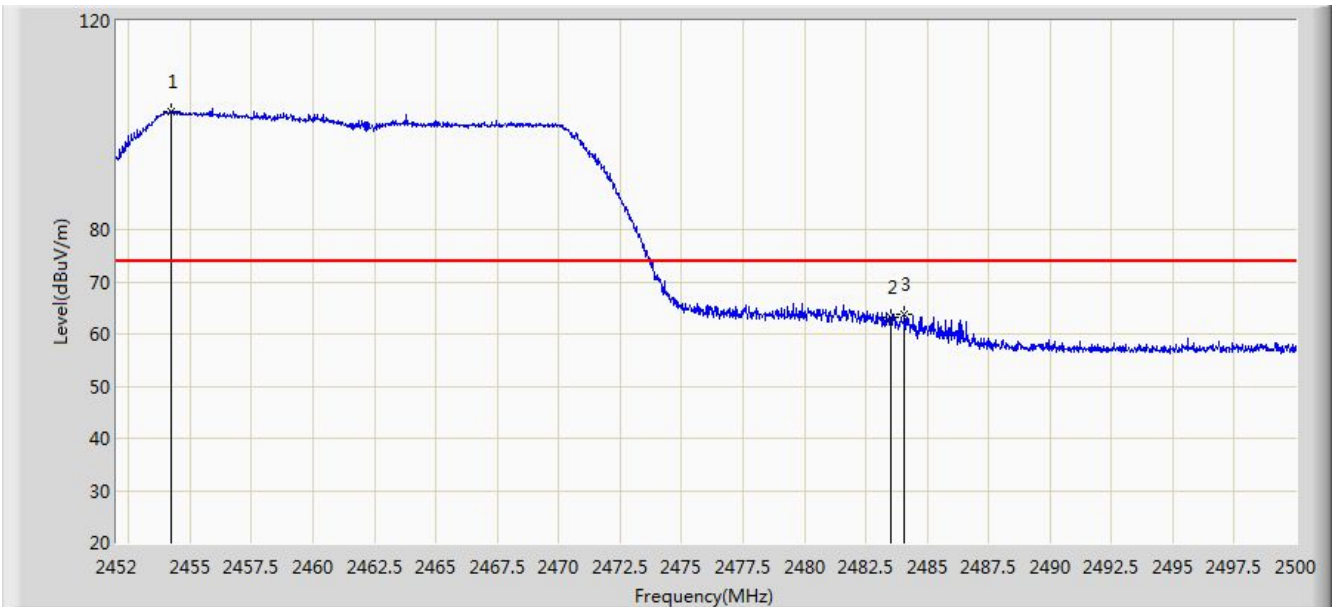

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.208	102.488	71.367	N/A	N/A	31.121	PK
2			2483.500	63.198	32.005	-10.802	74.000	31.194	PK
3			2484.088	63.770	32.575	-10.230	74.000	31.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/08/10 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Deepoon VR All-In-One Headset	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.520	86.045	54.923	N/A	N/A	31.122	AV
2			2483.500	45.673	14.480	-8.327	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

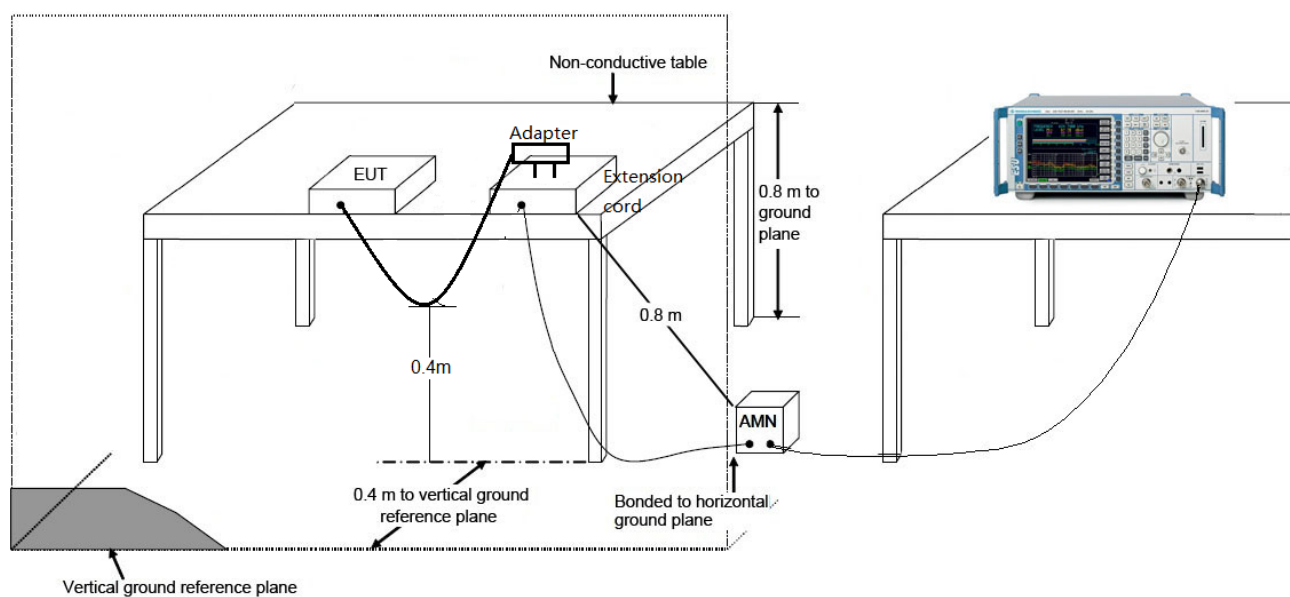

### 7.8.3. Test Result

Site: SR2	Time: 2016/09/01 - 10:05
Limit: FCC_Part15.207_CE_AC Power_ClassB	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Deepoon VR All-In-One Headset	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> Transmit by 802.11g at Channel 2437MHz	

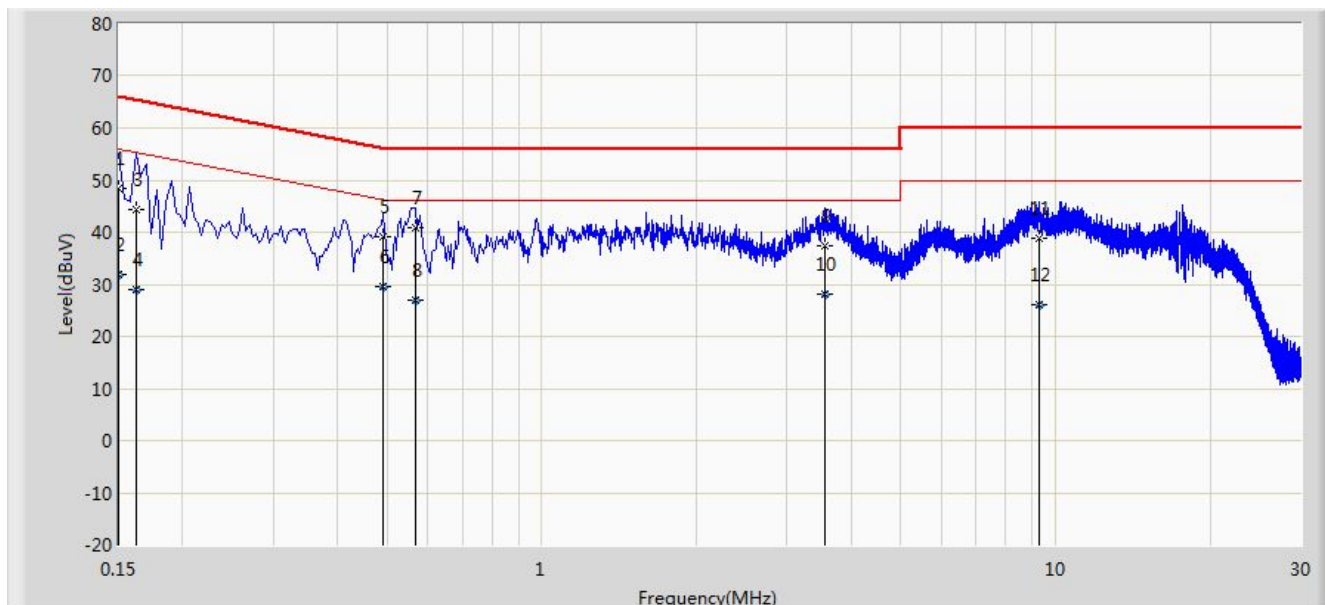


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	48.417	37.248	-17.583	66.000	11.168	QP
2			0.150	31.936	20.768	-24.064	56.000	11.168	AV
3			0.162	44.415	34.318	-20.946	65.361	10.097	QP
4			0.162	29.043	18.946	-26.317	55.361	10.097	AV
5			0.490	39.061	28.903	-17.107	56.168	10.158	QP
6			0.490	29.600	19.442	-16.568	46.168	10.158	AV
7		*	0.566	40.914	30.781	-15.086	56.000	10.132	QP
8			0.566	27.075	16.942	-18.925	46.000	10.132	AV
9			3.566	37.493	27.579	-18.507	56.000	9.914	QP
10			3.566	28.136	18.222	-17.864	46.000	9.914	AV
11			9.306	38.792	28.638	-21.208	60.000	10.154	QP
12			9.306	26.152	15.998	-23.848	50.000	10.154	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2016/09/01 - 10:09
Limit: FCC_Part15.207_CE_AC Power_ClassB	Engineer: Vince Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Deepoon VR All-In-One Headset	Power: AC 120V/60Hz
<b>Worst Case Mode:</b> Transmit by 802.11g at Channel 2437MHz	

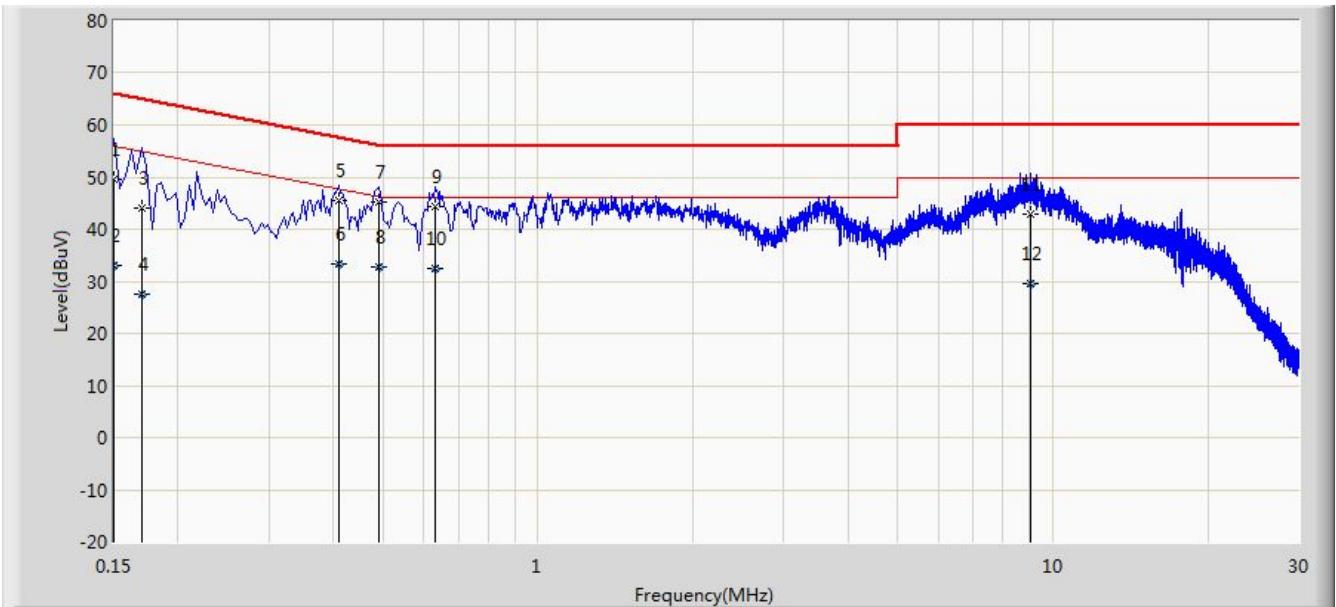

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	49.433	38.291	-16.567	66.000	11.142	QP
2			0.150	33.082	21.940	-22.918	56.000	11.142	AV
3			0.170	44.159	34.095	-20.802	64.960	10.064	QP
4			0.170	27.619	17.555	-27.341	54.960	10.064	AV
5			0.410	45.413	35.293	-12.235	57.648	10.119	QP
6			0.410	33.191	23.072	-14.457	47.648	10.119	AV
7		*	0.490	45.216	35.037	-10.952	56.168	10.179	QP
8			0.490	32.631	22.452	-13.536	46.168	10.179	AV
9			0.630	44.258	34.144	-11.742	56.000	10.115	QP
10			0.630	32.555	22.441	-13.445	46.000	10.115	AV
11			9.062	42.796	32.619	-17.204	60.000	10.178	QP
12			9.062	29.652	19.475	-20.348	50.000	10.178	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Deepoon VR All-In-One Headset Mode Number: DeePoon M2** is in compliance with Part 15C of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_