



**CENTRE OF TESTING SERVICE
INTERNATIONAL**

OPERATE ACCORDING TO ISO/IEC 17025

FCC/IC ID TEST REPORT

TEST REPORT NUMBER : CGZ3110825-00669-E



CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao,
Guangzhou, China.



| | |
|---|--|
| TEST REPORT For FCC ID 47 CFR PART 15 OCT, 2010 RSS-210 Issue 8 | |
| Report Reference No. | CGZ3110825-00669-E |
| Date of issue | 2 Aug~11 Aug 2011 |
| Testing Laboratory Name | CETRE OF TESTING SERVICE CO., LTD. |
| Address | Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China. |
| Testing location/ procedure | Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/> |
| Applicant's name | Datel Design & Development, Inc |
| Address | 33 N . Garden Avenue, Suite 900, Clearwater, FL 33755 |
| Test specification | |
| Standard | 47 CFR PART 15 OCT, 2010, RSS-210 Issue 8, RSS-Gen Issue 3 |
| Test Report Form No. | CTSEMC-1.0 |
| TRF Originator | CENTRE OF TESTING SERVICE CO., LTD |
| Master TRF | Dated 2009-01 |
| CENTRE OF TESTING SERVICE CO., LTD. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the CENTRE OF TESTING SERVICE CO., LTD is acknowledged as copyright owner and source of the material. CENTRE OF TESTING SERVICE CO., LTD takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. | |
| Test item description | Game Talk Pro-2™ Wireless |
| Trade Mark | DATEL |
| Manufacturer | Datel Design & Development, Inc |
| Model/Type reference | AS183 |
| Ratings | DC 3.7V by battery |
| Operating Frequency | 2406MMHz ~2474.00MHz/ GFSK |
| Result | Positive |

Compiled by:

Violet Lee / File administrators

Supervised by:

Tom Xiao / Technique principal

Approved by:

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



FCC ID -- T E S T R E P O R T

| | | |
|--------------------------|-------------------------------------|-------------------------------------|
| Test Report No. : | CGZ3110722-00585&00583-E | <u>12 Aug 2011</u> Date of issue |
|--------------------------|-------------------------------------|-------------------------------------|

| | |
|--------------------------------|---|
| Type / Model..... | AS183 |
| EUT..... | Game Talk Pro-2™ Wireless |
| Applicant..... | Datel Design & Development, Inc. |
| Address..... | 33 N. Garden Avenue Suite 900 Clearwater, FL 33755 United States. |
| Telephone..... | +(727) 431-0651 |
| Fax..... | / |
| Contact..... | Kenneth Tarolla |
| Manufacturer..... | DATEL DIRECT LIMITED |
| Address..... | Stafford Road,Stone,staffordshire,UK,ST15,0DG |
| Telephone..... | / |
| Fax..... | / |
| Contact..... | Emma.murray |
| Test report holder..... | Datel Design & Development, Inc. |
| Address..... | 33 N. Garden Avenue Suite 900 Clearwater, FL 33755 United States. |
| Telephone..... | +(727) 431-0651 |
| Fax..... | / |
| Contact..... | Kenneth Tarolla |

Test Result according to the standards on page 3: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



TABLE OF CONTENTS

| Description | Page |
|---|------|
| 1.TEST STANDARDS..... | 5 |
| 2.SUMMARY..... | 5 |
| 2.1 GENERAL REMARKS..... | 5 |
| 2.2 FINAL ASSESSMENT | 5 |
| 3.EQUIPMENT UNDER TEST | 5 |
| 3.1 POWER SUPPLY SYSTEM UTILISED | 5 |
| 3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT) | 5 |
| 3.3 EUT OPERATION MODE | 5 |
| 3.4 EUT CONFIGURATION | 6 |
| 4.TEST ENVIRONMENT..... | 7 |
| 4.1 ADDRESS OF THE TEST LABORATORY | 7 |
| 4.2 TEST FACILITY | 7 |
| 4.3 ENVIRONMENTAL CONDITIONS | 7 |
| 4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT | 7 |
| 4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY | 7 |
| 4.6 MEASUREMENT UNCERTAINTY..... | 8 |
| 5.SUMMARY OF STANDARDS AND RESULTS..... | 8 |
| 5.1.DESCRPTION OF STANDARDS AND RESULTS | 8 |
| 6.POWER LINE CONDUCTED EMISSION TEST | 9 |
| 6.1.TEST EQUIPMENT..... | 9 |
| 6.2. BLOCK DIAGRAM OF TEST SETUP | 9 |
| 6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS | 9 |
| 6.4.TEST PROCEDURE | 9 |
| 6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS | 9 |
| 7.RADIATED DISTURBANCE (ELECTRIC FIELD) | 12 |
| 7.1.TEST EQUIPMENT..... | 12 |
| 7.2.BLOCK DIAGRAM OF TEST SETUP | 12 |
| 7.3.RADIATED EMISSION LIMIT : | 13 |
| 7.4.TEST PROCEDURE | 14 |
| 7.5.RADIATED EMISSION TEST RESULTS | 14 |
| 8. RECEIVER SPURIOUS EMISSION (ELECTRIC FIELD) | 24 |
| 8.1.TEST EQUIPMENT..... | 24 |
| 8.2.BLOCK DIAGRAM OF TEST SETUP | 24 |
| 8.3. RECEIVER SPURIOUS EMISSION LIMIT STANDARD: | 25 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | |
|--|----|
| 8.4. TEST PROCEDURE | 25 |
| 8.5. RECEIVER SPURIOUS EMISSION TEST RESULTS | 26 |
| 9. BAND EDGE COMPLIANCE TEST..... | 33 |
| 9.1. TEST EQUIPMENT..... | 33 |
| 9.2. TEST INFORMATION..... | 33 |
| 9.3. TEST PROCEDURE..... | 33 |
| 9.4. TEST RESULTS | 33 |
| 10. 99% BANDWIDTH | 38 |
| 10.1 TEST PROCEDURE..... | 38 |
| 10.2. TEST EQUIPMENT..... | 38 |
| 10.3. TEST INFORMATION..... | 38 |
| 10.4. TEST RESULTS | 38 |
| 11. DEVIATION TO TEST SPECIFICATIONS | 40 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



1. TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2010
- RSS-210 Issue 8
- RSS-Gen Issue 3
- ANSI C63.4-2009

2. SUMMARY

2.1 GENERAL REMARKS

| | |
|--------------------------------|-------------|
| Date of receipt of test sample | 11 Jul 2011 |
| | |
| Testing commenced on | 02 Aug 2011 |
| | |
| Testing concluded on | 11 Aug 2011 |

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

- - fulfilled.
- - **not** fulfilled.

The equipment under test

- - fulfils the FCC requirements cited on page 3.
- - **does not** fulfil the FCC requirements cited on page 3.

3. EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ DC 3.7V For TX, AC 120V For RX(XBOX)

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- - Standby
- TX- Y position
- TX- Zposition
- TX- X position
- RX Normal link

Operation mode 1: TX-X Position Low (2406MHz) , TX-X Position Middle (2442MHz) ,
TX-X Position High (2474MHz)

Operation mode 2: RX Normal Link

Note: TX -X position and RX Normal Link of EUT is the worst case, so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



3.4 EUT configuration

3.4.1. Description of configuration (EUT)

| | | |
|-----------------------|---|---|
| Description | : | Game Talk Pro-2™ Wireless |
| Model Number | : | AS183 |
| Operation frequency | : | 2406~ 2474 MHz ISM Band |
| Radio Technology | : | GFSK |
| Modulation Technology | : | GFSK modulation |
| Antenna | : | Integral antenna, met requirement of FCC 15.203 |

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

4. TEST ENVIRONMENT

4.1 Address of the test laboratory

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 21, 2009.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|------------|
| Temperature: | 15~35 ° C |
| Humidity: | 25~75 % |
| Atmospheric pressure: | 86~106 kPa |

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- - The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.6 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|-------------------------|-----------------|---------------------|------|
| Conduction disturbance | 150kHz~30MHz | $\pm 1.22\text{dB}$ | (1) |
| Power disturbance | 30MHz~300MHz | $\pm 1.38\text{dB}$ | (1) |
| Radiation emission (3m) | 30MHz~300MHz | $\pm 3.14\text{dB}$ | (1) |
| | 300MHz~1000MHz | $\pm 3.18\text{dB}$ | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

| EMISSION | | |
|--|--|---------|
| Description of Test Item | Standard | Results |
| Conducted Emission Test | RSS-Gen:7.2.4 FCC Part 15 : 15.207 ANSI C63.4-2009 | PASSED |
| Radiated Emission Test | RSS-Gen:7.2 RSS-210 A2.9 FCC Part 15 C: 15.249 FCC Part 15 : 109 ANSI C63.4-2009 | PASSED |
| Receiver Spurious Emission | RSS-Gen:7.2 RSS-210 A2.9 FCC Part 15 C: 15.249 FCC Part 15 : 109 ANSI C63.4-2009 | PASSED |
| Band Edge Compliance Test | RSS-210 Annex 8 FCC Part 15 C: 15.249 ANSI C63.4-2009 | PASSED |
| 99% Bandwidth | RSS-210 Annex 8 RSS-Gen 4.6.1 | PASSED |
| N/A is an abbreviation for Not Applicable. | | |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

6. Power Line Conducted Emission Test

6.1. Test Equipment

| Conducted Disturbance | | | | | |
|-----------------------|-------------------|-----------------|-----------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESHS10 | 842884/012 | 2010/12 |
| 2 | Artificial Mains | ROHDE & SCHWARZ | ESH3-Z5 | 832479/025 | 2010/12 |
| 3 | Artificial Mains | ROHDE & SCHWARZ | ESH3-Z5 | 832479/026 | 2010/12 |
| 4 | Pulse Limiter | ROHDE & SCHWARZ | ESHSZ2 | 100301 | 2010/12 |
| 5 | EMI Test Software | ROHDE & SCHWARZ | ESK1 | N/A | 2010/12 |

6.2. Block Diagram of Test Setup

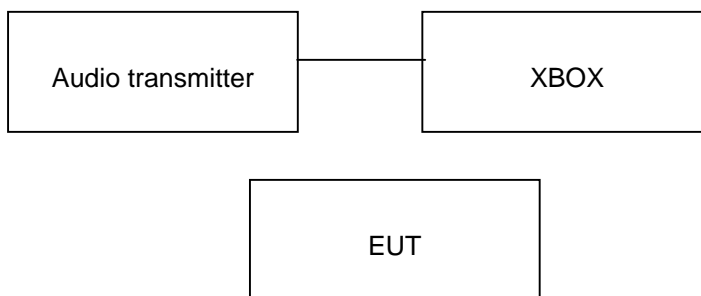

(EUT: Game Talk Pro-2™ Wireless)

6.3. Power Line Conducted Emission Test Limits

Standard:RSS-Gen:7.2.4,FCC Part 15 : 15.207,ANSI C63.4-2009

| Frequency | Maximum RF Line Voltage | |
|-----------------|----------------------------|-------------------------|
| | Quasi-Peak Level dB(μV) | Average Level dB(μV) |
| 150kHz ~ 500kHz | 66 ~ 56* | 56 ~ 46* |
| 500kHz ~ 5MHz | 56 | 46 |
| 5MHz ~ 30MHz | 60 | 50 |

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.4. Test Procedure

The XBOX Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

Passed
Test Result

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|------------------------------|
| Channel: | RX Normal Link Mode | Result: | ■ - passed □ - not passed |
| Test point: | L1 | | |
| Frequency range: | 0.15MHz~30MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX AC 120V for RX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

80.0 dBuV

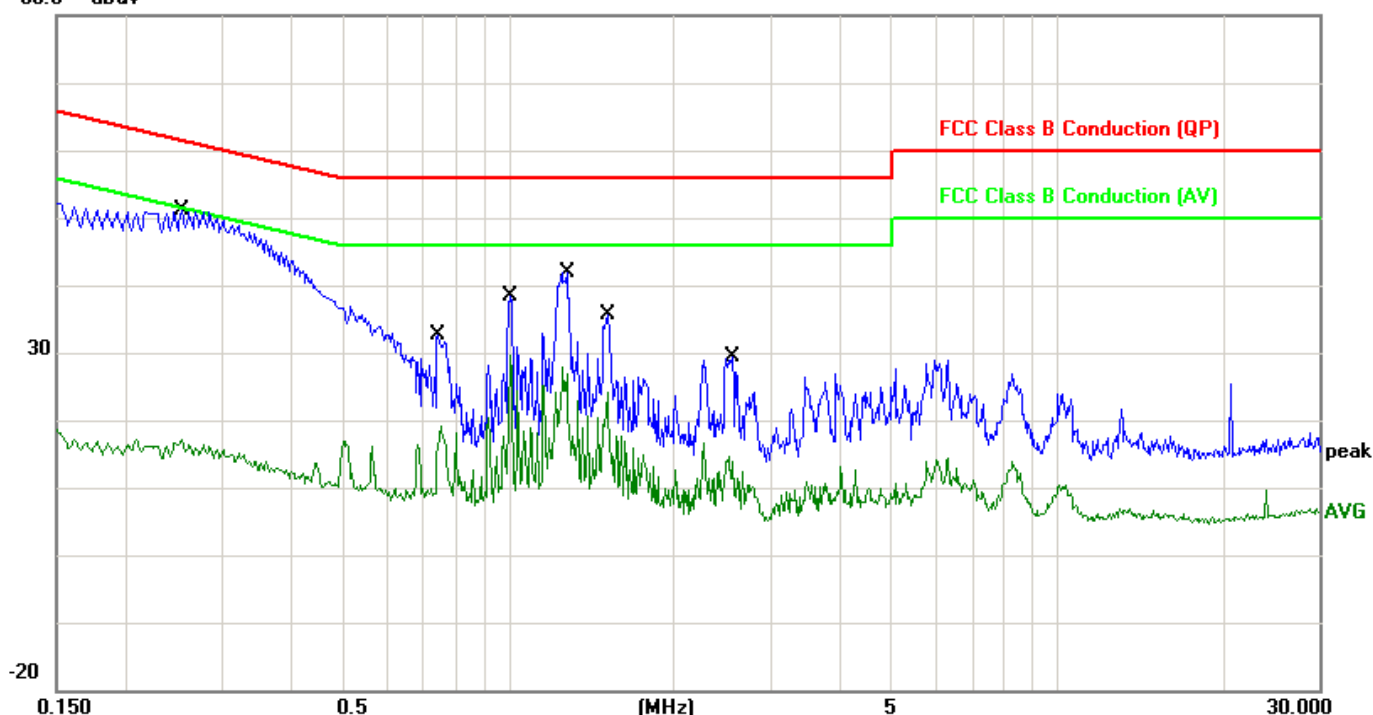

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|
| 1 | 0.2540 | 9.99 | 32.87 | 42.86 | 61.63 | -18.77 | QP |
| 2 | 0.2540 | 9.99 | 6.66 | 16.65 | 51.63 | -34.98 | AVG |
| 3 | 0.7460 | 10.10 | 19.21 | 29.31 | 56.00 | -26.69 | QP |
| 4 | 0.7460 | 10.10 | 5.07 | 15.17 | 46.00 | -30.83 | AVG |
| 5 | 1.0100 | 10.12 | 26.32 | 36.44 | 56.00 | -19.56 | QP |
| 6 | 1.0100 | 10.12 | 15.24 | 25.36 | 46.00 | -20.64 | AVG |
| 7 | 1.2780 | 10.11 | 26.36 | 36.47 | 56.00 | -19.53 | QP |
| 8 | 1.2780 | 10.11 | 13.94 | 24.05 | 46.00 | -21.95 | AVG |
| 9 | 1.5140 | 10.10 | 24.08 | 34.18 | 56.00 | -21.82 | QP |
| 10 | 1.5140 | 10.10 | 13.66 | 23.76 | 46.00 | -22.24 | AVG |
| 11 | 2.5540 | 10.05 | 12.72 | 22.77 | 56.00 | -33.23 | QP |
| 12 | 2.5540 | 10.05 | 3.32 | 13.37 | 46.00 | -32.63 | AVG |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|------------------------------|
| Channel: | RX Normal link Mode | Result: | ■ - passed □ - not passed |
| Test point: | L2 | | |
| Frequency range: | 0.15MHz~30MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX AC 120V for RX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

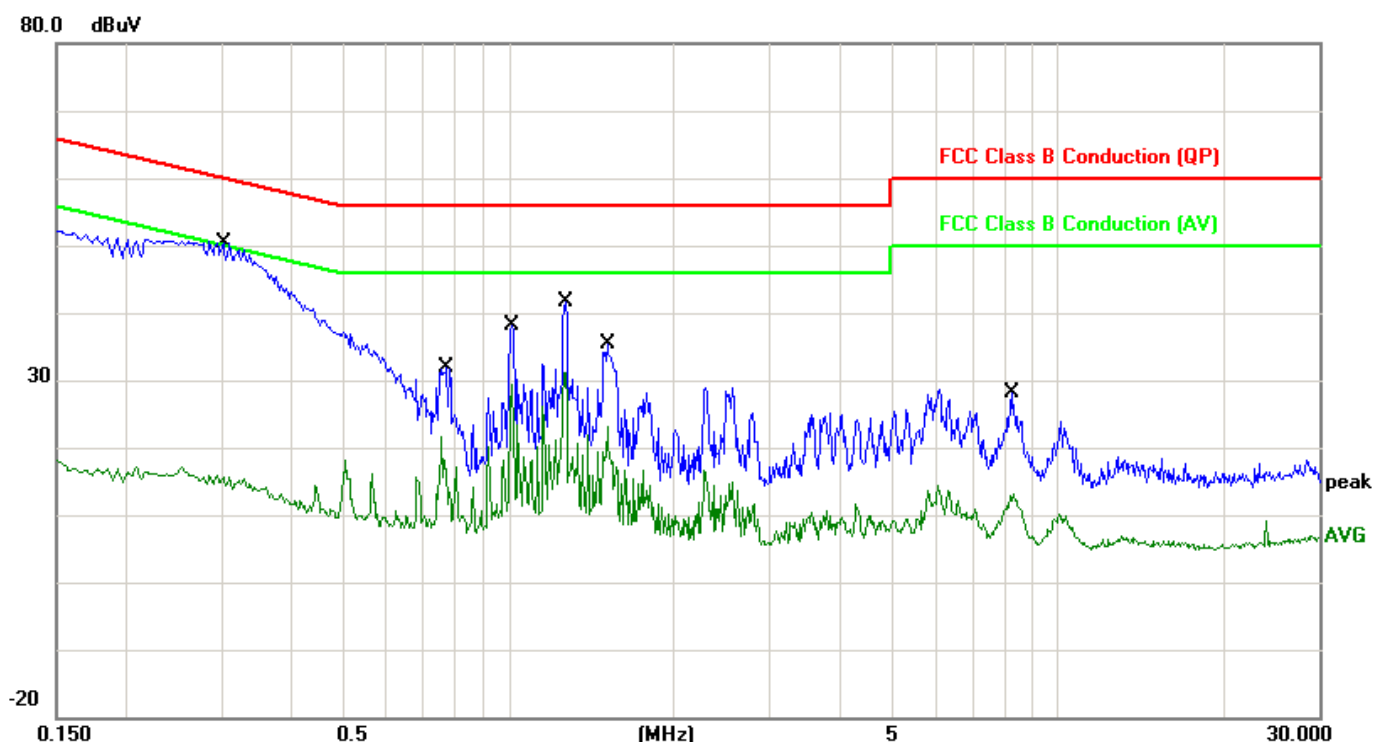

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|
| 1 | 0.3020 | 9.99 | 32.65 | 42.64 | 60.19 | -17.55 | QP |
| 2 | 0.3020 | 9.99 | 4.94 | 14.93 | 50.19 | -35.26 | AVG |
| 3 | 0.7740 | 10.10 | 18.78 | 28.88 | 56.00 | -27.12 | QP |
| 4 | 0.7740 | 10.10 | 4.50 | 14.60 | 46.00 | -31.40 | AVG |
| 5 | 1.0180 | 10.12 | 26.30 | 36.42 | 56.00 | -19.58 | QP |
| 6 | 1.0180 | 10.12 | 15.24 | 25.36 | 46.00 | -20.64 | AVG |
| 7 | 1.2700 | 10.11 | 28.44 | 38.55 | 56.00 | -17.45 | QP |
| 8 | 1.2700 | 10.11 | 16.36 | 26.47 | 46.00 | -19.53 | AVG |
| 9 | 1.5180 | 10.10 | 24.51 | 34.61 | 56.00 | -21.39 | QP |
| 10 | 1.5180 | 10.10 | 13.68 | 23.78 | 46.00 | -22.22 | AVG |
| 11 | 8.2380 | 10.13 | 9.20 | 19.33 | 60.00 | -40.67 | QP |
| 12 | 8.2380 | 10.13 | 0.92 | 11.05 | 50.00 | -38.95 | AVG |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



7. Radiated disturbance (electric field)

7.1. Test Equipment

| Radiated disturbance (electric field) | | | | | |
|---------------------------------------|-------------------|-----------------|------------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 100868 | 2010/12 |
| 2 | Biconical Antenna | ROHDE & SCHWARZ | HK116 | 100221 | 2010/12 |
| 3 | Log per Antenna | ROHDE & SCHWARZ | HL223 | 100226 | 2010/12 |
| 4 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2010/12 |
| 5 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2010/12 |
| 6 | Loop Antenna | A.R.A | PLA-1030/B | 1030 | 2010/12 |


7.2. Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

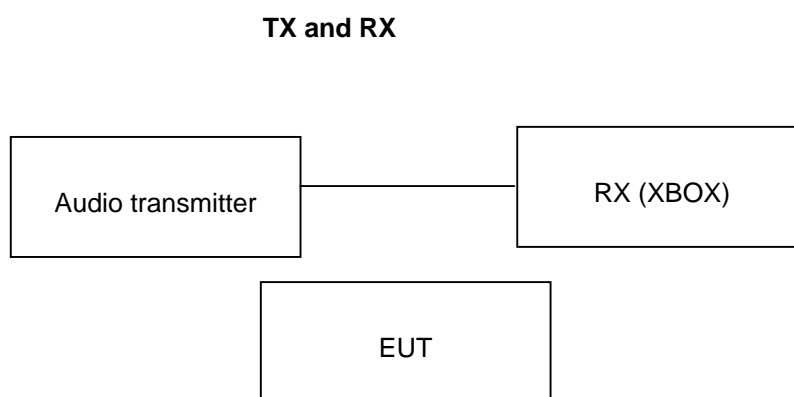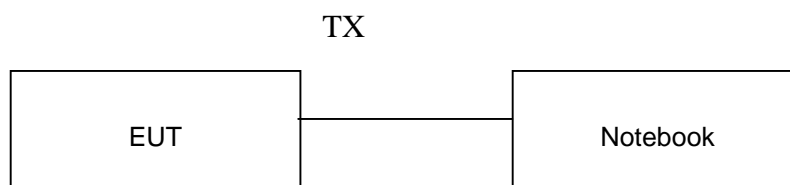

(EUT: Game Talk Pro-2™ Wireless)

7.2.2 Anechoic Chamber Setup Diagram

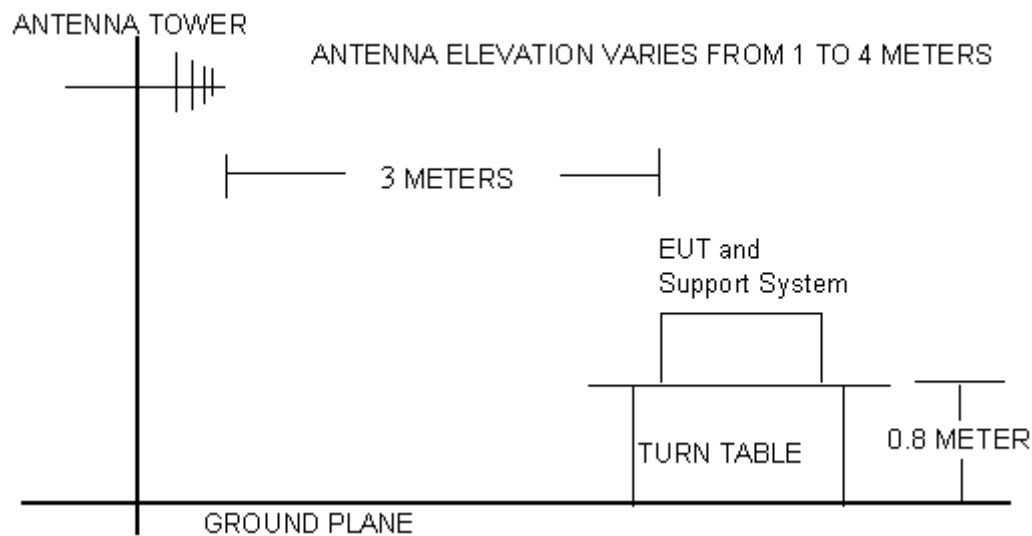

7.3.Radiated Emission Limit :

Standard:FCC 15.249 , FCC 15.209, RSS-Gen:7.2,RSS-210 A2.9

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental Frequency (MHz) | Field Strength of Fundamental (mV/m) | Field Strength of Harmonics (µV/m) |
|-----------------------------|--------------------------------------|------------------------------------|
| 902-928 | 50 | 500 |
| 2400-2483.5 | 50 | 500 |
| 5725-5875 | 50 | 500 |
| 24000-24250 | 250 | 2500 |

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|---------------|-----------------|---|----------|
| | | µV/m | dB(µV)/m |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average) | |

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 4MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 4MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5.Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated.

Please see the following pages.



| | | | |
|------------------|---------------------|---------|--|
| Test Mode: | TX -X Position Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Frequency range: | 9KHz~30MHz | | <input type="checkbox"/> - not passed |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Det. |
|-----|-----------------|---------------|----------------|----------------|------|
| 1 | 0.0595 | 18.28 | 19.44 | 37.72 | peak |
| 2 | 0.1500 | 18.51 | 15.54 | 34.05 | peak |
| 3 | 0.5100 | 18.54 | 15.97 | 34.51 | peak |
| 4 | 1.5220 | 18.65 | 13.99 | 32.64 | peak |
| 5 | 2.7980 | 18.78 | 17.15 | 35.93 | peak |
| 6 | 28.6220 | 21.59 | 6.74 | 28.33 | peak |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|--|
| Channel: | TX -X Position Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Horizontal | | <input type="checkbox"/> - not passed |
| Frequency range: | 30MHz~1000MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development,Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

80.0 dBuV/m

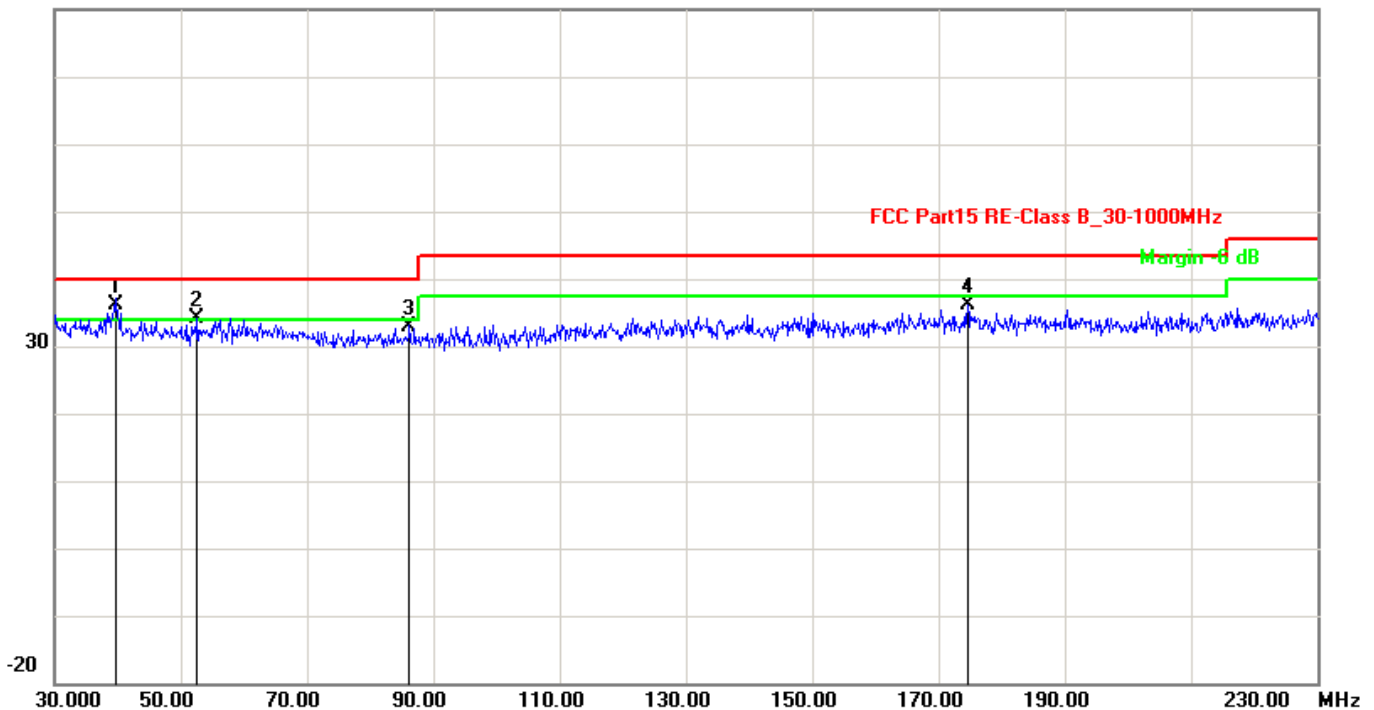

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 39.6000 | 5.73 | 30.35 | 36.08 | 40.00 | -3.92 | QP |
| 2 | 52.6000 | 5.30 | 28.90 | 34.20 | 40.00 | -5.80 | QP |
| 3 | 86.2000 | 4.81 | 28.19 | 33.00 | 40.00 | -7.00 | QP |
| 4 | 174.6000 | 7.42 | 28.74 | 36.16 | 43.50 | -7.34 | QP |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

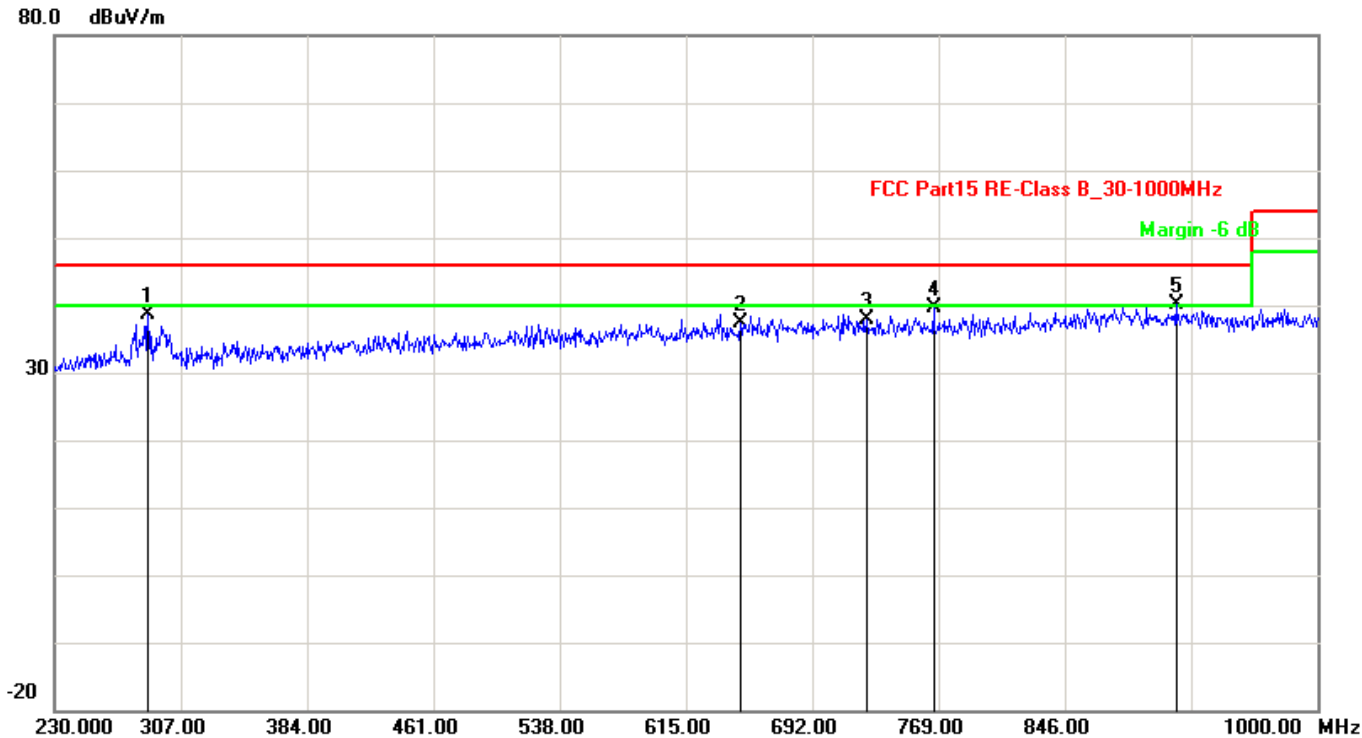

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 286.9800 | 6.17 | 32.39 | 38.56 | 46.00 | -7.44 | QP |
| 2 | 648.1100 | 9.75 | 27.73 | 37.48 | 46.00 | -8.52 | QP |
| 3 | 725.1100 | 10.25 | 27.56 | 37.81 | 46.00 | -8.19 | QP |
| 4 | 765.9200 | 10.25 | 29.36 | 39.61 | 46.00 | -6.39 | QP |
| 5 | 913.7600 | 10.50 | 29.73 | 40.23 | 46.00 | -5.77 | QP |

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------------------|---------|--|
| Channel: | TX -X Position Mode Low 2406MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Horizontal | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2406.000 | 17.83 | 73.52 | 91.35 | 114.00 | -22.65 | peak |
| 2 | 2406.000 | 17.83 | 64.79 | 82.62 | 94.00 | -11.38 | AVG |
| 3 | 1484.970 | 14.58 | 34.16 | 48.74 | 74.00 | -25.26 | peak |
| 4 | 4812.000 | 22.94 | 23.50 | 46.44 | 54.00 | -7.56 | AVG |
| 5 | 6444.890 | 24.98 | 20.73 | 45.71 | 54.00 | -8.29 | peak |
| 6 | 8098.196 | 26.90 | 19.14 | 46.04 | 54.00 | -7.96 | AVG |
| 7 | 9751.503 | 28.76 | 18.00 | 46.76 | 54.00 | -7.24 | peak |
| 8 | 11360.721 | 29.00 | 19.65 | 48.65 | 54.00 | -5.35 | AVG |
| 9 | 11845.691 | 29.93 | 18.99 | 48.92 | 54.00 | -5.08 | AVG |

Remark: Other frequency mini margin all >10 dB of Limit

- Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

| | | | |
|------------------|------------------------------------|---------|--|
| Channel: | TX -X Position Mode Middle 2442MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Horizontal | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2442.000 | 17.97 | 73.99 | 91.96 | 114.00 | -22.04 | peak |
| 2 | 2442.000 | 17.97 | 64.40 | 82.37 | 94.00 | -11.63 | AVG |
| 3 | 1066.132 | 12.74 | 36.99 | 49.73 | 74.00 | -24.27 | peak |
| 4 | 2484.039 | 18.14 | 28.35 | 46.49 | 74.00 | -7.51 | AVG |
| 5 | 5981.964 | 24.80 | 19.51 | 44.31 | 74.00 | -9.69 | AVG |
| 6 | 8076.152 | 26.89 | 19.05 | 45.94 | 74.00 | -8.06 | AVG |
| 7 | 8671.343 | 27.05 | 22.73 | 49.78 | 74.00 | -4.22 | AVG |
| 8 | 10104.208 | 29.19 | 17.04 | 46.23 | 74.00 | -7.77 | AVG |
| 9 | 11845.691 | 29.93 | 17.79 | 47.72 | 74.00 | -6.28 | AVG |

Remark: Other frequency mini margin all >10 dB of Limit

- Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|----------------------------------|---------|--|
| Channel: | TX -X Position Mode High 2474MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Horizontal | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2474.000 | 18.11 | 74.01 | 92.12 | 114.00 | -21.88 | peak |
| 2 | 2474.000 | 18.11 | 65.57 | 83.68 | 94.00 | -10.32 | AVG |
| 3 | 1220.441 | 13.42 | 36.27 | 49.69 | 74.00 | -24.31 | peak |
| 4 | 3623.246 | 20.88 | 23.48 | 44.36 | 54.00 | -9.64 | AVG |
| 5 | 4950.115 | 23.24 | 23.86 | 47.10 | 54.00 | -6.90 | AVG |
| 6 | 6621.242 | 25.04 | 19.97 | 45.01 | 54.00 | -8.99 | AVG |
| 7 | 10148.297 | 29.14 | 19.09 | 48.23 | 54.00 | -5.77 | AVG |
| 8 | 11625.251 | 29.50 | 19.38 | 48.88 | 54.00 | -5.12 | AVG |

Remark: Other frequency mini margin all >10 dB of Limit

- Note: 1. Emission level=Read level + Factor
 2. Factor=Antenna factor + Cable loss
 3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------------|---------|--|
| Channel: | TX -X Position Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 30-230MHz and 230-1000MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development,Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

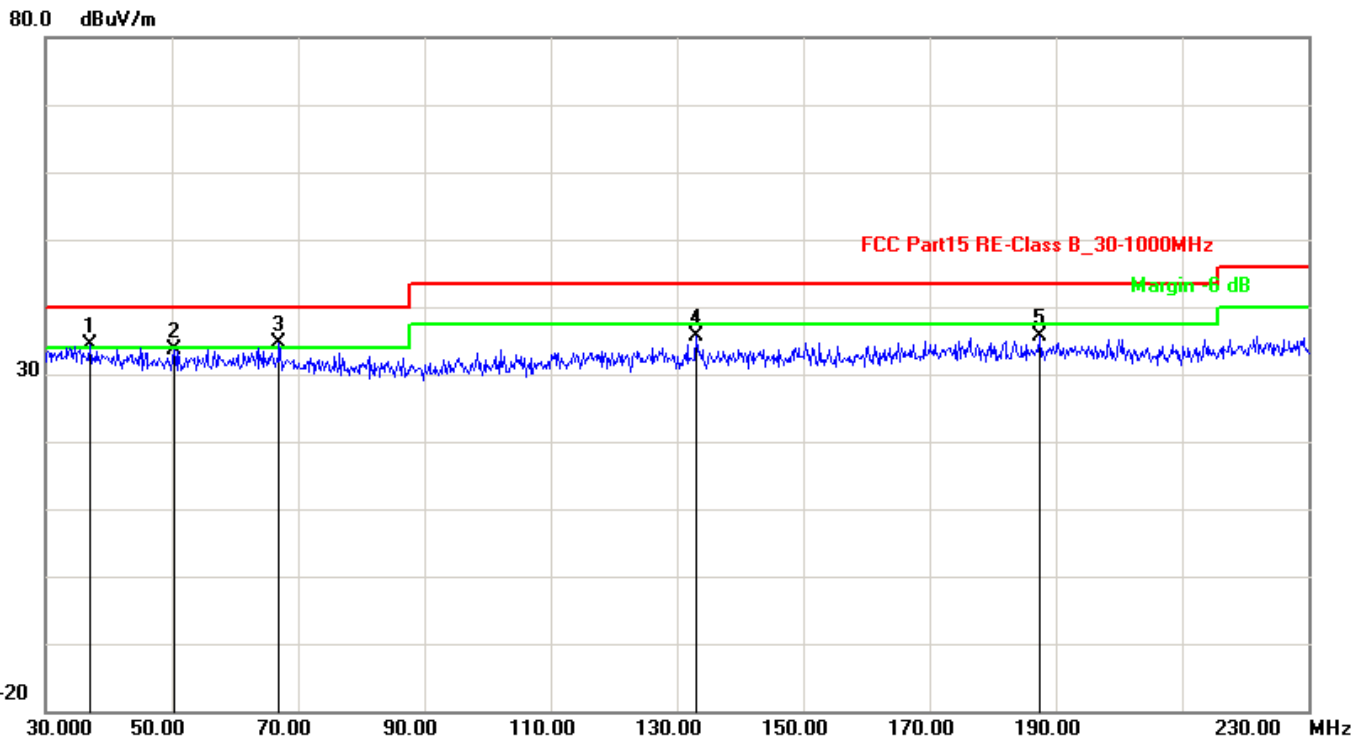

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 37.0000 | 5.91 | 28.35 | 34.26 | 40.00 | -5.74 | QP |
| 2 | 50.4000 | 5.30 | 28.44 | 33.74 | 40.00 | -6.26 | QP |
| 3 | 67.0000 | 5.27 | 29.28 | 34.55 | 40.00 | -5.45 | QP |
| 4 | 133.0000 | 6.54 | 29.08 | 35.62 | 43.50 | -7.88 | QP |
| 5 | 187.4000 | 7.41 | 28.18 | 35.59 | 43.50 | -7.91 | QP |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

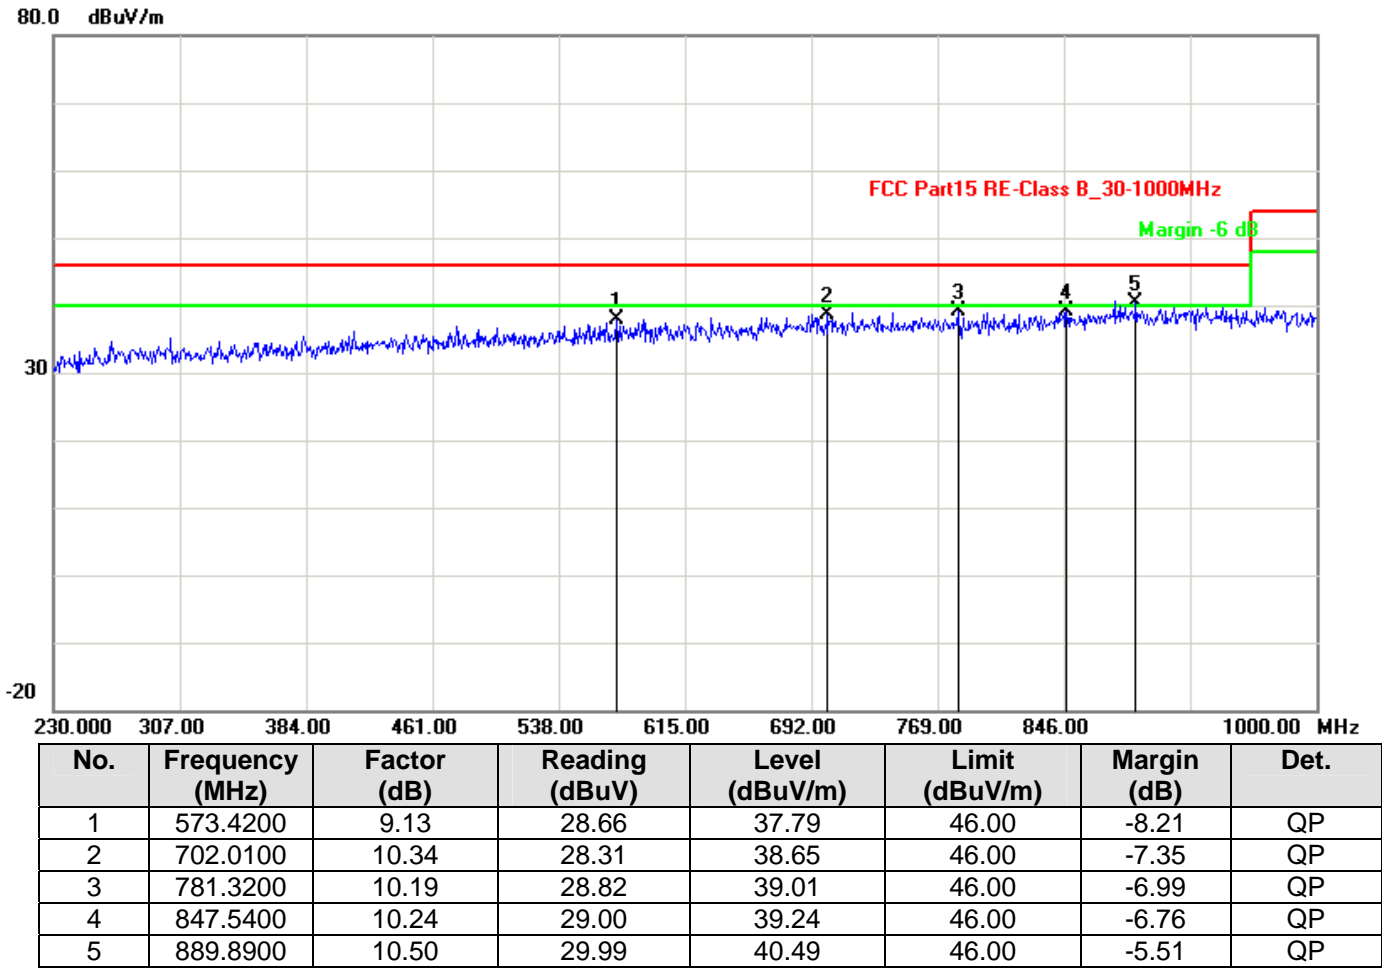

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3.Margin=Level- Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------------------|---------|--|
| Channel: | TX -X Position Mode Low 2406MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|---|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2406.000 | 17.83 | 69.24 | 87.07 | 114.00 | -26.93 | peak |
| 2 | 2406.000 | 17.83 | 60.67 | 78.50 | 94.00 | -15.50 | AVG |
| 3 | 1410.000 | 15.61 | 32.31 | 47.92 | 74.00 | -26.08 | peak |
| 4 | 6026.052 | 24.84 | 18.51 | 43.35 | 74.00 | -30.65 | AVG |
| 5 | 8142.285 | 26.91 | 19.26 | 46.17 | 74.00 | -27.83 | AVG |
| 6 | 9597.194 | 28.42 | 16.88 | 45.30 | 74.00 | -28.70 | AVG |
| 7 | 11294.589 | 28.87 | 18.18 | 47.05 | 74.00 | -26.95 | AVG |
| 8 | 11647.295 | 29.55 | 18.30 | 47.85 | 74.00 | -26.15 | AVG |
| 9 | 6026.052 | 24.84 | 18.51 | 43.35 | 74.00 | -30.65 | AVG |
| Remark: Other frequency mini margin all >10 dB of Limit | | | | | | | |

| | | | |
|------------------|------------------------------------|---------|--|
| Channel: | TX -X Position Mode Middle 2442MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|---|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2442.000 | 17.97 | 70.21 | 88.18 | 114.00 | -25.82 | peak |
| 2 | 2442.000 | 17.97 | 60.39 | 78.36 | 94.00 | -15.64 | AVG |
| 3 | 1264.529 | 13.61 | 33.90 | 47.51 | 74.00 | -26.49 | peak |
| 4 | 4884.036 | 23.10 | 21.55 | 44.65 | 54.00 | -9.35 | AVG |
| 5 | 6048.096 | 24.85 | 18.94 | 43.79 | 54.00 | -10.21 | AVG |
| 6 | 8913.828 | 27.12 | 19.75 | 46.87 | 54.00 | -7.13 | AVG |
| 7 | 10346.693 | 28.95 | 18.64 | 47.59 | 54.00 | -6.41 | AVG |
| 8 | 11559.118 | 29.38 | 17.70 | 47.08 | 54.00 | -6.92 | AVG |
| 9 | 1264.529 | 13.61 | 33.90 | 47.51 | 54.00 | -6.49 | AVG |
| Remark: Other frequency mini margin all >10 dB of Limit | | | | | | | |

- Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|----------------------------------|---------|--|
| Channel: | TX -X Position Mode High 2474MHz | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 2474.000 | 21.06 | 66.89 | 87.95 | 114.00 | -26.05 | peak |
| 2 | 2474.000 | 21.06 | 57.77 | 78.83 | 94.00 | -15.17 | AVG |
| 3 | 1110.220 | 12.93 | 27.38 | 40.31 | 54.00 | -13.69 | AVG |
| 4 | 4950.115 | 23.24 | 20.86 | 44.10 | 54.00 | -9.90 | AVG |
| 5 | 6048.096 | 24.85 | 17.59 | 42.44 | 54.00 | -11.56 | AVG |
| 6 | 8693.387 | 27.06 | 19.26 | 46.32 | 54.00 | -7.68 | AVG |
| 7 | 10038.076 | 29.25 | 13.59 | 42.84 | 54.00 | -11.16 | AVG |
| 8 | 11052.104 | 28.41 | 14.01 | 42.42 | 54.00 | -11.58 | AVG |
| 9 | 11779.559 | 29.80 | 16.59 | 46.39 | 54.00 | -7.61 | AVG |

Remark: Other frequency mini margin all >10 dB of Limit

- Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


8. Receiver Spurious Emission (electric field)

8.1.Test Equipment

| Radiated disturbance (electric field) | | | | | |
|---------------------------------------|-------------------|-----------------|------------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 100868 | 2010/12 |
| 2 | Biconical Antenna | ROHDE & SCHWARZ | HK116 | 100221 | 2010/12 |
| 3 | Log per Antenna | ROHDE & SCHWARZ | HL223 | 100226 | 2010/12 |
| 4 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2010/12 |
| 5 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2010/12 |
| 6 | Loop Antenna | A.R.A | PLA-1030/B | 1030 | 2010/12 |


8.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

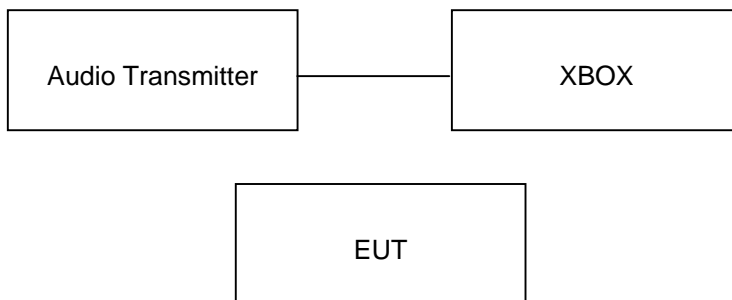

(EUT: Game Talk Pro-2™ Wireless)

8.2.2 Anechoic Chamber Setup Diagram

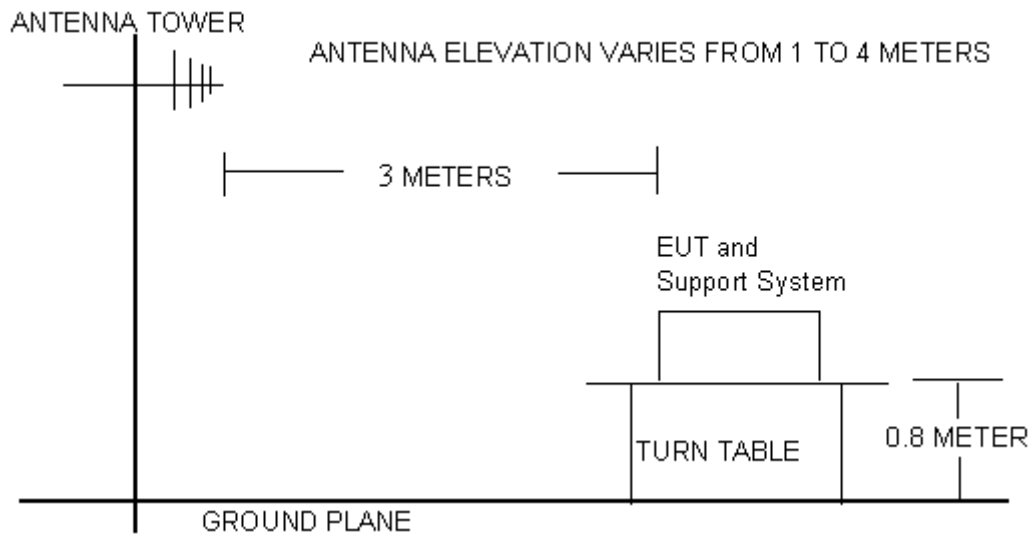

8.3. Receiver Spurious Emission Limit Standard:

Standard:FCC 15.249 , FCC 15.209, FCC 15.109,RSS-Gen:7.2,RSS-210 A2.9

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|---|-----------------------|
| | | $\mu\text{V/m}$ | Db(μV)/m |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | Other:74.0 Db(μV)/m (Peak) 54.0 Db(μV)/m (Average) | |

Remark: (1) Emission level $\text{Db}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

8. . The smaller limit shall apply at the cross point between two frequency bands.
8. . Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. Is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 1MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

8.5. Receiver Spurious Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz ,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. Is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|----------------|
| Channel: | RX Normal link Mode | Result: | ■ – passed |
| Test point: | Horizontal | | □ – not passed |
| Frequency range: | 30MHz~230MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

80.0 dBuV/m

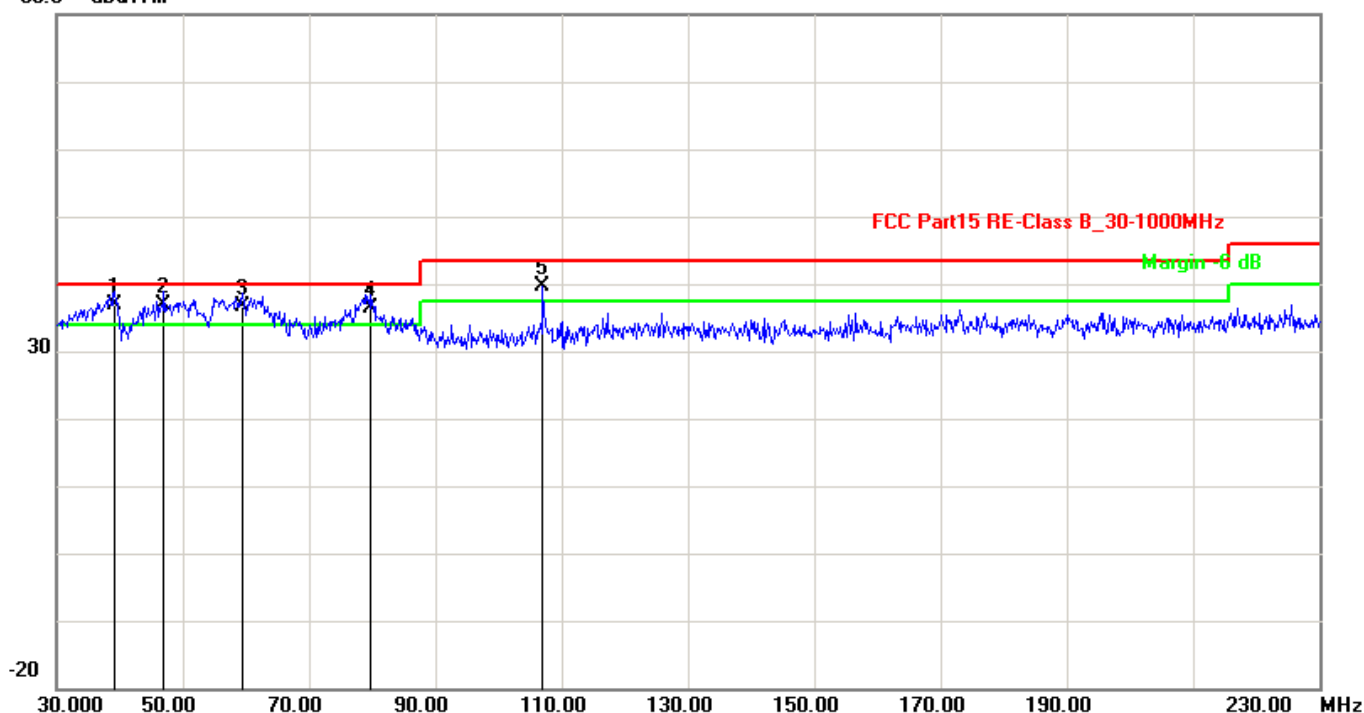

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 39.2000 | 5.76 | 31.16 | 36.92 | 40.00 | -3.08 | QP |
| 2 | 47.0000 | 5.36 | 31.52 | 36.88 | 40.00 | -3.12 | QP |
| 3 | 59.4000 | 5.34 | 31.17 | 36.51 | 40.00 | -3.49 | QP |
| 4 | 79.6000 | 4.86 | 31.42 | 36.28 | 40.00 | -3.72 | QP |
| 5 | 107.0000 | 5.57 | 33.97 | 39.54 | 43.50 | -3.96 | QP |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

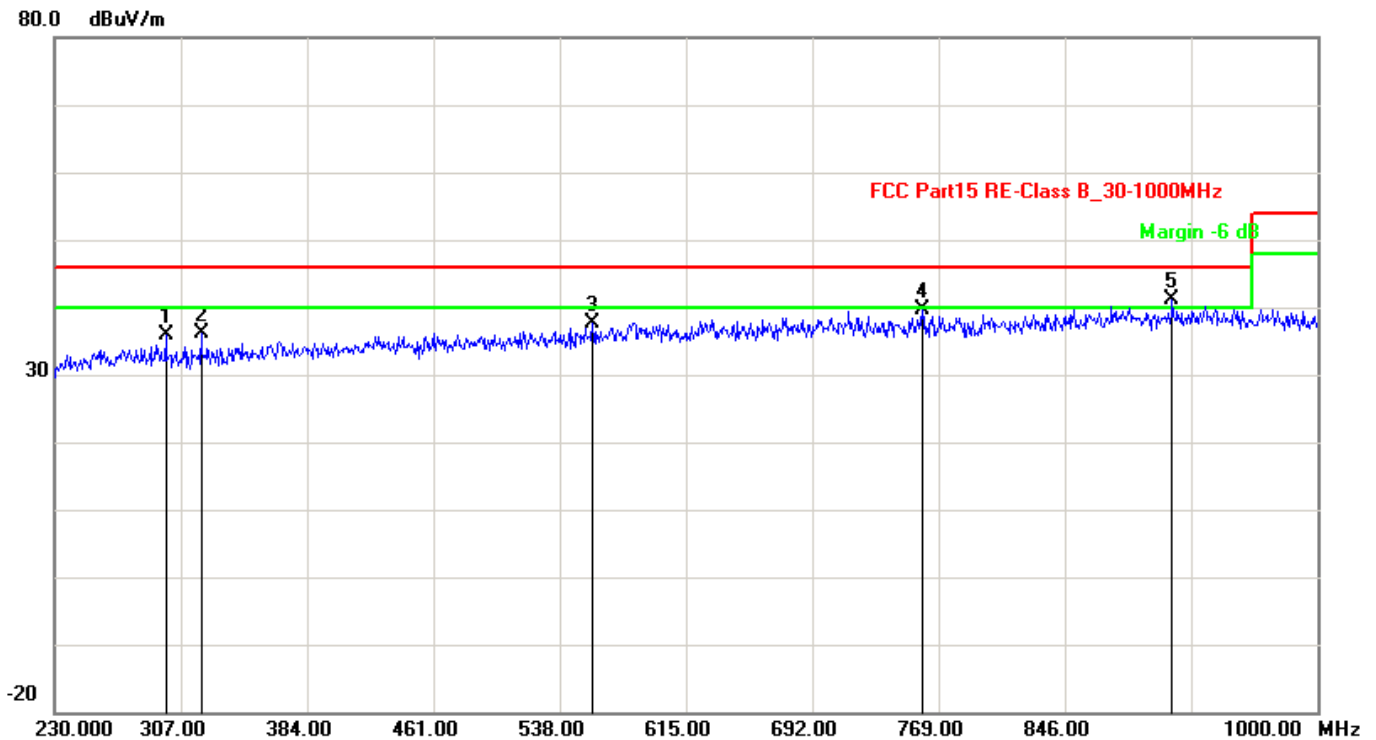

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 297.7600 | 6.32 | 29.64 | 35.96 | 46.00 | -10.04 | QP |
| 2 | 319.3200 | 6.58 | 29.49 | 36.07 | 46.00 | -9.93 | QP |
| 3 | 558.0200 | 8.98 | 28.74 | 37.72 | 46.00 | -8.28 | QP |
| 4 | 758.9900 | 10.25 | 29.44 | 39.69 | 46.00 | -6.31 | QP |
| 5 | 911.4500 | 10.50 | 30.60 | 41.10 | 46.00 | -4.90 | QP |

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|--|
| Channel: | RX Normal link Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Horizontal | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 1274.000 | 13.66 | 29.61 | 43.27 | 74.00 | -30.73 | peak |
| 2 | 2562.000 | 18.48 | 26.28 | 44.76 | 74.00 | -29.24 | peak |
| 3 | 3070.000 | 20.42 | 26.36 | 46.78 | 74.00 | -27.22 | peak |
| 4 | 4130.000 | 21.47 | 25.17 | 46.64 | 74.00 | -27.36 | peak |
| 5 | 5372.000 | 23.90 | 24.20 | 48.10 | 74.00 | -25.90 | peak |
| 6 | 7806.000 | 26.54 | 14.10 | 40.64 | 54.00 | -13.36 | AVG |
| 7 | 8978.000 | 27.13 | 16.83 | 43.96 | 54.00 | -10.04 | AVG |

Remark: Other frequency mini margin all >10 dB of Limit

- Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3. Margin=Level-Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------------|---------|--|
| Channel: | RX Normal link Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 30-230MHz and 230-1000MHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development,Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

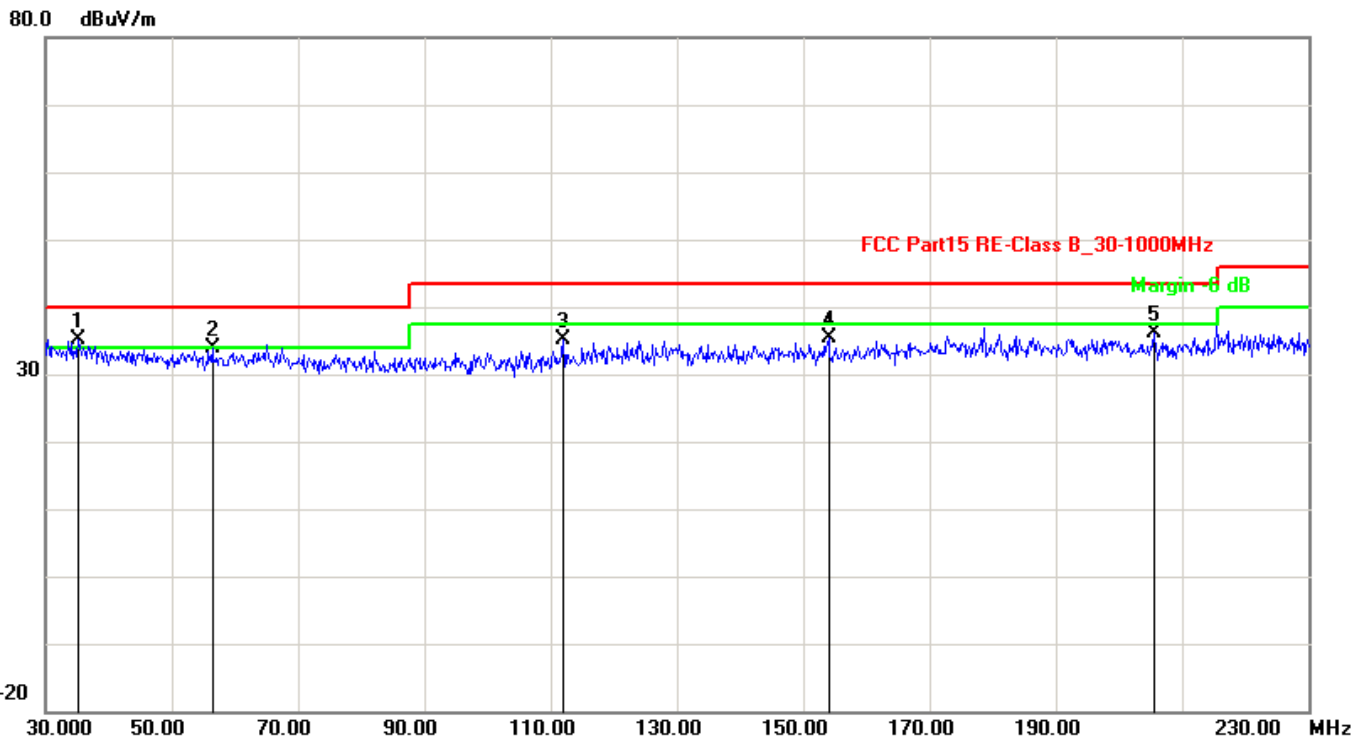

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 35.2000 | 6.04 | 29.09 | 35.13 | 40.00 | -4.87 | QP |
| 2 | 56.4000 | 5.31 | 28.49 | 33.80 | 40.00 | -6.20 | QP |
| 3 | 112.0000 | 5.90 | 29.13 | 35.03 | 43.50 | -8.47 | QP |
| 4 | 154.0000 | 6.47 | 28.95 | 35.42 | 43.50 | -8.08 | QP |
| 5 | 205.6000 | 7.32 | 28.71 | 36.03 | 43.50 | -7.47 | QP |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China


Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

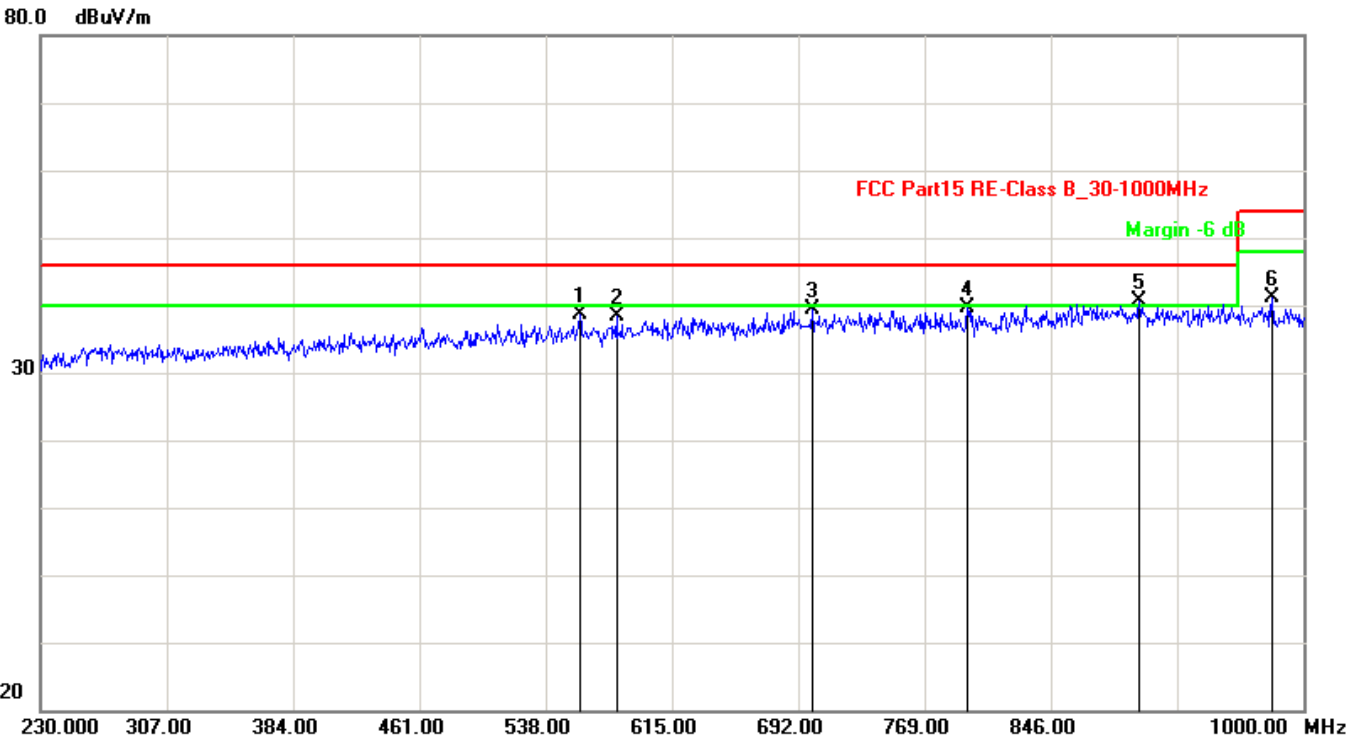

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 558.7900 | 8.99 | 29.68 | 38.67 | 46.00 | -7.33 | QP |
| 2 | 581.1200 | 9.19 | 29.08 | 38.27 | 46.00 | -7.73 | QP |
| 3 | 700.4700 | 10.35 | 29.06 | 39.41 | 46.00 | -6.59 | QP |
| 4 | 795.1800 | 10.05 | 29.54 | 39.59 | 46.00 | -6.41 | QP |
| 5 | 899.9000 | 10.50 | 30.01 | 40.51 | 46.00 | -5.49 | QP |
| 6 | 980.7500 | 10.50 | 30.58 | 41.08 | 54.00 | -12.92 | QP |

Note: 1. Emission level=Read level + Factor
2. Factor=Antenna factor + Cable loss
3.Margin=Level- Limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



| | | | |
|------------------|---------------------|---------|--|
| Channel: | RX Normal link Mode | Result: | <input checked="" type="checkbox"/> - passed |
| Test point: | Vertical | | <input type="checkbox"/> - not passed |
| Frequency range: | 1GHz-26.5GHz | | |

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|------|
| 1 | 1352.000 | 14.00 | 30.82 | 44.82 | 74.00 | -29.18 | peak |
| 2 | 2054.000 | 16.39 | 30.19 | 46.58 | 74.00 | -27.42 | peak |
| 3 | 3826.000 | 21.05 | 20.76 | 41.81 | 54.00 | -12.19 | AVG |
| 4 | 4576.000 | 22.43 | 25.55 | 47.98 | 74.00 | -26.02 | peak |
| 5 | 4971.000 | 23.29 | 19.47 | 42.76 | 54.00 | -11.24 | AVG |
| 6 | 6400.000 | 24.97 | 22.28 | 47.25 | 74.00 | -26.75 | peak |
| 7 | 8646.000 | 27.04 | 22.94 | 49.98 | 74.00 | -24.02 | peak |

Remark: Other frequency mini margin all >10 dB of Limit

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



9. Band Edge Compliance test

9.1. Test Equipment

| Band Edge Compliance test | | | | | |
|---------------------------|-------------------|-----------------|-----------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 10868 | 2010/12 |
| 2 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2010/12 |
| 3 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2010/12 |

9.2. Test Information

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test distance | 3 Meter |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

9.3. Test procedure

- 1、The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2、Max hold the trace of the setp 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

9.4. Test Results

PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

| Test Mode | Channel Marked Frequency | Test Result Highest Emission (dBuV/m) | | | |
|--------------|-----------------------------|---|---------|----------|---------|
| | | Horizontal | | Vertical | |
| | | Peak | Average | Peak | Average |
| Low Channel | 2390MHz | 25.84 | 19.14 | 23.47 | 17.02 |
| | 2400MHz | 40.80 | 35.89 | 35.60 | 27.06 |
| High Channel | 2483.5MHz | 30.04 | 16.69 | 28.22 | 16.19 |
| | 2500MHz | 28.95 | 16.37 | 28.25 | 15.89 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Band Edges(CH Low)
Detector mode:Peak


Polarity:Horizontal

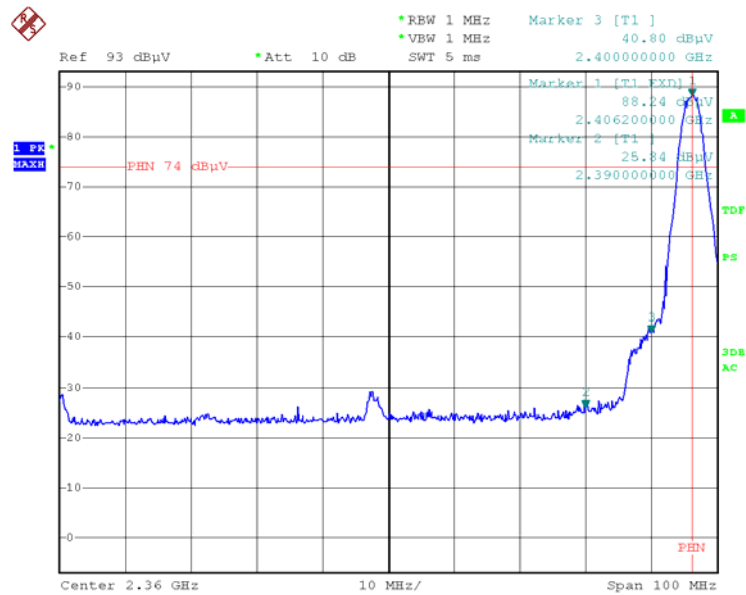

Date: 4.AUG.2011 14:19:54

Band Edges(CH Low)
Detector mode:Average

Polarity:Horizontal

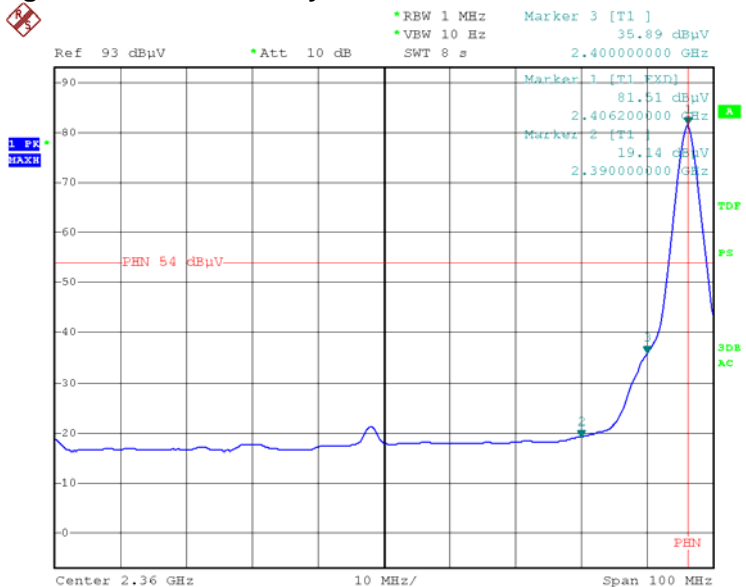

Date: 4.AUG.2011 14:29:54

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Band Edges(CH Low)
Detector mode:Peak


Polarity:Vertical

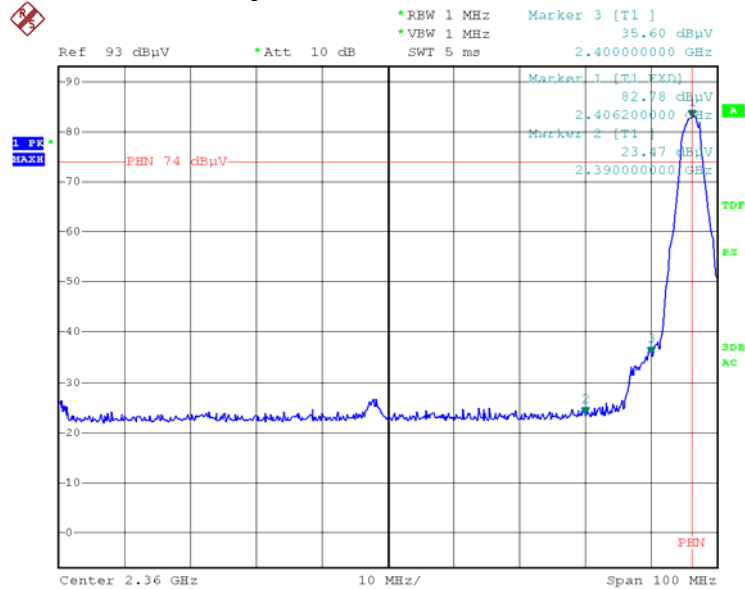

Date: 4.AUG.2011 14:21:27

Band Edges(CH Low)
Detector mode:Average

Polarity:Vertical

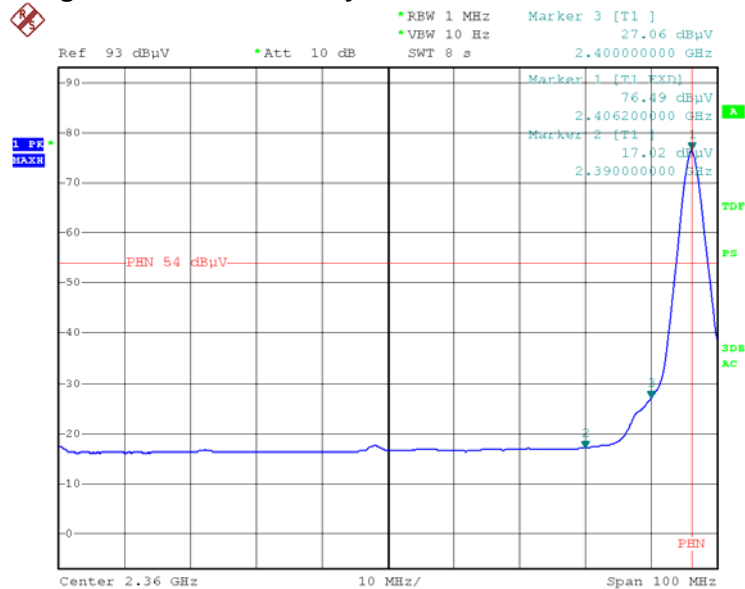

Date: 4.AUG.2011 14:28:13

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Band Edges(CH High)
Detector mode:Peak


Polarity:Horizontal

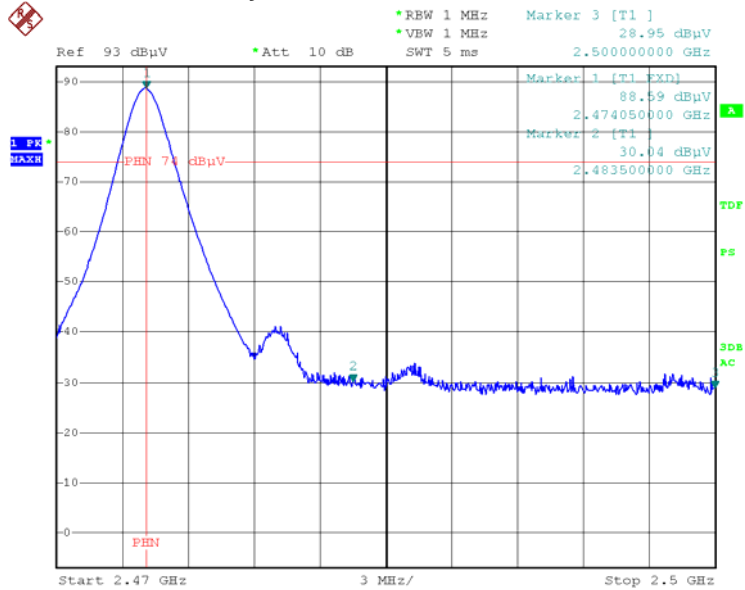

Date: 4.AUG.2011 14:35:38

Band Edges(CH High)
Detector mode:Average

Polarity:Horizontal

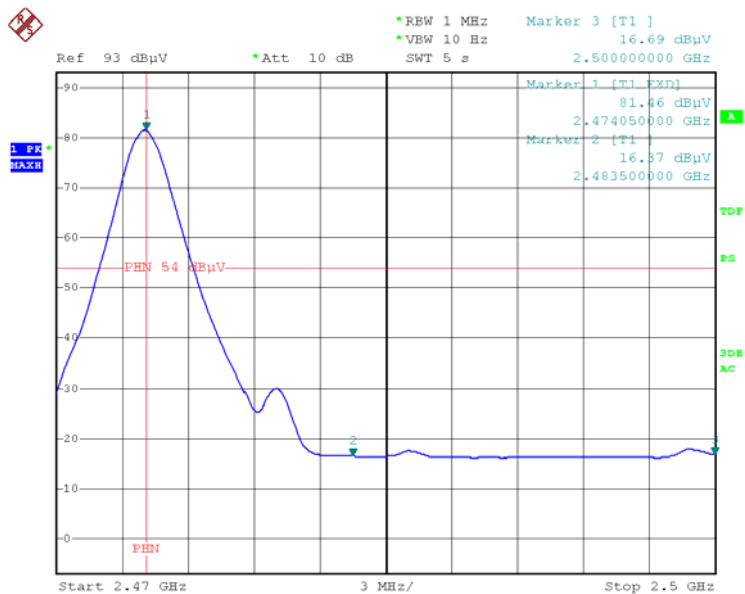

Date: 4.AUG.2011 14:37:52

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service




Band Edges(CH High)
Detector mode:Peak Polarity:Vertical

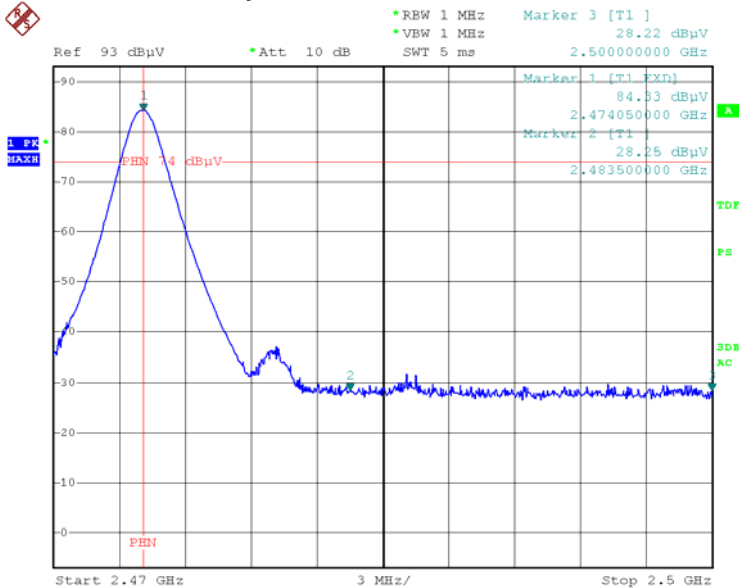

Date: 4.AUG.2011 14:36:39

Band Edges(CH High)
Detector mode:Average Polarity:Vertical

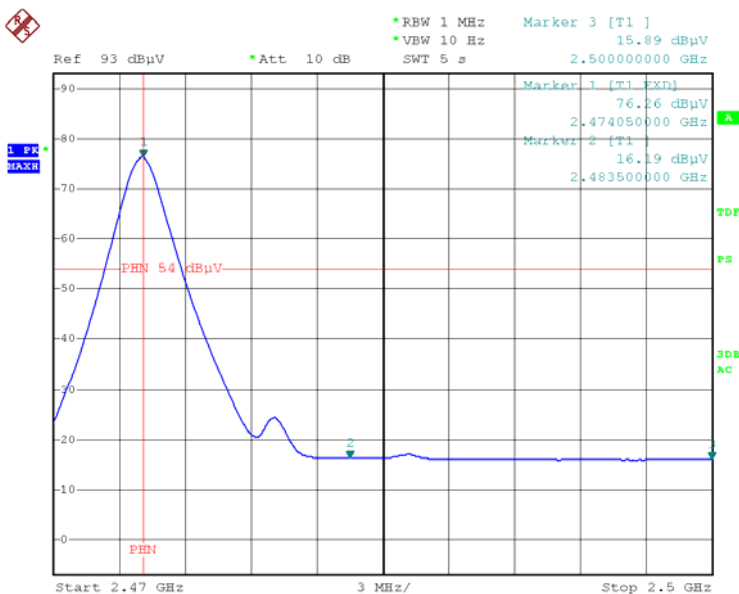

Date: 4.AUG.2011 14:38:27

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

10. 99% bandwidth

10.1 Test procedure

According to RSS-210 Annex 8 and RSS-Gen 4.6.1 The transmitter output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

10.2. Test Equipment

| Band Edge Compliance test | | | | | |
|---------------------------|-------------------|-----------------|-----------|------------|-----------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 10868 | 2010/12 |
| 2 | Log per Antenna | ROHDE & SCHWARZ | HL050 | 100186 | 2010/12 |
| 3 | Signal analyzer | ROHDE & SCHWARZ | FSIQ26 | 100311 | 2010/12 |

10.3. Test Information

| | |
|---------------------|---|
| EUT | Game Talk Pro-2™ Wireless |
| Firm Name | Datel Design & Development, Inc |
| Operating Condition | DC 3.7V for TX |
| Test Condition | Ambient Temperature: 25°C Humidity: 56% |
| Test Date: | 02 Aug~11 Aug 2011 |
| Operator | Peter |
| MODEL NO | AS183 |

10.4. Test Results

PASSED.

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2406 | 3.88 |
| Middle | 2442 | 3.80 |
| High | 2474 | 3.86 |

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service




99% Bandwidth 2406 MHz

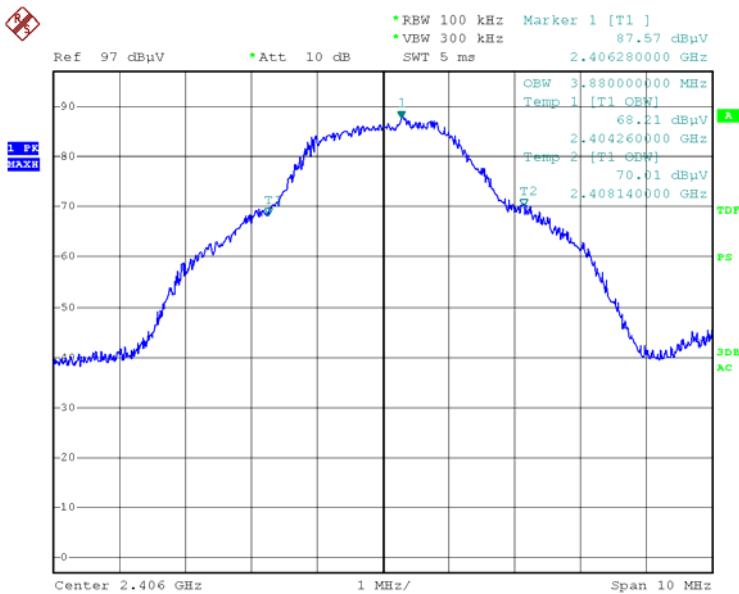

Date: 11.AUG.2011 15:38:17

99% Bandwidth 2442 MHz

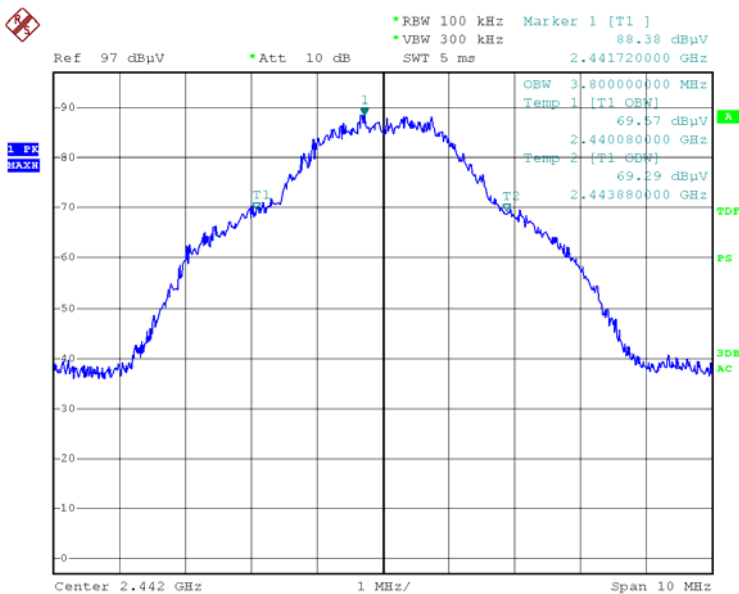

Date: 11.AUG.2011 15:39:56


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



99% Bandwidth 2474 MHz

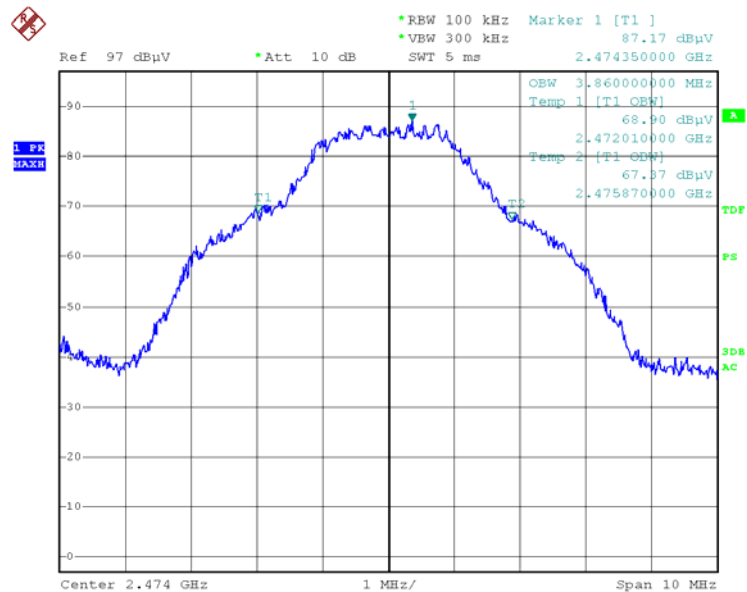

Date: 11.AUG.2011 15:41:50

11.Deviation to test specifications

[NONE]

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
Building F, Dachuang industrial park, No.379, Zhongshan Dadao, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service