


Swiftpoint GT

SEPARATION
PANTONE COOL GRAY 430 C
SCALE 5:1

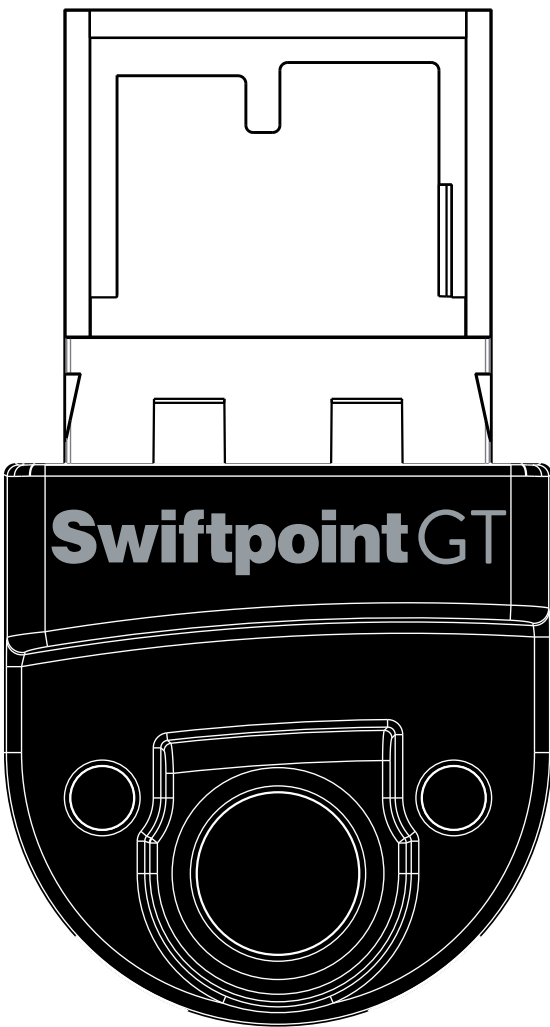

COMPOSITE - ASSEMBLED DONGLE
SCALE 5:1

NOTES:

1. FOR OVERALL PART GEOMETRY REFER TO PART DRAWING OR CAD DATA WHICH IS AVAILABLE FOR THIS PART.
2. SUPPLIER CAN DETERMINE SEPARATION PRINT ORDER, BUT SHOULD AVOID PRINTING DARK COLOURS BEHIND LIGHT COLOURS.
3. PLEASE ENSURE SUFFICIENT OPACITY TO PREVENT UNDERLYING PART COLOURS (SUCH AS BLACK) SHOWING THROUGH.
4. COLOURS TO BE SPREAD / TRAPPED / OVERPRINT AS NECESSARY.
5. SPECIFIED COLOURS ARE FOR FINISHED PART.
6. DO NOT MATCH COLOURS TO THIS DRAWING; REFER TO THE SPECIFIED PANTONE COLOUR.
7. INK MUST BE A DURABLE UV CURE TYPE.
8. PRINT ABRASION RESISTANCE TEST:
ERASER TYPE: EF74
LOAD: 450gf
SPEED: 1CYCLE/SEC.
DURATION: 600CYCLES
PASS CRITERIA: THE PRINTING MUST SHOW NO VISUAL DEFECTS WHEN VIEWED FROM 300mm FOR 3SEC IN NATURAL LIGHT.
9. PRINT ALCOHOL RESISTANCE TEST:
95% ALCOHOL ON COTTON
LOAD: 500gf
DURATION: 30 CYCLES
PASS CRITERIA: THE PRINTING MUST SHOW NO VISUAL DEFECTS WHEN VIEWED FROM 300mm FOR 3SEC IN NATURAL LIGHT.
10. PRINT ALCOHOL RESISTANCE TEST:
95% ALCOHOL ON COTTON
LOAD: 500gf
DURATION: 100 CYCLES
PASS CRITERIA: THE RAW PLASTIC MATERIA MUST NOT BE SEEN THROUGH THE PRINTING.
11. IF UNSURE ABOUT ANY ASPECT OF THIS DRAWING - PLEASE ASK.

SWIFTPOINT™

© Copyright 2012 SWIFTPOINT Ltd.

TITLE: DONGLE TRAY SWIFTPOINT

PART No: 114-04-003

ISSUE:

A

PROJECT: V2 MOUSE

MATERIAL: 114-03-031

DATE: 07-10-2014

TOLERANCES

0<as6

6<as15

15<as40

40<as70

70<as150

150<as300

ANGLES

FINISH:

(UNLESS OTHERWISE STATED)

±0.06

±0.08

±0.11

±0.15

±0.24

±0.36

±0.5°

SCALE: 1:1

SHEET 1 OF 1

A3