







ISO/IEC17025 Accredited Lab.

Report No: FCC 1003346-03

File reference No: 2010-06-05

Applicant: Shenzhen Sinchun Electronic Co., Ltd

Product: NOTE BOOK

Model No: UMPC891

Trademark: saycool

Test Standards: FCC Part 15 Subpart B: 2008

Test result:

It is herewith confirmed and found to comply with the requirements

set up by ANSI C63.4&FCC Part 15 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 05, 2010

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. Chegongmiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1003346-03 Page 2 of 23

Date: 2010-06-05



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 23

Report No: 1003346-03

Date: 2010-06-05



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Test Uncertainty.	4
1.5	Submitted Sample	4
1.6	Test Duration.	4
2.0	List of Measurement Equipment.	5
2.1	Conducted Emission Test.	5
2.2	Radiated electromagnetic disturbance test.	5
2.3	Auxiliary Equipment	5
3.0	Technical Details	6
3.1	Investigations Requested.	6
3.2	Test Standards	6
4.0	Power line Conducted Emission Test.	7
5.0	Radiated Disturbance Test	13
6.0	FCC ID Label	23
7.0	Photo of testing	23

Date: 2010-06-05



Page 4 of 23

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian

District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Dongguan Tangxia USmart Electronic Products Limited

Address: No.12,Lu Yi 2 Road, Tang Xia Town,Dongguan City,Guang Dong Prov.,China

Telephone: +86-769-87911890 Fax: +86-769-87915263

1.3 Description of EUT

Product: NOTE BOOK

Manufacturer: Shenzhen Sinchun Electronic Co., Ltd

Brand Name: saycool
Model Number: UMPC891
The adapter Model No.: K-8828B1853500

Rating: Input: 100-240V~1.5A 60/50Hz ,Output: 18.5V-3.5A

1.4 Submitted Sample: 1 Sample

1.5 Test Duration: 2010-03-24 to 2010-05-26

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Teny Tang

Print Name: Terry Tong

Page 5 of 23

Report No: 1003346-03

Date: 2010-06-05



2.0 List of Measurement Equipment

2.1 Conducted Emission Test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESH3	860905/006	RS	2010.4.26	1Year
Spectrum Analyzer	ESA-L1500A	US37451154	HP	2010.4.26	1Year
PULSE LIMITER	ESH3-Z2	100281	RS	2010.4.26	1Year
LISN	ESH3-Z5	100294	RS	2010.4.26	1Year
LISN	ESH3-Z5	100253	RS	2010.4.26	1Year
LISN	LS16C	10010947251	AFJ	2010-5-14	1Year
LISN (Three Phase)	NSLK 8126	8126453	Schwarebeck	2010-5-14	1Year

2.2 Radiated electromagnetic disturbance test

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
EMI Test Receiver	ESVD	100008	RS	2010.4.26	1Year
Coaxial Switch	MP59B	M70585	ANRITSU	N/A	N/A
Spectrum Analyzer	8595E	3441A00893	НР	2010.4.26	1Year
Amplifier	8447D	2727A05017	HP	2010.4.26	1Year
Bilog Antenna	VULB9163	9163/340	Schwarebeck	2010.4.26	1Year
Horn Antenna	BBHA 9120D	9120D-631	Schwarebeck	2010.07.03	1Year

2.3 Auxiliary Equipment

				Calibration	Calibration
Name	Model No.	Serial No.	Manufacturer	Date	Cycle
				Data cable	
				of 1.5m	
Mouse	OM860XC	HM0509	BIGCOW	length	FCC DOC
U-disk	U208		Netac		FCC DOC
				Data cable	
				of 1.0m	
Earphone				length	
LCD Monitor	Q5T4		BENQ		FCC DOC
Keyboard	KB-0225		IBM		
SD			Kingston		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1003346-03 Page 6 of 23

Date: 2010-06-05



3.0 **Technical Details**

3.1 **Investigations Requested** Perform Electromagnetic Interference [EMI] tests for FCC Requirement.

3.2 **Test Standards**


FCC Part 15 Subpart B: 2008

Date: 2010-06-05



4.0 Conducted Power line Test

4.1 Schematics of the test

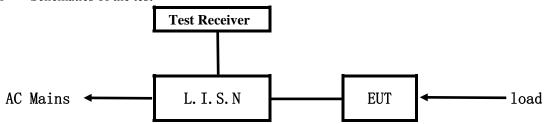


EUT: Equipment Under Test

4.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003. Cables and peripherals were moved to find the maximum emission levels for each frequency.

Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

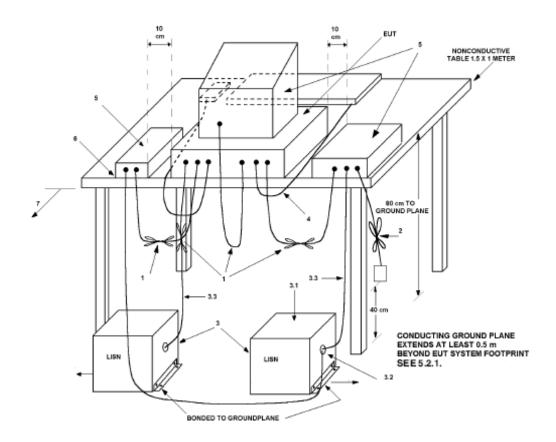

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1003346-03 Page 8 of 23

Date: 2010-06-05

TEST REPORT

4.3 Power line conducted Emission Limit

Eraguanay (MHz)	Class A Li	mits dB(μV)	Class B Limits dB(µV)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.00	66.00	66.00~56.00*	56.00~46.00*	
$0.50 \sim 5.00$	73.00	60.00	56.00	46.00	
5.00 ~ 30.00	73.00	60.00	60.00	50.00	


Notes: 1. *decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

4.4 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.


Date: 2010-06-05



EUT set Condition: Read USB,SD card and Running EMC test software and Ping

wireless network

Results: Pass

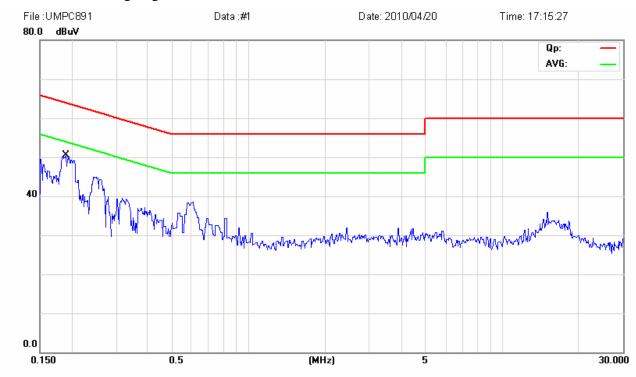

Fraguanay		Reading	(dB μ V)		Limi	t
Frequency (MHz)	Line		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1873	48.24	14.94			64.16	54.16


Date: 2010-06-05



EUT set Condition: Read USB,SD card and Running EMC test software and Ping


wireless network

Results: Pass

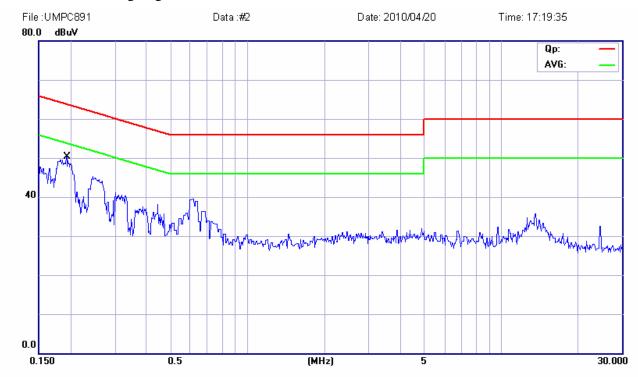

Fraguanay		Reading	(dB μ V)		Limi	t
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1922			47.34	17.74	63.94	53.94


Date: 2010-06-05



EUT set Condition: Running notebook test program, Ping network and Keep Bluetooth

Transmitting

Results: Pass

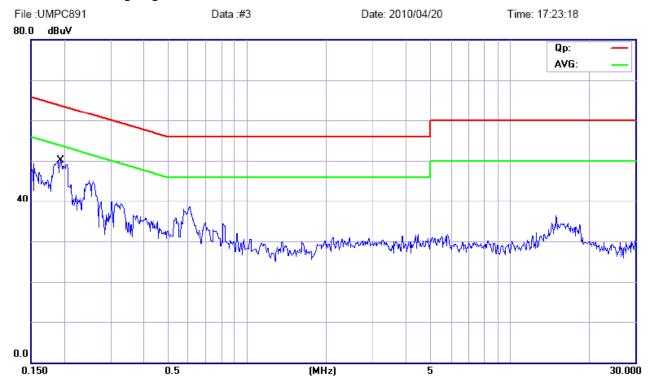

Eroguanav		Reading	(dB µ V)		Limi	t
Frequency (MHz)	Line		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1941	50.06	20.12			63.86	53.86

Page 12 of 23

Report No: 1003346-03


Date: 2010-06-05

Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Running notebook test program, Ping network and Keep Bluetooth

Transmitting

Results: Pass

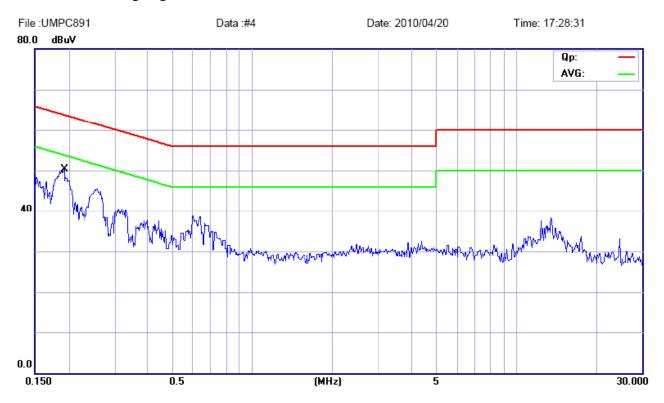

Eraguanay		Reading	(dB μ V)		Limi	t
Frequency (MHz)	Live		Neutral		$(dB \mu V)$	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1927			50.32	22.37	63.92	53.92

Page 13 of 23


Report No: 1003346-03

Date: 2010-06-05



5.0 Radiated Disturbance Test

5.1 Schematics of the test




5.2 Test Method and test Procedure:

The EUT was tested according to ANSI C63.4 –2003, The frequency spectrum from 30MHz to 5GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. For measurement above 1GHz, peak values with RBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK


Actual Working Voltage and Frequency: 120V~, 60Hz

Block diagram of Test setup

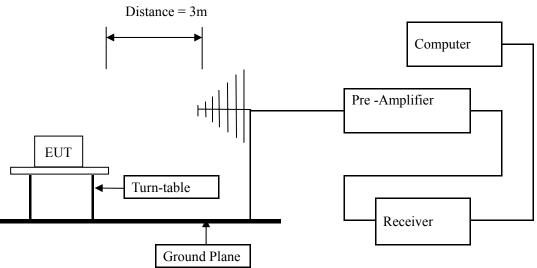

Date: 2010-06-05



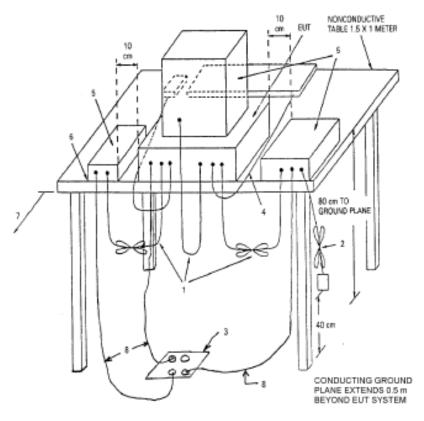

5.3 Radiated Emission Limit

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.00
88-216	3	43.50
216-960	3	46.00
Above 960	3	54.00

Note: The lower limit shall apply at the transition frequencies

5.4 Test result

The frequency spectrum from 30MHz to 8GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK. Measurements were made at 3 meters.

Page 15 of 23

Report No: 1003346-03

Date: 2010-06-05



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----8000MHz)

EUT set Condition: Read USB, SD card and Running EMC test software and Ping

wireless network


Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
141.552	29.68	Н	43.50
243.406	35.21	Н	46.00
665.351	37.46	Н	46.00
718.706	36.47	Н	46.00
961.213	40.25	Н	54.00
66.616	32.32	V	40.00
122.152	35.06	V	43.50
483.475	38.72	V	46.00
963.618	41.86	V	54.00
135.993	36.82	V	43.50

Date: 2010-06-05



Test Figure:

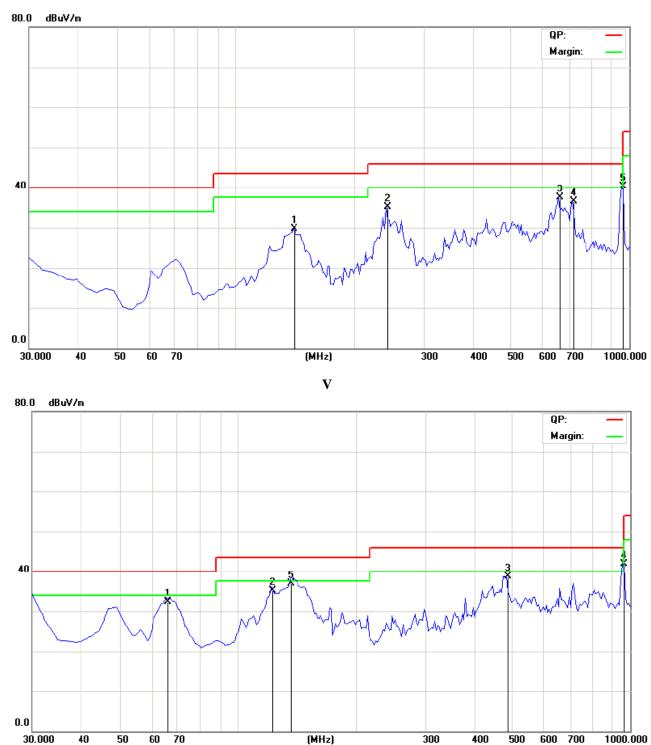

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 17 of 23

Report No: 1003346-03

Date: 2010-06-05



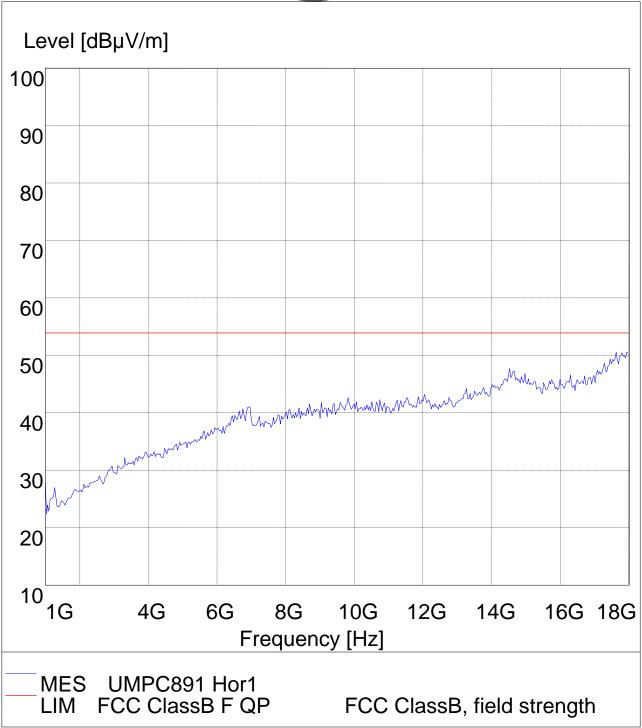


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2010-06-05



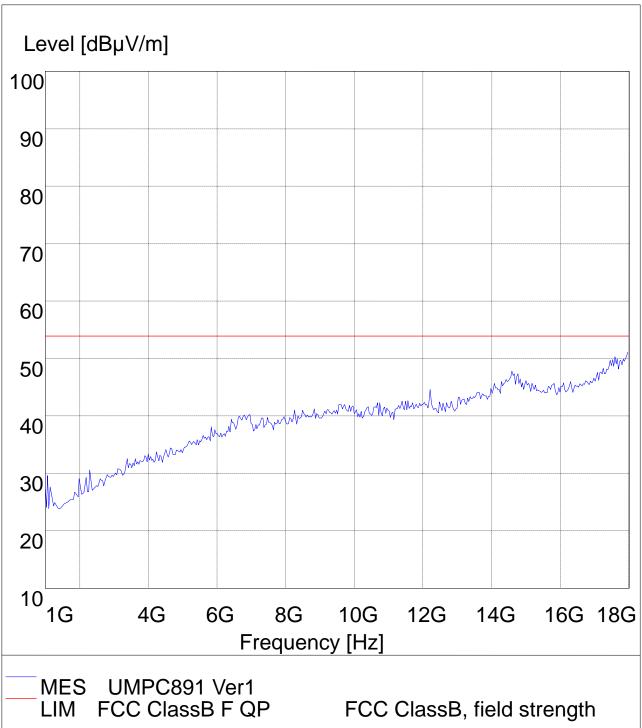

Page 19 of 23

Report No: 1003346-03

Date: 2010-06-05



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----8000MHz)

EUT set Condition: Running notebook test program, Ping network and Keep Bluetooth

Transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
143.975	31.85	Н	43.50
248.250	32.87	Н	46.00
662.925	38.95	Н	46.00
716.275	36.98	Н	46.00
963.625	40.89	Н	54.00
30.000	34.48	V	40.00
67.794	33.03	V	40.00
106.013	34.52	V	43.50
418.000	37.12	V	46.00
808.425	38.30	V	46.00
963.625	41.19	V	54.00

Date: 2010-06-05



Test Figure:



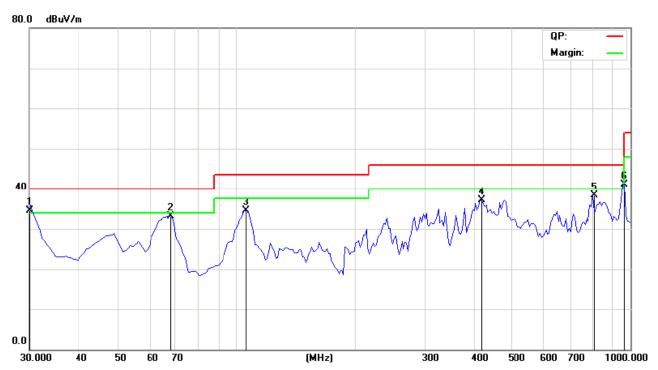

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 21 of 23

Report No: 1003346-03

Date: 2010-06-05



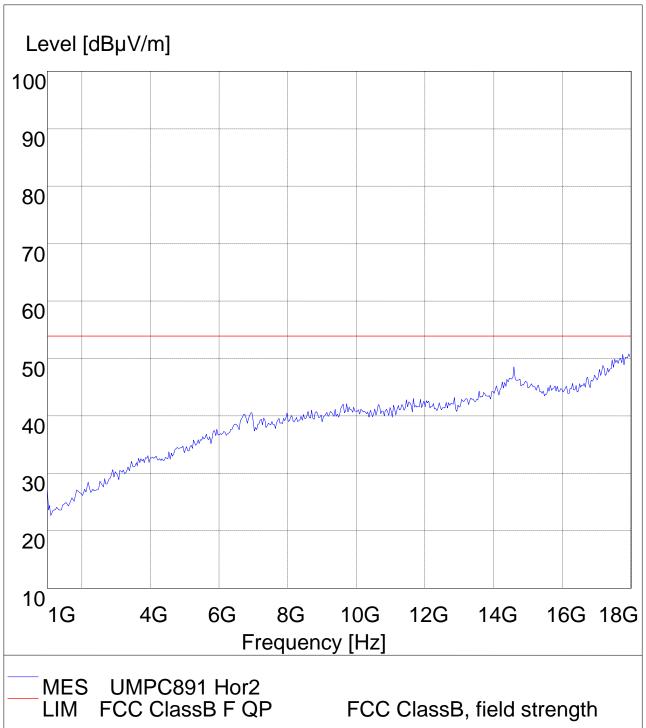


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2010-06-05



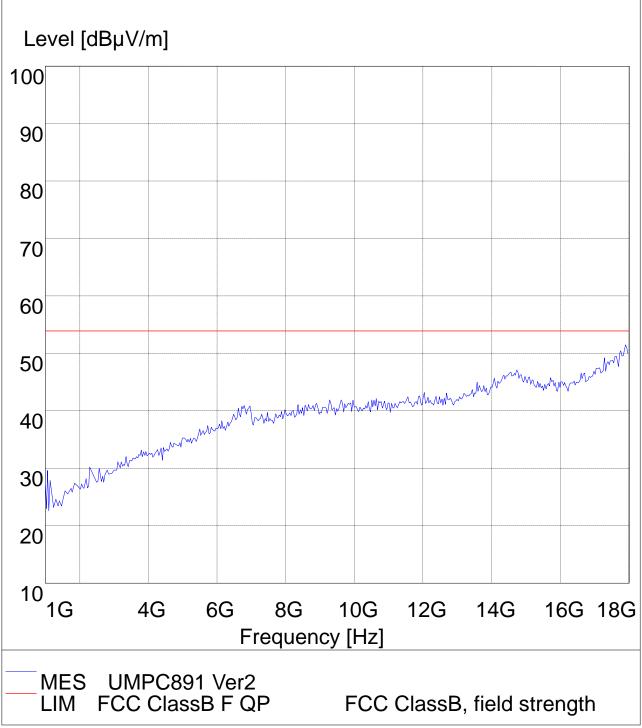

6.0 FCC ID Label

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 23 of 23

Report No: 1003346-03


Date: 2010-06-05



This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

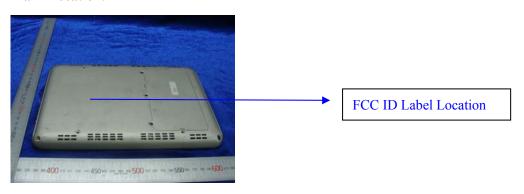

- 7.0 Photo of testing
- 7.1 Conducted test View-Please refer to report EMC1003346-02
- 7.2 Radiated emission test view-Please refer to report EMC1003346-02

-End of the report-