

VENT LINE - REMOVAL/INSTALLATION

EFFECTIVITY: ALL

1. General

- A. This section gives the procedures to remove/install the vent line.
- B. The vent line connects the toilet unit with the external air to cause the airflow to remove odors, exhaust, etc. by differential pressure.
- C. To get access to the vent line, you must remove the toilet shroud assembly.
- D. The procedures in this section are given in the sequence below. The tasks identified with (♦) are part of the Scheduled Maintenance Requirements Document (SMRD).

TASK NUMBER	DESCRIPTION	EFFECTIVITY
38-32-03-000-801-A	VENT LINE - REMOVAL	ALL
38-32-03-400-801-A	VENT LINE - INSTALLATION	ALL

TASK 38-32-03-000-801-A

EFFECTIVITY: ALL

2. VENT LINE - REMOVAL

A. General

(1) This task gives the procedure for removal of the vent line.

B. References

REFERENCE	DESIGNATION
AMM TASK 25-40-04-000-801-A/400	TOILET SHROUD ASSEMBLY - REMOVAL

C. Zones and Accesses

Not Applicable

D. Tools and Equipment

Not Applicable

E. Auxiliary Items

Not Applicable

F. Consumable Materials

Not Applicable

G. Expandable Parts

Not Applicable

H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	Lavatory

I. Preparation

SUBTASK 841-002-A

(1) Remove the toilet shroud assembly ([AMM TASK 25-40-04-000-801-A/400](#)).

J. Removal (Figure 401)

SUBTASK 020-002-A


(1) Loosen the clamps (2) that attach the vent line (1).

(2) Disconnect the vent line (1) from the toilet unit exhaust outlet (4) and from the noise suppressor (3).

EFFECTIVITY: ALL

Vent Line - Removal/Installation

Figure 401

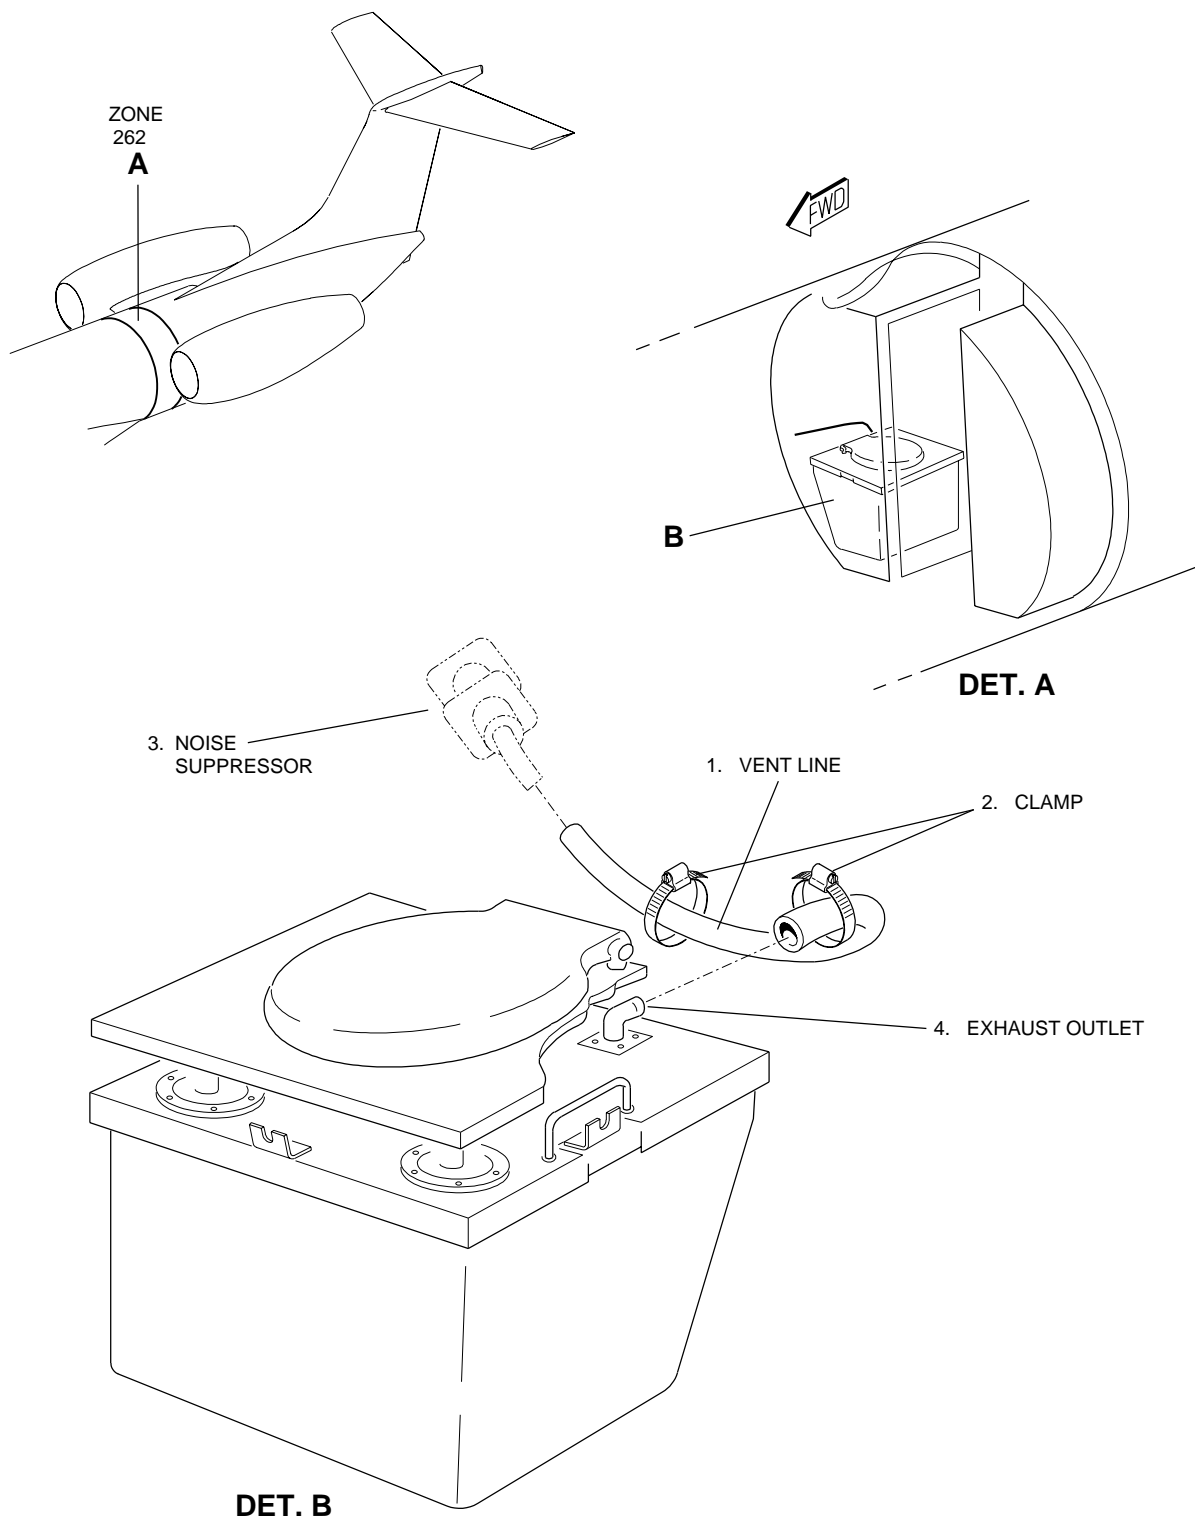

145AMM380005.MCE C

TASK 38-32-03-400-801-A

EFFECTIVITY: ALL

3. VENT LINE - INSTALLATION

A. General

(1) This task gives the procedure for installation of the vent line.

B. References

REFERENCE	DESIGNATION
AMM TASK 25-40-04-400-801-A/400	TOILET SHROUD ASSEMBLY - INSTALLATION

C. Zones and Accesses

Not Applicable

D. Tools and Equipment

Not Applicable

E. Auxiliary Items

Not Applicable

F. Consumable Materials

Not Applicable

G. Expandable Parts

Not Applicable

H. Persons Recommended

QTY	FUNCTION	PLACE
1	Does the task	Lavatory

I. Installation (Figure 401)

SUBTASK 420-002-A

(1) Connect the vent line (1) to the noise suppressor (3) and to the toilet unit exhaust outlet (4).

(2) Tighten the clamps (2) that attach the vent line (1).

J. Follow-on

SUBTASK 842-002-A

(1) Install the toilet shroud assembly ([AMM TASK 25-40-04-400-801-A/400](#)).