

Quantum Computing

Summary

Fabian Damken

July 16, 2022



TECHNISCHE
UNIVERSITÄT
DARMSTADT

Contents

1 Preliminaries	7
1.1 Complex Numbers	7
1.2 Continued Fraction Expansion	7
2 Postulates of Quantum Mechanics	9
2.1 States	9
2.2 Evolution	10
2.2.1 Gates	10
2.3 Measurement	10
2.4 Composite Systems and Tensor Products	11
2.4.1 Entanglement	12
2.4.2 Multi-Qubit Gates	13
2.5 Protocols	15
2.5.1 No-Cloning	15
2.5.2 Quantum Teleportation	16
2.5.3 Dense-Coding	17
2.6 Why these postulates?	17
3 Computational Complexity	19
4 Universal Computation	21
4.1 Classical Analogy	21
4.2 Universal Quantum Gates	21
4.2.1 Proof	21
4.2.2 Final Gate Count	21
5 Algorithms	22
5.1 Quantum Parallelism	23
5.1.1 Interference	23
5.1.2 The Query Unitary	23
5.1.3 Deutsch's Approach	23
5.2 Deutsch-Josza Algorithm	23
5.3 Bernstein-Vazirani Algorithm	23
5.4 Simon's Algorithm	23
5.4.1 Problem	23
5.4.2 Classical Approach	23
5.4.3 Quantum Approach	23
5.5 Quantum Fourier Transform	23
5.5.1 Binary Fraction Expansion	23
5.5.2 Quantum Circuit	23

5.5.3	Remarks	23
5.6	Shor's Algorithm	23
5.6.1	Period Finding	23
5.6.2	From Period Finding to Factoring	24
5.6.3	Summary	24
5.7	Grover's Algorithm	24
5.7.1	Classical Approach	24
5.7.2	Quantum Approach	24
6	Quantum Error Correction	25
6.1	Tackling Bit-Flips	25
6.2	Tackling Phase-Flips	25
6.3	Shor's Code	25
6.3.1	Universal Error Correction	25
6.4	Steane Code	25
6.5	Fault-Tolerance and Transversality	25
6.6	Threshold Theorem	25
7	Quantum Nonlocality	26
7.1	Elements of Reality	26
7.2	CHSH Inequality	26
7.3	Quantum Violation of the CHSH Inequality	26
7.4	Tsirelson's Bound and Quantum Key Distribution	26
8	Measurement-Based Quantum Computing	27
8.1	Identity	27
8.2	Arbitrary Rotations	27
8.3	CNOT	27
8.4	Cluster States	27
8.5	Handling Errors	27
8.6	Important Gates	27



List of Figures

3.1 The Computational Complexity Zoo	20
--	----



List of Tables

2.1 Common Single-Qubit Gates 11



List of Algorithms

1 Preliminaries

In this chapter we discuss the groundwork for the upcoming topics. Along with these subjects, basic knowledge from linear algebra is required.

1.1 Complex Numbers

One of the underlying principles of quantum mechanics (QM) and therefore quantum computing (QC), too, are complex numbers. This section summarizes some results for them *very briefly*.

Let $z = a + ib \in \mathbb{C}$ be a complex number with the real and imaginary components $\text{Re}(z) = a, \text{Im}(z) = b \in \mathbb{R}$. Its magnitude is

$$|z| := \sqrt{a^2 + b^2} = \sqrt{zz^*}$$

with the *complex conjugate* $z^* = a - ib$. The complex conjugate is distributive over addition and multiplication¹, i.e., $(z_1 + z_2)^* = z_1^* + z_2^*$ and $(z_1 z_2)^* = z_1^* z_2^*$ holds for two complex numbers $z_1, z_2 \in \mathbb{C}$. Any complex number can also be written in polar form $z = re^{i\varphi}$ with magnitude

$$|z| = \sqrt{zz^*} = \sqrt{re^{i\varphi}re^{-i\varphi}} = \sqrt{r^2e^{i\varphi-i\varphi}} = \sqrt{r^2} = |r|.$$

Definition 1 (*n*-th Root of Unity). We call the special complex number $\omega_n = e^{2\pi i/n}$ the *n*-th root of unity.

Theorem 1 (Power Sum of *n*-th Roots of Unity). Let ω_n be the *n*-th root of unity with $n > 1$. Then $\sum_{k=0}^{n-1} \omega_n^k = 0$.

Proof.

$$\sum_{k=0}^{n-1} \omega_n^k = \frac{1 - \omega_n^n}{1 - \omega_n} = \frac{1 - e^{2i\pi}}{1 - \omega_n} = \frac{1 - 1}{1 - \omega_n} = \frac{0}{1 - \omega_n} = 0$$

□

1.2 Continued Fraction Expansion

Let $x \in (0, 1)$ be a real number². Then we can express this number as its *continued fraction expansion (CFE)*

$$x = \frac{1}{a_0 + \frac{1}{a_1 + \frac{1}{a_2 + \dots}}}$$

where $a_0, a_1, \dots \in \mathbb{N}^+$. The CFE of x is finite iff x is rational. The sums

$$\frac{1}{a_0} \qquad \frac{1}{a_0 + \frac{1}{a_1}} \qquad \frac{1}{a_0 + \frac{1}{a_1 + \frac{1}{a_2}}} \qquad \dots$$

¹For other useful properties, see https://en.wikipedia.org/wiki/Complex_conjugate#Properties.

²Note that the restriction on the interval $(0, 1)$ is purely for convenience as we only have x 's between zero and one down the line. It is also possible to extend continued fraction expansions to \mathbb{R} .

are called *partial sums*. For calculating a_0, a_1, \dots , let

$$x_0 := \frac{1}{a_0 + \frac{1}{a_1 + \frac{1}{a_2 + \dots}}} \quad x_1 := \frac{1}{a_1 + \frac{1}{a_2 + \dots}} \quad x_2 := \frac{1}{a_2 + \dots} \quad \dots$$

then the coefficients are $a_i = [1/x_i]$, where the brackets indicate the integral part, i.e., the part in front of the decimal. If for any j , $x_j = 0$, the CFE terminates and the number is exactly represented.

Example 1. Let $x = 11\,490/2^{14} \approx 0.701294$. Then the CFE is calculated as follows:

i	x_i	$1/x_i$	a_i
0	0.701 294	1.425 94	1
1	0.425 94	2.347 77	2
2	0.347 77	2.875 44	2
3	0.875 44	1.142 28	1
4	0.142 28	7.028 30	7
5	0.028 30	35.3333	35
6	0.333 33	3	3
7	0		

The final CFE is therefore

$$x = \frac{1}{1 + \frac{1}{2 + \frac{1}{2 + \frac{1}{1 + \frac{1}{7 + \frac{1}{35 + \frac{1}{3}}}}}}}$$

with the coefficients $(a_0, a_1, a_2, a_3, a_4, a_5, a_6) = (1, 2, 2, 1, 7, 35, 3)$.

2 Postulates of Quantum Mechanics

In this chapter we discuss the postulates of QM and some important protocols and results in QC such as the *no-cloning theorem*. This theorem states that it is impossible to copy a quantum state!

2.1 States

In classical computing, a bit is either 0 or 1. A quantum bit, a *qubit*, however, is more general and has the basis states $|0\rangle$ and $|1\rangle$. The states are formed by basis vectors $|0\rangle = (1, 0)^\dagger$ and $|1\rangle = (0, 1)^\dagger$. More generally, an arbitrary quantum state $|\psi\rangle$ can be a combination of the basis states, $|\psi\rangle = c_0 |0\rangle + c_1 |1\rangle$, a *superposition* (with complex coefficients $c_0, c_1 \in \mathbb{C}$). However, the state has to be normalized, i.e., $|\langle\psi|\psi\rangle|^2 = 1$. The left part of this inner product is called a *bra* vector representing the conjugate transpose of the right side, the *ket* vector.

The following postulate digests this idea more formally.

Postulate 1 (Quantum State). *Any closed physical system can be associated with a Hilbert space \mathcal{H} . The state of the system is completely described by a state vector $|\psi\rangle = \sum_{i=0}^{d-1} c_i |i\rangle$ with $\sum_{i=0}^{d-1} |c_i|^2 = 1$ where $\{|i\rangle\}_{i=0}^{d-1}$ forms a basis of \mathcal{H}^d .*

Remark 1. *The basis is not confined to the computational basis $\{|0\rangle, |1\rangle\}$, although this basis is often used. It may be any other orthonormal basis of \mathcal{H} , see ?? . For basis of Hilbert spaces with $d > 2$, see section 2.4.*

Instead of writing out the complex coefficients c_0 and c_1 , we can also parameterize an arbitrary superposition with angles $\gamma, \varphi, \theta \in \mathbb{R}$:

$$|\psi\rangle = c_0 |0\rangle + c_1 |1\rangle = e^{i\gamma} \left(\cos \frac{\theta}{2} |0\rangle + e^{i\varphi} \sin \frac{\theta}{2} |1\rangle \right).$$

However, as we will see in section 2.3, a global phase such as $e^{i\gamma}$ vanishes in all important calculations as $e^{i\gamma} e^{-i\gamma} = 1$. Hence, we can also parameterize any state with just two angles $\varphi \in (0, 2\pi]$ and $\theta \in (0, \pi]$:

$$|\psi\rangle = \cos \frac{\theta}{2} |0\rangle + e^{i\varphi} \sin \frac{\theta}{2} |1\rangle.$$

Checking that this state is actually normalized is straightforward:

$$\begin{aligned} \langle\psi|\psi\rangle &= \left(\cos \frac{\theta}{2} \langle 0| + e^{-i\varphi} \sin \frac{\theta}{2} \langle 1| \right) \left(\cos \frac{\theta}{2} |0\rangle + e^{i\varphi} \sin \frac{\theta}{2} |1\rangle \right) \\ &= \cos \frac{\theta}{2} \langle 0| + e^{-i\varphi} \sin \frac{\theta}{2} \langle 1| \left(\cos \frac{\theta}{2} |0\rangle + e^{i\varphi} \sin \frac{\theta}{2} |1\rangle \right) \\ &= \cos^2 \frac{\theta}{2} \underbrace{\langle 0|0\rangle}_{=1} + e^{i\varphi} \cos \frac{\theta}{2} \sin \frac{\theta}{2} \underbrace{\langle 0|1\rangle}_{=0} + e^{-i\varphi} \cos \frac{\theta}{2} \sin \frac{\theta}{2} \underbrace{\langle 1|0\rangle}_{=0} + e^{i\varphi} e^{-i\varphi} \sin \frac{\theta}{2} \sin \frac{\theta}{2} \underbrace{\langle 1|1\rangle}_{=1} \\ &= \cos^2 \frac{\theta}{2} + \sin^2 \frac{\theta}{2} = 1. \end{aligned}$$

Note that in this case $\langle\psi|\psi\rangle = 1$, so $|\langle\psi|\psi\rangle|^2 = 1$ holds, too, and we can drop the absolute-square. In most of the following discussions where we need explicit parametrization, we confine ourselves to real coefficients, i.e., $\varphi = 0$. This simplifies the discussion as now there is only one parameter θ .

2.2 Evolution

The evolution of quantum states, i.e., how they pass between states, is described by linear transformations U , also called *gates*. These gates transform a quantum state $|\psi\rangle$ into another quantum state $|\psi'\rangle$. In quantum circuits, we denote an application of U_1 and then U_2 to a state $|\psi\rangle$, i.e., $U_2U_1|\psi\rangle$, as:

$$|\psi\rangle \text{ --- } \boxed{U_1} \text{ --- } \boxed{U_2} \text{ --- } U_2U_1|\psi\rangle$$

Postulate 2 (State Evolution). *The evolution $|\psi(t_0)\rangle \xrightarrow{U} |\psi(t)\rangle$ of a closed physical system is described by a unitary transformation $UU^\dagger = \mathbb{1}$.*

Theorem 2 (Unitarity of Quantum Gates). *A linear quantum gate U is unitary, i.e., $UU^\dagger = \mathbb{1}$.*

Proof.

□

2.2.1 Gates

In this section we collect the most important single-qubit gates. They are summarized in Table 2.1 and their semantics are given in the caption.

Theorem 3 (Decomposition of Two-By-Two Unitary Matrices). *Every unitary matrix $U \in \mathbb{C}^{2 \times 2}$ can be decomposed into three rotations as $U = e^{i\alpha} R_z(\beta) R_y(\gamma) R_z(\delta)$.*

From this theorem, one might think that it is necessary to implement every rotation in the lab for a universal quantum computer. Fortunately, this is not the case! As we will see in chapter 4, only three gates are necessary to implement arbitrary rotations.

2.3 Measurement

We will now discuss the last postulate of QM which is concerned with *measurements*. The central result is that measuring a quantum system is inherently *probabilistic*, i.e., the outcome of a measurement is not deterministic and truly random. For any quantum state $|\psi\rangle$, the probability of measuring an outcome v_i is given by the absolute-square of the inner product between the “measurement state” $|v_i\rangle$ and the state $|\psi\rangle$:

$$P(i) = |\langle v_i | \psi \rangle|^2.$$

The value of this inner product (without the absolute-square) is called the *probability amplitude* and can be negative or even complex. Immediately after a measurement, the state $|\psi\rangle$ collapses into a post-measurement state $|\psi'\rangle$. This post-measurement state is

$$|\psi'\rangle = \frac{M_i |\psi\rangle}{N_i}$$

where $M_i = |v_i\rangle\langle v_i|$ and $N_i = \sqrt{P(i)}$ are the *measurement operator* and *normalization constant*, respectively. These results are digested in the following postulate.

Postulate 3 (Quantum Measurement). *Quantum measurements are described by a collection of measurement operators $\{M_i\}$ where i indicated the outcome of the experiment. Let $|\psi\rangle$ be the state before the measurement, then the state immediately after the measurement is $|\psi'\rangle = M_i |\psi\rangle / N_i$ where $N = \sqrt{P(i)}$ is for normalization.*

U	$U 0\rangle$	$U 1\rangle$	$U +\rangle$	$U -\rangle$
$X = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} = HZH$	$ 1\rangle$	$ 0\rangle$	$ +\rangle$	$- -\rangle$
$Y = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix} \equiv XZ$	$i 1\rangle$	$-i 0\rangle$	$-i -\rangle$	$i +\rangle$
$Z = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix}$	$ 0\rangle$	$- 1\rangle$	$ -\rangle$	$ +\rangle$
$H = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix}$	$ +\rangle$	$ -\rangle$	$ 0\rangle$	$ 1\rangle$
$R_y(\gamma) = \begin{bmatrix} c_\gamma & -s_\gamma \\ s_\gamma & c_\gamma \end{bmatrix}$	$c_\gamma 0\rangle + s_\gamma 1\rangle$	$-s_\gamma 0\rangle + c_\gamma 1\rangle$	$c_\gamma +\rangle - s_\gamma -\rangle$	$s_\gamma +\rangle + c_\gamma -\rangle$
$R_z(\beta) = \begin{bmatrix} e^{i\beta/2} & 0 \\ 0 & e^{-i\beta/2} \end{bmatrix}$	$e^{i\beta/2} 0\rangle$	$e^{-i\beta/2} 1\rangle$	$e^{i\beta/2} 0\rangle + e^{-i\beta/2} 1\rangle$	$e^{i\beta/2} 0\rangle - e^{-i\beta/2} 1\rangle$

Table 2.1: Common qubit gates and their effect on the computational and Hadamard basis. For brevity, let $c_\gamma := \cos(\gamma/2)$ and $s_\gamma := \sin(\gamma/2)$. The gates have the following effects in the computational basis: X implements a logical not, Y combines a phase flip and logical not, Z implements a phase flip, H creates an equal superposition, $R_y(\gamma)$ rotates around an arbitrary angle γ , and $R_z(\beta)$ adds a phase. In Hadamard basis, the gates have the following effects: X implement a phase flip, Y combined a phase flip and logical not, Z implements a logical not, H creates an equal superposition, $R_y(\gamma)$ rotates around an arbitrary angle γ , and $R_z(\beta)$ adds a phase.

Theorem 4 (Measurement of Pure Quantum States). *For pure states $|\psi\rangle$, the post-measurement state $|\psi'\rangle$ after a measurement of $|v_i\rangle$ is $|\psi'\rangle = |v_i\rangle$.*

Proof.

$$\frac{M_i|\psi\rangle}{N_i} = \frac{|v_i\rangle\langle v_i||\psi\rangle}{\sqrt{P(i)}} = \frac{|v_i\rangle\langle v_i||\psi\rangle}{\sqrt{|\langle v_i|\psi\rangle|^2}} = \frac{|v_i\rangle\langle v_i|\psi\rangle}{|\langle v_i|\psi\rangle|} = |v_i\rangle \frac{\langle v_i|\psi\rangle}{|\langle v_i|\psi\rangle|} \equiv |v_i\rangle$$

□

2.4 Composite Systems and Tensor Products

As in classical computing where we are concerned with more than one bit, QC also works with more than one qubit. The formalism for this are *tensor products* $\mathcal{H}^2 \otimes \mathcal{H}^2$ between the Hilbert spaces of the individual qubits. Its basis vectors are also constructed using tensor products:

$$|0\rangle \otimes |0\rangle = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix} \quad |0\rangle \otimes |1\rangle = \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix} \quad |1\rangle \otimes |0\rangle = \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} \quad |1\rangle \otimes |1\rangle = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

For two single-qubit operators $A = \begin{bmatrix} a_{00} & a_{01} \\ a_{10} & a_{11} \end{bmatrix}$ and $B = \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix}$, the tensor product is carried out as

$$A \otimes B = \begin{bmatrix} a_{00} & a_{01} \\ a_{10} & a_{11} \end{bmatrix} \otimes \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix} = \begin{bmatrix} a_{00} \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix} & a_{01} \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix} \\ a_{10} \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix} & a_{11} \begin{bmatrix} b_{00} & b_{01} \\ b_{10} & b_{11} \end{bmatrix} \end{bmatrix} = \begin{bmatrix} a_{00}b_{00} & a_{00}b_{01} & a_{01}b_{00} & a_{01}b_{01} \\ a_{00}b_{10} & a_{00}b_{11} & a_{01}b_{10} & a_{01}b_{11} \\ a_{10}b_{00} & a_{10}b_{01} & a_{11}b_{00} & a_{11}b_{01} \\ a_{10}b_{10} & a_{10}b_{11} & a_{11}b_{10} & a_{11}b_{11} \end{bmatrix}$$

with some abuse of notation. This definition has the effect of applying unitary A to the first and unitary B to the second qubit in a tensor-multiplied Hilbert space, i.e.,

$$(A \otimes B)(|\psi\rangle_1 \otimes |\psi\rangle_2) = (A|\psi\rangle_1) \otimes (B|\psi\rangle_2)$$

For brevity, we often write product state as $|0\rangle \otimes |1\rangle \doteq |0\rangle |1\rangle \doteq |01\rangle$ and the application of product operators as $(A \otimes B)(|0\rangle \otimes |1\rangle) \doteq A \otimes B |0\rangle \otimes |1\rangle = A_1 B_2 |01\rangle$. As long as it is clear which unitary is applied to which qubit, a variety of notations may be used. For brevity, we also often write $|\psi\rangle^{\otimes N} \doteq \underbrace{|\psi\rangle \otimes \cdots \otimes |\psi\rangle}_{N \text{ times}}$ and the same for gates.

2.4.1 Entanglement

A *composite* or *product* state is a state $|\psi_{12}\rangle$ that can be written as the product of two individual states $|\psi_1\rangle = \alpha_1 |0\rangle + \beta_1 |1\rangle$ and $|\psi_2\rangle = \alpha_2 |0\rangle + \beta_2 |1\rangle$:

$$|\psi_{12}\rangle = |\psi_1\rangle \otimes |\psi_2\rangle = (\alpha_1 |0\rangle + \beta_1 |1\rangle) \otimes (\alpha_2 |0\rangle + \beta_2 |1\rangle) = \alpha_1 \alpha_2 |00\rangle + \alpha_1 \beta_2 |01\rangle + \beta_1 \alpha_2 |10\rangle + \beta_1 \beta_2 |11\rangle$$

However, there are states that cannot be written like this!

Definition 2 (Entangled State). A quantum state $|\psi_{12}\rangle \in \mathcal{H}_1 \otimes \mathcal{H}_2$ is called *entangled* if there are no states $|\psi_1\rangle \in \mathcal{H}_1$ and $|\psi_2\rangle \in \mathcal{H}_2$ such that $|\psi_{12}\rangle = |\psi_1\rangle \otimes |\psi_2\rangle$.

Theorem 5 (Simple Entangled States). All states $|\psi_\theta\rangle = \cos \frac{\theta}{2} |00\rangle + \sin \frac{\theta}{2} |11\rangle$, $\theta \in (0, \pi/2]$ are entangled.

Proof. Let $|\psi_1\rangle := \alpha_1 |0\rangle + \beta_1 |1\rangle$ and $|\psi_2\rangle := \alpha_2 |0\rangle + \beta_2 |1\rangle$ with coefficients $\alpha_1, \alpha_2, \beta_1, \beta_2 \in \mathbb{C}$. Assume that $|\psi_\theta\rangle = |\psi_1\rangle \otimes |\psi_2\rangle$. Hence,

$$|\psi_\theta\rangle = \alpha_1 \alpha_2 |00\rangle + \alpha_1 \beta_2 |01\rangle + \beta_1 \alpha_2 |10\rangle + \beta_1 \beta_2 |11\rangle \stackrel{!}{=} \cos \frac{\theta}{2} |00\rangle + \sin \frac{\theta}{2} |11\rangle$$

By comparing coefficients, all of the following must hold: $\alpha_1 \alpha_2 \neq 0$, $\beta_1 \beta_2 \neq 0$, and $\alpha_1 \beta_2 = \beta_1 \alpha_2 = 0$. From the first two constraints it follows that all coefficients must be non-zero which contradicts the last constraint. Hence, the state is entangled. \square

One important special case of this result is the *Bell state* $|\Phi^+\rangle := \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle)$ which we will study further in chapter 7.

Multipartite

So far, we only studied entanglement of two parties \mathcal{H}_1 and \mathcal{H}_2 . However, it is also possible to describe entanglement between three or more parties. For three parties \mathcal{H}_1 , \mathcal{H}_2 , and \mathcal{H}_3 , there can be a variety of different entanglements:

$$|\psi_{123}\rangle = |\psi_{12}\rangle \otimes |\psi_3\rangle \qquad |\psi_{123}\rangle = |\psi_1\rangle \otimes |\psi_{23}\rangle \qquad |\psi_{123}\rangle = |\psi_2\rangle \otimes |\psi_{13}\rangle$$

For more than two parties, a state $|\psi\rangle_{123}$ that cannot be expressed as a product of its components is called *genuine multipartite entangled (GME)*. To check whether some state is GME can be done explicitly analogous to the above proof of two-party entanglement by checking all the above cases along with

$$|\psi_{123}\rangle = |\psi_1\rangle \otimes |\psi_2\rangle \otimes |\psi_3\rangle.$$


However, for N qubits the (potentially) entangled state has 2^N coefficients! The complexity of this checking is therefore $\mathcal{O}(\text{scary})$. There are, however, less straightforward, but easier-to-check procedures for validating whether a state is GME, but these are out of scope of this course.

Graph States

Although general methods for checking GME is out of scope, we will still look at the most famous example: *graph states*. Graph states are multi-qubit states corresponding to the mathematical structure of a graph. Let $G = (V, E)$ be a graph with vertices V and edges E . Then the corresponding multi-qubit state is

$$|G\rangle = \prod_{e \in E} CZ_e |+\rangle^{\otimes |V|}$$

where $CZ_e = \text{diag}(1, 1, 1, -1)$ is a controlled-Z-gate (see subsection 2.4.2) acting on the qubits of the edge. These graph states allowed for a new language to reason about quantum states. For instance, when measuring the first qubit of the following graph state in Z-basis,



it just disappears, dropping the connections to the second and third qubit:



Similar rules exist for other measurements, but these are again out of scope for this course.

2.4.2 Multi-Qubit Gates

So far, we only discussed local gates acting on a single qubit (remember, gates combined with tensor products are applied on each gate individually). While this already allows some calculations, it does not allow interplay of multiple qubits or generation of entangled states which are very important for various protocols (see section 2.5). Hence, we need *multi-qubit gates* U that cannot be written as the product of local gates, i.e., $U \neq U_1 \otimes \cdots \otimes U_N$.


CNOT-Gate The simplest is the CNOT-gate:

$$CNOT_{12} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix}$$

Input	Output
$ 00\rangle$	$ 00\rangle$
$ 01\rangle$	$ 01\rangle$
$ 10\rangle$	$ 11\rangle$
$ 11\rangle$	$ 10\rangle$

This gate is a *controlled* gate and applied the X-gate to the second qubit iff the first qubit is 1. The indices $CNOT_{ij}$ indicate that the gate is acting on the j -th qubit (the *target*) and controlled by the i -th qubit. This gate can be extended to more than two qubits (with $n - 1$ control qubits and a single target). For $n = 3$, it is called the *Toffoli gate* which can be used to represent classical logical operations like logical not, and, or, and not-and.

SWAP-Gate Another important two-qubit gate is the SWAP-gate



which simply switches the state of two qubits. The circuit on the right is the implementation of the SWAP-gate. Showing their equivalence is straightforward:

$$\begin{array}{ll}
 |00\rangle \xrightarrow{CNOT_{12}} |00\rangle \xrightarrow{CNOT_{21}} |00\rangle \xrightarrow{CNOT_{12}} |00\rangle & |01\rangle \xrightarrow{CNOT_{12}} |01\rangle \xrightarrow{CNOT_{21}} |11\rangle \xrightarrow{CNOT_{12}} |10\rangle \\
 |10\rangle \xrightarrow{CNOT_{12}} |11\rangle \xrightarrow{CNOT_{21}} |01\rangle \xrightarrow{CNOT_{12}} |01\rangle & |11\rangle \xrightarrow{CNOT_{12}} |10\rangle \xrightarrow{CNOT_{21}} |10\rangle \xrightarrow{CNOT_{12}} |11\rangle
 \end{array}$$

As unitary transformations are linear, we almost always only have to show the equivalence for the basis states as every state can be expressed as a superposition of them. This simplifies a lot of derivations! As the above circuit implements swapping for the basis states, it is a valid implementation of the SWAP-gate.

Controlled-U-Gate Note that any gate U can be used in a controlled fashion:


$$CU_{12} = \begin{bmatrix} \mathbb{1} & 0 \\ 0 & U \end{bmatrix}$$

To implement this gate in practice, it can be decomposed into CNOT-gates and single-qubit gates (see section 4.2.1).

Preparing the Bell State Equipped with these tools, we can prepare the Bell state $|\Phi^+\rangle$ with the following circuit:

$$|00\rangle \xrightarrow{H_1} \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)|0\rangle \xrightarrow{CNOT_{12}} \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) = |\Phi^+\rangle$$

For brevity, we will write



from now on whenever a Bell state is prepared between two qubits. Also, we will leave out the explicit derivation of the Bell state will from derivations.

2.5 Protocols

In this section we discuss some essential protocols in QC and the no-cloning theorem. These protocols are not complete algorithms (which are discussed in chapter 5), but illustrate essential ideas supporting some of the algorithms.

2.5.1 No-Cloning

While the no-cloning theorem is not really a protocol, it is an extremely important result for QC and thus also covered here.

Theorem 6 (No-Cloning). *Let $|\psi\rangle$ be some state. Then there exists no U such that $U |\psi\rangle |0\rangle = |\psi\rangle |\psi\rangle$. That is, no circuit exists that copies an arbitrary quantum state.*

Proof. Assume that U is a cloning circuit and let $|\psi\rangle$ and $|\phi\rangle$ be arbitrary states. Then we can compute

$$(\langle\phi| \langle\phi|)(|\psi\rangle |\psi\rangle) = \langle\phi|\psi\rangle \langle\psi|\phi\rangle = (\langle\phi|\psi\rangle)^2.$$

However, we can also express the composite states as $|\phi\rangle |\phi\rangle = U |\phi\rangle |0\rangle$ and $|\psi\rangle |\psi\rangle = U |\psi\rangle |0\rangle$ using the definition of the cloning circuit U . Hence,

$$\langle 0| \langle\phi| \underbrace{U^\dagger U}_{=1} |\psi\rangle |0\rangle = \langle 0| \langle\phi|\psi\rangle |0\rangle = \langle 0|0\rangle \langle\phi|\psi\rangle = \langle\phi|\psi\rangle.$$

Therefore, $(\langle\phi|\psi\rangle)^2 = \langle\phi|\psi\rangle$ holds. The states $|\phi\rangle$ and $|\psi\rangle$ are therefore orthogonal, $\langle\phi|\psi\rangle = 0$, or equal, $\langle\phi|\psi\rangle = 1$. This corresponds to classical data (either 0 or 1) and no arbitrary quantum states. Hence, there exists no such U . \square


This theorem is a fundamental result of QC and hinders some algorithms down the line. But it is not new! In fact, the no-cloning theorem is *equivalent* to Heisenberg's uncertainty principles stating that for any quantum system there exist two properties which cannot both be measured with certainty. Proofing this equivalence would go as follows (proofing both directions using contraposition):

- From no-cloning to Heisenberg: if Heisenberg's uncertainty principle would be false, we could measure everything with certainty and thus prepare a second state simply by transferring the measured data, violating the no-cloning theorem.
- From Heisenberg to no-cloning: if the no-cloning theorem would be false, we could copy an arbitrary quantum state an arbitrary number of times and thus measure the state with arbitrary precision, violating Heisenberg's uncertainty principle.

2.5.2 Quantum Teleportation

With *quantum teleportation*, it is possible to teleport an arbitrary quantum state from one position to another (e.g., from Alice's to Bob's lab) using entanglement. Both parties (Alice and Bob) previously shared a Bell state $|\Phi^+\rangle$ and now Alice wants to transmit her state $|\psi\rangle$ over to Bob, but they cannot meet and have no secure communication channel. However, Alice can publicly announce two classical bits of information that Bob will read.

Consider the following circuit:

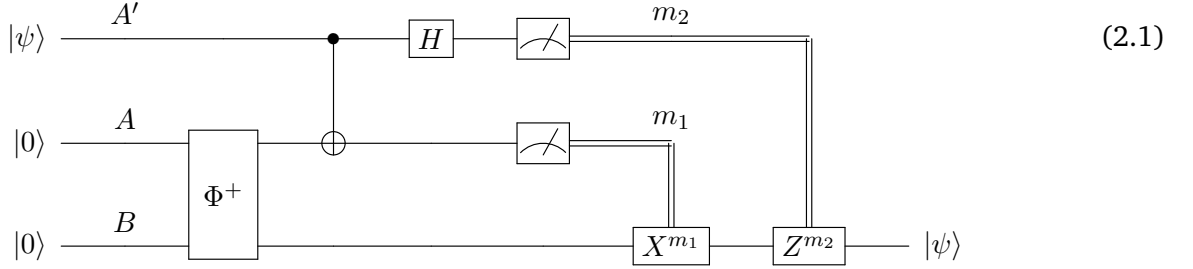

Note how the state $|\psi\rangle$ is teleported from qubit A to qubit B . Also note that the state is not cloned as Alice's measurement destroys her copy. To see that the above circuit actually copies the state, we can simply calculate what it does to the circuit. Let $|\psi\rangle = c_0 |0\rangle + c_1 |1\rangle$ be the qubit to be copied. Right before the measurements, the system has the following state:

$$\begin{aligned}
 & (c_0 |0\rangle + c_1 |1\rangle)_{A'} |00\rangle_{AB} \\
 \Phi_{AB}^+ \longrightarrow & \frac{1}{\sqrt{2}} (c_0 |0\rangle + c_1 |1\rangle)_{A'} (|00\rangle + |11\rangle)_{AB} \\
 CNOT_{A'A} \longrightarrow & \frac{1}{\sqrt{2}} (c_0 |0\rangle_{A'} (|00\rangle + |11\rangle)_{AB} + c_1 |1\rangle_{A'} (|10\rangle + |01\rangle)_{AB}) \\
 H_{A'} \longrightarrow & \frac{1}{\sqrt{2}} (c_0 |+\rangle_{A'} (|00\rangle + |11\rangle)_{AB} + c_1 |-\rangle_{A'} (|10\rangle + |01\rangle)_{AB}) \\
 = & \frac{1}{2} (c_0 (|0\rangle + |1\rangle)_{A'} (|00\rangle + |11\rangle)_{AB} + c_1 (|0\rangle - |1\rangle)_{A'} (|10\rangle + |01\rangle)_{AB}) \\
 = & \frac{1}{2} (|00\rangle_{A'A} (c_0 |0\rangle + c_1 |1\rangle)_B + |01\rangle_{A'A} (c_0 |1\rangle + c_1 |0\rangle)_B \\
 & + |10\rangle_{A'A} (c_0 |0\rangle - c_1 |1\rangle) + |11\rangle_{A'A} (c_0 |1\rangle - c_1 |0\rangle)_B)
 \end{aligned}$$

When now measuring the first two qubits, the following outcomes and post-measurement states are present, and the corresponding corrections have to be applied to recover $|\psi\rangle$:

m_1	m_2	$ \psi'\rangle_B$	Correction
0	0	$c_0 0\rangle + c_1 1\rangle$	$\mathbb{1}$
0	1	$c_0 1\rangle + c_1 0\rangle$	X
1	0	$c_0 0\rangle - c_1 1\rangle$	Z
1	1	$c_0 1\rangle - c_1 0\rangle$	ZX

With $U^1 = U$ and $U^0 = \mathbb{1}$, the corrections can be summarized into $Z^{m_2} X^{m_1}$ which are the last two gates of circuit (2.1).


We therefore teleported a qubit from A to B ! Note that this does *not* allow transmission of information faster-than-light as the two classical bits have to be transmitted. Without them, the qubit is worthless as Bob

cannot interpret it correctly¹. It also does not violate the no-cloning theorem as Alice's copy is destroyed during the measurement.

Concatenated Teleportation

2.5.3 Dense-Coding

We are now concerned with the “opposite” problem of qubit teleportation: instead of teleporting a qubit's state, we physically transport it to another location but encode two classical bits of information in it. That is, we transmit two bits of classical information by only transmitting a single qubit. Consider the following circuit:

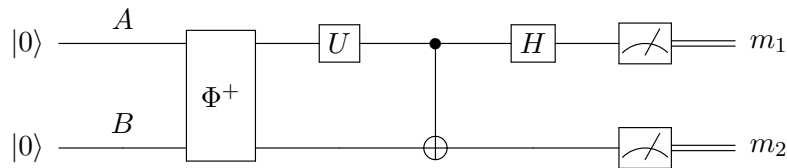

After creating the Bell state, Alice applies a unitary $U \in \{\mathbb{1}, X, Z, ZX\}$ and subsequently transmits the qubit to Bob. He, now in possession of both qubits A and B , now applies the rest of the gates to read out what unitary Alice applied. The measurement results are as follows:

U	m_1	m_2
$\mathbb{1}$	0	0
X	0	1
Z	1	0
ZX	1	1

Validating this is analogous to the teleportation and left as an exercise to the reader.

Again, this protocol does not allow faster-than-light communication as the qubit has to be physically transmitted. A combination with the teleportation protocol is possible, but this in turns requires the classical transmission of two bits, so still no faster-than-light transmission is possible.

2.6 Why these postulates?

One might ask *why* the postulates are as is (e.g., Why probabilities in the first place? Why amplitudes and not real positive numbers? Why the Euclidean norm and not an arbitrary p -norm? Why linearity?). The hard way to understand this is:

1. learn classical physics
2. learn why classical physics is not sufficient
3. learn quantum physics
4. maybe hear about why amplitudes and not probabilities

However, this course is not the place to squeeze in at least one year worth of lectures just to understand the postulates. Instead, we will take a more pragmatic approach, starting from why we use the Euclidean norm.

¹One might argue that Bob might get lucky and read out the correct information. But this kind of “faster-than-light transportation” is also possible classically: you can just guess what the information is—but does not actually transmit information!

Why the Euclidean Norm? Consider $\mathbf{v} = (v_1, v_2, \dots, v_N)$ describing the probabilities of an event with N possible outcomes. We impose a condition $\|\mathbf{v}\|_p = 1$ to ensure normalization. The most natural choice would be $p = 1$, i.e., requiring that the sum of the magnitudes is unity. However, remember that we want to apply transformations A to the vector and still keep the normalization condition: $\|\mathbf{v}\|_p = \|A\mathbf{v}\|_p = 1$. For any p , this condition only allows permutations $v_i \mapsto v_j$ and sign flips $v_i \mapsto -v_i$. None of these are capable of encoding everything interesting! However, for $p \in \{1, 2\}$, these matrices can encode more things. For $p = 1$, stochastic matrices are allowed and for $p = 2$, we can use unitary matrices! For higher p , no interesting behavior can be encoded. A very practical argument why we use $p = 2$ is therefore that otherwise QM would be very boring.

Why Complex Numbers? Again, we can bring up a very practical argument: only complex numbers are algebraically closed. Consider, for instance, a unitary gate U . Applying this gate takes t time. If we want to apply it for only $t/2$ time, we need to take its square-root $U = VV = V^2$. With being closed under this operation, it might be that there is no such gate! But as we are able to apply it for only $t/2$ time, there must be some form of square-root- U in the universe. Hence, we have to use complex numbers. Take, for instance, the gate $U = Z = \text{diag}(1, -1) = (\text{diag}(1, i))^2$.

Why Linearity? We always have the assumption that gates progress our state linearly. If it would not, i.e., if it would progress nonlinearly, we could solve NP-complete problems! But this is unrealistic, so we confine ourselves to linear evolution...

What is Quantum Mechanics About? Quantum mechanics is not about matter, energy, waves, nor particles. Instead, it's solely about information, probabilities, and observables and how these relate to each other! Whenever seeing two linear operators in QM, the sole answer to whether they commute conveys large amounts of information.

3 Computational Complexity

In this chapter we cover the basic ideas of complexity theory. As the core motivation behind QC is to speed up certain tasks, we first have to lay the ground for discussing what “speed up” actually means. In computer science, the *complex* of an algorithm describes the resources required to run it. This resource is often *space* or *time*. That is, how much memory or time it takes to run a specific algorithm. To assign a complexity to a problem instead of a specific algorithm, we assign say that the problem has the complexity of the best algorithm solving it.

The most common complexity classes are depicted in Figure 3.1. These are:

- P: problems that are solvable in polynomial time (graph connectivity, testing if a number is prime, matchmaking, sorting, linear search, ...)
- Bounded-Error Quantum Polynomial (BQP): problems solvable on a quantum computer with bounded error probability (e.g., $P(\text{error}) \leq 2/3$) (factoring, discrete logarithm, ...?)
- NP: problems believed to not be solvable in polynomial time (graph isomorphism, ...)
- NP-complete: hard problems that can be reduced on each other and for which the solution can be checked in polynomial time (box packing, map coloring, traveling salesman, $n \times n$ Sudoku, ...)
- PSPACE: problems which need polynomial amount of memory ($n \times n$ chess, $n \times n$ Go, ...)

These complexity classes are defined such that $P \subseteq BQP \subseteq NP \subseteq PSPACE$. A big open problem of computer science is whether $P \neq NP$, i.e., whether we can solve all problems “fast.” A similar question comes up for QC: is $P \neq BQP$, i.e., are there problems that can actually be solved faster on a quantum computer?

To assess the complexity of a quantum algorithm, we count the gates required to implement the circuit. We will see in the next chapter (chapter 4) how this scales with the problem size.

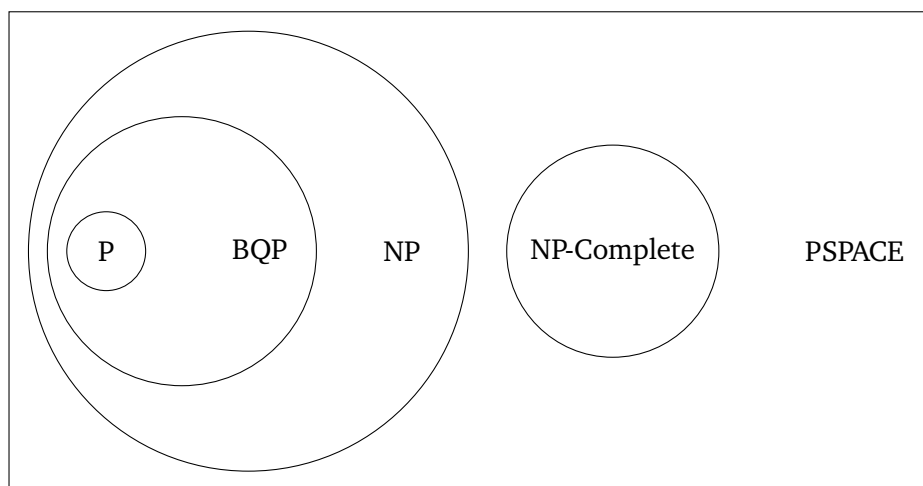


Figure 3.1: The Computational Complexity Zoo

4 Universal Computation

4.1 Classical Analogy

4.2 Universal Quantum Gates

4.2.1 Proof

Part 1/3: Unitaries as Two-Level Unitaries

Part 2/3: Decomposition of Two-Level Unitaries

Part 3/3: Approximation of Single-Qubit Gates

4.2.2 Final Gate Count

5 Algorithms

5.1 Quantum Parallelism

5.1.1 Interference

5.1.2 The Query Unitary

5.1.3 Deutsch's Approach

5.2 Deutsch-Josza Algorithm

5.3 Bernstein-Vazirani Algorithm

5.4 Simon's Algorithm

5.4.1 Problem

5.4.2 Classical Approach

5.4.3 Quantum Approach

Circuit

Post-Processing

Remarks

5.5 Quantum Fourier Transform

5.5.1 Binary Fraction Expansion

5.5.2 Quantum Circuit

5.5.3 Remarks

5.6 Shor's Algorithm

5.6.1 Period Finding

Using Quantum Fourier Transform

Post-Processing

Maximizing the $P(y)$

Recovering the Period

Remarks

5.6.2 From Period Finding to Factoring

Remarks

5.6.3 Summary

5.7 Grover's Algorithm

5.7.1 Classical Approach

5.7.2 Quantum Approach

Circuit

Illustration

Algebraic Proof

Multiple Solutions

Remarks

6 Quantum Error Correction

6.1 Tackling Bit-Flips

6.2 Tackling Phase-Flips

6.3 Shor's Code

6.3.1 Universal Error Correction

6.4 Steane Code

6.5 Fault-Tolerance and Transversality

6.6 Threshold Theorem

7 Quantum Nonlocality

7.1 Elements of Reality

7.2 CHSH Inequality

7.3 Quantum Violation of the CHSH Inequality

7.4 Tsirelson's Bound and Quantum Key Distribution

8 Measurement-Based Quantum Computing

8.1 Identity

8.2 Arbitrary Rotations

8.3 CNOT

8.4 Cluster States

8.5 Handling Errors

8.6 Important Gates
