

# Chapter 1

## Databasing Sound: Applications Of Databases In Sound



Figure 1.1: Database performance and interdisciplinary feedback.

The arrows between databases (cylinders) and computers (squares) represent data flow. Left: the database is ‘visibly next’ to the computer, as is the case with Music Information Retrieval (MIR); the two bottom arrows indicate the intervention of the human operator. Right: the database is ‘visibly below’ the computer as is the case with Sonification; the database feeds the computer from an external source (right arrow). Middle: the database is ‘invisibly behind’ the computer, within the softwares used for (and as) music works. The arrows in between the practices represent interdisciplinary feedback.

Having discussed the current state of new media theory and the theory of databases and data structures, in this section I theorize the use of databases in relation to sound. To a certain extent, ever since the first computers were used to make music the database has been an invisible partner in the music literature. I argue that by shedding some light on this inherent aspect of

computers we can arrive at a clearer notion of how databases sound. Particularly, by placing the database along a visibility continuum, we may find a reverse relation with audibility: the more invisible the database, the more present its sound. By this I do not argue in favor of either loudness or quietness. I am only addressing the different possibilities that come from multiple access points to computers. Here I will use the words ‘database’ and ‘computer’ somewhat interchangeably. This decision comes from the fact, as I described in earlier sections, that computers cannot exist without databases. From this, we can further ask ourselves if all computer music is database music.

As I demonstrate, there are overt and covert uses of the database, but the database is ubiquitous in all computer practices. The various disciplines at the intersection of music and computers take each a different approach to databases and, thus, to database performance. In this sense I describe and discuss the scope of actions that comprise database performance within three practices using computers and sound: MIR, sonification, and computer music. While there may be different ways of representing the position of the database in relation to each practice, I provide a set of figures throughout this section that can be used metaphorically to point to the differences with which each practice interacts with databases (See Figure 1.1). Furthermore, these positions are only fixed within a graph in the form of snapshots. Thus, in no way I mean to fix a certain position or to prioritize one in relation to another. The purpose of these graphs is to describe a motility inherent to database practice that suggests further a way of thinking database performance in a choreographic way. By choreography, I mean the movement that we as ‘computer musicians,’ as ‘sonicators,’ and as music information ‘retrievers’ (in sum, as databasers), perform in the continuous dance of our practices.

## 1.1 Music Information Retrieval

In Music Information Retrieval (MIR), the database is *in front* of the programmer, *next* to the computer. This practice combines Information Retrieval (IR) with Music Theory, and it has been

present in academia for a while, most generally within Electrical Engineering departments. The objective of MIR is to obtain useful information from the analysis of sound signals. That is, MIR seeks to represent a complex signal with a small number of data points, thus defining a navigable ‘information space,’ which is, quite literally, the discretized space of the database.

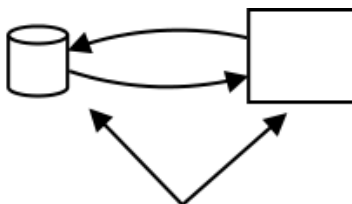


Figure 1.2: Diagram of database performance in MIR practices. The database is visibly next to the computer, and the two bottom arrows indicate the intervention of the human operator.

For instance, out of sound file containing millions of samples, information space reduces these points to a database of few ‘descriptors’ that point to certain ‘features’ of the sound file. A descriptor is, in essence, a small amount of data that identifies other larger data. In this case, a feature descriptor relates to the values of a certain characteristics of the analyzed audio file, such as spectral centroid, brightness, flatness, etc.

Over the 18 years of the International Society for Music Information Retrieval (ISMIR) conference, more than thirty databases of this sort have been publicly created and released, as a means to classify millions of songs and musical genres. This type of database navigation has been used to perform automatic tasks such as categorization for recommendation systems (G. Tzanetakis & Cook, 2002; Dinuzzo, Pillionetto, & Nicolao, 2008; Poddar, Zangerle, & Yang, 2018), track separation or instrument recognition, and score transcriptions, among other uses (see below). A recent emphasis in open source database creation has gained momentum (Fonseca et al., 2017), such as the Freesound or Looperman.com (Looperman) databases, or Centre des Musiques Arabes et Méditerranéennes (CMAM)’s Telemeta, both collaborative database systems: the first two for general sound file sharing and classification, the latter for ethno-musicological purposes. Audio

databases such as Freesound or Looperman have been growing exponentially, as well as their use within live performances and interactive systems (Correia, 2010). Automatic audio description and clustering among these databases automatic have improved greatly their usability (Xambo, Roma, Herrera, & Laney, 2012). Collins (2015) created open-source software implementing MIR techniques for navigation, analysis, and classification of the electronic music archive within UbuWeb.

Before sound and audio descriptor databases, however, music notation databases have been developed with a variety of file formats (See 1.3.2). Some examples of these notation databases can be the Polish folk song database in the Essen Associative Code (EsAC) format, the electronic library for musical scores MuseData, the Repertoire International des Sources Musicales (RISM) database, the *Kern Scores* database,<sup>1</sup> among others. In turn, these databases have been a fruitful area of exploration in Computational Musicology (Yolk, Wiering, & van Kranenburg, 2011), for which toolkits such as Massachusetts Institute of Technology (MIT)’s Music21 have been developed. Two examples of widely used libraries for audio analysis, classification, and synthesis are Music Analysis, Retrieval and Synthesis for Audio Signals (Marsyas) (George Tzanetakis & Cook, 2000) and the Essentia (Bogdanov et al., 2013). For a more general overview of MIR software, see (ibid.). The different applications of databases are endless and so varied that would extend the scope of this study.<sup>2</sup> Some specific uses that MIR has given to databases have been:

- for audio classification and clustering (Yang, 2001; Homburg, Mierswa, Möller, Morik, & Wurst, 2005; Queiroz & Yoshimura, 2018)
- for genre recognition and classification (G. Tzanetakis & Cook, 2002; Xu, Zang, & Yang, 2005; Jr., Koerich, & Kaestner, 2008; Sanden, Befus, & Zahng, 2010; Dehkordi & Banitalebi-Dehkordi, 2018; X. Wang & Haque, 2017; Mitra & Saha, 2014; Correa, Saito, & Costa, 2010; Dinuzzo et al., 2008)
- to describe performance expression (Hashida, Matsui, & Katayose, 2008; Hashida, Naka-

---

<sup>1</sup><http://kern.ccarh.org/>

<sup>2</sup>For example, consider the Musical Instrument Museums Online (MIMO) database, a project dedicated to the cataloguing of musical instruments, and how it was used for the statistical tracking of the evolution of the violin based on pattern recognition of its shapes (Peron, Rodrigues, & Costa, 2018)

- mura, & Katayose, 2017; Hashida, Nakamura, & Katayose, 2018)
- for emotion recognition and color associations in the listener (Pesek et al., 2014)
  - for multimodal mood prediction (Delbouys, Hennequin, Piccoli, Royo-Letelier, & Moussallam, 2018; Hu & Yang, 2014; Corona & O'Mahony, 2015)
  - for multi-instrument recognition (Humphrey, Durand, & McFee, 2018)
  - for the evaluation of multiple-source fundamental frequency estimation algorithms (Yeh, Bogaards, & Röbel, 2007)
  - for contextual music listening pattern detection using social media (Hauger, Schedl, Kosir, & Tkalcic, 2013)
  - for melody (Karydis, Nanopoulos, Papadopoulos, Cambouropoulos, & Manolopoulos, 2007; Bittner et al., 2014) or singing voice (Stoller, Ewert, & Dixon, 2017) extraction
  - for structural analysis (J. B. L. Smith, Burgoyne, Fujinaga, Roure, & Downie, 2011)
  - for schenkerian analysis (Kirlin, 2014)
  - for harmonic analysis (Devaney, Arthur, Condit-Schultz, & Nisula, 2015)
  - for melodic similarity (Haus & Pinto, 2005)
  - for forensic analysis as a complement of video analysis (Serizel, Bisot, Essid, & Richard, 2016)
  - for the evaluation of tempo estimation and key detection algorithms (Knees et al., 2015)
  - for tonal music analysis using Generative Theory of Tonal Music (GTTM) (Hamanaka, Hirata, & Tojo, 2014)
  - for counterpoint analysis (Antila & Cumming, 2014)
  - to train models for phoneme detection (Proutskova, Rhodes, Wiggins, & Crawford, 2012) and music source separation (Miron & Janer, 2017)
  - for training and evaluating chord transcription algorithms (Eremenko, Demirel, Bozkurt, & Serra, 2018)
  - for training querying methods (Cartwright & Pardo, 2012; Brzezinski-Spiczak, Dobosz, Lis, & Pinal, 2013; Nagavi & Bhajantri, 2014; Nagavi & Bhajantri, 2013; Melucci & Orio, 1999)
  - for adversarial audio synthesis (Donahue, McAuley, & Puckette, 2018)
  - for orchestration (Crestel, Esling, Heng, & McAdams, 2017)

- for modeling carnic rhythm generation (Guedes, Trochidis, & Anantapadmanabhan, 2018)
- to create digital libraries (Dunn, 2000)
- to store music notation (Good, 2000)

For further reference, the following citations point to different audio databases which have been created over the years: Goto, Hashiguchi, Nishimura, and Oka (2002), Goto, Hashiguchi, Nishimura, and Oka (2003), Wüst and Celma (2004), Maxwell and Eigenfeldt (2008), Bertin-Mahieux, Ellis, Whitman, and Lamere (2011), Karaosmanoglu (2012), Jaimovich, Ortiz, Coghlan, and Knapp (2012), Mital and Grierson (2013), Bortz, Jaimovich, and Knapp (2015), Jaimovich and Knapp (2015), Nort, Jarvis, and Palumbo (2016), Defferrard, Benzi, Vanderghenst, and Bresson (2017), Vigliensoni and Fujinaga (2017), Meseguer-Brocal, Cohen-Hadria, and Peeters (2018), Donahue, Mao, and McAuley (2018), Xi, Bittner, Pauwels, Ye, and Bello (2018), Wilkins, Seetharaman, Wahl, and Pardo (2018).

## 1.2 Sonification

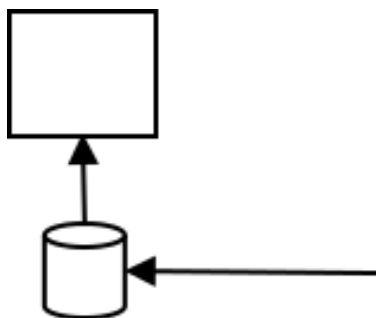


Figure 1.3: Diagram of database performance in sonification practices. The database is visibly below the computer, and it feeds the computer from an external source represented by the right-most arrow.

The database is the ground floor of sonification. The sonified data is very likely to be

digital,<sup>3</sup> which means that data needs to be stored in a structured way for fast access by computers, and the role of the sonifier is to acoustically translate the database's inner relationships (Walker & Nees, 2011, p. 9).

According to Walker and Nees (*ibid.*) there are three types of sonification: event-based, model-based, and continuous. I see these types of sonification as ways of performing a database. Continuous sonification (audification) consists of directly translating waveforms of periodic data into sound, that is, reading non-audio data as if it were audio data (*ibid.*, p. 17). Model-based sonification consists of distributing data points in such a way that enables data exploration. Generally, these models are interactive interfaces with which users navigate the database to find relationships (*ibid.*, p. 17). Event-based (parameter mapping) sonification is aimed at representing changes in a database as acoustic saliences or tendencies. In this sense, dimensions of the data need to be translated (mapped) into acoustic parameters (frequency, periodicity, density, etc.), so as to listen how the generated sound behaves over time and interpret these changes within the database (*ibid.*, p. 16).

Sonification depends on databases, on the interaction between databases, and on their traversing, but also on the human body's perceptual limits. In sonification, the data comes first, and it needs to be pre-processed so that it can be adapted to the sound synthesis engines of choice. Sonification is a subset of auditory display techniques, and it belongs to the broader scope of information systems and visualization practices (*ibid.*, p. 10). Therefore, since sonification belongs to the process of information, as a practice it has taken into account the auditory system's ability to extract biologically relevant information from the complex acoustic world (Carlile, 2011). What this emphasis on sound perception and cognition abides to, however, is the fact that there is no one-to-one correspondence between sound parameters (frequency, amplitude, spectral content) and how these are perceived (pitch, loudness, timbre). Therefore, the success of a sonification is the result

---

<sup>3</sup>There are cases where sonification is entirely analog, such as the first sonification tool ever created: the Geiger counter

of the play between, on the one hand a rigid link between data and sound, and on the other, the perceived acoustic relations. From this interplay of relations is how information can be obtained from data. In other words, in sonification practices there is no communication unless the data has been acoustically shaped, and perceived as information (*in-formed*) by the listener.

In what follows, I present some instances of sonification practices as described by their authors.

### 1.2.1 Parameter mapping

**DOW** Rossiter and Ng (1996) sonified the Dow Jones financial stock market data with Csound. Since the Csound program depends on two separate files (orchestra and score), they implemented another program to control the data flow. Within this second program, the Csound score was automatically generated based on a ‘configuration’ file which was used to map the ‘data file’ holding the stock market data, as it was read in separate window frames into the Csound-formatted score.<sup>4</sup>

**Medical Images** Cádiz et al. (2015) proposed a sonification approach based on statistical descriptors of Region of Interest (ROI) selected from medical images. In their study, they focused on enhancing breast cancer symptom detection in mammograms by mapping statistical descriptors, such as mean, minimum, maximum, standard deviation, kurtosis, skewness, among others, to different synthesis techniques in various ways. They then surveyed the usefulness and pleasantness of the sonifications to different subjects in order to better adjust the technique to the task. What is novel of their approach is on the creative use of statistical curves obtained from pixel distributions within computer music techniques.

---

<sup>4</sup>Other examples of stock market sonification include Ciardi’s set of tools for downloading and sonifying real-time data, see Ciardi (2004); and Ian Whalley’s research on telematic performance, see Whalley (2014)



### 1.2.2 Model-based sonification

**Space** One example of model-based sonification is the *Data Listening Space* installation by the QCD-Audio project at the Institute of Electronic Music and Acoustics (IEM) of the University of Music and Performing Arts in Graz (Vogt, Pirro, Rumori, & Hoeldrich, 2012). Within this installation, they proposed a three dimensional, navigable space holding a Monte Carlo simulation of the theory of Quantum Electrodynamics (QED). Within this QED *lattice*, a walking participant holding sensors — $x$ ,  $y$ , and  $z$  coordinates— could explore the simulated data by way of sonification.

### 1.2.3 Artistic sonification

**Wolves** Klein (1998) composed a piece called “The Wolves of Bays Mountain”, using a set of recordings she took along the Bays Mountain Park in Kingsport, Tennessee, for a period of six months. In this period she researched the sonic activity of a pack of wolves, and in her recordings she achieved a level of intimacy with the pack that translated into the recordings, and resulted in a strong animal rights activism (Klein, 2017). Therefore, her compositional choice was to treat the sound file in a non-destructive and non-intrusive way: “for the composition I used the Csound computer music language. All of the sounds came from the recordings, in unaltered or slightly modified form as the source material in musical settings and transitions” (Klein, 1998). Thus, by analyzing spectral contours of extremely precise frequency bandwidths of the data and resynthesizing into the soundscape in almost unnoticeable ways, she sonified a space in between the wolves. This space invites the listener into a space of action, and to reflect on human activity itself and how it always returns to resonate with the wolves.

**Selva** Barrett (2000a) composed an electroacoustic work called “Viva La Selva” (Barrett, 2000b) using 14-hour long recordings taken with an array of four microphones from a biological field station called *La Suerte* in Costa Rica. From these recordings, she extracted location (by difference

in arrival time) and timestamps (by manual logging) of different animal sounds, and long-term energy distribution in various frequency bands, to describe various environmental sounds such as airplanes, wind, insects, etc. While the spatio-temporal data of the animal sounds was used for sound spatialization of sounds within the electroacoustic work, the long-term energy distribution was scaled down to 20 minutes so as to constitute the form of the piece.

**Ocean** B. L. Sturm (2002) sonified ocean wave conditions of the USA Pacific coast obtained by the Coastal Data Information Program (CDIP) since 1975. The database until 2002 contained over 50 Gigabyte (GB) of spectral and directional content of the wave-driven motions at the location of the sensing buoys. By scaling to hearable range and then performing an Inverse Fourier Transform (IFT) of the data, Sturm composed a piece called *Pacific Pulse*, on which frequency sweeps indicate storms beginnings (rising) and endings (falling).

**Molecules** Falk Morawitz (2016) composed *Spin Dynamics* using molecular sonification by two audification processes (direct audification and via a straightforward additive synthesis process) applied to the Human Metabolome Database (HMDB), a database holding Nuclear magnetic resonance (NMR) spectroscopies of molecules.

**Gender Distribution** Emma Frid (2017) derived a database of gender distribution by applying the python module `genderize` to author names in three main computer music conference proceedings databases: International Computer Music Conference (ICMC), New Interfaces for Musical Expression (NIME), and Sound and Music Computing Conference (SMC). By assigning polar frequency ranges for each group (male and female), her sonification emphasizes the significant inequality of gender in the resulting acoustic stream segregation into male background (continuous drone-like sound) and female foreground (fewer and sparser sounds). Her conclusion, therefore, is that “there is a need for analysis of the existing environments and social relations that surround music technology and computer music. If we identify the challenges that women are facing in our

research community, we will be able to create more initiatives towards changing practices” (ibid., p. 238).

## 1.2.4 Sonification Installations

**IP-based soundscape** Ballora, Panulla, Gourley, and Hall (2010) sonified a database of Hypertext Transfer Protocol (HTTP) requests at Penn State’s Center for Network-Centric Cognition and Information Fusion (NC2IF). This database contained entries with four fields such as timestamp, location (latitude-longitude), Internet Protocol (IP) address, and response type. Using parameter mapping, Ballora controlled rhythm and spatialization with the first two, and pitch and timbre with IP data. However, the latter ranged from the more concrete (IP to frequency) to the more abstract (IP as formant and high-pass filters for brown noise), thus resulting in a soundscape with different but simultaneous sonifications of the data. This multi-layered approach to sonification stems from his PhD dissertation on cardiac rate sonification (Ballora, 2000).

**Earthquakes** Lindborg (2017) sonified real-time earthquake data as a sound sculpture. Within “Pacific Bell Tower, a sculptural sound installation for live sonification of earthquake data”, he used data from the Incorporated Research Institutions for Seismology (IRIS) Data Services, which transmits seismographic data packets updated every thirty minutes from multiple observation sites. He spatialized this data using coordinates of the events and using a four-speaker array located at the center of the gallery space, and mapped the rest of the data to Frequency Modulation (FM) synthesis parameters.

**GPU-based waveforms** Schlei and Yoshikane (2016) proposed a novel way to generate waveforms by populating an array using vertex data obtained from the Graphics Processing Unit (GPU). In order to carry this out, they used the Metal API<sup>5</sup>, and intervened on the processing pipeline to

---

<sup>5</sup>Apple’s built-in framework to interface with the GPU. See <https://developer.apple.com/documentation/metal>

output Central Processing Unit (CPU) accessible data. The audio engine running on the CPU was able to interpret as waveforms the values of the vertex and fragment shaders, thus sonifying the position data related to a rendered shape and the pixel values respective to its display. Therefore, they obtained simultaneous visualization and audification of the rendered three dimensional shape. In their installation *The Things of Shapes*<sup>6</sup>, they used the generated waveforms as a database, composing each waveform together with their visual generators as a collage.

**Uncanny Faces** Simonelli, Delgadino, and Halac (2017) designed *Hally*, an installation based on face tracking and real-time sonification of spectral features present in both pixel information containing the face, and the  $x$  and  $y$  coordinates of the moving data points of the face mesh used for tracking. Furthermore, by video-based audio convolution, *Hally* aims to simulate a theory of perception based on IFT (Connes, 2012). Parting from previous work by Thiebaut, Bello, and Schwarz (2007) on simultaneous sonification and visualization, *Hally* explores the role of both sound and image in the definition of the self, by immersing the participant in an uncanny spectrality (Cámara Halac, 2018). Among other sounds, there is one drone-like sound produced throughout the installation that comes out of a set of programming decisions which bring into surface certain aspects of the software used in the piece. The within Pure Data is scheduled in blocks of samples that the user can set. A certain combination of block size, overlap, and sample rate results in a frequency, in this case, of about 43 Hz (Simonelli et al., 2017, p. 3). In fact, these combinations around block size result in a set of octave-spaced pitches that are tethered to Pure Data's only possible block sizes ( $2^n$ , at least in audio computations). In this sense, when making these pitches audible, the listener can recognize a certain 'sound' proper to the internal memory management and computation rate of the software. In this installation, it is the human participant that enters as a filter to the spectrum of this 'sound' by the position of their faces on the camera sensing area. Thus, participants change this 'sound' with the unique ways in which they behave in front of the

---

<sup>6</sup><https://vimeo.com/167646306>

sensor.

### 1.2.5 Sonification Software

**SonArt** Originally intended for sonification purposes, SonART (Ben-Tal, Berger, Cook, Daniels, & Scavone, 2002) was an open-source platform that enabled users to map parameters to sound synthesis, and later (W. Yeo, Berger, Lee, & Zune, 2004) to obtain cross-correlated image and sound synthesis. In other words, users were able to easily translate a database into sound parameters, or image and sound data into one another. The program acted in a modular way, that is, it was networked with other software via Open Sound Control (OSC) connections. This software enabled W. S. Yeo and Berger (2005) to generate novel image sonifications, by combining two methods of sonification into one interface: sonified data in a fixed, non-modifiable order (*scanning*) and sonified selected data points (*probing*).

**DataPlayer** In his Computer Aided Data Driven Composition (CADDCC) environment called *DataPlayer* programmed as a standalone MAX/MSP application, Nardelli (2015) sonified data from the Automatic Flow for Materials Discovery (AFLOWLIB). His sonification intent was aimed towards data navigation by means of a unique mapping that would convey an overall trend (a gist) of each material compound. Furthermore, this environment allowed for artistic remixing and exploration of the sonification procedures, simultaneously touching on the scientific and the artistic uses of the environment.

**madBPM** Fox, Stewart, and Hamilton (2017) devised madBPM, a data-ingestion engine suitable for database perceptualization, that is, sonification and visualization. This modular C++ software platform enables data loading from Comma Separated Values (CSV) files, multiple mapping via tagging, several traversing algorithms and units, and networked connectivity to SuperCollider for sound and OpenFrameworks (OFX) for visual output. Their approach is innovative since they

provide features for database behaviors. By ‘behavior’ they mean ways of structuring, traversing and perceptualizing the database. These behaviors define the dual purpose of the software: finding relationships among the inputted data and interpreting them artistically. Furthermore, users can structure and re-structure potentially any type of data set (*ibid.*, p. 504). However, in order to design new behavior objects the user needs to implement them in the source code and compile them. Thus, besides real-time data streaming and networking functionality, in their future work the authors aim at designing a Domain Specific Language (DSL) that would enable extending the functionality of these behaviors in real-time.

For further sonification software, see Sonifying Data (SonData) and the following references: Wilson and Lodha (1996), Pauletto and Hunt (2004), Lodha, Beahan, Joseph, and Zaneulman (1998), Beilharz and Ferguson (2009), Hildebrandt, Hermann, and Rinderle-Ma (2014), Worrall, Bylstra, Barrass, and Dean (2007), Walker and Cothran (2003), Vicinanza (2006)

## 1.3 Computer Music

Computer music software is computer music’s playground. Composing and programming blend into different forms of play that can be understood by a closer look at the playground’s design. A key aspect of software design is delimiting constraints to data structures. The first choice is generally the programming language, after which the database tree unfolds its way up to the leaves. Among these leaves is where computer music programs reside. At this level of ‘leaves’ software users are certainly aware that there is a ‘tree’ in front of them. However, their awareness does not necessarily extend to the branches, trunk, or roots of the tree. There is endless music that can be made with leaves just as it can with paper. However, neither music quantity nor music quality are the point here. My argument is that working with data structures changes how we think and perform music making. I claim that composers using these leaves of computer music software are working indirectly with data structures, and unless they engage with programming, they re-

main unaware of data structures and their constraints. ‘Indirectly,’ because the twigs and branches connect the leaf to the trunk, but these connections become invisible to the non-programmer composer *by design*. Like a phantom limb of the tree, the database remains invisibly *behind*. In this section, I present different approaches from composers and programmers that show how music concepts change with the presence and performance of the database. By database performance I mean neither the quality of musical output, nor the dexterity of the programming activity. Database performance in music composition is the activity of the databaser: databasing to make music.




Figure 1.4: Diagram of database performance in computer music practices. The database is invisibly behind the computer, within the softwares used to create musical works.

### 1.3.1 Hierarchical environments

One of the most important aspects in the design of any computer system is determining the basic data types and structures to be used. . . we have been guided by our projection of the interaction between the tool which we are developing, and the composer. (Buxton, Reeves, Baecker, & Mezei, 1978, p. 119)

**Reducing cognitive burden** In William Buxton’s survey of computer music practices (Buxton, 1977; Buxton, Reeves, et al., 1978; Buxton, Patel, Reeves, & Baecker, 1980), he distinguished between *composing programs* and *computer aided composition*, arguing that they had both failed as software, the former on account of their personalization and formalization, and the latter on their lack of interactivity. On his later interdisciplinary venture called Structured Sound Synthesis Project (SSSP), he focused on Human Computer Interaction (HCI) —a field in its very early stages

in 1978—<sup>7</sup>. Buxton’s concern throughout his work on SSSP was to address the “problems and benefits arising from the use of computers in musical composition” (Buxton, Fedorkow, et al., 1978, p. 472). His solution to the problems was to reduce the cognitive burden of the composer, who “should simply not have to memorize a large number of commands, the sequence in which they may be called, or the order in which their arguments must be specified” (ibid., p. 474). He argued that reducing the amount of information given to composers helped them focus on music making. Therefore, in SSSP, the composer’s action was reduced to four main selection tasks: timbres, pitch-time structure, orchestration, and playback. Timbres were assigned by defining waveforms for the table lookup oscillators, and pitch-time structure consisted on pitches and rhythms on a score-like Graphical User Interface (GUI) program called SCRIVA (Buxton, 2016a). Orchestration consisted in placing the previously chosen timbres on the score, and playback meant running the score or parts of it. With this simple but very concise structure, stemming from a somewhat dated programming philosophy in relation to audio software, Buxton delimited the scope of action of the composer

**A Hierarchical Representation** Buxton, Fedorkow, et al. (1978) based their research on differing approaches to composition: Iannis Xenakis’s score-as-entity approach in his 1971 *Formalized Music*, an unpublished 1975 manuscript by Barry Vercoe at Massachusetts Institute of Technology (MIT) studio for Experimental Music, where Buxton found a note-by-note approach, and Barry Truax’s computer music systems (Truax, 1973) which was, for Buxton, located somewhere in between the first two but did not provide a solution for “the problem of dealing with the different structural levels of composition—from note to score” (Buxton, Reeves, et al., 1978, p. 120) (See 1.3.1). Buxton, however, condensed these different approaches into what he called a “chunk-by-chunk” composition, where a ‘chunk’ represented anything from a single note to an entire score, and thus reframed the question of a compositional approach as one of scale. For Buxton, “the key

---

<sup>7</sup>William Buxton is now considered a pioneer in HCI, and he is now a major figure in the Microsoft Research department.



to allowing this ‘chunk-by-chunk’ addressing lies in our second observation: that the discussion of structural ‘levels’ immediately suggests a hierarchical internal representation of scores” (ibid., p. 120). That is to say, his solution for the scalability problem relied on a hierarchical representation of scores.

In Buxton’s SSSP, the hierarchical design depended on a data structure called *symbol table*, which he subsequently divided into two objects called `score` and `Mevent` (musical events). The `score` structure had a series of global fields (variables) together with pointers to the first (head) and last (tail) `Mevents`. In turn, `Mevents` had local fields for each event together with pointers to the next and previous `Mevents`, so as to keep an ordered sequence (See ??) and enable temporal traversing of the tree. In turn, `Mevents` could have two different types: `MUSICAL_NOTE` and `Mscore`, the former relating to terminal nodes editable by the user —what he referred to as ‘leaves’ of the tree structure—, and the latter consisting of nested `score` objects that added recursivity to the structure. Buxton’s model was thus hierarchic (a tree structure) implemented in nested and doubly-linked symbol tables.

Buxton, Reeves, et al. (ibid.) gave a detailed exposition of the data structures and their functionality. Buxton’s general purpose in his HCI philosophy was to make the software work in such a way that it became invisible or transparent to the user. This is also known as a black-box approach. His innovations in this and other projects have had enormous resonances in computer science, and the concept of reducing cognitive burden of the user has developed as a standard of HCI (Buxton, 2016b).

**Black-boxing** Media theorist Vilem Flusser (2011) proposed the term ‘envision’ to describe a person’s power to visualize beyond the surface of the image, and to bring the technical image into a concrete state of experience. The ‘image,’ in Flusser’s case is the television screen in its abstract state of “electrons in a cathode ray tube.” Therefore, he argues, “if we are asking about the power to envision, we must let the black box remain —cybernetically— black” (ibid., p. 35). By seeing past

the abstract quality of media we bring an image into experience. The black box allows envisioning to take place. In a similar way, by seeing past the hidden complexities of the software, composers are able to create music with unrestrained imagination. However, as I have shown before, Hansen makes a divergent point claiming that the virtuality inherent in the body is the creative potential of image *in-formation* (See ??).

Understanding the process of information as the experience of technical images, it follows that virtuality and envisioning can be considered complementary. On one hand, there is the technical device, whose multidimensionality is as complex as it is hidden from the envisioner. On the other, the human body with its capacity to create and embody. Flusser's point is, however, paradoxical: "The envisioner's superficiality, to which the apparatus has *condemned* him and for which the apparatus has *freed* him, unleashes a wholly unanticipated power of invention" [emphasis added] (ibid., p. 37). Therefore, the black-box is what condemns and frees the envisioner to a state of superficiality. However, Flusser continues, "envisioners press buttons to inform, in the strictest sense of that word, namely, to make something improbable out of possibilities" (ibid., p. 37). In other words, Flusser justifies the invisibility of the technological device in favor of its most useful consequence, that is, its ability to make the user create something "out of possibilities." Composers, therefore, are often given these possibilities to create, at the cost of a restricted creation space.

### Generality and Portability

Music data structures must be general enough so that as many styles of music as possible may be represented. This implies that the data structures (or the application's interface to them) should not enforce a musical model (such as equal temperament) that is inappropriate for the musical task at hand. (Free, 1987, p. 318)

The SSSP lasted until 1982 due to lack of funding, and in the mid-1980s its research re-emerged with the work of Free and Vytas (1986), Free (1987), Free and Vytas (1988), under Helicon Systems' Computer Assisted Music Project (CAMP). Free's programming philosophy

called for generality, portability, and simplicity. Due to SSSP's many hardware dependencies, the code had to be completely re-written (Free & Vytas, 1986). A crucial aspect of Free's programming concerns was portability (See ??), which moved him to create higher levels of software abstractions, so that software continued to live on in newer hardware. Free also developed SCRIVA, SSSP's GUI program into extensible data structures for music notation arguing that software had to be general enough so that composers could work in multiple styles. The larger implication in Free's argument is that enforcing musical concepts in data structures limits the style that the program can achieve. Therefore, if the program fails to provide a certain level of generic functionality, the composer's output will be modelled by the data structure. On the one hand, it can be argued that this implication is simultaneously overestimating the agency of the database and underestimating that of the composer. In any case, the database works for the composer by taking care of the more tedious task. The cost of this, nonetheless, is that by working for the composer, the database guides the composer through certain paths while hiding other paths.

**Simplification** Hardware-independence led Free to imagine a general purpose, or *vanilla* synthesizer, with which students in “a music lab with multiple users on a networked computer system” (Free & Vytas, 1988, p. 127) could seamlessly use the timbre world offered by various synthesizers made by different manufacturers. Free created a database that enabled simultaneous interaction among different types of hardware. The *Music Configuration Database* consisted of an intermediate program between the physical Musical Instrument Digital Interface (MIDI) input devices (such as the Yamaha DX7 or Casio CZ101), and the computers in the network, so that “rather than have the user tediously specify the MIDI device properties for each synthesizer” (ibid., p. 133) (channel management, control mapping, etc), these processes were handled by an intermediary database. Free's approach, in comparison to Buxton's, was not entirely black-boxed, since the database was open to modification by a specific set of commands provided to the user. The user could edit the database with a library of database access subroutines such as open/close, create/delete items,

querying fields/keys, and loading/storing property items. With this library, Free simultaneously simplified user's interaction and reduced the "chance of corrupting the database" (ibid., p. 137).

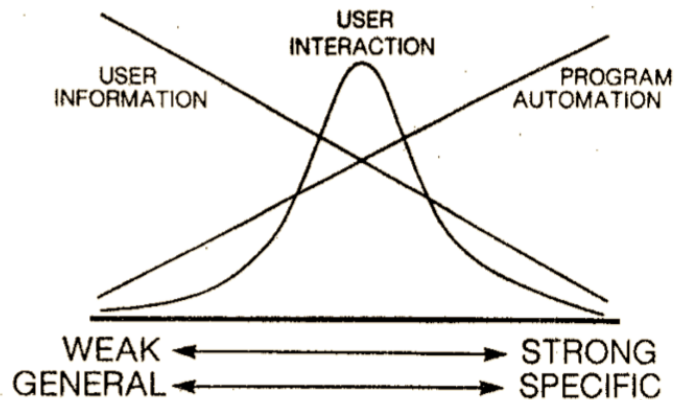


Fig. 1. Variation of user information, program automation, and user interaction as a function of the generality and strength of a system.

Figure 1.5: Generality vs. Strength

Barry Truax' "Inverse Relation Between Generality and Strength" (Truax, 1980, p. 51). Another version of this graph can be found in (Laske & Tabor, 1999, p. 38).

## Balance

...all computer music systems both *explicitly and implicitly embody a model of the musical processes that may be inferred from the program and data structure of the system*, and from the behavior of user working with the system. The inference of this model is independent of whether the system designer(s) claim that the system reflects such a model, or is simply a tool. [emphasis added] (Truax, 1976, pp. 230–231)

Truax (1973), Truax (1976), Truax (1980), Emmerson (1986, Chapter 8) often compared grammatical structures of natural language to the structures of computer music systems, claiming that in both cases one can find certain constraints and facilitations for thought (Emmerson, 1986, p. 156). Arguing for balance between generality of applicability and strength of embedded knowledge within models for computer music systems (See Figure 1.5), he writes:

In a computer music system, the grouping of data into larger units such as a sound-object, event, gesture, distribution, texture, or layer may have a profound effect on the composer's process of organization. The challenge for the software designer is how to provide powerful controls for such interrelated sets of data, how to make intelligent correlations between parameters, and how to make such data groupings *flexible according to context*. [emphasis added] (ibid., p. 157)

Truax's notion of balance speaks of a 'meeting halfway' between the system and the user regarding the programmer's capability to embed a more complex conception of hierarchy in the system. What provides this balance is a certain flexibility among data structures which would enable them to adapt to the different hierarchical contexts with which music is understood. That is to say, since data structures can embody models of musical processes, they have an effect on the composer's overall performance of the database, and by extension, on the resulting music.

### 1.3.2 Music Notation Software

Music representation has occupied an important area of research within the programming community. Formats and specifications such as MIDI, MusicXML (MusicXML), the Humdrum `**kern` data format (Sapp, 2005), GUIDO Music Notation Format (GUIDO), to name a few, have appeared over the years in conjunction with music engraving software. An extensive guide on musical representations can be seen in Selfridge-Field (1997a). In this section, I point to certain aspects of music notation software development that reveal different approaches towards data structures, and the possibilities that arise henceforth.

**DARMS and SCORE** Two major programs were developed during the 1960s and 1970s: Stefan Bauer-Mengelberg's Digital Alternate Representation of Musical Scores (DARMS) project for music engraving which started in 1963 (Brinkman, 1983; Erickson, 1975), and Leland Smith's SCORE (L. Smith, 1972). Both of these programs worked first in mainframe computers and were used for music printing and publishing. At first, SCORE's character scanner was designed to inter-

pret complex musical input into MUSIC-V output, thus acting as a link between music notation and computer music synthesis. However, with the appearance of vector graphics in the 1970s it shifted solely to music printing. With the appearance of the PostScript format in the 1980s, it became commercially available thus becoming one of the earliest music engraving softwares still in use today by major publishing houses (Selfridge-Field, 1997b).

**From Staves to Speakers** Other programming approaches stemming from DARMS and SCORE were developed during the 1980s. Clements (1980) joined together the DARMS data structures with those used in MUSIC-V in a first attempt to obtain sonic feedback out of a notation system. Clements' attempt was nonetheless overshadowed by SCORE's success. Later, Dydo (1987) worked on an interface to the DARMS language called the *Note Processor*, which became one of the earliest commercially available music notation systems. Dydo's data structures, however, were not publicly released when he presented his software at the International Computer Music Conference (ICMC) in 1987. He later released it commercially in the early 1990s at a significantly lower price than other notation software such as *Finale* which is still available today by MakeMusic, Inc. (Skinner, 1990a; Skinner, 1990b). Brinkman (1981) modeled the SCORE input format into *Score-11*, adapting it to Barry Vercoe's MUSIC-11. Written in Pascal, *Score-11* used circular linked lists traversed by an interpreter to produce MUSIC-11-formatted output. The user creates a text file with blocks dedicated to individual instruments and specifies parameters such as rhythm, pitch, movement (glissandi, crescendo), amplitude, etc. These parameters are then reformatted to fit the less musically-oriented notation of the MUSIC-N programs. Brinkman argued that such a software would result in faster and less arduous performance on the composer's end: "a crescendo over several hundred very short notes requires several hundred different amplitude values representing the increasing volume. *Typing in several hundred note statements each with a slightly larger amplitude number would take forever.* If the computer could be instructed to gradually increase the amplitude value over twenty seconds then *life would be much simpler*" [emphasis

added] (Brinkman, 1982). Brinkman emphasized on the program's extensibility by users, inspiring Mikel Kuehn's recent *nGen* program (McCurdy, Heintz, Joaquin, & Knevel, 2015), a version of Brinkman's program for the current Csound. Brinkman (1983) later designed an interpreter for the DARMS language, which became useful for obtaining computable data structures for automated music analysis (Brinkman, 1984). Another approach to music notation was carried out at Center for Computer Research in Music and Acoustics (CCRMA), when G. Diener (1988), G. Diener (1989) devised a "pure structure" devoted to the "hierarchical organization of musical objects into musical scores:" the *TTree* (G. Diener, 1988, p. 184). Stemming from his PhD research on formal languages in music theory (G. Diener, 1985), this data structure was based in the hierarchic structures of the SSSP project. The change Diener introduced to these structures was their capability of sustaining links between not only the previous and the next data records, but to the 'parent' or 'child' data records to which it was related. This is known as 'inheritance,' and it enabled "any event in the [structure] to communicate with any other event" (G. Diener, 1988, p. 188). While Diener implemented this data structure in the object-oriented programming language Smalltalk, he later developed it into *Nutation* (G. R. Diener, 1992), a visual programming environment for music notation. *Nutation* was written in Objective-C, and it combined the previously developed *TTree* structure with glyphs and a music synthesis toolkit called *Music Kit* that the NeXT computer provided. This resulted in an extremely malleable Computer Aided Composition (CAC) environment, which enabled fast manipulation and sonic feedback at the cost of limiting timbre to a predefined, hardware-specific set of digital instruments.

**Theoretical Performance** What notation software is most often criticised for is the way in which sonic feedback often comes to be equiparated to (human) music performance. When Leeland Smith presented SCORE as "not a 'performer's' instrument, but rather a 'musician's' instrument," for example, he claimed that "theoretically, any performance, clearly conceived in the mind, can be realized on [the computer]" (L. Smith, 1972, p. 14). It is indeed a fact that computers can

offer automated tasks to an unimaginable extent. However, to translate this type of automation into music composition and performance, results in a disembodied music conception. In other words, an algorithmically generated stream of notes may result in physically impossible tasks for a performer, or for the listener. This is the point of inflexion when envisioning goes beyond the threshold of embodiment. It can be argued, however, that further developments in musical performance techniques can be achieved by pushing the limits of bodily skills. Nonetheless, what I am stressing here is the extent to which music composition can be reconfigured by the possibilities data structures have brought to the field. Furthermore, what is at stake with notation-based music software is yet another musical concern that governed most of music software development during the 1980s: style.

### 1.3.3 Enter Objects

MILLER PUCKETTE, BARRY VERCOE, JOHN STAUTNER, MIT  
 "A Real-time Music 11 Emulator"  
 The MIT Experimental Music Studio is near completion on two real-time synthesis programs for an Analogic array processor. Together they emulate much of Music 11. One plays scores polyphonically on a flexible FM instrument, and the other plays Music 11 instruments written by the user monophonically from a clavier keyboard.

Figure 1.6: A real-time version of MUSIC-11.

A bodiless abstract published at the ICMC (1981) stating that a real-time version of MUSIC-11 was “near completion” by a group at MIT (M. Puckette, Vercoe, & Stautner, 1981).

**Max** Faster, cheaper, and portable microcomputers with real-time capabilities for audio processing began to appear onstage within institutions such as MIT and Institut de Recherche et Coordination Acoustique/Musique (IRCAM), and a growing interest among composers and programmers circled around real-time computer music software (See Figure 1.6). Towards the end of the 1980s,



after the proliferation of MIDI (Loy, 1985), composers were already incorporating real-time techniques within musical instruments and software (Vercoe, 1984; M. Puckette, 1991). This is the context for Miller Puckette’s development of Max for the 4X real-time audio processor at IRCAM (M. Puckette, 1986). With an emphasis on time and scheduling, Puckette devised a new approach towards complexity in computer music software:

...complexity must never appear in the dealings between objects, only within them. Three other features currently in vogue seem unnecessary. First, there is no point in having a built-in notion of hierarchy; it is usually a hindrance. Second, I would drop the idea of continuously-running processes; they create overhead and anything they do can be done better through [input, output] related timing. Third, there should be few defaults. Rather than hide complexity I would keep it visible as an incentive to avoid it altogether. (ibid., p. 43)

Puckette keeps complexity “visible” within the concept of the programming *object*. Furthermore, he removes the notion of hierarchical programming proposing a light-weight, on-the-spot programming practice based on discontinuous processes: “the scheduler keeps the runnable-message pool in the form of a separate queue for each latency” (ibid., p. 46). In other words, the structure of the database was placed *horizontally* along the time axis, and Puckette’s efforts were dedicated to optimizing the internal timing of audio processes. Specifically, linked lists are used to keep track of the order of processes that are run, and each process is scheduled according to its own temporality (latency). Thus, the entire network of processes that can be run is maintained in a dynamic list (stack) that can be changed at any time by adding or removing elements (push/pop). The way in which these processes (methods) are called is by messages that can be sent (input/output) by the user or objects themselves.<sup>8</sup> In sum, the object-oriented paradigm was thus applied to the scheduling system, resulting in a ground-breaking implementation that changed the

---

<sup>8</sup>“The scheduler always sends the first message in the lowest-latency non empty queue. When the associated method returns the scheduler sends another message and so on. The only situation in which we need to interrupt a method before it is done is when I/O (including the clock) causes a lower-latency message to appear... In this case the scheduler causes a software interrupt to occur by pushing a new stack frame onto the stack and executing the lower-latency method. When this method returns ... we pop the stack back to the prior frame at latency  $d_2$  and resume the associated method” (M. Puckette, 1986, p. 46).

real-time computer music performance scene: “. . . rather than a programming environment, Max is fundamentally a system for scheduling real-time tasks and managing intercommunication between them” (M. Puckette, 2002a).

**Kyma** Another powerful example of an object-oriented language for non-real-time music composition is Carla Scaletti’s Kyma, developed at the University of Illinois’ Computer Based Education Research Laboratory (CERL) (Scaletti, 1987). It is designed as an interactive composition environment for the Platypus digital signal processor. Scaletti’s language was hierarchical in its structure, enabling data records to be linked vertically and horizontally. Together, these data structures formed objects, enabling the composer to treat any set of sounds within the composition, and even starting from the composition itself as an object. In such a way: “. . . the composer could create a ‘sound universe,’ endow the sound objects in this universe with certain properties and relationships, and explore this universe in a logically consistent way” (ibid., p. 50). Given the “vast amounts of data required for sound synthesis” (ibid., p. 50), Kyma’s objective was to fit timbre creation and temporal event lists into the same traversable database underlying the program. Like Puckette and Free, Scaletti’s design was aimed at a language that “itself would not impose notational or stylistic preconceptions” (ibid., p. 50).

On one hand, Scaletti based her research on Larry Polansky’s Hierarchical Music Specification Language (HMSL), another “non-stylistically based” music composition environment that was “not fundamentally motivated by a desire to imitate certain historical compositional procedures” (Rosenboom & Polansky, 1985, p. 224). Polansky’s focus was on a language that would “reflect as little as possible musical styles and procedures that have already been implemented—like conventional music notation—” (ibid., p. 224). On the other hand, the “notational bias” (Scaletti, 1987, p. 49) that Scaletti recognized in languages such as MUSIC-V and FORMES (Rodet, Barrière, Cointe, & Potard, 1982; Boynton, Duthen, Potard, & Rodet, 1986), prescribed a very clear division between composition and synthesis which, in turn, was a very difficult and

time-consuming “wall” she had to “circumvent” (Scaletti, 1987, p. 49). Therefore, she imagined a language in which the composer could “choose to think in terms of notes and keyboards and staves but in which this structuring would be no easier and no harder to implement than any of countless, as yet uninvented, alternatives” (ibid., p. 49). Both HMSL and Kyma are still in used today, the former with a further Java version by Didkovsky and Burk (Didkovsky & Burk, 2001), and the latter embedded into a commercially available workstation.<sup>9</sup>

**Pure Data** Ten years after Max, M. S. Puckette (1997) moved on to Pure Data. The commercially available MAX/MSP (Zicarelli, 1998) presents, like Pure Data, the Max programming paradigm (M. Puckette, 2002a). In resonance with the neutrality of the 1980s, Puckette introduced more data structure flexibility as a means to provide a musical instrument without stylistic constraints. Data structures became a more accessible feature for the user to define and edit:

The design of Max goes to great lengths to avoid imposing a stylistic bias on the musician’s output. To return to the piano analogy, although pianos might impose constraints on the composer or pianist, a wide variety of styles can be expressed through it. To the musician, the piano is a vehicle of empowerment, not constraint. (ibid.)

Puckette, therefore, aims to a certain stylistic neutrality, which he represents by the way in which the user opens the program: a blank page: “no staves, time or key signatures, not even a notion of ‘note,’ and certainly none of instrumental ‘voice’ or ‘sequence’” (ibid.). While acknowledging that even the ‘blank page’ is a culturally loaded symbol referring to the use of paper in Western Art Music (much in the same way that it is favoring complexity altogether), Puckette reconfigured computer music design, composition, and performance by considering the way in which the structure of the program resonates aesthetically.

**Graphic Scores** In order to include graphic scores for electronic music within the Pure Data, Puckette implemented a data structure deriving from those of the C programming language, which

---

<sup>9</sup><https://kyma.symbolicsound.com/>

can be used in relation to any type of data: “the underlying idea is to allow the user to display any kind of data he or she wants to, associating it in any way with the display” (M. Puckette, 2002b, p. 184). Puckette’s philosophy, as I have mentioned earlier, was aimed at detaching music software from music concepts, leaving these aesthetic decisions to the user. To this end, anything within the canvas can be customizable, and there is no notion of time assigned to canvas coordinates. However, Puckette provided the user with a sorting function, “on the assumption that users might often want to use Pd data collections as  $x$ -ordered sequences” (ibid., p. 185). In fact, this is the only sorting function within Pure Data, and it is the same function that sorts the patch ‘graph,’ only now made accessible to the user. A common and elementary database routine (`sort`) that emerged to the program’s surface because of traditional music notation practices.

Puckette contextualized his research with the *Animal* project by Lindemann and de Cecco which allowed users to “graphically draw pictures which define complex data objects” (Lindemann, 1990), three cases of graphic scores used to model electroacoustic music: Stockhausen’s *Kontakte* and *Studio II*, Yuasa’s *Towards the Midnight Sun*, and Xenakis’ *Mycenae Alpha*, and, most interestingly, the SSSP’s user-defined features for graphical representations. Although in the Max papers Puckette does not quote Buxton’s research, the latter’s numerous publications at ICMC towards the end of the 1970s suggests that they reached the scope of MIT’s Experimental Studio where Puckette studied with Barry Vercoe. Furthermore, in Puckette’s later introduction of graphic scores to Pure data (M. Puckette, 2002b) (See 1.3.3), he references the SSSP quoted by Curtis Roads (1985) as one source of inspiration, indicating that at least in 2002 Puckette was aware of Buxton’s research. In any case, both Buxton’s and Puckette’s approaches can be considered musical resonances that go beyond geographical limits, reaching the level of data structures in computer music software.

An interesting point in common, however, between much of the interactive composition programs that emerged during the 1980s is that stylistic neutrality became a leitmotif. Computer music software designers were interested in providing stylistic freedom by user-definability. This

became a programming need that stemmed from earlier computer music software implementations, and their experimentation. This shift in the course of computer music programs can be understood from two perspectives. On the one hand, by experiencing first-hand the extent to which data structures can indeed structure musical output, the composer-programmers of the 1980s took charge on data structure design and devised new approaches to music-making software. On the other hand, the novel flexibility allowed by the object-oriented model within the programming world made its way to the community by the younger generation of composer-programmers. In any case, the database was moving, expanding through computer music networks, institutions, and softwares.

**OpenMusic** In the same ICMC 1997 where Pure Data was presented, two object-oriented languages appeared: Realtime Cmix (RTcmix) (Garton & Topper, 1997) and OpenMusic (Assayag, Agón, Fineberg, & Hanappe, 1997). While neither real-time nor a synthesis engine, the strength of OpenMusic resides in its ability to provide the composer access to a variety of sound analysis tools for composition (Bresson & Agon, 2004; Bresson & Agon, 2010), as well as the possibility to generate algorithmic streams that output directly into a traditionally notated score. For example, OpenMusic introduced the concept of a *maquette*, which is a graphic canvas upon which a heterogenous set of elements as varied as audio waveforms, scores, or piano-roll type notation can be displayed. The LISP Processor (LISP)-based graphic language developed as a collaboration at IRCAM held music notation as a focal point, distinguishing it from other stylistically neutral software.

**Heaps and Nodes** Garton and Topper (1997) presented RTcmix, a real-time version of Paul Lansky's Cmix (Lansky, 1990). What they described as innovative in this project was, in a similar way to the data structures for time management that Puckette presented, the scheduling capabilities of the program. In contrast to the Cmix language, which assumes a non-real-time access of objects, "event scheduling is accomplished through a binary tree, priority-queue dynamic heap..." (Garton

& Topper, 1997). A heap is a tree-based data structure where both keys and parent-child relationships follow a hierarchical logic. Garton and Topper thus introduced hierarchy into the scheduler. What this allowed, in turn, was “scheduling-on-the-fly,” that is, “allowing notes to be scheduled at run-time (usually triggered by an external event, such as a MIDI note being depressed)” (ibid.). The real-time problem became once again a scheduling problem of computational tasks, and it was solved differently with yet another element: instruments instantiated “on-the-fly” could also establish their own Transmission Control Protocol / Internet Protocol (TCP/IP) connection sockets in order to allow for networked access to the individual synthesizers (ibid.). That is to say, whenever a new instrument appears, it has the potential to enter into networked communication with earlier and future nodes. This means that synthesizer nodes could enter and leave the scheduler at any time, always in communication with each other. A musical equivalent would be for a violin player to enter in and out of the orchestra at will, while being able to lend the violin to any other player, and also play any other instrument except the conductor. In a similar networked way, SuperCollider (McCartney, 1996; McCartney, 1998) is a high-level language that provides the user with a different paradigm to handle audio processes scheduling. The innovation that this language implemented, however, is the “garbage collection” of each process. McCartney took the hierarchic structure of the object-oriented paradigm and defined ‘nodes’ in a tree-like structure, each with its own capability of nesting groups of other nodes, but most importantly, with its own initiation and expiration times. In other words, in contrast to Pure Data and MAX/MSP’s constantly running audio processes, SuperCollider only consumes Central Processing Unit (CPU) resources whenever it needs to.

Both RTcmix and SuperCollider meant a step forward towards networked musical environments that have resulted in recent forms of music making such as laptop orchestras and live coding, along with new music software such as ChucK (G. Wang & Cook, 2003). The literature on computer music software for composition alone would extend beyond the scope of this dissertation. For further reference in other sound synthesis data structures, see: the Diphone synthesis

program (Rodet, Depalle, & Poirot, 1988; Caraty, Richard, & Rodet, 1989; Depalle, Rodet, Galas, & Eckel, 1993; Rodet & Lefèvre, 1996; Rodet & Lefèvre, 1997); the Otkinshi system (Osaka, Sakakibara, & Hikichi, 2002). For an overview of existing audio software up to 2004, see Xamat's PhD Dissertation (Amatriain, 2004, Chapter 2). See also the Integra project (Bullock & Coccioli, 2009; Bullock, Beattie, & Turner, 2011), and Ariza's work on python's data structures (Ariza, 2005).

## 1.4 Intersections

The computer music software race that took place at the level of data structures has moved from music to media in an attempt to generalize applicability by maximizing stylistic potentials. To a certain extent, this motion can be understood as an axis between sound and music data structures. On one hand there is music tradition with its notational baggage. On the other, sound synthesis and programming, with its multi-stylistic promise grounded on the more general use of media. In any case, the shape that this motion takes is given by the composer-programmer's needs, ideas, and implementations. The computer music scene today builds on these struggles, and continues to propose novel approaches that reconfigure the practice.

In this section, I provide a glimpse of the many shapes that this reconfiguration has taken. I focus on artistic ventures, program extensions, and innovative research that has appeared under four main aspects of database performance: corpus-based approaches, querying methods, traversing methods, and resource sharing. These examples point only to some moments in which data structure design changed computer music.

### 1.4.1 Corpus-based Approaches

Modern uses of databases in computer music take the general form of a corpus of sounds from which descriptors are obtained and then used to create sounds. These are known as corpus-based

approaches, also known as data-driven approaches. Their difference is a matter of scale. These approaches have emerged in opposition to rule-based ones, highly useful still in many applications. In what follows, I show some implementations of the corpus-based model in sound.

**Concatenative Synthesis** Diemo Schwarz developed the concept of data-driven concatenative sound synthesis in his PhD thesis at Institut de Recherche et Coordination Acoustique/Musique (IRCAM) (Schwarz, 2000; Schwarz, 2003; Schwarz, 2006a). By segmenting a large database of source sounds into units, a selection algorithm is used to find any given target by looking for “units that match best the sound or musical phrase to be synthesised” (Schwarz, 2006a). In contrast to rule-based approaches in which sound synthesis is arrived at by models of the sound signal, concatenative synthesis is data-driven, or corpus-driven (when referring to larger databases). That is to say, by joining together recorded samples, Schwarz obtained a model for sound synthesis that preserves even the smallest details of the input signal. Schwarz later contextualized ‘information space’ as a musical instrument in itself (Schwarz & Schnell, 2009; Schwarz, 2012).

**Other approaches** The variety of applications of corpus-based or data-driven is still a fruitful research area. I present here only some data-driven cases that arrive at other ways to generate sounds than sample concatenation. Kobayashi (2003) used a database of Short Time Fourier Transform (STFT) analysed sounds in an original way. Upon calculating the distances between the results of these analysis he was able to define a database of similarity between his original database which he then re-synthesized. Collins (2007) developed an audiovisual concatenative synthesis method where “databases tagged by both audio and visual features, then creating new output streams by feature matching with a given input sequence” (ibid., p. 1). A recent case in which concatenative synthesis was applied to rhythm can be found in Nuanàin, Jordà, and Herrera (2016). Ariza (2003) was able to implement a model for heterophonic texture by pitch-tracking the highly ornamented



music of the Csángó<sup>10</sup> music into a database that enabled him to present a data structure of the ornament. The implementation of analysis and subsequent algorithmic rule extraction can be thought of as a form of analysis-based sound generation: by inputting a sound file, a dataset of rules was obtained to approach a model for the ornament. Therefore, a rule-model was obtained by means of a data-driven approach. This relates to *Orchidée* (Carpentier, Tardieu, Rodet, & Saint-James, 2006), a computer-aided orchestration tool based on database input-matching and a series of candidate orchestration targets. The data-driven approach is combined with a highly dense corpus of instrumental techniques, in order to concatenate orchestral targets.

**Software Libraries** One of the central concepts of the object-oriented programming is extensibility. The list of objects that can be added to the main program tends to grow exponentially as a function of its use. A list covering all extensions would require a research project of its own. However, I would like to focus on those extensions that enable further and more specific use of databases in the context of music composition. B. Sturm (2004) developed *MATCONCAT*, a concatenative synthesis library for *Matlab*. Schwarz (2006b) designed Real-Time Corpus-Based Concatenative Synthesis (CataRT) as a concatenative synthesis toolkit both as a standalone application and as a MAX/MSP external. Another concatenative synthesis library is Ben Hackbarth's python module AudioGuide. William Brent's research on timbre analysis developed into a timbre description library for Pure Data called `timbreID` (Brent, 2010). Within this library, users are able to analyze sound files using most available timbre descriptors. Since Brent's library enables users not only to analyze sounds and store the resulting descriptors in a database, but also to cluster them within the database, it allows for a variety of applications of which only one of them is concatenative synthesis.

---

<sup>10</sup>“The Csángó, in some cases a Szekler ethnic group, are found in eastern Transylvania (Kalotaszeg), the Gyimes valley, and Moldavia” (Ariza, 2003).

### 1.4.2 Querying Methods

**Query-by-content** One of the innovations that brought forth Music Information Retrieval (MIR) is high-level audio feature analysis. This enabled computers to understand keywords such as ‘bright’, ‘sharp’, ‘dark’, ‘metallic’, etc., that would describe timbral content of audio files. When applied to database querying, these keywords enable ‘query-by-content’ searches. Many online databases such as Freesound or Looperman.com (Looperman) have this type of querying. The Content Based Unified Interfaces and Descriptors for Audio/music Databases available Online (CUIDADO) project at IRCAM consisted of a database system aimed at content based querying of sound files (Vinet, Herrera, & Pachet, 2002a; Vinet, Herrera, & Pachet, 2002b; Vinet, 2005). This project enabled Disk Jockeys (DJs) to browse through files, apply beat-synchronized transitions between them, among other automated tasks during performance. CUIDADO later developed into the *Semantic Hi-Fi* project and influenced subsequent software. Norman and Amatriain (2007) enabled users generation of personalized audio description databases that could also be queried by content in *Data Jockey*.

**Similarity-based** Frisson (2015) provides an overview of multimedia browsing by similarity. Real-time audio analysis moved users beyond descriptive keyword, with sound based input by singing or by providing a sample array. These systems calculate the spectral similarity between the incoming signal to obtain a match from a sound database. In this sense, a different type of performativity was enabled with systems with query-by-content in live contexts. For example, *SoundSpotter* (Casey & Grierson, 2007) was dedicated to real-time matching of audio-visual streams by using audio input as feed for a shingling algorithm based on Log Frequency Cepstral Coefficientss (LFCCs).<sup>11</sup>

---

<sup>11</sup>“Audio Shingling is a technique for similarity matching that concatenates audio feature vectors into a sequence of vectors, and matches the entire sequence” (Casey & Grierson, 2007). “Shingles are a popular way to detect duplicate web pages and to look for copies of images. Shingles are one way to determine if a new web page discovered by a web crawl is already in the database” (Casey & Slaney, 2006).

Querying a database by similarity appeared in contexts other than performance workstations. Based on both the *Semantic Hi-Fi* and *SoundSpotter* projects, Price and Rebelo (2008) developed an installation with an interface to a relational database of percussive sounds.<sup>12</sup> This database contained description data of the beginning of each analyzed sound file. Thus, participants were able to query a bank of percussion timbres based on brightness, noisiness, and loudness.

Concatenative synthesis uses similarity for the purpose of sample concatenation at the analysis frame level. In this sense, concatenative synthesis can be understood as a real-time query-by-content engine feeding a granular synthesis engine. Therefore, the difference between concatenative synthesis and content-based-queries is a matter of scale (samples as opposed to sound files) and in the use (new sample combinations as opposed to previously stored sound files).

**Hybrid Queries** Some authors have managed to conjugate disparate database uses by hybridizing the queries. The following modal translations represent only some of the many examples in the literature. Schloss, Driessen, and Peter (2001) used audio analysis to obtain gesture features from the non-audio signals obtained from the *Radio Drum*, an variant of Max Mathews’s *Radio Batton* (Boie, Mathews, & Schloss, 1989). Schloss et al. (2001) searched for peak detection in the incoming signal to determine mallet (air) strokes. At Center for Computer Research in Music and Acoustics (CCRMA), Serafin et al. (2001) managed to invert the concept of physical modeling by estimating violin bow position, pressure, and speed using Linear Predictive Coding (LPC) coefficients of violin audio recordings. Oliver and Jenkins (2008) presented a controller composed of an elastic head suspended along the rim of an empty drum shell. The player presses the head making different shapes with the hand, fingers, or mallets, and “these shapes are captured by a video camera that sends these images to the computer, which analyzes them and outputs the tracked parameters” (ibid., p. 1). This instrument enabled a possibility for “dissociating gesture with sound” (ibid., p. 1). That is to say, gestures whose sound could be visually anticipated (the

---

<sup>12</sup>In their project, they used a MAX/MSP library called *net.loadbang-SQL* to query and import data for the communication with Structured Query Language (SQL) databases.

hitting of a drum) were extended by micro-gestures only visible to the camera sensor. Further, in contrast with acoustic drums, with the silent drum “one can manipulate continuous sounds through a new gestural vocabulary (ibid., p. 1). Oliver La Rosa developed the sensing algorithm into a Graphics Environment for Multimedia (GEM) external called `pix_drum`, and later moved on to `pix_mano`, where he removed the fabric and focused on what he calls “direct hand-tracking” (Oliver, 2010) (See ??). Caramiaux, Bevilacqua, and Schnell (2011) proposed gestural input for the query-by-content method. They used gesture-to-sound matching techniques based on the similarities of temporal evolution between the gesture query and the sound target. Another example of hybrid querying is Cartwright and Pardo (2014), where a database of computer synthesis parameters was queried by vocal input, enabling users to mimic sounds with their voices in order to obtain parameter settings (presets) that would approach the analyzed vocal sound.

### 1.4.3 Traversing Methods

Given that querying methods have resulted in novel ways to approach information space within databases, many authors have proposed their own approaches towards navigating this space. Like browsing, or surfing the Internet, database traversing is a form of navigation across the  $n$ -dimensional space that databases have to offer. Despite their differences, the approaches I refer to now point to the hybrid qualities that data can take when used in performance, specifically in terms of the mixed use of data coming from multiple sensing mechanism, and the networked quality that reconfigures music performance and composition.

**Sensorial Networks** Insook Choi, Zheng, and Chen (2000) presented an interactive installation (Choi, 2000) at the Dorsky Gallery in NYC where a ‘sensorial network’ made from a sound database of speeches by famous leaders was distributed along the installation space. Choi et al. implemented a motion tracking computer vision algorithm enabled sounds to be modulated as a function of the different ‘clouds’ of pixel data where values gradually changed as participants

moved across the sensing area: “pixels do not switch on and off, they fade in and out forming clusters in the 2D camera plane according to the degree of movement projected from the corresponding floor positions” (ibid., p. 4). In this sense, participants were able to walk the database itself: “Traversing the [sensorial network] can be thought of as rotating its shadow such that one moves through a semantic neighborhood which includes sound synthesis and residual tuning as well as speech acts” (ibid., p. 3). In addition to this tracking system, however, she included hysteresis within the system. Thus, the recorded history of the participant’s interaction with the system enabled condition-dependent events to occur as participants’ interaction lasted longer. Within this installation, the artist prototyped a “sensory information retrieval system where the acquisition of information is an acquisition of an experience” (ibid., p. 1).

**Involuntary Navigation** Bioinformatic data taken from galvanic skin sensors attached to a cellist’s toes within a live performance environment is the point of departure for a complex network for performance (Hamilton, 2006). The Galvanic Skin Response (GSR) activity was correlated with intervallic distance between adjacent musical notes in a database of ‘cell nodes’ previously written by the composer. However such score acted as a “filter for the autonomic control signals generated by the performer” (ibid., p. 601). What this means is that the music fragment database, involuntarily navigated by the performer, becomes a parameter for a live-generated score. The performer is thus embedded within a convoluted networked loop that goes through voluntary and involuntary agents that intertwine composition, interaction, and performance.

**Networked Collaborations** Among the many cases of network performances with multiple players that exist in the literature, I would like to point to one case where the rules of 16th century counterpoint demanded a relational database (Nakamoto & Kuhara, 2007). By implementing a database system such as MySQL, to store and retrieve vocal parts, Nakamoto and Kuhara enabled performers to sing together in canon form from distant locations. Going beyond any notion of

anachrony, what is interesting about this approach is the fact that by “using a PC and database server with the internet” two or more performers can engage seamlessly in musical performance (ibid.). Telematic performances have spawned ever since Internet connectivity enabled networked audio and video feeds. Whalley (2014) considers that the listener’s body within telematic electroacoustic concerts has been traditionally left out. Therefore, in he devised a set of parameter constraints within these performances, based on musicians who were used as baseline. His argument was grounded on an affective approach towards networked performance, and it is aimed at addressing the limitations that arise from the separation between performer and listener, specifically within telematic electroacoustic performances.

**Mobile Devices** The mobility that networks enabled can be represented in the work of Liu, Han, Kuchera-Morin, and Wright (2013), who created an audiovisual environment for live data exploration that implemented simultaneous sonifications and visualizations of networked database queries made by participants using I Operating System (iOS) devices. Taylor, Allison, Conlin, Oh, and Holmes (2014) implemented centralized database systems to include user-defined interfaces to be saved and shared within their mobile device platform. Carter (2017) presented a work that gives each member of the audience their own instrument through their cell phones. By accessing a website that loads custom synthesizers made with the Web Audio Application Programming Interface (API), the audience becomes the performer in an innovative way. While the title of the work (“On the expressive potential of suboptimal speakers”) refers to the potentials and the ubiquity of small transducers, the ‘score’ (source code) of the work lives on a server and travels wirelessly to the audience to become a (mobile) instrument.

These are some of the many examples that point to the many shapes that traversing a database can take. These shapes have given different resonances within the concert and installation spaces, as well as within the performativity of the music involved. Further, the possibilities of these reconfigurations can be seen in terms of a need for sharing resources and experiences through

networks.

#### 1.4.4 Resource Sharing

Sharing resources can be interpreted in many ways. On one end, it points to networked environments on which multiple client users connect to a server that provides shared data flow among the network. This is the case of live coding, where multiple users share the same network. Another definition pertains to the data itself, the way that it is formatted, and how to access or edit it: the file format, where users can read the same data. Lastly, the activity of sharing relates to publishing results like in research or academic communities. This is the case of the multiple datasets that exist.<sup>13</sup> In any case, what is common between these forms of sharing is an entropic and endless plurality.

**Multimodal Datasets** Among the many datasets that are available (See 1.1), a research interest has been growing among gesture datasets. This is the case of a hand drumming gesture dataset that uses data from a two-dimensional pressure sensor that could be compared to the membrane of a drum (Jones, Lagrange, & Schloss, 2007). Jones et al. aimed to provide physical model designers with a collection of six techniques of hand drumming, recorded as matrices at a slow rate (100 Hz) suitable for non-real-time synthesis by way of interpolation into a model for physical modeling of wave propagation called ‘waveguide mesh.’ Andrew Schmeder (Schmeder, 2009), stemming from the research at Center for New Music and Audio Technologies (CNMAT) on the Open Sound Control (OSC) format, proposed a real-time application for efficient storage and retrieval of gestural data using the relational model offered by the PostgreSQL Database Management System (DBMS). The motivation behind these datasets, besides research is mostly to provide open access to any user with a computer and an Internet connection. Young and Deshmane (2007) created web-accessible databases of gestural and audio data concerning violin bow strokes. Hochenbaum,

---

<sup>13</sup>‘Dataset’ differs from ‘database’ in terms of scale: multiple datasets may reside in a single database.

Kapur, and Wright (2010) developed a gestural and audio joint database that enabled identification of a given performer between a group of performers, gaining insight on musical performance itself. These joint databases combining more than one sensing mode are called ‘multimodal.’ Multimodal databases can be extremely focused —combining different blowing profiles on recorder flutes (along with their sound) (García, Vincelas, Tubau, & Maestre, 2011)—, or radically plural: listening subjects asked to move as if creating a sound (Visi, Caramiaux, Mcloughlin, & Miranda, 2017).

**Formats** While the purpose of a format is to store as much information as possible, using as little space possible, and in an efficient way so that read and write operations occur seamlessly, formats are the equivalent of database models within files: they can be implemented in endless ways, and they are contingent upon programming decisions (Sterne, 2012, p. 8). One way to categorize formats is based on human readability. Readability of the format is a function of the task at hand and the quantity of the data involved. In cases where the data is very little, for example, a `.pd` file (Pure Data), MetriX in Extensible Markup Language (MetriXML) (Amatriain, 2004), JavaScript Object Notation (JSON), YAML Ain’t Markup Language (YAML), or `.bib` (L<sup>A</sup>T<sub>E</sub>X bibliography file), data structures can be stored in (text) characters, and thus be readable by humans. In this sense, data does not need to be highly structured. For example, within the *Integra* project, programmers implemented a data format called Videoalive Indexer Extracted Closed Captions and Metadata (IXD), capable of containing sequences, tags and meta-data, and presets, for shared use among different multimedia environments. Their argument for a semi-structured model resided in the semantic richness that can be allocated in opposition to the binary format only readable by machines. To this end, they implemented IXD using the Extensible Markup Language (XML) language (Bullock & Frisk, 2009). In other cases, data is large enough to justify the need for binary format with a simple header such as `.timid (timbreID)`. At this level, by structuring the format and sacrificing human readable semantic richness, faster write and read times are achieved,



and less resources are used. However, in the case of larger media files such as audio, image, or video, and also multimodal gesture data, these demand high-performance compression algorithms that reproduce data in ‘streams.’ Some formats for sound and gesture analysis were standardized in recent years, as is the case of Sound Description Interchange Format (SDIF) and Gesture Description Interchange Format (GDIF), which are widely used in audio analysis software like Sinusoidal Partial Editing Analysis and Resynthesis (SPEAR) and OpenMusic (Bresson & Agon, 2004; Ny-moen & Jensenius, 2011). In one case revealing the extent to which data can reside in multiple combinations, the SDIF format was used for audio spatialization data (Bresson & Agon, 2004). There is still little format standardization within datasets, and in general, the plurality of formats demands database creators to either implement routines to interpret as many formats as possible, or to rely on external libraries for transcoding. In any case, the plurality of formats is almost as great as that of datasets and, to a certain extent, almost as numerous as there are software developers.

**Live Coding** Live coding has now a long history and it occupies a fair portion of the computer music scene today. In terms of database performance, the practice of live coding in audio or in video exposes both computer technology and art performance in simultaneity to the cutting edges of both worlds. For a more general overview on live coding, see (Collins, 2006; Collins, Mclean, Rohrhuber, & Ward, 2003; Nilson, 2007; m zmölnig & Eckel, 2015). In this brief section, I would like to point to the work of Roberts, Wright, Kuchera-Morin, and Höllerer, 2014, who implemented within a real-time live coding web-based environment called *Gibber* a centralized database for the storage and quick access of digital instruments that can be prototyped in the environment. This type of on-the-spot database system enables shared access to sound files that have potential use throughout the performance. By means of a networked database, two or more players can grab and record sounds from different locations. Another case of networked situations in live coding is a system that incorporates content based searches (query-by-humming, query-by-tapping) of various Creative Commons (CC) sound databases such as Freesound or to user-defined databases (Xambo,

Roma, Lerch, Barthet, & Fazekas, 2018).

### 1.4.5 Closing Remarks

The many shapes that database performance has taken over the years can be approached with what I have shown so far. Since many applications of the database in music continues to grow, I have only selected a few areas in which the database has had some agency. One area that I have not included above is that of artificial intelligence for music applications, where databases have been used for training models, and other forms of machine learning. For example, in interactive music systems (Rowe, 1992), in improvisation systems (Assayag, Dubnov, & Delerue, 1999; Bloch & Dubnov, 2008), to model Electronic Dance Music (EDM) patterns (Vogl & Knees, 2017), analog synthesizer parameter settings (Loviscach, 2008). Multimodal datasets have also been used in training (Schöner, Cooper, Douglas, & Gershenfeld, 1998). Notwithstanding the multiple gaps and omissions that these lines reveal, I believe the plurality of shapes speaks for itself. As I have shown, from bytes to terabytes, from data structures and files to datasets and databases, has had different positions in relation to sound practices. These positions can be summarized in a three-dimensional diagram (See Figure 1.7) where the database can be placed along three axes. Visibility of the database can be represented by the sign: positive values indicate visibility and negative indicate invisibility. ‘Negative’ in this context relates only to the sign of the value, and not to any ‘judgment’ whatsoever. If anything, this graph is intended as a metaphor. As I have mentioned earlier, the database is generally the grounds of sonification, so it can be represented by the  $y$ -axis. In MIR, the database is next to the databaser, that is, in the  $x$ -axis. Finally, I mentioned that the database in computer music is behind the databaser, therefore the  $z$ -axis seems appropriate.

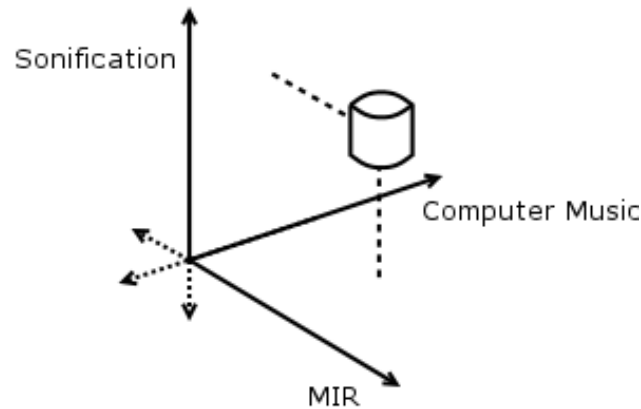


Figure 1.7: Intersection space.

A snapshot indicating a possible position of the database in terms of visibility among MIR, sonification, and computer music. Positive values indicate visibility and negative indicate invisibility. This graph is only one of multiple frames in which we can capture the visibility of the database in relation to the different practices. Despite the fact that the location in which the database can be placed within this graph is reduced to a single point, the database can occupy multiple points simultaneously. Thus, the more complex coreography inherent in databasing escapes the bi-dimensionality of this graph, but it can nonetheless be hinted by it.

The simplicity of this diagram is intentional, to avoid any attempt to quantize the actual value that the database represents in the plurality of shapes that I have discussed. There is no percentage that can be drawn from how visible a database can be. Therefore, when practices begin to intersect, as I have shown here, the visibility of the database can thus be understood as in constant motion along these axes. Database performance, in this sense, provides a key to understand the motion of this intersection. Furthermore, there is one dimension not contemplated within this diagram: time. The intersections referenced here are always moving in time, which indicates that the diagram that I have shown here is but one frame in the movement of this database choreography. At each point in time the databaser can pause for a second, analyze the frame, and perhaps describe the motion that the database has taken thus far, and the position that it occupies at that point. And further, perhaps the database occupies two positions at once. The dimensionality reduction carried out when graphing the position of the database should not misguide the reader into thinking that the database is fixed, or that it may have only one position. Quite the contrary, the

database is in constant motion and incessant fluidity, and databasers engage in a form of dance that sometimes brings the database to a certain visibility, and other times might veil it beyond layers of code. In any case, this description has been my task until now, and it is safe to say that we have glanced at the database dance. In what follows, I will change the focus and approach the database from a different perspective, one not guided by light, but immersed within sound.

# **Glossary**

- AFLOWLIB** A globally available database of 2,118,033 material compounds with over 281,698,389 calculated properties See also: <http://aflowlib.org/>. 13
- API** In computer programming, an application programming interface is a set of subroutine definitions, communication protocols, and tools for building software. See also: [https://en.wikipedia.org/wiki/Application\\_programming\\_interface](https://en.wikipedia.org/wiki/Application_programming_interface). 38
- AudioGuide** AudioGuide is a program for concatenative synthesis that I'm currently developing with Norbert Schnell, Philippe Esling and Diemo Schwarz. Work began in 2010 at IRCAM when I was composer in residence for musical research. Written in python, it analyzes databases of sound segments and arranges them to follow a target sound according to audio descriptors. The program outputs soundfile event lists that can be either synthesized (in csound or Max MSP/Pure Data) or translated into symbolic musical notation.. 33
- CAMP** A general purpose composition and performance software environment originally based upon William Buxton's SSSP. See also: . 18
- CataRT** The concatenative real-time sound synthesis system CataRT plays grains from a large corpus of segmented and descriptor-analysed sounds according to proximity to a target position in the descriptor space. This can be seen as a content-based extension to granular synthesis providing direct access to specific sound characteristics. See also: <http://imtr.ircam.fr/imtr/CataRT>. 33
- CC** An American non-profit organization devoted to expanding the range of creative works available for others to build upon legally and to share. See also: [https://en.wikipedia.org/wiki/Creative\\_Commons](https://en.wikipedia.org/wiki/Creative_Commons). 41
- CCRMA** A multi-disciplinary facility where composers and researchers work together using computer-based technology both as an artistic medium and as a research tool. See also: <https://ccrma.stanford.edu/>. 22, 35
- CDIP** An extensive network for monitoring waves and beaches along the coastlines of the United States. Since its inception in 1975, the program has produced a vast database of publicly-accessible environmental data for use by coastal engineers and planners, scientists, mariners, and marine enthusiasts. See also: <https://cdip.ucsd.edu/>. 9
- CERL** A research center based in the University of Illinois See also: [https://en.wikipedia.org/wiki/PLATO\\_\(computer\\_system\)](https://en.wikipedia.org/wiki/PLATO_(computer_system)). 25
- CMAM** The Centre for Arab and Mediterranean Music — Centre des Musiques Arabes et Méditerranéennes (CMAM) — is an institution operating under the authority of the Ministry of Cultural Affairs. It was established on 20 December 1991 and its statutes were enacted in October 1994. See also: <http://cmam.tn/>. 3
- Cmix** A computer music software designed and developed by Paul Lansky. Belongs to the Music N family, although it was designed for a more specific context of concrete music.. 29

- CNMAT** A multidisciplinary research center within University of California, Berkeley Department of Music. The Center's goal is to provide a common ground where music, cognitive science, computer science, and other disciplines meet to investigate, invent, and implement creative tools for composition, performance, and research. It was founded in the 1980s by composer Richard Felciano. See also: [https://en.wikipedia.org/wiki/Center\\_for\\_New\\_Music\\_and\\_Audio\\_Technologies](https://en.wikipedia.org/wiki/Center_for_New_Music_and_Audio_Technologies). 39
- CPU** The electronic circuitry within a computer that carries out the instructions of a computer program by performing the basic arithmetic, logic, controlling, and input/output (I/O) operations specified by the instructions. See also: [https://en.wikipedia.org/wiki/Central\\_processing\\_unit](https://en.wikipedia.org/wiki/Central_processing_unit). 11, 30
- CSV** A delimited text file that uses a comma to separate values. See also: [https://en.wikipedia.org/wiki/Comma-separated\\_values](https://en.wikipedia.org/wiki/Comma-separated_values). 13
- CUIDADO** A new chain of applications through the use of audio/music content descriptors, in the spirit of the MPEG-7 standard See also: . 33
- DARMS** The DARMS project started in 1963 by Stefan Bauer-Mengelberg and it is one of the first programming languages for music engraving See also: . 21
- DBMS** A computer program (or more typically, a suite of them) designed to manage a database, a large set of structured data, and run operations on the data requested by numerous users. Typical examples of DBMS use include accounting, human resources and customer support systems. See also: [https://en.wikipedia.org/wiki/Category:Database\\_management\\_systems](https://en.wikipedia.org/wiki/Category:Database_management_systems). 39
- DJ** A person who plays existing recorded music for a live audience. Most common types of DJs include radio DJ, club DJ who performs at a nightclub or music festival and turntablist who uses record players, usually turntables, to manipulate sounds on phonograph records. See also: [https://en.wikipedia.org/wiki/Disc\\_jockey](https://en.wikipedia.org/wiki/Disc_jockey). 34
- DSL** A computer language specialized to a particular application domain. This is in contrast to a general-purpose language, which is broadly applicable across domains. See also: [https://en.wikipedia.org/wiki/Domain-specific\\_language](https://en.wikipedia.org/wiki/Domain-specific_language). 13
- EDM** A broad range of percussive electronic music genres made largely for nightclubs, raves and festivals See also: [https://en.wikipedia.org/wiki/Electronic\\_dance\\_music](https://en.wikipedia.org/wiki/Electronic_dance_music). 41
- EsAC** Essen Associative Code (EsAC) was developed for one-part music, especially for European folksong databases. The code itself was inspired by the Chinese notation JIANPU and consists of cyphers (meaning pitches related to the declared tonic of the mode) and underlines and dots (standing for rhythmic durations). In addition to the code, several programs have been written for PC to analyze, listen, transpose and represent melodies. Conversions are possible into TEX, PCX, MIDI and other formats. See also: <http://www.esac-data.org/>. 4

**Essentia** Open-source library and tools for audio and music analysis, description and synthesis. 4

**FM** In telecommunications and signal processing, frequency modulation is the encoding of information in a carrier wave by varying the instantaneous frequency of the wave. See also: [https://en.wikipedia.org/wiki/Frequency\\_modulation](https://en.wikipedia.org/wiki/Frequency_modulation). 11

**Freesound** Freesound is a collaborative database of Creative Commons Licensed sounds. Browse, download and share sounds.. 3, 4, 33, 41

**GB** A unit of information equal to one thousand million (10<sup>9</sup>) or, strictly, 230 bytes. See also: <https://en.wikipedia.org/wiki/Gigabyte>. 9

**GDIF** A format for storing, retrieving and sharing information about music-related gestures. See also: . 40

**GEM** GEM stands for Graphics Environment for Multimedia and is an external (plugin) for the computer-music software Pure Data. See also: <http://gem.iem.at/>. 35

**GPU** A specialized electronic circuit designed to rapidly manipulate and alter memory to accelerate the creation of images in a frame buffer intended for output to a display device. See also: [https://en.wikipedia.org/wiki/Graphics\\_processing\\_unit](https://en.wikipedia.org/wiki/Graphics_processing_unit). 11

**GSR** GSR is another name for Electrodermal Activity (EDA) is the property of the human body that causes continuous variation in the electrical characteristics of the skin. See also: [https://en.wikipedia.org/wiki/Electrodermal\\_activity](https://en.wikipedia.org/wiki/Electrodermal_activity). 37

**GTTM** A theory of music conceived by American composer and music theorist Fred Lerdahl and American linguist Ray Jackendoff and presented in the 1983 book of the same title. See also: [https://en.wikipedia.org/wiki/Generative\\_theory\\_of\\_tonal\\_music](https://en.wikipedia.org/wiki/Generative_theory_of_tonal_music). 5

**GUI** The graphical user interface is a form of user interface that allows users to interact with electronic devices through graphical icons and visual indicators such as secondary notation, instead of text-based user interfaces, typed command labels or text navigation. See also: [https://en.wikipedia.org/wiki/Graphical\\_user\\_interface](https://en.wikipedia.org/wiki/Graphical_user_interface). 15

**GUIDO** The GUIDO Music Notation Format is a formal language for score level music representation. It is a plain-text, i.e. readable and platform independent format capable of representing all information contained in conventional musical scores. See also: <http://guidolib.sourceforge.net/GUIDO/>. 20

**HCI** A field that researches the design and use of computer technology, focused on the interfaces between people (users) and computers. See also: [https://en.wikipedia.org/wiki/Human-computer\\_interaction](https://en.wikipedia.org/wiki/Human-computer_interaction). 15



**HMDB** A comprehensive, high-quality, freely accessible, online database of small molecule metabolites found in the human body. Created by the Human Metabolome Project funded by Genome Canada. See also: [https://en.wikipedia.org/wiki/Human\\_Metabolome\\_Database](https://en.wikipedia.org/wiki/Human_Metabolome_Database). 10

**HMSL** HMSL is a programming language for experimental music composition and performance. It was popular between 1986 to 1996. HMSL is an object oriented set of extensions to the Forth language for the Amiga and the Macintosh. See also: <http://www.softsynth.com/hmsl/>. 26

**HTTP** An application protocol for distributed, collaborative, hypermedia information systems. See also: [https://en.wikipedia.org/wiki/Hypertext\\_Transfer\\_Protocol](https://en.wikipedia.org/wiki/Hypertext_Transfer_Protocol). 10

**ICMC** A yearly international conference for computer music researchers and composers. It is the annual conference of the International Computer Music Association (ICMA). See also: [https://en.wikipedia.org/wiki/International\\_Computer\\_Music\\_Conference](https://en.wikipedia.org/wiki/International_Computer_Music_Conference). 10, 21

**IEM** A multidisciplinary research center within the University of Music and Performing Arts, Graz, (Austria). See also: [https://en.wikipedia.org/wiki/Institute\\_of\\_Electronic\\_Music\\_and\\_Acoustics](https://en.wikipedia.org/wiki/Institute_of_Electronic_Music_and_Acoustics). 8

**iOS** A mobile operating system created and developed by Apple Inc. exclusively for its hardware. See also: <https://en.wikipedia.org/wiki/iOS>. 38

**IP** The principal communications protocol in the Internet protocol suite for relaying datagrams across network boundaries. Its routing function enables internetworking, and essentially establishes the Internet. See also: [https://en.wikipedia.org/wiki/Internet\\_Protocol](https://en.wikipedia.org/wiki/Internet_Protocol). 10

**IR** The activity of obtaining information system resources relevant to an information need from a collection of information resources. Searches can be based on full-text or other content-based indexing. See also: [https://en.wikipedia.org/wiki/Information\\_retrieval](https://en.wikipedia.org/wiki/Information_retrieval). 2

**IRCAM** A French institute for science about music and sound and avant garde electro-acoustical art music. See also: <https://www.ircam.fr/>. 24, 31

**IRIS** IRIS is a consortium of over 120 US universities dedicated to the operation of science facilities for the acquisition, management, and distribution of seismological data. See also: <https://www.iris.edu>. 11

**ISMIR** An international forum for research on the organization of music-related data. See also: <http://ismir.net>. 3

**IXD** This is an index file in text form that shows closed captions and file offset information from a MPEG or WM video file. The .IXD file is used by VBrick Systems, Videoalive, Discov-ervideo.com, and other vendors. See also: <https://filext.com/file-extension/IXD>. 40

**JSON** An open-standard file format that uses human-readable text to transmit data objects consisting of attribute-value pairs and array data types (or any other serializable value) See also: <https://www.json.org/>. 40

**LISP** A family of computer programming languages with a long history and a distinctive, fully parenthesized prefix notation. Originally specified in 1958, Lisp is the second-oldest high-level programming language in widespread use today. Linked lists are one of Lisp's major data structures, and Lisp source code is made of lists. See also: [https://en.wikipedia.org/wiki/Lisp\\_\(programming\\_language\)](https://en.wikipedia.org/wiki/Lisp_(programming_language)). 29

**Looperman** Looperman is a Free pro audio community for musicians, film and video producers, djs and multi media designers. See also: <https://www.looperman.com/>. 3, 33

**LPC** A tool used mostly in audio signal processing and speech processing for representing the spectral envelope of a digital signal of speech in compressed form, using the information of a linear predictive model See also: [https://en.wikipedia.org/wiki/Linear\\_predictive\\_coding](https://en.wikipedia.org/wiki/Linear_predictive_coding). 35

**madBPM** A modular C++ software platform serving as a data-ingestion engine suitable for database perceptualization (i.e. sonification and visualization). 13

**Marsyas** Marsyas is an open source software framework for audio processing with specific emphasis on Music Information Retrieval applications. It has been designed and written by George Tzanetakis with help from students and researchers from around the world. Marsyas has been used for a variety of projects in both academia and industry. See also: <http://marsyas.info/>. 4

**Max** Max programming language. Named after Max Mathews.. 24–28

**MAX/MSP** Also known as Max/MSP/Jitter, is a visual programming language for music and multimedia developed and maintained by San Francisco-based software company Cycling '74. Max (Mathews) + ("Max Signal Processing", or the initials Miller Smith Puckette). 13, 26, 30, 33, 34

**MetriXML** A computer music synthesis programming language based in the Music-N type. See also: <https://xamat.github.io/Thesis/html-thesis/>. 40

**MIDI** A technical standard that describes a communications protocol, digital interface, and electrical connectors that connect a wide variety of electronic musical instruments, computers, and related audio devices. See also: <https://en.wikipedia.org/wiki/MIDI>. 19

**MIMO** The world's largest freely accessible database for information on musical instruments held in public collections. See also: <http://www.mimo-international.com>. 4

- MIR** The interdisciplinary science of retrieving information from music. MIR is a small but growing field of research with many real-world applications. Those involved in MIR may have a background in musicology, psychoacoustics, psychology, academic music study, signal processing, informatics, machine learning, optical music recognition, computational intelligence or some combination of these. See also: [https://en.wikipedia.org/wiki/Music\\_information\\_retrieval](https://en.wikipedia.org/wiki/Music_information_retrieval). 1, 2, 33
- MIT** Private research university in Cambridge, Massachusetts. See also: <http://www.mit.edu/>. 4, 16
- MuseData** The MuseData database is a project of the Center for Computer Assisted Research in the Humanities (CCARH). The database was created by Walter Hewlett. Data entry has been primarily done by Frances Bennion, Edmund Correia, Walter Hewlett, and Steve Rasmussen.. 4
- MUSIC-11** Barry Vercoe's development of MUSIC-IV which later grew into the still widely used Csound.. 22, 24
- MUSIC-N** MUSIC-N refers to a family of computer music programs and programming languages descended from or influenced by MUSIC, a program written by Max Mathews in 1957 at Bell Labs.. 22
- MUSIC-V** See MUSIC-N. 21, 26
- Music21** Music21 is a set of tools for helping scholars and other active listeners answer questions about music quickly and simply. It is a python module.. 4
- MusicXML** MusicXML is an XML-based file format for representing Western musical notation. The format is open, fully documented, and can be freely used. See also: <https://en.wikipedia.org/wiki/MusicXML>. 20
- MySQL** An open source relational database management system (RDBMS). Its name is a combination of "My", the name of co-founder Michael Widenius's daughter, and "SQL", the abbreviation for Structured Query Language.. 37
- NC2IF** The Center for Network-Centric Cognition and Information Fusion (NC2IF) explores the information chain from energy detection via sensors and human observation to physical modeling, signal and image processing, pattern recognition, knowledge creation, information infrastructure, and human decision-making-all in the context of organizations and the nation. See also: [https://ist.psu.edu/research/centers\\_labs/nc2if](https://ist.psu.edu/research/centers_labs/nc2if). 10
- NeXT** An American computer and software company founded in 1985 by Apple Computer co-founder Steve Jobs.. 23

- NIME** An international conference dedicated to scientific research on the development of new technologies and their role in musical expression and artistic performance. Researchers and musicians from all over the world gather to share their knowledge and late-breaking work on new musical interface design. See also: [https://en.wikipedia.org/wiki/New\\_Interfaces\\_for\\_Musical\\_Expression](https://en.wikipedia.org/wiki/New_Interfaces_for_Musical_Expression). 10
- NMR** A physical phenomenon in which nuclei in a strong static magnetic field are perturbed by a weak oscillating magnetic field (in the near field and therefore not involving electromagnetic waves) and respond by producing an electromagnetic signal with a frequency characteristic of the magnetic field at the nucleus. See also: [https://en.wikipedia.org/wiki/Nuclear\\_magnetic\\_resonance](https://en.wikipedia.org/wiki/Nuclear_magnetic_resonance). 10
- Objective-C** Objective-C is a programming language combining the Smalltalk messaging system and the C programming language, which enables an object-oriented approach to the latter.. 23
- OFX** openFrameworks is an open source toolkit designed for creative coding. It is written in C++ and built on top of OpenGL. It runs on Microsoft Windows, macOS, Linux, iOS, Android and Emscripten. See also: <https://openframeworks.cc>. 13
- OSC** A protocol for networking sound synthesizers, computers, and other multimedia devices for purposes such as musical performance or show control. OSC's advantages include interoperability, accuracy, flexibility and enhanced organization and documentation. See also: [https://en.wikipedia.org/wiki/Open\\_Sound\\_Control](https://en.wikipedia.org/wiki/Open_Sound_Control). 12, 39
- PostgreSQL** An open source object-relational database management system with an emphasis on extensibility and standards compliance. It can handle workloads ranging from small single-machine applications to large Internet-facing applications with many concurrent users.. 39
- QCD-Audio** QCD-audio works on data of computer physics, stemming from the Institute for Physics. Our interdisciplinary proposal QCD-Audio will develop sonification techniques for data of numerical models in physics.. 8
- QED** In particle physics, quantum electrodynamics is the relativistic quantum field theory of electrodynamics See also: [https://en.wikipedia.org/wiki/Quantum\\_electrodynamics](https://en.wikipedia.org/wiki/Quantum_electrodynamics). 8
- RISM** The International Inventory of Musical Sources —Repertoire International des Sources Musicales (RISM)— is an international, non-profit organization which aims for comprehensive documentation of extant musical sources worldwide... Nearly all of the records may be downloaded as open data and linked open data in MARCXML and RDF format under a Creative Commons CC-BY license. See also: <https://opac.rism.info>. 4
- ROI** Samples within a data set identified for a particular purpose. For example, in medical imaging, the boundaries of a tumor may be defined on an image or in a volume, for the purpose of measuring its size. See also: [https://en.wikipedia.org/wiki/Region\\_of\\_interest](https://en.wikipedia.org/wiki/Region_of_interest). 8

**RTcmix** A real-time software "language" for doing digital sound synthesis and signal-processing. It is written in C/C++, and is distributed open-source, free of charge. See also: <http://rtcmix.org/>. 29

**SCORE** A scorewriter program, written in FORTRAN for DOS by Stanford Professor Leland Smith (1925-2013) with a reputation for producing very high-quality results.. 21–23

**SCRIVA** Notation software for the Structured Sound Synthesis Project (SSSP). 15, 18

**SDIF** A standard for the well-defined and extensible interchange of a variety of sound descriptions. See also: <https://en.wikipedia.org/wiki/SDIF>. 40

**Smalltalk** Smalltalk is an object-oriented, dynamically typed reflective programming language.. 22

**SonART** A flexible, multi-purpose multimedia environment that allows for networked collaborative interaction with applications for art, science and industry. It provides an open ended framework for integration of powerful image and audio processing methods with a flexible network features.. 12

**SonData** SonData is an Interactive Data Sonification toolkit, targeted at all practitioners interested in sonifying data. However, it also provides a set of tools that are useful to the academic and scientific Data Sonification community. See also: <https://github.com/JoaoMenezes/SonData>. 13

**SPEAR** An application for audio analysis, editing and synthesis. The analysis procedure (which is based on the traditional McAulay-Quatieri technique) attempts to represent a sound with many individual sinusoidal tracks (partials), each corresponding to a single sinusoidal wave with time varying frequency and amplitude. See also: <http://www.klingbeil.com/spear/>. 40

**SQL** A domain-specific language used in programming and designed for managing data held in a relational database management system, or for stream processing in a relational data stream management system. See also: <https://en.wikipedia.org/wiki/SQL>. 34

**SSSP** An interdisciplinary project whose aim is to conduct research into problems and benefits arising from the use of computers in musical composition See also: <https://www.billbuxton.com/SSSP.html>. 15

**STFT** A Fourier-related transform used to determine the sinusoidal frequency and phase content of local sections of a signal as it changes over time. See also: [https://en.wikipedia.org/wiki/Short-time\\_Fourier\\_transform](https://en.wikipedia.org/wiki/Short-time_Fourier_transform). 32

**TCP/IP** The Internet protocol suite is the conceptual model and set of communications protocols used in the Internet and similar computer networks. It is commonly known as TCP/IP because the foundational protocols in the suite are the Transmission Control Protocol (TCP)

and the Internet Protocol (IP). See also: [https://en.wikipedia.org/wiki/Internet\\_protocol\\_suite](https://en.wikipedia.org/wiki/Internet_protocol_suite). 29

**Telemeta** Telemeta is a free and open source collaborative multimedia asset management system (MAM) which introduces fast and secure methods to archive, backup, transcode, analyse, annotate and publish any digitalized video or audio file with extensive metadata. It is dedicated to collaborative media archiving projects, research laboratories and digital humanities — especially in ethno-musicological use cases — who need to easily organize and publish documented sound collections of audio files, CDs, digitalized vinyls and magnetic tapes over a strong database, through a smart and secure platform, in accordance with open web standards. Telemeta stands for Tele for “remote access” and meta for “metadata.”. 3

**UbuWeb** UbuWeb is a large web-based educational resource for avant-garde material available on the internet, founded in 1996 by poet Kenneth Goldsmith. It offers visual, concrete and sound poetry, expanding to include film and sound art mp3 archives.. 4

**XML** A markup language that defines a set of rules for encoding documents in a format that is both human-readable and machine-readable. The W3C’s XML 1.0 Specification and several other related specifications-all of them free open standards-define XML See also: <https://en.wikipedia.org/wiki/XML>. 40

**YAML** A human-readable data serialization language. It is commonly used for configuration files, but could be used in many applications where data is being stored or transmitted. See also: <https://en.wikipedia.org/wiki/YAML>. 40

# **Acronyms**

- Access** Microsoft Access. *Glossary:* Access
- AFLOWLIB** Automatic Flow for Materials Discovery. 13, *Glossary:* AFLOWLIB
- API** Application Programming Interface. 38, *Glossary:* API
- ASE** Adaptive Server Enterprise. *Glossary:* ASE
- ASF** Apache Software Foundation. *Glossary:* ASF
- AutoCAD** Automatic Computer Assisted Design. *Glossary:* AutoCAD
- BFCC** Bark Frequency Cepstrum Coefficient. *Glossary:* BFCC
- BOOST** Boost Software Library. *Glossary:* BOOST
- CAAC** Computer-Aided Algorithmic Composition. *Glossary:* CAAC
- CAC** Computer Aided Composition. 23
- CAD** Computer Aided Design. *Glossary:* CAD
- CADDIC** Computer Aided Data Driven Composition. 13
- CAMP** Computer Assisted Music Project. 18, *Glossary:* CAMP
- CASE** Computer Aided Software Engineering. *Glossary:* CASE
- CataRT** Real-Time Corpus-Based Concatenative Synthesis. 33, *Glossary:* CataRT
- CC** Creative Commons. 41, *Glossary:* CC
- CCRMA** Center for Computer Research in Music and Acoustics. 22, 35, *Glossary:* CCRMA
- CDIP** Coastal Data Information Program. 9, *Glossary:* CDIP
- CERL** Computer Based Education Research Laboratory. 25, *Glossary:* CERL
- CMAM** Centre des Musiques Arabes et Mediterraneennes. 3, *Glossary:* CMAM
- CNMAT** Center for New Music and Audio Technologies. 39, *Glossary:* CNMAT
- COBOL** Common Business Oriented Language. *Glossary:* COBOL
- CODASYL** Conference/Committee on Data Systems Languages. *Glossary:* CODASYL
- COMPath** Composition Path. *Glossary:* COMPath
- CouchDB** Apache Couch Database. *Glossary:* CouchDB



**CPU** Central Processing Unit. 11, 30, *Glossary*: CPU

**CSV** Comma Separated Values. 13, *Glossary*: CSV

**CUIDADO** Content Based Unified Interfaces and Descriptors for Audio/music Databases available Online. 33, 34, *Glossary*: CUIDADO

**CWM** Cluster Weighted Modeling. *Glossary*: CWM

**DARMS** Digital Alternate Representation of Musical Scores. 21, 22, *Glossary*: DARMS

**DBMS** Database Managemet System. 39, *Glossary*: DBMS

**DDL** Data Definition Language. *Glossary*: DDL

**DJ** Disk Jockey. 34, *Glossary*: DJ

**DML** Data Manipulation Language. *Glossary*: DML

**DOM** Document Object Model. *Glossary*: DOM

**DSL** Domain Specific Language. 13, *Glossary*: DSL

**EDM** Electronic Dance Music. 41, *Glossary*: EDM

**EMI** Experiments in Music Intelligence. *Glossary*: EMI

**ER** Entity Relationship. *Glossary*: ER

**EsAC** Essen Associative Code. 4, *Glossary*: EsAC

**FDN** Feedback Delay Network. *Glossary*: FDN

**FM** Frequency Modulation. 11, *Glossary*: FM

**FORTTRAN** Formula Translation. *Glossary*: FORTRAN

**GB** Gigabyte. 9, *Glossary*: GB

**GDIF** Gesture Description Interchange Format. 40, *Glossary*: GDIF

**GEM** Graphics Environment for Multimedia. 35, *Glossary*: GEM

**GPU** Graphics Processing Unit. 11, *Glossary*: GPU

**GSR** Galvanic Skin Response. 37, *Glossary*: GSR

**GTTM** Generative Theory of Tonal Music. 5, *Glossary*: GTTM

- GUI** Graphical User Interface. 15, 18, *Glossary*: GUI
- GUIDO** GUIDO Music Notation Format. 20, *Glossary*: GUIDO
- HCI** Human Computer Interaction. 15–17, *Glossary*: HCI
- HMDB** Human Metabolome Database. 10, *Glossary*: HMDB
- HMSL** Hierarchical Music Specification Language. 26, *Glossary*: HMSL
- HP** Hewlett Packard. *Glossary*: HP
- HTML** Hypertext Markup Language. *Glossary*: HTML
- HTTP** Hypertext Transfer Protocol . 10, *Glossary*: HTTP
- IBM** International Business Machines Corporation. *Glossary*: IBM
- ICMC** International Computer Music Conference. 10, 21, 24, 28, 29, *Glossary*: ICMC
- IDMS** Integrated Database Management System. *Glossary*: IDMS
- IDS** Integrated Data Store. *Glossary*: IDS
- IEM** Institute of Electronic Music and Acoustics. 8, *Glossary*: IEM
- IFT** Inverse Fourier Transform. 10, 12
- IMDBs** In Memory Data Bases. *Glossary*: IMDBs
- IMS** Information Management System. *Glossary*: IMS
- iOS** I Operating System. 38, *Glossary*: iOS
- IP** Internet Protocol. 10, 11, *Glossary*: IP
- IR** Information Retrieval. 2, *Glossary*: IR
- IRCAM** Institut de Recherche et Coordination Acoustique/Musique. 24, 29, 31, 33, *Glossary*: IRCAM
- IRIS** Incorporated Research Institutions for Seismology. 11, *Glossary*: IRIS
- ISMIR** International Society for Music Information Retrieval. 3, *Glossary*: ISMIR
- IXD** Videoalive Indexer Extracted Closed Captions and Metadata. 40, *Glossary*: IXD
- JSON** JavaScript Object Notation. 40, *Glossary*: JSON

**LBDM** Local Boundaries Detection Model. *Glossary:* LBDM

**LFCC** Log Frequency Cepstral Coefficients. 34

**LISP** LISt Processor. 29, *Glossary:* LISP

**Looperman** Looperman.com. 3, 4, 33, *Glossary:* Looperman

**LPC** Linear Predictive Coding. 35, *Glossary:* LPC

**Marsyas** Music Analysis, Retrieval and Synthesis for Audio Signals. 4, *Glossary:* Marsyas

**MetriXML** MetriX in Extensible Markup Language. 40, *Glossary:* MetriXML

**MIDI** Musical Instrument Digital Interface. 19, 20, 24, 29, *Glossary:* MIDI

**MIMO** Musical Instrument Museums Online. 4, *Glossary:* MIMO

**MIR** Music Information Retrieval . 1–4, 33, 42, *Glossary:* MIR

**MIT** Massachusetts Institute of Technology . 4, 16, 24, 28, *Glossary:* MIT

**MUSICOMP** MUsic Simulator-Interpreter for COMpositional Procedures. *Glossary:* MUSI-COMP

**MusicXML** MusicXML. 20, *Glossary:* MusicXML

**NASA** National Aeronautics and Space Administration. *Glossary:* NASA

**NC2IF** Center for Network-Centric Cognition and Information Fusion. 10, *Glossary:* NC2IF

**NetworkX** NetworkX. *Glossary:* NetworkX

**NIME** New Interfaces for Musical Expression. 10, *Glossary:* NIME

**NMR** Nuclear magnetic resonance. 10, *Glossary:* NMR

**NoSQL** Non or Not only SQL. *Glossary:* NoSQL

**NYU** New York University. *Glossary:* NYU

**OFX** OpenFrameworks. 13, *Glossary:* OFX

**Oracle** Oracle Corporation. *Glossary:* Oracle

**OS 2200** Unisys OS 2200 databases. *Glossary:* OS 2200

**OSC** Open Sound Control . 12, 39, *Glossary:* OSC

**PVC** Phase Vocoder. *Glossary:* PVC

**QED** Quantum Electrodynamics. 8, *Glossary:* QED

**RAM** Random Access Memory . *Glossary:* RAM

**RDM** Raima Database Manager . *Glossary:* RDM

**RISM** Repertoire International des Sources Musicales. 4, *Glossary:* RISM

**RM/T** Relational Model/Tasmania. *Glossary:* RM/T

**ROI** Region of Interest. 8, *Glossary:* ROI

**RTcmix** Realtime Cmix. 29, 30, *Glossary:* RTcmix

**RWC** Real World Computing Music Database. *Glossary:* RWC

**SAP HANA** High Performance Analytics Appliance. *Glossary:* SAP HANA

**SDIF** Sound Description Interchange Format. 40, *Glossary:* SDIF

**SMC** Sound and Music Computing Conference. 10

**SMIL** Synchronized Multimedia Integration Language. *Glossary:* SMIL

**SonData** Sonifying Data. 13, *Glossary:* SonData

**SPEAR** Sinusoidal Partial Editing Analysis and Resynthesis. 40, *Glossary:* SPEAR

**SQL** Structured Query Language. 34, *Glossary:* SQL

**SQLite** Structured Query Language Lite. *Glossary:* SQLite

**SSSP** Structured Sound Synthesis Project. 15, 16, 18, 22, 28, *Glossary:* SSSP

**STFT** Short Time Fourier Transform. 32, *Glossary:* STFT

**STRAIGHT** Speech Transformation and Representation using Adaptive Interpolation of weiGHTed spectrogram. *Glossary:* STRAIGHT

**TCP/IP** Transmission Control Protocol / Internet Protocol. 29, *Glossary:* TCP/IP

**timbreID** Timbre Identification. *Glossary:* timbreID

**Unisys** United Information Systems. *Glossary:* Unisys

**URI** Uniform Resource Identifier. *Glossary:* URI

**URL** Uniform Resource Locator . *Glossary:* URL

**XML** Extensible Markup Language. 40, *Glossary:* XML

**YAML** YAML Ain't Markup Language. 40, *Glossary:* YAML

# Bibliography

- Amatriain, X. (2004). *An object-oriented metamodel for digital signal processing with a focus on audio and music* (Doctoral dissertation, Universitat Pompeu Fabra). Retrieved from <https://xamat.github.io/Thesis/html-thesis/node51.html>
- Antila, C., & Cumming, J. (2014). The VIS framework: Analyzing counterpoint in large datasets. In H. Wang, Y. Yang, & J. H. Lee (Eds.), *Proceedings of the 15th international society for music information retrieval conference, ISMIR 2014, taipei, taiwan, october 27-31, 2014* (pp. 71–76). Retrieved from [http://www.terasoft.com.tw/conf/ismir2014/proceedings/T014\\_162\\_Paper.pdf](http://www.terasoft.com.tw/conf/ismir2014/proceedings/T014_162_Paper.pdf)
- Ariza, C. (2003). Ornament as data structure: An algorithmic model based on micro-rhythms of csng laments and funeral music. In *Proceedings of the international computer music conference, ICMC 2003*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2003.030/1>
- Ariza, C. (2005). *An open design for computer-aided algorithmic music composition: Athenacl* (Doctoral dissertation). Copyright - Database copyright ProQuest LLC; ProQuest does not claim copyright in the individual underlying works; Last updated - 2017-02-23. Retrieved from <http://proxy.library.nyu.edu/login?url=https://search-proquest-com.proxy.library.nyu.edu/docview/305469710?accountid=12768>
- Assayag, G., Agón, C., Fineberg, J., & Hanappe, P. (1997). An object oriented visual environment for musical composition. In *Proceedings of the 1997 international computer music conference, ICMC 1997, thessaloniki, greece, september 25-30, 1997*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1997.097>
- Assayag, G., Dubnov, S., & Delerue, O. (1999). Guessing the composer's mind: Applying universal prediction to musical style. In *Proceedings of the 1999 international computer music conference, ICMC 1999, beijing, china, october 22-27, 1999*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1999.454>
- Ballora, M. (2000). *Data analysis through auditory display: Applications in heart rate variability* (Doctoral dissertation, McGill University). Retrieved from <http://www.markballora.com/publications/diss.pdf>
- Ballora, M., Panulla, B., Gourley, M., & Hall, D. (2010). Sonification of web log data. In *Proceedings of the international computer music conference, ICMC 2010*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2010.117/1>

- Barrett, N. (2000a). A compositional methodology based on data extracted from natural phenomena. In *Proceedings of the international computer music conference, ICMC 2000*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2000.123/1>
- Barrett, N. (2000b). Viva la selva. Retrieved from <http://www.natashabarrett.org/viva.html>
- Beilharz, K., & Ferguson, S. (2009). Aesthetic sonification toolkit for real-time interaction with data. (pp. 401–408).
- Ben-Tal, O., Berger, J., Cook, B., Daniels, M., & Scavone, G. (2002). Sonart: The sonification application research toolbox. In *Presented at the 8th international conference on auditory display (icad), kyoto, japan, july 2-5, 2002*, Georgia Institute of Technology. Retrieved from <http://hdl.handle.net/1853/51376>
- Bertin-Mahieux, T., Ellis, D. P. W., Whitman, B., & Lamere, P. (2011). The million song dataset. In A. Klapuri & C. Leider (Eds.), *Proceedings of the 12th international society for music information retrieval conference, ISMIR 2011, miami, florida, usa, october 24-28, 2011* (pp. 591–596). University of Miami. Retrieved from <http://ismir2011.ismir.net/papers/OS6-1.pdf>
- Bittner, R. M., Salamon, J., Tierney, M., Mauch, M., Cannam, C., & Bello, J. P. (2014). Medleydb: A multitrack dataset for annotation-intensive MIR research. In H. Wang, Y. Yang, & J. H. Lee (Eds.), *Proceedings of the 15th international society for music information retrieval conference, ISMIR 2014, taipei, taiwan, october 27-31, 2014* (pp. 155–160). Retrieved from [http://www.terasoft.com.tw/conf/ismir2014/proceedings/T028\\_322\\_Paper.pdf](http://www.terasoft.com.tw/conf/ismir2014/proceedings/T028_322_Paper.pdf)
- Bloch, G., & Dubnov, S. (2008). Introducing video features and spectral descriptors in the omax improvisation system. In *Proceedings of the 2008 international computer music conference, ICMC 2008, belfast, ireland, august 24-29, 2008*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2008.090>
- Bogdanov, D., Wack, N., Gómez, E., Gulati, S., Herrera, P., Mayor, O., ... Serra, X. (2013). Essentia: An audio analysis library for music information retrieval. In A. de Souza Britto Jr., F. Gouyon, & S. Dixon (Eds.), *Proceedings of the 14th international society for music information retrieval conference, ISMIR 2013, curitiba, brazil, november 4-8, 2013* (pp. 493–498). Retrieved from [http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/177%5C\\_Paper.pdf](http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/177%5C_Paper.pdf)
- Boie, R., Mathews, M., & Schloss, A. (1989). The radio drum as a synthesizer controller. In *Proceedings of the 1989 international computer music conference, ICMC 1989, columbus, ohio, usa, november 2-5, 1989*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1989.010>
- Bortz, B., Jaimovich, J., & Knapp, R. (2015). Emotion in motion: A reimagined framework for biomusical/emotional interaction. In E. Berdahl & J. Allison (Eds.), *Proceedings of the international conference on new interfaces for musical expression* (pp. 44–49). Baton Rouge, Louisiana, USA: Louisiana State University. Retrieved from [http://www.nime.org/proceedings/2015/nime2015\\_291.pdf](http://www.nime.org/proceedings/2015/nime2015_291.pdf)
- Boynton, L., Duthen, J., Potard, Y., & Rodet, X. (1986). Adding a graphical user interface to FORMES. In *Proceedings of the 1986 international computer music conference, ICMC 1986, den haag, the netherlands, october 20-24, 1986*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1986.025>

- Brent, W. (2010). A timbre analysis and classification toolkit for pure data. In *Proceedings of the international computer music conference, ICMC 2010*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2010.044/1>
- Bresson, J., & Agon, C. (2004). Sdif sound description data representation and manipulation in computer assisted composition. In *Proceedings of the international computer music conference, ICMC 2004*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2004.004/1>
- Bresson, J., & Agon, C. (2010). Processing sound and music description data using openmusic. In *Proceedings of the international computer music conference, ICMC 2010*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2010.129/1>
- Brinkman, A. R. (1981). Data structures for a music-11 preprocessor. In *Proceedings of the international computer music conference, ICMC 1981*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1981.018/1>
- Brinkman, A. R. (1982). Original version of the score11 manual. *Score11 Manual*. Copyright <c> 1982 by Alexander R. Brinkman. Retrieved from <http://ecmc.rochester.edu/ecmc/docs/score11/index.html#Introduction>
- Brinkman, A. R. (1983). A design for a single pass scanner for the darms music coding language. In *Proceedings of the international computer music conference, ICMC 1980*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1983.002/1>
- Brinkman, A. R. (1984). A data structure for computer analysis of musical scores. In *Proceedings of the international computer music conference, ICMC 1984*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1984.033/1>
- Brzezinski-Spiczak, M., Dobosz, K., Lis, M., & Pinal, M. (2013). Music files search system. *CoRR, abs/1309.4345*. arXiv: 1309.4345. Retrieved from <http://arxiv.org/abs/1309.4345>
- Bullock, J., Beattie, D., & Turner, J. (2011). Integra live : A new graphical user interface for live electronic music. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 387–392). Oslo, Norway. Retrieved from [http://www.nime.org/proceedings/2011/nime2011\\_387.pdf](http://www.nime.org/proceedings/2011/nime2011_387.pdf)
- Bullock, J., & Coccioli, L. (2009). Towards a humane graphical user interface for live electronic music. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 266–267). Pittsburgh, PA, United States. Retrieved from [http://www.nime.org/proceedings/2009/nime2009\\_266.pdf](http://www.nime.org/proceedings/2009/nime2009_266.pdf)
- Bullock, J., & Frisk, H. (2009). An object oriented model for the representation of temporal data in the integra framework. In *Proceedings of the international computer music conference, ICMC 2009*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2009.012/1>
- Buxton, W. (1977). A composer's introduction to computer music. *Interface*, 6, 57–72.
- Buxton, W. (2016a). Objed: The sssp sound editing tool. *Youtube*. Retrieved from [https://www.youtube.com/watch?v=pUoHc\\_2wUjY](https://www.youtube.com/watch?v=pUoHc_2wUjY)
- Buxton, W. (2016b). Socializing technology for the mobile human. keynote, the next web conference, amsterdam/europe. *Youtube*. Retrieved from <https://youtu.be/rEeEofRShAQ>



- Buxton, W., Fedorkow, G., Baecker, R., Reeves, W. T., Smith, K. C., Ciamaga, G., & Mezei, L. (1978). An overview of the structured sound synthesis project. In *Proceedings of the 1978 international computer music conference, ICMC 1978, evanston, illinois, usa, 1978*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1978.031>
- Buxton, W., Patel, S., Reeves, W. T., & Baecker, R. (1980). "objed" and the design of timbral resources. In *Proceedings of the 1980 international computer music conference, ICMC 1980, new york city, usa, 1980*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1980.006>
- Buxton, W., Reeves, W., Baecker, R., & Mezei, L. (1978). The use of hierarchy and instance in a data structure for computer music. In *Proceedings of the international computer music conference, ICMC 1978*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1978.012/1>
- Cádiz, R. F., de la Cuadra, P., Montoya, A., Marín, V., Andia, M. E., Tejos, C., & Irarrazaval, P. (2015). Sonification of medical images based on statistical descriptors. In *Proceedings of the international computer music conference, ICMC 2015*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2015.072/1>
- Cámara Halac, F. (2018). *A spectral experience: Self convolution and face tracking*. Accepted at ICMC 2018 and SEAMUS 2019 conferences.
- Caramiaux, B., Bevilacqua, F., & Schnell, N. (2011). Sound selection by gestures. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 329–330). Oslo, Norway. Retrieved from [http://www.nime.org/proceedings/2011/nime2011\\_329.pdf](http://www.nime.org/proceedings/2011/nime2011_329.pdf)
- Caraty, M. J., Richard, J. C., & Rodet, X. (1989). "vowel recognition in a data base of continuous speech: Experiments with local and global identification principles". *EUROSPEECH*, 2272.
- Carlile, S. (2011). Psychoacoustics. In T. Hermann, A. Hunt, & J. G. Neuhoff (Eds.), *The sonification handbook* (Chap. 3, pp. 41–61). Berlin, Germany: Logos Publishing House. Retrieved from <http://sonification.de/handbook/chapters/chapter3/>
- Carpentier, G., Tardieu, D., Rodet, X., & Saint-James, E. (2006). Imitative and Generative Orchestration Using Pre-analysed Sounds Databases. doi:10.5281/zenodo.849343
- Carter, R. (2017). On the expressive potential of suboptimal speakers. audience participation on mobile devices.
- Cartwright, M., & Pardo, B. (2012). Building a Music Search Database Using Human Computation. doi:10.5281/zenodo.850060
- Cartwright, M., & Pardo, B. (2014). Synthassist: Querying an audio synthesizer by vocal imitation. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 363–366). London, United Kingdom: Goldsmiths, University of London. Retrieved from [http://www.nime.org/proceedings/2014/nime2014\\_446.pdf](http://www.nime.org/proceedings/2014/nime2014_446.pdf)
- Casey, M. A., & Grierson, M. (2007). Soundspotter / remix-tv: Fast approximate matching for audio and video performance. In *Proceedings of the 2007 international computer music conference, ICMC 2007, copenhagen, denmark, august 27-31, 2007*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2007.205>

- Casey, M. A., & Slaney, M. (2006). Song intersection by approximate nearest neighbor search. In *ISMIR 2006, 7th international conference on music information retrieval, victoria, canada, 8-12 october 2006, proceedings* (pp. 144–149).
- Choi, I. (2000). Voices in ruins — composition with residuals. Retrieved from <https://vimeo.com/23086026>
- Choi, I., Zheng, G., & Chen, K. (2000). Embedding a sensory data retrieval system in a movement-sensitive space and a surround sound system. In *Proceedings of the international computer music conference, ICMC 2000*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2000.146/1>
- Ciardi, F. C. (2004). Real time sonification of stock market data with smax. In *Proceedings of the international computer music conference, ICMC 2004*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2004.124/1>
- Clements, P. J. (1980). Musical data structures in a multi-use environment. In *Proceedings of the international computer music conference, ICMC 1980*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1980.020/1>
- Collins, N. (2006). *Towards autonomous agents for live computer music: Realtime machine listening and interactive music systems* (Doctoral dissertation, University of Cambridge).
- Collins, N. (2007). Audiovisual concatenative synthesis. In *Proceedings of the 2007 international computer music conference, ICMC 2007, copenhagen, denmark, august 27-31, 2007*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2007.187>
- Collins, N. (2015). The ubuweb electronic music corpus: An mir investigation of a historical database. *Organised Sound*, 20(1), 122–134. doi:10.1017/S1355771814000533
- Collins, N., Mclean, A., Rohrhuber, J., & Ward, A. (2003). Live coding in laptop performance. *Organised Sound*, 8, 321–329. doi:10.1017/S135577180300030X
- Connes, A. (2012). The music of shapes. Retrieved from <http://www.alainconnes.org/en/videos.php>
- Corona, H., & O'Mahony, M. P. (2015). An Exploration of Mood Classification in the Million Songs Dataset. doi:10.5281/zenodo.851021
- Correa, D. C., Saito, J. H., & Costa, L. d. F. (2010). Musical genres: beating to the rhythms of different drums. *New Journal of Physics*, 12, 053030. doi:10.1088/1367-2630/12/5/053030. arXiv: 0911.3842 [physics.data-an]
- Correia, N. N. (2010). AV Clash - Online Tool for Mixing and Visualizing Audio Retrieved From freesound.org Database. doi:10.5281/zenodo.849729
- Crestel, L., Esling, P., Heng, L., & McAdams, S. (2017). A database linking piano and orchestral MIDI scores with application to automatic projective orchestration. In S. J. Cunningham, Z. Duan, X. Hu, & D. Turnbull (Eds.), *Proceedings of the 18th international society for music information retrieval conference, ISMIR 2017, suzhou, china, october 23-27, 2017* (pp. 592–598). Retrieved from [https://ismir2017.smcnus.org/wp-content/uploads/2017/10/235\\_Paper.pdf](https://ismir2017.smcnus.org/wp-content/uploads/2017/10/235_Paper.pdf)
- Defferrard, M., Benzi, K., Vandergheynst, P., & Bresson, X. (2017). FMA: A dataset for music analysis. In S. J. Cunningham, Z. Duan, X. Hu, & D. Turnbull (Eds.), *Proceedings of the 18th international society for music information retrieval conference, ISMIR 2017, suzhou,*

- china, october 23-27, 2017 (pp. 316–323). Retrieved from [https://ismir2017.smcnus.org/wp-content/uploads/2017/10/75\\_Paper.pdf](https://ismir2017.smcnus.org/wp-content/uploads/2017/10/75_Paper.pdf)
- Dehkordi, M. B., & Banitalebi-Dehkordi, A. (2018). Music genre classification using spectral analysis and sparse representation of the signals. *CoRR*, *abs/1803.04652*. arXiv: 1803.04652. Retrieved from <http://arxiv.org/abs/1803.04652>
- Delbouys, R., Hennequin, R., Piccoli, F., Royo-Letelier, J., & Moussallam, M. (2018). Music mood detection based on audio and lyrics with deep neural net. *CoRR*, *abs/1809.07276*. arXiv: 1809.07276. Retrieved from <http://arxiv.org/abs/1809.07276>
- Depalle, P., Rodet, X., Galas, T., & Eckel, G. (1993). Generalized diphone control. In *Opening a new horizon: Proceedings of the 1993 international computer music conference, ICMC 1993, tokyo, japan, september 10-15, 1993*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1993.038>
- Devaney, J., Arthur, C., Condit-Schultz, N., & Nisula, K. (2015). Theme and variation encodings with roman numerals (TAVERN): A new data set for symbolic music analysis. In M. Müller & F. Wiering (Eds.), *Proceedings of the 16th international society for music information retrieval conference, ISMIR 2015, málaga, spain, october 26-30, 2015* (pp. 728–734). Retrieved from [http://ismir2015.uma.es/articles/261\\_Paper.pdf](http://ismir2015.uma.es/articles/261_Paper.pdf)
- Didkovsky, N., & Burk, P. L. (2001). Java music specification language, an introduction and overview. In *Proceedings of the 2001 international computer music conference, ICMC 2001, havana, cuba, september 17-22, 2001*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2001.007>
- Diener, G. (1985). *Formal languages in music theory* (Master's thesis, McGill University, Faculty of Music).
- Diener, G. (1988). Ttrees: An active data structure for computer music. In *Proceedings of the international computer music conference, ICMC 1988*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1988.020/1>
- Diener, G. (1989). Ttrees: A tool for the compositional environment. *Computer Music Journal*, *13*(2), 77–85. Retrieved from <http://www.jstor.org/stable/3680043>
- Diener, G. R. (1992). A visual programming environment for music notation. In *Proceedings of the 1992 international computer music conference, ICMC 1992, san jose, california, usa, october 14-18, 1992*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1992.030>
- Dinuzzo, F., Pillonetto, G., & Nicolao, G. D. (2008). Client-server multi-task learning from distributed datasets. *CoRR*, *abs/0812.4235*. arXiv: 0812.4235. Retrieved from <http://arxiv.org/abs/0812.4235>
- Donahue, C., Mao, H. H., & McAuley, J. (2018). The NES music database: A multi-instrumental dataset with expressive performance attributes. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 475–482). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/265\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/265_Paper.pdf)
- Donahue, C., McAuley, J., & Puckette, M. (2018). Adversarial Audio Synthesis. *arXiv e-prints*, arXiv:1802.04208. arXiv: 1802.04208 [cs.LG]

- Dunn, J. W. (2000). Beyond VARIATIONS: creating a digital music library. In *ISMIR 2000, 1st international symposium on music information retrieval, plymouth, massachusetts, usa, october 23-25, 2000, proceedings*. Retrieved from [http://ismir2000.ismir.net/papers/invites/dunn\\_invite.pdf](http://ismir2000.ismir.net/papers/invites/dunn_invite.pdf)
- Dydo, J. S. (1987). Data structures in the note processor. In *Proceedings of the international computer music conference, ICMC 1987*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1987.045/1>
- Emmerson, S. (1986). *The language of electroacoustic music*. doi:10.1007/978-1-349-18492-7
- Eremenko, V., Demirel, E., Bozkurt, B., & Serra, X. (2018). Audio-aligned jazz harmony dataset for automatic chord transcription and corpus-based research. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 483–490). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/206\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/206_Paper.pdf)
- Erickson, R. F. (1975). "the darms project": A status report. *Computers and the Humanities*, 9(6), 291–298. Retrieved from <http://www.jstor.org/stable/30204239>
- Flusser, V. (2011). *Into the universe of technical images*. University of Minnesota Press.
- Fonseca, E., Pons, J., Favory, X., Font, F., Bogdanov, D., Ferraro, A., . . . Serra, X. (2017). Freesound datasets: A platform for the creation of open audio datasets. In S. J. Cunningham, Z. Duan, X. Hu, & D. Turnbull (Eds.), *Proceedings of the 18th international society for music information retrieval conference, ISMIR 2017, suzhou, china, october 23-27, 2017* (pp. 486–493). Retrieved from [https://ismir2017.smcnus.org/wp-content/uploads/2017/10/161\\_Paper.pdf](https://ismir2017.smcnus.org/wp-content/uploads/2017/10/161_Paper.pdf)
- Fox, M. K., Stewart, J., & Hamilton, R. (2017). Madbpm: A modular multimodal environment for data-driven composition and sonification. In *Proceedings of the international computer music conference, ICMC 2017*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/bbp2372.2017.087>
- Free, J. (1987). Towards an extensible data structure for the representation of music on computers. In *Proceedings of the international computer music conference, ICMC 1987*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1987.046/1>
- Free, J., & Vytas, P. (1986). What ever happened to sssp? In *Proceedings of the 1986 international computer music conference, ICMC 1986, den haag, the netherlands, october 20-24, 1986*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1986.004>
- Free, J., & Vytas, P. (1988). The CAMP music configuration database. In *Proceedings of the 1988 international computer music conference, ICMC 1988, cologne, germany, september 20-25, 1988*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1988.014>
- Frid, E. (2017). Sonification of women in sound and music computing - the sound of female authorship in icmc, smc and nime proceedings. In *ICMC* (pp. 233–238). Michigan Publishing.
- Frisson, C. (2015). *Designing interaction for browsing media collections (by similarity)* (Doctoral dissertation, Universit de Mons). Retrieved from <http://tcts.fpms.ac.be/publications/phds/frisson/phd-frisson.pdf>
- García, F., Vineslas, L., Tubau, J., & Maestre, E. (2011). Acquisition and study of blowing pressure profiles in recorder playing. In *Proceedings of the international conference on new*

- interfaces for musical expression* (pp. 124–127). Oslo, Norway. Retrieved from [http://www.nime.org/proceedings/2011/nime2011\\_124.pdf](http://www.nime.org/proceedings/2011/nime2011_124.pdf)
- Garton, B., & Topper, D. (1997). Rtcmix - using CMIX in real time. In *Proceedings of the 1997 international computer music conference, ICMC 1997, thessaloniki, greece, september 25-30, 1997*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1997.106>
- Good, M. (2000). Representing music using XML. In *ISMIR 2000, 1st international symposium on music information retrieval, plymouth, massachusetts, usa, october 23-25, 2000, proceedings*. Retrieved from <http://ismir2000.ismir.net/posters/good.pdf>
- Goto, M., Hashiguchi, H., Nishimura, T., & Oka, R. (2002). RWC music database: Popular, classical and jazz music databases. In *ISMIR 2002, 3rd international conference on music information retrieval, paris, france, october 13-17, 2002, proceedings*. Retrieved from <http://ismir2002.ismir.net/proceedings/03-SP04-1.pdf>
- Goto, M., Hashiguchi, H., Nishimura, T., & Oka, R. (2003). RWC music database: Music genre database and musical instrument sound database. In *ISMIR 2003, 4th international conference on music information retrieval, baltimore, maryland, usa, october 27-30, 2003, proceedings*. Retrieved from <http://ismir2003.ismir.net/papers/Goto1.PDF>
- Guedes, C., Trochidis, K., & Anantapadmanabhan, A. (2018). Modeling Carnatic Rhythm Generation: a Data Driven Approach Based on Rhythmic Analysis. doi:10.5281/zenodo.1422615
- Hamanaka, M., Hirata, K., & Tojo, S. (2014). Musical structural analysis database based on GTTM. In H. Wang, Y. Yang, & J. H. Lee (Eds.), *Proceedings of the 15th international society for music information retrieval conference, ISMIR 2014, taipei, taiwan, october 27-31, 2014* (pp. 325–330). Retrieved from [http://www.terasoft.com.tw/conf/ismir2014/proceedings/T059\\_257\\_Paper.pdf](http://www.terasoft.com.tw/conf/ismir2014/proceedings/T059_257_Paper.pdf)
- Hamilton, R. (2006). Bioinformatic response data as a compositional driver. In *Proceedings of the international computer music conference, ICMC 2006*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2006.123/1>
- Hashida, M., Matsui, T., & Katayose, H. (2008). A new music database describing deviation information of performance expressions. In J. P. Bello, E. Chew, & D. Turnbull (Eds.), *ISMIR 2008, 9th international conference on music information retrieval, drexel university, philadelphia, pa, usa, september 14-18, 2008* (pp. 489–494). Retrieved from [http://ismir2008.ismir.net/papers/ISMIR2008\\_173.pdf](http://ismir2008.ismir.net/papers/ISMIR2008_173.pdf)
- Hashida, M., Nakamura, E., & Katayose, H. (2017). Constructing PEDB 2nd Edition: A Music Performance Database with Phrase Information. doi:10.5281/zenodo.1401963
- Hashida, M., Nakamura, E., & Katayose, H. (2018). CrestMusePEDB 2nd EDITION: MUSIC PERFORMANCE DATABASE WITH PHRASE INFORMATION. doi:10.5281/zenodo.1422503
- Hauger, D., Schedl, M., Kosir, A., & Tkalcic, M. (2013). The million musical tweet dataset - what we can learn from microblogs. In A. de Souza Britto Jr., F. Gouyon, & S. Dixon (Eds.), *Proceedings of the 14th international society for music information retrieval conference, ISMIR 2013, curitiba, brazil, november 4-8, 2013* (pp. 189–194). Retrieved from [http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/85\\_Paper.pdf](http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/85_Paper.pdf)

- Haus, G., & Pinto, A. (2005). Mx structural metadata as mir tools. doi:10.5281/zenodo.849297
- Hildebrandt, T., Hermann, T., & Rinderle-Ma, S. (2014). A Sonification System for Process Monitoring as Secondary Task. In *Proceedings of the 5th ieee conference on cognitive infocommunication (coginfocom 2014)* (pp. 191–196). Vietri sul Mare, Italy: IEEE.
- Hochenbaum, J., Kapur, A., & Wright, M. (2010). Multimodal musician recognition. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 233–237). Sydney, Australia. Retrieved from [http://www.nime.org/proceedings/2010/nime2010\\_233.pdf](http://www.nime.org/proceedings/2010/nime2010_233.pdf)
- Homburg, H., Mierswa, I., Möller, B., Morik, K., & Wurst, M. (2005). A benchmark dataset for audio classification and clustering. In *ISMIR 2005, 6th international conference on music information retrieval, london, uk, 11-15 september 2005, proceedings* (pp. 528–531). Retrieved from <http://ismir2005.ismir.net/proceedings/2117.pdf>
- Hu, X., & Yang, Y.-H. (2014). A Study on Cross-cultural and Cross-dataset Generalizability of Music Mood Regression Models. doi:10.5281/zenodo.850795
- Humphrey, E., Durand, S., & McFee, B. (2018). Openmic-2018: An open data-set for multiple instrument recognition. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 438–444). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/248\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/248_Paper.pdf)
- Jaimovich, J., & Knapp, R. (2015). Creating biosignal algorithms for musical applications from an extensive physiological database. In E. Berdahl & J. Allison (Eds.), *Proceedings of the international conference on new interfaces for musical expression* (pp. 1–4). Baton Rouge, Louisiana, USA: Louisiana State University. Retrieved from [http://www.nime.org/proceedings/2015/nime2015\\_163.pdf](http://www.nime.org/proceedings/2015/nime2015_163.pdf)
- Jaimovich, J., Ortiz, M., Coghlan, N., & Knapp, R. B. (2012). The emotion in motion experiment: Using an interactive installation as a means for understanding emotional response to music. In *Proceedings of the international conference on new interfaces for musical expression*, Ann Arbor, Michigan: University of Michigan. Retrieved from [http://www.nime.org/proceedings/2012/nime2012\\_254.pdf](http://www.nime.org/proceedings/2012/nime2012_254.pdf)
- Jones, R., Lagrange, M., & Schloss, W. A. (2007). A hand drumming dataset for physical modeling. In *Proceedings of the 2007 international computer music conference, ICMC 2007, copenhagen, denmark, august 27-31, 2007*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2007.083>
- Jr., C. N. S., Koerich, A. L., & Kaestner, C. A. A. (2008). The latin music database. In J. P. Bello, E. Chew, & D. Turnbull (Eds.), *ISMIR 2008, 9th international conference on music information retrieval, drexel university, philadelphia, pa, usa, september 14-18, 2008* (pp. 451–456). Retrieved from [http://ismir2008.ismir.net/papers/ISMIR2008\\_106.pdf](http://ismir2008.ismir.net/papers/ISMIR2008_106.pdf)
- Karaosmanoglu, M. K. (2012). A turkish makam music symbolic database for music information retrieval: Symbtr. In F. Gouyon, P. Herrera, L. G. Martins, & M. Müller (Eds.), *Proceedings of the 13th international society for music information retrieval conference, ISMIR 2012, mosteiro s.bento da vitória, porto, portugal, october 8-12, 2012* (pp. 223–228). FEUP Edições. Retrieved from <http://ismir2012.ismir.net/event/papers/223-ismir-2012.pdf>

- Karydis, I., Nanopoulos, A., Papadopoulos, A., Cambouropoulos, E., & Manolopoulos, Y. (2007). Horizontal and Vertical Integration/Segregation in Auditory Streaming: A Voice Separation Algorithm for Symbolic Musical Data. doi:10.5281/zenodo.849469
- Kirlin, P. B. (2014). A data set for computational studies of schenkerian analysis. In H. Wang, Y. Yang, & J. H. Lee (Eds.), *Proceedings of the 15th international society for music information retrieval conference, ISMIR 2014, taipei, taiwan, october 27-31, 2014* (pp. 213–218). Retrieved from [http://www.terasoft.com.tw/conf/ismir2014/proceedings/T039\\_344\\_Paper.pdf](http://www.terasoft.com.tw/conf/ismir2014/proceedings/T039_344_Paper.pdf)
- Klein, J. (1998). The wolves of bays mountain. Published in 2004. Open Space.
- Klein, J. (2017). *On my compositional approach*. Lecture given at New York University's Waverly Project, on February 2nd, 2017.
- Knees, P., Faraldo, Á., Herrera, P., Vogl, R., Böck, S., Hörschläger, F., & Goff, M. L. (2015). Two data sets for tempo estimation and key detection in electronic dance music annotated from user corrections. In M. Müller & F. Wiering (Eds.), *Proceedings of the 16th international society for music information retrieval conference, ISMIR 2015, Málaga, Spain, October 26-30, 2015* (pp. 364–370). Retrieved from [http://ismir2015.uma.es/articles/246\\_Paper.pdf](http://ismir2015.uma.es/articles/246_Paper.pdf)
- Kobayashi, R. (2003). Sound clustering synthesis using spectral data. In *Proceedings of the international computer music conference, ICMC 2003*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2003.052/1>
- Lansky, P. (1990). The architecture and musical logic of cmix. In *Proceedings of the 1990 international computer music conference, ICMC 1990, Glasgow, Scotland, September 10-15, 1990*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1990.023>
- Laske, O. E. 1.-., & Tabor, J. (1999). *Otto laske : Navigating new musical horizons*. Westport, Conn.: Greenwood Press.
- Lindborg, P. (2017). Pacific bell tower, a sculptural sound installation for live sonification of earthquake data. In *Proceedings of the international computer music conference, ICMC 2017*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2017.033/1>
- Lindemann, E. (1990). ANIMAL-A rapid prototyping environment for computer music systems. In *Proceedings of the 1990 international computer music conference, ICMC 1990, Glasgow, Scotland, September 10-15, 1990*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1990.068>
- Liu, Q., Han, Y. C., Kuchera-Morin, J., & Wright, M. (2013). Cloud bridge: A data-driven immersive audio-visual software interface. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 431–436). Daejeon, Republic of Korea: Graduate School of Culture Technology, KAIST. Retrieved from [http://nime.org/proceedings/2013/nime2013\\_250.pdf](http://nime.org/proceedings/2013/nime2013_250.pdf)
- Lodha, S., Beahan, J., Joseph, A., & Zane-ulman, B. (1998). Muse: A musical data sonification toolkit.
- Loviscach, J. (2008). Programming a music synthesizer through data mining. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 221–224). Genoa, Italy. Retrieved from [http://www.nime.org/proceedings/2008/nime2008\\_221.pdf](http://www.nime.org/proceedings/2008/nime2008_221.pdf)

- Loy, G. (1985). Musicians make a standard: The midi phenomenon. *Computer Music Journal*, 9(4), 8–26. Retrieved from <http://www.jstor.org/stable/3679619>
- m zmölnig, I., & Eckel, G. (2015). *Live coding: An overview*.
- Maxwell, J. B., & Eigenfeldt, A. (2008). A music database and query system for recombinant composition. In J. P. Bello, E. Chew, & D. Turnbull (Eds.), *ISMIR 2008, 9th international conference on music information retrieval, drexel university, philadelphia, pa, usa, september 14-18, 2008* (pp. 75–80). Retrieved from [http://ismir2008.ismir.net/papers/ISMIR2008\\_158.pdf](http://ismir2008.ismir.net/papers/ISMIR2008_158.pdf)
- McCartney, J. (1996). Supercollider, a new real time synthesis language. In *Proceedings of the 1996 international computer music conference, ICMC 1996, hong kong, august 19-24, 1996*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1996.078>
- McCartney, J. (1998). Continued evolution of the supercollider real time synthesis environment. In *Proceedings of the 1998 international computer music conference, ICMC 1998, ann arbor, michigan, usa, october 1-6, 1998*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1998.262>
- McCurdy, I., Heintz, J., Joaquin, J., & Knevel, M. (2015). Methods of writing csound scores. *FLOSS Manuals*. Retrieved from <http://write.flossmanuals.net/csound/methods-of-writing-csound-scores/>
- Melucci, M., & Orio, N. (1999). The use of melodic segmentation for content-based retrieval of musical data. In *Proceedings of the international computer music conference, ICMC 1999*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1999.355/1>
- Meseguer-Brocal, G., Cohen-Hadria, A., & Peeters, G. (2018). DALI: A large dataset of synchronized audio, lyrics and notes, automatically created using teacher-student machine learning paradigm. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 431–437). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/35\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/35_Paper.pdf)
- Miron, M., & Janer, J. (2017). Generating Data to Train Convolutional Neural Networks for Classical Music Source Separation. doi:10.5281/zenodo.1401923
- Mital, P. K., & Grierson, M. (2013). Mining unlabeled electronic music databases through 3D interactive visualization of latent component relationships. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 227–232). Daejeon, Republic of Korea: Graduate School of Culture Technology, KAIST. Retrieved from [http://nime.org/proceedings/2013/nime2013\\_132.pdf](http://nime.org/proceedings/2013/nime2013_132.pdf)
- Mitra, J., & Saha, D. (2014). An efficient feature selection in classification of audio files. *CoRR*, abs/1404.1491. arXiv: 1404.1491. Retrieved from <http://arxiv.org/abs/1404.1491>
- Morawitz, F. (2016). Molecular sonification of nuclear magnetic resonance data as a novel tool for sound creation. In *Proceedings of the international computer music conference, ICMC 2016*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2016.002/1>



- Nagavi, T. C., & Bhajantri, N. U. (2013). An extensive analysis of query by singing/humming system through query proportion. *CoRR, abs/1301.1894*. arXiv: 1301.1894. Retrieved from <http://arxiv.org/abs/1301.1894>
- Nagavi, T. C., & Bhajantri, N. U. (2014). Progressive filtering using multiresolution histograms for query by humming system. *CoRR, abs/1401.2516*. arXiv: 1401.2516. Retrieved from <http://arxiv.org/abs/1401.2516>
- Nakamoto, M., & Kuhara, Y. (2007). Circle canon chorus system used to enjoy a musical ensemble singing "frog round". In *Proceedings of the international conference on new interfaces for musical expression* (pp. 409–410). New York City, NY, United States. Retrieved from [http://www.nime.org/proceedings/2007/nime2007\\_409.pdf](http://www.nime.org/proceedings/2007/nime2007_409.pdf)
- Nardelli, M. B. (2015). Materialsoundmusic: A computer-aided data-driven composition environment for the sonification and dramatization of scientific data streams. In *Proceedings of the international computer music conference, ICMC 2015*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2015.072/1>
- Nilson, C. (2007). Live coding practice. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 112–117). New York City, NY, United States. Retrieved from [http://www.nime.org/proceedings/2007/nime2007\\_112.pdf](http://www.nime.org/proceedings/2007/nime2007_112.pdf)
- Norman, A., & Amatriain, X. (2007). Data jockey, a tool for meta-data enhanced digital djjing and active listening. In *Proceedings of the international computer music conference, ICMC 2007*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2007.117/1>
- Nort, D. V., Jarvis, I., & Palumbo, M. (2016). Towards a mappable database of emergent gestural meaning. In *Proceedings of the international conference on new interfaces for musical expression* (Vol. 16, pp. 46–50). 2220–4806. Brisbane, Australia: Queensland Conservatorium Griffith University. Retrieved from [http://www.nime.org/proceedings/2016/nime2016\\_paper0010.pdf](http://www.nime.org/proceedings/2016/nime2016_paper0010.pdf)
- Nuanàin, C. Ó., Jordà, S., & Herrera, P. (2016). An interactive software instrument for real-time rhythmic concatenative synthesis. In *Proceedings of the international conference on new interfaces for musical expression* (Vol. 16, pp. 383–387). 2220–4806. Brisbane, Australia: Queensland Conservatorium Griffith University. Retrieved from [http://www.nime.org/proceedings/2016/nime2016\\_paper0076.pdf](http://www.nime.org/proceedings/2016/nime2016_paper0076.pdf)
- Nymoen, K., & Jensenius, A. R. (2011). A Toolbox for Storing and Streaming Music-related Data. doi:10.5281/zenodo.849865
- Oliver, J. (2010). The mano controller: A video based hand tracking system. In *Proceedings of the 2010 international computer music conference, ICMC 2010, new york, usa, 2010*, Michigan Publishing. Retrieved from <http://www.jaimeoliver.pe/instrumentos/mano/pub-mano>
- Oliver, J., & Jenkins, M. (2008). The silent drum controller: A new percussive gestural interface. In *Proceedings of the 2008 international computer music conference, ICMC 2008, belfast, ireland, august 24-29, 2008*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2008.118>
- Osaka, N., Sakakibara, K.-I., & Hikichi, T. (2002). The sound synthesis system "otkinshi": Its data structure and graphical user interface. In *Proceedings of the international computer music*

- conference, *ICMC 2002*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2002.039/1>
- Pauletto, S., & Hunt, A. (2004). A toolkit for interactive sonification. In *Proceedings of icad 04. tenth meeting of the international conference on auditory display, sydney, australia, july 6-9, 2004*. ed. barrass, s. and vickers, p. international community for auditory display, 2004. Retrieved from <http://hdl.handle.net/1853/50809>
- Peron, T., Rodrigues, F. A., & Costa, L. d. F. (2018). Pattern Recognition Approach to Violin Shapes of MIMO database. *arXiv e-prints*, arXiv:1808.02848. arXiv: 1808.02848 [stat.AP]
- Pesek, M., Godec, P., Poredos, M., Strle, G., Guna, J., Stojmenova, E., ... Marolt, M. (2014). Introducing a dataset of emotional and color responses to music. In H. Wang, Y. Yang, & J. H. Lee (Eds.), *Proceedings of the 15th international society for music information retrieval conference, ISMIR 2014, taipei, taiwan, october 27-31, 2014* (pp. 355–360). Retrieved from [http://www.terasoft.com.tw/conf/ismir2014/proceedings/T064\\_307\\_Paper.pdf](http://www.terasoft.com.tw/conf/ismir2014/proceedings/T064_307_Paper.pdf)
- Poddar, A., Zangerle, E., & Yang, Y.-H. (2018). nowplaying-RS: A New Benchmark Dataset for Building Context-Aware Music Recommender Systems. doi:10.5281/zenodo.1422565
- Price, R., & Rebelo, P. (2008). Database and mapping design for audiovisual prepared radio set installation. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 311–314). Genoa, Italy. Retrieved from [http://www.nime.org/proceedings/2008/nime2008\\_311.pdf](http://www.nime.org/proceedings/2008/nime2008_311.pdf)
- Proutskova, P., Rhodes, C., Wiggins, G. A., & Crawford, T. (2012). Breathy or resonant - A controlled and curated dataset for phonation mode detection in singing. In F. Gouyon, P. Herrera, L. G. Martins, & M. Müller (Eds.), *Proceedings of the 13th international society for music information retrieval conference, ISMIR 2012, mosteiro s.bento da vitória, porto, portugal, october 8-12, 2012* (pp. 589–594). FEUP Edições. Retrieved from <http://ismir2012.ismir.net/event/papers/589-ismir-2012.pdf>
- Puckette, M. (1986). Interprocess communication and timing in real-time computer music performance. In *Proceedings of the 1986 international computer music conference, ICMC 1986, den haag, the netherlands, october 20-24, 1986*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1986.008>
- Puckette, M. (1991). Something digital. *Computer Music Journal*, 15(4), 65–69. Retrieved from <http://www.jstor.org/stable/3681075>
- Puckette, M. (2002a). Max at seventeen. *Computer Music Journal*, 26(4), 31–43. doi:10.1162/014892602320991356
- Puckette, M. (2002b). Using pd as a score language. In *Proceedings of the 2002 international computer music conference, ICMC 2002, gothenburg, sweden, september 16-21, 2002*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2002.038>
- Puckette, M. S. (1997). Pure data. In *Proceedings of the international computer music conference, ICMC 1997*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1997.060/1>
- Puckette, M., Vercoe, B., & Stautner, J. P. (1981). A real-time music 11 emulator. In *Proceedings of the 1981 international computer music conference, ICMC 1981, denton, texas, usa, 1981*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1981.036>

- Queiroz, M., & Yoshimura, G. J. (2018). Relative DTW Embedding for Binary Classification of Audio Data. doi:10.5281/zenodo.1422585
- Roberts, C., Wright, M., Kuchera-Morin, J., & Höllerer, T. (2014). Rapid creation and publication of digital musical instruments. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 239–242). London, United Kingdom: Goldsmiths, University of London. Retrieved from [http://www.nime.org/proceedings/2014/nime2014\\_373.pdf](http://www.nime.org/proceedings/2014/nime2014_373.pdf)
- Rodet, X., Barrière, J., Cointe, P., & Potard, Y. (1982). The CHANT project: Modelization and production, an environment for composers including the FORMES language for describing and controlling sound and musical processes. In *Proceedings of the 1982 international computer music conference, ICMC 1982, venice, italy, september 27 - october 1, 1982*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1982.035>
- Rodet, X., Depalle, P., & Poirot, G. (1988). Diphone sound synthesis based on spectral envelopes and harmonic/noise excitation functions. In *Proceedings of the 1988 international computer music conference, ICMC 1988, cologne, germany, september 20-25, 1988*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1988.033>
- Rodet, X., & Lefèvre, A. (1996). Macintosh graphical interface and improvements to generalized diphone control and synthesis. In *Proceedings of the 1996 international computer music conference, ICMC 1996, hong kong, august 19-24, 1996*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1996.102>
- Rodet, X., & Lefèvre, A. (1997). The diphone program: New features, new synthesis methods and experience of musical use. In *Proceedings of the 1997 international computer music conference, ICMC 1997, thessaloniki, greece, september 25-30, 1997*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1997.111>
- Rosenboom, D., & Polansky, L. (1985). HMSL (hierarchical music specification language): A real-time environment for formal, perceptual and compositional experimentation. In *Proceedings of the 1985 international computer music conference, ICMC 1985, burnaby, bc, canada, august 19-22, 1985*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1985.039>
- Rossiter, D., & Ng, W.-Y. (1996). A system for the musical investigation and expression of levels of self-similarity in an arbitrary data stream. In *Proceedings of the international computer music conference, ICMC 1996*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.1996.085/1>
- Rowe, R. (1992). *Interactive music systems: Machine listening and composing*. Cambridge, MA, USA: MIT Press. Retrieved from [https://wp.nyu.edu/robert\\_rowe/text/interactive-music-systems-1993](https://wp.nyu.edu/robert_rowe/text/interactive-music-systems-1993)
- Sanden, C., Befus, C. R., & Zahng, J. (2010). Perception based multi-genre labeling on music data. In *Proceedings of the international computer music conference, ICMC 2010*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2010.003/1>
- Sapp, C. S. (2005). Online database of scores in the humdrum file format. In *ISMIR 2005, 6th international conference on music information retrieval, london, uk, 11-15 september 2005, proceedings* (pp. 664–665). Retrieved from <http://ismir2005.ismir.net/proceedings/3123.pdf>

- Scaletti, C. A. (1987). Kyma: An object-oriented language for music composition. In *Proceedings of the 1987 international computer music conference, ICMC 1987, champaign/urbana, illinois, usa, august 23-26, 1987*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1987.007>
- Schlei, K., & Yoshikane, R. (2016). The things of shapes: Waveform generation using 3d vertex data. In *Proceedings of the international computer music conference, ICMC 2016*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2016.056/1>
- Schloss, W., Driessen, A., & Peter, F. (2001). Towards a virtual membrane: New algorithms and technology for analyzing gestural data. In *Proceedings of the international computer music conference, ICMC 2001*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2001.103/1>
- Schmeder, A. (2009). Efficient gesture storage and retrieval for multiple applications using a relational data model of open sound control. In *Proceedings of the international computer music conference, ICMC 2009*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2009.005/1>
- Schöner, B., Cooper, C., Douglas, C., & Gershenfeld, N. (1998). Data-driven modeling and synthesis of acoustical instruments. In *Proceedings of the 1998 international computer music conference, ICMC 1998, ann arbor, michigan, usa, october 1-6, 1998*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1998.265>
- Schwarz, D. (2000). A system for data-driven concatenative sound synthesis. In *Proceedings of the cost g-6 conference on digital audio effects (dafx-00), verona, italy, december 7-9*.
- Schwarz, D. (2003). New developments in data-driven concatenative sound synthesis. In *Proceedings of the international computer music conference, ICMC 2003*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2003.099/1>
- Schwarz, D. (2006a). Concatenative sound synthesis: The early years. *Journal of New Music Research*, 35, 3–22. doi:10.1080/09298210600696857
- Schwarz, D. (2006b). Real-time corpus-based concatenative synthesis with catart. (pp. 18–21).
- Schwarz, D. (2012). The sound space as musical instrument: Playing corpus-based concatenative synthesis. In *Proceedings of the international conference on new interfaces for musical expression*, Ann Arbor, Michigan: University of Michigan. Retrieved from [http://www.nime.org/proceedings/2012/nime2012\\_120.pdf](http://www.nime.org/proceedings/2012/nime2012_120.pdf)
- Schwarz, D., & Schnell, N. (2009). Sound Search by Content-based Navigation in Large Databases. doi:10.5281/zenodo.849679
- Selfridge-Field, E. (Ed.). (1997a). *Beyond midi: The handbook of musical codes*. Cambridge, MA, USA: MIT Press.
- Selfridge-Field, E. (1997b). The score music publishing system. *SCORE*. From Beyond MIDI, The Handbook of Musical Codes. Retrieved from <http://scoremus.com/score.html>
- Serafin, S., Smith, J., III, O., Thornburg, H., Mazzella, F., Tellier, A., & Thonier, G. (2001). Data driven identification and computer animation of bowed string model. In *Proceedings of the international computer music conference, ICMC 2001*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2001.071/1>

- Serizel, R., Bisot, V., Essid, S., & Richard, G. (2016). Machine listening techniques as a complement to video image analysis in forensics. In *IEEE International Conference on Image Processing* (pp. 948–952). doi:10.1109/ICIP.2016.7532497
- Simonelli, L., Delgadino, M., & Halac, F. C. (2017). Hearing the self: A spectral experience. For 2 PS3 Eyecams, multichannel audio, screens and participants. 1440 minutes. Xuhui Art Museum, Shanghai, China: International Computer Music Conference.
- Skinner, R. (1990a). Music software. *Notes*, 46(3), 660–684. Retrieved from <http://www.jstor.org/stable/941442>
- Skinner, R. (1990b). Music software. *Notes*, 47(1), 91–101. Retrieved from <http://www.jstor.org/stable/940555>
- Smith, J. B. L., Burgoyne, J. A., Fujinaga, I., Roure, D. D., & Downie, J. S. (2011). Design and creation of a large-scale database of structural annotations. In A. Klapuri & C. Leider (Eds.), *Proceedings of the 12th international society for music information retrieval conference, ISMIR 2011, miami, florida, usa, october 24-28, 2011* (pp. 555–560). University of Miami. Retrieved from <http://ismir2011.ismir.net/papers/PS4-14.pdf>
- Smith, L. (1972). Score: A musician's approach to computer music. *Journal of the Audio Engineering Society*, 20(1), 7–14. Retrieved from <https://ccrma.stanford.edu/~aj/archives/docs/all/649.pdf>
- Sterne, J. (2012). *Mp3: The meaning of a format*. Duke University Press.
- Stoller, D., Ewert, S., & Dixon, S. (2017). Adversarial semi-supervised audio source separation applied to singing voice extraction. *CoRR*, abs/1711.00048. arXiv: 1711.00048. Retrieved from <http://arxiv.org/abs/1711.00048>
- Sturm, B. (2004). Matconcat: An application for exploring concatenative sound synthesis using matlab.
- Sturm, B. L. (2002). Water music: Sonification of ocean buoy spectral data. In *Proceedings of the international computer music conference, ICMC 2002*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2002.056/1>
- Taylor, B., Allison, J., Conlin, W., Oh, Y., & Holmes, D. (2014). Simplified expressive mobile development with nexusui, nexusup, and nexusdrop. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 257–262). London, United Kingdom: Goldsmiths, University of London. Retrieved from [http://www.nime.org/proceedings/2014/nime2014\\_480.pdf](http://www.nime.org/proceedings/2014/nime2014_480.pdf)
- Thiebaut, J.-B., Bello, J., & Schwarz, D. (2007). How musical are images? from sound representation to image sonification: An eco systemic approach.
- Truax, B. D. (1973). The computer composition: Sound synthesis programs pod4, pod5 and pod6. *Sonological Reports*, 2.
- Truax, B. D. (1976). A comunicational approach to computer sound programs. *Journal of Music Theory*, 20(2), 227–300.
- Truax, B. D. (1980). The inverse relation between generality and strength in computer music programs. *Interface*, 9, 49–57.

- Tzanetakis, G. [G.], & Cook, P. [P.]. (2002). Musical genre classification of audio signals. *IEEE Transactions on Speech and Audio Processing*, 10(5), 293–302. doi:10.1109/TSA.2002.800560
- Tzanetakis, G. [George], & Cook, P. [Perry]. (2000). Marsyas: A framework for audio analysis. *Organised Sound*, 4(3), 169–175.
- Vercoe, B. (1984). The synthetic performer in the context of live performance.
- Vicinanza, D. (2006). A Java Framework for Data Sonification and 3D Graphic Rendering. doi:10.5281/zenodo.849321
- Vigliensoni, G., & Fujinaga, I. (2017). The music listening histories dataset. In S. J. Cunningham, Z. Duan, X. Hu, & D. Turnbull (Eds.), *Proceedings of the 18th international society for music information retrieval conference, ISMIR 2017, suzhou, china, october 23-27, 2017* (pp. 96–102). Retrieved from [https://ismir2017.smcnus.org/wp-content/uploads/2017/10/180\\_Paper.pdf](https://ismir2017.smcnus.org/wp-content/uploads/2017/10/180_Paper.pdf)
- Vinet, H. (2005). The semantic hifi project. In *Proceedings of the 2005 international computer music conference, ICMC 2005, barcelona, spain, september 4-10, 2005*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2005.171>
- Vinet, H., Herrera, P., & Pachet, F. (2002a). The CUIDADO project. In *ISMIR 2002, 3rd international conference on music information retrieval, paris, france, october 13-17, 2002, proceedings*. Retrieved from <http://ismir2002.ismir.net/proceedings/02-FP06-3.pdf>
- Vinet, H., Herrera, P., & Pachet, F. (2002b). The CUIDADO project: New applications based on audio and music content description. In *Proceedings of the 2002 international computer music conference, ICMC 2002, gothenburg, sweden, september 16-21, 2002*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2002.093>
- Visi, F., Caramiaux, B., Mcloughlin, M., & Miranda, E. (2017). A knowledge-based, data-driven method for action-sound mapping. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 231–236). Copenhagen, Denmark: Aalborg University Copenhagen. Retrieved from [http://www.nime.org/proceedings/2017/nime2017\\_paper0043.pdf](http://www.nime.org/proceedings/2017/nime2017_paper0043.pdf)
- Vogl, R., & Knees, P. (2017). An intelligent drum machine for electronic dance music production and performance. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 251–256). Copenhagen, Denmark: Aalborg University Copenhagen. Retrieved from [http://www.nime.org/proceedings/2017/nime2017\\_paper0047.pdf](http://www.nime.org/proceedings/2017/nime2017_paper0047.pdf)
- Vogt, K., Pirro, D., Rumori, M., & Hoeldrich, R. (2012). Sounds of simulations: Data listening space. In *Proceedings of the international computer music conference, ICMC 2012*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2012.096/1>
- Walker, B. N., & Cothran, J. T. (2003). ICAD 2004: The 13th meeting of the international conference on auditory display, boston, ma, usa, 6-9 july 2003, proceedings. In S. Barrass & P. Vickers (Eds.), *International Community for Auditory Display*.
- Walker, B. N., & Nees, M. A. (2011). Theory of sonification. In T. Hermann, A. Hunt, & J. G. Neuhoff (Eds.), *The sonification handbook* (Chap. 2, pp. 9–39). Berlin, Germany: Logos Publishing House. Retrieved from <http://sonification.de/handbook/chapters/chapter2/>

- Wang, G., & Cook, P. R. (2003). Chuck: A concurrent, on-the-fly, audio programming language. In *Proceedings of the 2003 international computer music conference, ICMC 2003, singapore, september 29 - october 4, 2003*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2003.055>
- Wang, X., & Haque, S. A. (2017). Classical music clustering based on acoustic features. *CoRR*, abs/1706.08928. arXiv: 1706.08928. Retrieved from <http://arxiv.org/abs/1706.08928>
- Whalley, I. (2014). Broadening telematic electroacoustic music by affective rendering and embodied real-time data sonification. In *Proceedings of the international computer music conference, ICMC 2014*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2014.046/1>
- Wilkins, J., Seetharaman, P., Wahl, A., & Pardo, B. (2018). Vocalset: A singing voice dataset. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 468–474). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/114\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/114_Paper.pdf)
- Wilson, C. M., & Lodha, S. K. (1996). Listen: A data sonification toolkit. In *Proceedings of the 3rd international conference on auditory display (icad1996), palo alto, california, november 4-6, 1996*. eds.: S. frysiner; g. kramer. international community for auditory display, 1996. Georgia Institute of Technology. Retrieved from <http://hdl.handle.net/1853/50809>
- Worrall, D., Bylstra, M., Barrass, S., & Dean, R. (2007). ICAD 2004: The 13th meeting of the international conference on auditory display, montreal, canada, june 26-29 2007, proceedings. In S. Barrass & P. Vickers (Eds.), *International Community for Auditory Display*.
- Wüst, O., & Celma, Ò. (2004). An MPEG-7 database system and application for content-based management and retrieval of music. In *ISMIR 2004, 5th international conference on music information retrieval, barcelona, spain, october 10-14, 2004, proceedings*. Retrieved from <http://ismir2004.ismir.net/proceedings/p010-page-48-paper227.pdf>
- Xambo, A., Roma, G., Herrera, P., & Laney, R. (2012). Factors in Human Recognition of Timbre Lexicons Generated by Data Clustering. doi:10.5281/zenodo.850102
- Xambo, A., Roma, G., Lerch, A., Barthet, M., & Fazekas, G. (2018). Live repurposing of sounds: Mir explorations with personal and crowdsourced databases. In T. M. Luke Dahl Douglas Bowman (Ed.), *Proceedings of the international conference on new interfaces for musical expression* (pp. 364–369). Blacksburg, Virginia, USA: Virginia Tech. Retrieved from [http://www.nime.org/proceedings/2018/nime2018\\_paper0081.pdf](http://www.nime.org/proceedings/2018/nime2018_paper0081.pdf)
- Xi, Q., Bittner, R. M., Pauwels, J., Ye, X., & Bello, J. P. (2018). Guitarset: A dataset for guitar transcription. In E. Gómez, X. Hu, E. Humphrey, & E. Benetos (Eds.), *Proceedings of the 19th international society for music information retrieval conference, ISMIR 2018, paris, france, september 23-27, 2018* (pp. 453–460). Retrieved from [http://ismir2018.ircam.fr/doc/pdfs/188\\_Paper.pdf](http://ismir2018.ircam.fr/doc/pdfs/188_Paper.pdf)
- Xu, Y., Zang, C., & Yang, J. (2005). Semi-supervised classification of musical genre using multi-view features. In *Proceedings of the 2005 international computer music conference, ICMC 2005, barcelona, spain, september 4-10, 2005*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2005.020>

- Yang, C. (2001). *Music database retrieval based on spectral similarity* (Technical Report No. 2001-14). Stanford InfoLab. Stanford. Retrieved from <http://ilpubs.stanford.edu:8090/489/>
- Yeh, C., Bogaards, N., & Röbel, A. (2007). Synthesized polyphonic music database with verifiable ground truth for multiple F0 estimation. In S. Dixon, D. Bainbridge, & R. Typke (Eds.), *Proceedings of the 8th international conference on music information retrieval, ISMIR 2007, vienna, austria, september 23-27, 2007* (pp. 393–398). Austrian Computer Society. Retrieved from [http://ismir2007.ismir.net/proceedings/ISMIR2007\\_p393\\_yeh.pdf](http://ismir2007.ismir.net/proceedings/ISMIR2007_p393_yeh.pdf)
- Yeo, W. S., & Berger, J. (2005). Application of image sonification methods to music. In *Proceedings of the 2005 international computer music conference, ICMC 2005, barcelona, spain, september 4-10, 2005*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.2005.036>
- Yeo, W., Berger, S., Lee, J., & Zune. (2004). Sonart: A framework for data sonification, visualization and networked multimedia applications. In *Proceedings of the international computer music conference, ICMC 2004*, Michigan Publishing. Retrieved from <https://quod.lib.umich.edu/i/icmc/bbp2372.2004.128/1>
- Yolk, A., Wiering, F., & van Kranenburg, P. (2011). Unfolding the potential of computational musicology. In *Problems and possibilities of computational humanities - 13th IFIP iwra 2011 ifip wgs.l — international conference on informatics and semiotics in organisations, ICISO 2011, netherlands, july 4-6, 2011. proceedings* (pp. 137–144).
- Young, D., & Deshmane, A. (2007). Bowstroke database : A web-accessible archive of violin bowing data. In *Proceedings of the international conference on new interfaces for musical expression* (pp. 352–357). New York City, NY, United States. Retrieved from [http://www.nime.org/proceedings/2007/nime2007\\_352.pdf](http://www.nime.org/proceedings/2007/nime2007_352.pdf)
- Zicarelli, D. (1998). An extensible real-time signal processing environment for max. In *Proceedings of the 1998 international computer music conference, ICMC 1998, ann arbor, michigan, usa, october 1-6, 1998*, Michigan Publishing. Retrieved from <http://hdl.handle.net/2027/spo.bbp2372.1998.274>