


profiling and cleaning decisions

Same seven panels with a quarter of the cells blanked. Fill it from memory first, then check.

1 the three counts

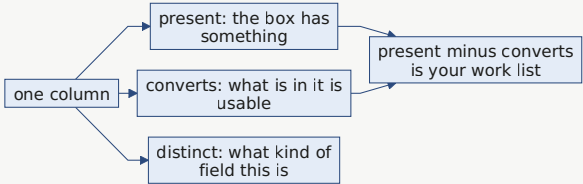

_____ the box has something in it
_____ what is in it is usable
_____ how many different values

present minus converts is _____.

Crux. _____ is the only count that can _____, so it is the only one that can warn you.

2 reading a profile

Shape	What it means
distinct 3 or 4 on 50 rows	_____
distinct near the row count	An id or a free value
distinct below the row count on an id	_____
converts 0 on a text field	_____

Crux. you know where the work is before _____.

3 missing is a decision

Choice	Use when	It costs
Drop	Required field, value exists nowhere else	_____
_____	Absence means something you can name	Telling absent from equal-to-the-default
Keep and flag	_____	Every downstream reader handles the flag

Crux. a default you did not state is _____.

4 the coercion trap

	RAW	COERCED	
present	48/50	50/50	_____
converts	44/50	50/50	_____
distinct	46	42	_____

Crux. every count _____ and the dataset _____.

5 duplicates

whole-record comparison	finds only _____
_____	finds the rest

Crux. an identity rule is _____, and _____ decides it.

6 outliers

sorted(amounts)[_____] read the tail

Crux. an outlier is _____ before it is _____.

7 what ships

_____ the rows you would compute on
_____ what you set aside, with reasons
_____ field, finding, choice, reason

input = _____

Crux. the profiled dataset without its _____ is an opinion.

THE WORDS ON THIS SHEET

Profile Three counts per field, taken before you change anything
present How many rows hold anything at all in this field

converts How many of those become the type you need
distinct How many different values the field holds, and the only count that can fall

Present and unusable present minus converts, the rows a presence check passes and arithmetic...

Identity rule The fields you decided make two rows the same record
Decisions log Field, finding, choice and reason, one line per cleaning act

Outlier A value far from the rest, and a finding before it is a row to delete