


1 the three counts

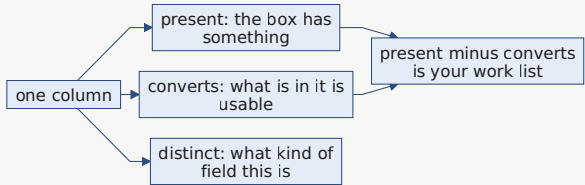

present the box has something in it
converts what is in it is usable
distinct how many different values

present minus converts is your work list.

Crux. distinct is the only count that can fall, so it is the only one that can warn you.

2 reading a profile

Shape	What it means
distinct 3 or 4 on 50 rows	A category
distinct near the row count	An id or a free value
distinct below the row count on an id	Something repeats that should not
converts 0 on a text field	Correct, not a failure

Crux. you know where the work is before you have touched anything.

3 missing is a decision

Choice	Use when	It costs
Drop	Required field, value exists nowhere else	The rest of that record
Stated default	Absence means something you can name	Telling absent from equal-to-the-default
Keep and flag	You need the record and the gap must travel	Every downstream reader handles the flag

Crux. a default you did not state is data you invented.

4 the coercion trap

	RAW	COERCED	
present	48/50	50/50	rose
converts	44/50	50/50	rose
distinct	46	42	FELL

Crux. every count improved and the dataset got worse.

5 duplicates

whole-record comparison finds only exact copies
distinct ids vs row count finds the rest

State the rule:

two rows are the same order when they share _____

Crux. an identity rule is something you state, and whoever owns the data decides it.

6 outliers

sorted(amounts)[-5:] read the tail

Converts cleanly and well formed means real until somebody says otherwise.

Crux. an outlier is a finding to investigate before it is a row to delete.

7 what ships

profiled dataset the rows you would compute on
rejects file what you set aside, with reasons
decisions log field, finding, choice, reason

input = profiled + rejected

Crux. the profiled dataset without its decisions log is an opinion.

THE WORDS ON THIS SHEET

Profile Three counts per field, taken before you change anything	converts How many of those become the type you need	Present and unusable present minus converts, the rows a presence check passes and arithmetic...	Identity rule The fields you decided make two rows the same record	Outlier A value far from the rest, and a finding before it is a row to delete
present How many rows hold anything at all in this field	distinct How many different values the field holds, and the only count that can fall		Decisions log Field, finding, choice and reason, one line per cleaning act	