

Music Theory with Dependent Types (Experience Report)

JOHN LEO, Halfaya Research, USA

YOUYOU CONG, Tokyo Institute of Technology, Japan

Throughout history, music has been composed following general rules and guidelines, expressed informally through natural language and examples. The expressiveness of dependent type theory allows us to capture these rules formally, and then use them to automate analysis and synthesis of music.

In this experience report, we explore expressing a small subset of the rules of the common practice period in Agda, a functional programming language with full dependent types. We focus on the construction of species counterpoint as well as four-part harmonization of melody. We point out both the advantages of using dependent types to express music theory and some of the challenges that remain to make languages like Agda more practical as a tool for musical exploration.

Additional Key Words and Phrases: dependent types, harmony, counterpoint

ACM Reference Format:

John Leo and Youyou Cong. 2020. Music Theory with Dependent Types (Experience Report). *Proc. ACM Program. Lang.* 4, ICFP, Article 42 (August 2020), 9 pages.

1 INTRODUCTION

Edgar Varèse describes music as “organized sound”, and throughout history cultures have created and applied systems of rules and guidelines to govern the music they create, most notably the Common Practice Period of Western music spanning the 17th to early 20th centuries. These rule systems are seldom absolute, and indeed deliberate breaking of the rules is often part of the aesthetic, but they roughly constrain the music they apply to and give it a common form and sound.

Artists and theoreticians have attempted to capture and codify these rule systems, informally in natural language, and typically accompanied by examples from the existing literature. The intent is both to analyze existing music and then to use these principles to guide the creation of new music, in other words for synthesis.

Starting in the 20th century, computers have become ubiquitous in music in every area, including sound synthesis, composition and production [Roads et al. 1996]. In terms of music theory, there has been a line of recent work on using functional programming for harmonic analysis [De Haas et al. 2011, 2013; Magalhães and de Haas 2011], harmonization of a melody and generation of melodies based on a harmonization [Koops et al. 2013; Magalhães and Koops 2014] and counterpoint [Szamozvancev and Gale 2017]. There is also an established Haskell library Euterpea [Hudak and Quick 2018] for general music and sound exploration.

To describe rules of basic harmonic structure, Magalhães and de Haas [2011] and its successors use dependent types. (TODO: Give an example.) However Haskell currently has limited support for

Authors’ addresses: John Leo, Halfaya Research, Bellevue, WA, USA, leo@halfaya.org; Youyou Cong, Tokyo Institute of Technology, Tokyo, Japan, cong@c.titech.ac.jp.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2020 Association for Computing Machinery.

2475-1421/2020/8-ART42 \$15.00

<https://doi.org/>

dependent types, and requires many extensions and tricks such as the use of singleton types [Eisenberg and Weirich 2013] to simulate a restricted form of dependent types. (TODO: fix wording)

We would like to explore what can be done in the context of music by using a programming language that offers full dependent types. We use the language Agda [Norell 2007] since it is fairly mature and aims to be a functional programming language as well as a proof assistant. It also features a Haskell FFI so we can take advantage of existing Haskell libraries, in particular for MIDI.

Full dependent types allow expression of full predicate logic, and it is tempting to take a standard textbook on music theory such as Piston and DeVoto [1987] or Aldwell and Cadwallader [2018] and attempt to formalize it in type theory. However this is difficult since most “rules” in music theory are not absolute, but rather suggestions of varying degrees (themselves vaguely specified) of importance. Since ultimately the resulting created music is more important than the theory, an alternative is to attempt to indirectly deduce the rules from music samples, using for example machine learning [Huang et al. 2017]. However.... TODO TODO: Perhaps create rules and weight them, then use ML.

Although formalization of a large amount of music theory is a goal, for now we start with the modest task of expressing a small, relatively strict rule set known as species counterpoint [Fux 1965]. TODO—more here We also present preliminary work on harmonizing a melody using a subset of rules based on Piston and DeVoto [1987], contrasting with existing work by Koops et al. [2013]. Notably, since counterpoint and harmony are not separate concepts but in fact deeply intertwined, we are able to reuse counterpoint rules to help develop natural-sounding harmonizations.

We make use of and extend [Leo and Cong 2020], a library of small tools for analysis and synthesis of music written in Agda, with the goal of eventually being a dependently-typed alternative to Euterpea. Previous work by [Cong and Leo 2019] using Music Tools expressed first-species counterpoint with the Agda type system, so that an error in counterpoint resulted in an Agda type error. Although this takes advantage of Agda’s native type checking, it has several downsides. One is that the Agda errors may be difficult to interpret as the corresponding musical error. Another is TODO: flexibility and composability.

Counterpoint section: contrast old and new methods

Harmony section: Harmonize melody, use counterpoint for voice leading and to constrain harmony. Mention grid for harmonic analysis, makes use of vectors.

conclusion: easy to express rules, break into parts, reuse in other contexts, extend. Downsides: hard to do some things (equality, sets, etc), Proof emphasis can get in the way, but may want to use in the future. Future work: equivalence, ornaments, ML.

TODO: Fix bib style.


2 MUSICAL PRELIMINARIES

Pitches. A *pitch* tells us how high or low a sound is. This notion is represented as natural numbers (of type `Pitch`) in our implementation, with zero representing the lowest possible sound. Throughout the paper, we use the notation `name octave` for pitches, where `name` ranges over `c`, `d`, `e`, etc., and `octave` denotes which octave the pitch belongs to. For instance, the middle C is represented as `c 5`.

Duration. *Duration* denotes an unspecified unit of time during which a sound or silence lasts. In our implementation, duration is again a natural number (of type `Duration`), with names such as `whole`, `half`, and `quarter`. These values are turned into an absolute length when the music is played at a specific tempo. As an example, `whole` has value 16 and corresponds to 4 seconds if the tempo is 60 beats per minute.

Notes. Combining pitches and duration gives us *notes*. We construct notes (of type `Note`) with the `tone` and `rest` constructors. For example, `tone whole (c 5)` is a whole note whose sound is the middle C, and `rest half` is a half rest.

Intervals. An *interval* represents the difference in pitch between two notes. There are 13 kinds of interval within an octave, and these intervals can be classified from several different perspectives: (i) major or minor; (ii) consonant or dissonant; and (iii) perfect or imperfect. We define intervals as a datatype `Interval`, where each constructor represents one of the 13 intervals.



per1	min2	maj2	min3	maj3	per4	aug4	per5	min6	maj6	min7	maj7	per8	
consonant?	yes	no	no	yes	yes	no	no	yes	yes	yes	no	no	yes

3 COUNTERPOINT

Counterpoint is a technique for combining multiple lines of melodies. Composing counterpoint is like arranging a song for choir: we start with a *cantus firmus*, which serves as the base melody, and compose counterpoint lines above or below the *cantus firmus*. When doing this, we must make sure that the whole music sounds harmonically pleasing, and that the individual melodic lines are distinguishable to the listener.

In this section, we present an implementation of species counterpoint, based on the formulation given by Fux [Fux 1965]. The idea is to represent “good” counterpoint as a dependent record, whose fields encode the musical content as well as proofs that the counterpoint follows certain rules. For space reason, we only describe two variants of species counterpoint; other variants can be formalized in an analogous way.

3.1 First Species Counterpoint

First species counterpoint is the simplest variant of counterpoint. In first species, we set one note against each note in the *cantus firmus*, which is required to start with a tonic and consist only of whole notes. Figure 1 shows an example of first species counterpoint. The lower line is the *cantus firmus*, which we excerpt from a famous German song called “Froschgesang” (Frog’s song). The upper line is the counterpoint composed by the second author.

3.1.1 Representing Music. In our implementation, we represent each bar as a pitch-interval pair (p, i) , where p is the pitch of a *cantus firmus* note, and i is the interval between p and the corresponding counterpoint note. We then represent a sequence of bars as a list of pitch-interval pairs, but with one proviso: we separate the first and last bars from the middle bars. Therefore, the Frog’s song in Figure 1 is represented as a compound of the following three elements:

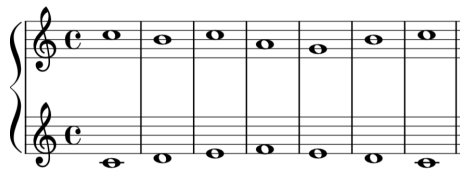


Fig. 1. First Species Counterpoint

```
PitchInterval : Set
PitchInterval = Pitch × Interval
```

```
first : PitchInterval
first = (c 5 , per8)
```

```
middle : List PitchInterval
middle = (d 5 , maj6) :: (e 5 , min6) :: (f 5 , maj3) ::
         (e 5 , min3) :: (d 5 , maj6) :: []
```

```
last : PitchInterval
last = (c 5 , per8)
```

3.1.2 Representing Rules. The reason behind our three-part representation of music is that different parts are subject to different rules, as we detail below.

Beginning. The beginning of the music should express perfection. As we saw in Section 2, there are three intervals that are classified as perfect: the 1st (more commonly called the *unison*), the 5th, and the 8th. The first interval of the music must then be one of these intervals. In our formalization, we implement this rule as the `checkBeginning` function, which reports an error `not158 i` when the first interval `i` is an invalid one. Since Agda does not have exceptions, we turn the error into an option value by wrapping it around the `just` constructor.

```
data BeginningError : Set where
  not158 : PitchInterval → BeginningError

checkBeginning : PitchInterval → Maybe BeginningError
checkBeginning pi@(_ , i) =
  if ((i == per1) ∨ (i == per5) ∨ (i == per8))
  then nothing
  else just (not158 pi)
```

Intervals. The middle bars of the music should maintain harmonical consonance and independence of melodic lines. As we saw before, consonant intervals include the unison, 3rd¹, 5th, 6th, and 8th, and among these, the unison is clearly an obstacle to distinguishing between the two lines of music. Therefore, the middle bars must consist of the latter four intervals. We encode this rule as the `checkIntervals` function, which returns a list of errors corresponding to the occurrences of dissonant intervals and unisons.

```
data IntervalError : Set where
  dissonant : Interval → IntervalError
  unison    : Pitch → IntervalError

intervalCheck : PitchInterval → Maybe IntervalError
intervalCheck (p , i) with isConsonant i | isUnison i
... | false | _ = just (dissonant i)
... | _      | true = just (unison p)
... | _      | _   = nothing
```

¹We use “3rd” to mean both the major and minor variants of the 3rd interval, and similarly for the 6th.

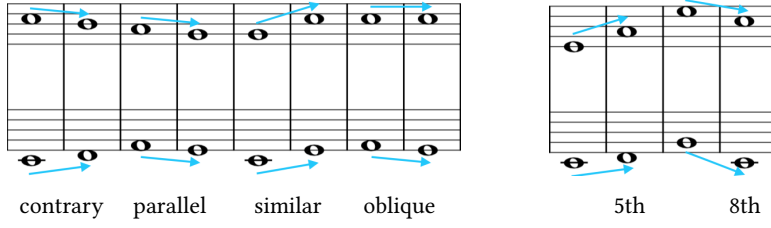


Fig. 2. Left: Four Kinds of Motion, Right: Invalid Motion

```
checkIntervals : List PitchInterval → List IntervalError
checkIntervals = mapMaybe intervalCheck
```

Motion. The independence of melodic lines is also affected by *motion*, i.e., the way one interval moves to another interval. As can be seen from Figure 2 left, there are four kinds of motion: *contrary* (two lines go in different directions), *parallel* (two lines go in the same direction by the same distance), *similar* (two lines go in the same direction), and *oblique* (one line plays the same note). There is a consensus that approaching a perfect interval by parallel or similar motion (as in Figure 2 right) destroys the independence of lines. To rule out this, we define the `checkMotion` function, which lists all occurrences of such invalid motion.

```
data MotionError : Set where
  parallel : PitchInterval → PitchInterval → MotionError
  similar  : PitchInterval → PitchInterval → MotionError

motionCheck : PitchInterval → PitchInterval → Maybe MotionError
motionCheck i1 i2 with motion i1 i2 | isPerfect (proj2 i2)
motionCheck i1 i2 | contrary | _      = nothing
motionCheck i1 i2 | oblique  | _      = nothing
motionCheck i1 i2 | parallel | false  = nothing
motionCheck i1 i2 | parallel | true   = just (parallel i1 i2)
motionCheck i1 i2 | similar  | false  = nothing
motionCheck i1 i2 | similar  | true   = just (similar i1 i2)

checkMotion : List PitchInterval → List MotionError
checkMotion = mapMaybe (uncurry motionCheck) ∘ pairs
-- where pairs returns a list of all adjacent pairs in a given list
```

Ending. The ending of the music should express relaxation. Among different intervals, the unison and the 8th are considered most stable, hence the last interval of the music must be either of these intervals. The last interval should also be approached by a *cadence*, a progression that gives rise to a sense of resolution. We encode these rules as the `checkEnding` function. Note that it returns the `tooShort` error when the music does not have enough number of bars to form a valid ending.

```
data EndingError : Set where
  not18      : PitchInterval → EndingError
  not27      : PitchInterval → EndingError
  tooShort   : List PitchInterval → EndingError

endingCheck : PitchInterval → PitchInterval → Maybe EndingError
```

```

endingCheck pi1@(pitch p , i) (pitch q , interval 0) =
  if ((p + 1 ≡b q) ∧ (i == min3)) then nothing else just (not27 pi1)
endingCheck pi1@(pitch p , i) (pitch q , interval 12) =
  if ((q + 2 ≡b p) ∧ (i == maj6) ∨ (p + 1 ≡b q) ∧ (i == min10))
  then nothing
  else just (not27 pi1)
endingCheck pi1          pi2          =
  just (not18 pi2)

```

```

checkEnding : List PitchInterval → PitchInterval → Maybe EndingError
checkEnding [] _ = just (tooShort [])
checkEnding (p :: []) q = endingCheck p q
checkEnding (p :: ps) q = checkEnding ps q

```

3.1.3 Putting Things Together. Using the encoding of music and rules we have seen so far, we define `FirstSpecies`, a record type inhabited by correct counterpoint. The first three fields of this record type represent the first, middle, and last bars, respectively. The last four fields stand for the proofs that the music satisfies all the required properties, that is:

- The beginning is a perfect consonance
- The middle bars have no dissonant interval or unison
- The middle bars have no perfect interval approached by parallel or similar motion
- The ending is a unison or an octave approached by a cadence

Recall that the functions representing these rules return either an option value or a list of found errors. Therefore, the correctness proofs either take the form `func args ≡ nothing`, or look like `func args ≡ []`.

```

record FirstSpecies : Set where
  constructor firstSpecies
  field
    firstBar      : PitchInterval
    middleBars    : List PitchInterval
    lastBar       : PitchInterval
    beginningOk   : checkBeginning firstBar ≡ nothing
    intervalsOk   : checkIntervals middleBars ≡ []
    motionOk      : checkMotion middleBars ≡ []
    endingOk      : checkEnding middleBars lastBar ≡ nothing

```

With this record type, we can show that the counterpoint in Figure 1 is correct, since the music is an inhabitant of the `FirstSpecies` type.

```

fs : FirstSpecies
fs = firstSpecies first1 middle1 last1 refl refl refl refl

```

3.2 Second Species Counterpoint

We next discuss a more complex variant of counterpoint, called the second species. In second species, we set *two* half notes against every cantus firmus note. Figure 3 is an example of such two-against-one counterpoint, again composed for the Frog’s song.

3.2.1 Representing Music. In second species, the first and last bars may have a different structure from middle bars. More specifically, it is encouraged to begin the counterpoint line with a half rest

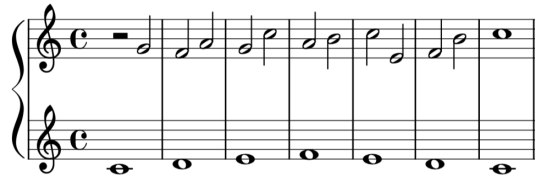


Fig. 3. Second Species Counterpoint

and end with a whole note. Therefore, in our implementation, we reuse the `PitchInterval` type for the first and last bars, and define a new type `PitchInterval2` for middle bars:

```
PitchInterval2 : Set
```

```
PitchInterval2 = Pitch × Interval × Interval
```

```
first2 : PitchInterval
```

```
first2 = (c 5 , per5)
```

```
middle2 : List PitchInterval2
```

```
middle2 =
```

```
  (d 5 , min3 , per5) :: (e 5 , min3 , min6) :: (f 5 , maj3 , aug4) ::
```

```
  (e 5 , min6 , min3) :: (d 5 , min3 , maj6) :: []
```

```
last2 : PitchInterval
```

```
last2 = (c 5 , per8)
```

3.2.2 Representing Rules. In second species counterpoint, some parts of the music are applied the same rules as first species, while other parts are constrained by new rules.

Beginning. The beginning of the music is *not* allowed to be the unison, as it prevents the listener from recognizing the beginning of the counterpoint line. We restrict the first interval by defining a new error `BeginningError2` and a function `checkBeginning2` that works analogously to `checkBeginning` for first species.

Strong Beats. The rhythmic structure of second species counterpoint gives rise to the distinction between *strong beats* (the first interval in a bar) and *weak beats* (the second interval). Strong beats in middle bars are constrained by the same rules as in first species. That is, they must all be consonant, non-unison intervals, and in the case of perfect intervals, the motion from the preceding interval (on the weak beat) must be either contrary or oblique. We encode these restrictions as the `checkStrongBeats` function, which, as the `checkIntervals` function for first species, returns a list of found errors.

Weak Beats. Compared to strong beats, weak beats are constrained in a looser manner. First, they are allowed to be dissonant if they are created by a *passing tone*, i.e., a note in the middle of two step-wise motions in the same direction (as in bars 4-5 of Figure 3). Second, they are allowed to be the unison if they are left by step in the opposite direction from their approach (as in bars 5-6 of Figure 3). We implement these rules as the `checkWeakBeats` function, which checks the validity of every three successive beats in the middle bars.

Motion. Parallel and similar motion towards a perfect interval is prohibited across bars. We enforce this rule using the `checkMotion2` function, which uses `expandPitchIntervals2` to convert

a list of `PitchInterval2` into a list of `PitchInterval`, and checks every pair of weak beat and strong beat intervals.

3.2.3 Putting Things Together. Now we define `SecondSpecies`, a record type inhabited by correct second species counterpoint. As in `FirstSpecies`, we have three fields holding the musical content, followed by five fields carrying the proofs of various properties.

```
record SecondSpecies : Set where
  constructor secondSpecies
  field
    firstBar      : PitchInterval
    middleBars    : List PitchInterval2
    lastBar       : PitchInterval
    beginningOk   : checkBeginning2 firstBar ≡ nothing
    strongBeatsOk : checkStrongBeats middleBars ≡ []
    weakBeatsOk   : checkWeakBeats middleBars (secondPitch lastBar) ≡ []
    motionOk      : checkMotion2 (firstBar ::
                                   (expandPitchIntervals2 middleBars) ++
                                   (lastBar :: [])) ≡ []
    endingOk      : checkEnding2 middleBars lastBar ≡ nothing
```

Using `SecondSpecies`, we can show that the second species counterpoint in Figure 3 is correct.

```
ss : SecondSpecies
ss = SecondSpecies first2 middle2 last2 refl refl refl refl refl
```

4 HARMONY

Text here.

5 CONCLUSION

Text here.

REFERENCES

- E. Aldwell and A. Cadwallader. 2018. *Harmony and Voice Leading*. Cengage Learning.
- Youyou Cong and John Leo. 2019. Demo: Counterpoint by Construction. In *Proceedings of the 7th ACM SIGPLAN International Workshop on Functional Art, Music, Modeling, and Design* (Berlin, Germany) (FARM 2019). Association for Computing Machinery, New York, NY, USA, 22–24. <https://doi.org/10.1145/3331543.3342578>
- W. Bas De Haas, José Pedro Magalhães, Remco C. Veltkamp, and Frans Wiering. 2011. HarmTrace: Improving Harmonic Similarity Estimation Using Functional Harmony Analysis. In *Proceedings of the 12th International Society for Music Information Retrieval Conference (ISMIR '11)*. 67–72.
- W. Bas De Haas, José Pedro Magalhães, Frans Wiering, and Remco C. Veltkamp. 2013. HarmTrace: Automatic Functional Harmonic Analysis. *Computer Music Journal* 37:4 (2013), 37–53. https://doi.org/10.1162/COMJ_a_00209
- Richard A Eisenberg and Stephanie Weirich. 2013. Dependently typed programming with singletons. *ACM SIGPLAN Notices* 47, 12 (2013), 117–130.
- Johann Joseph Fux. 1965. *The Study of Counterpoint*. W. W. Norton & Company.
- Cheng-Zhi Anna Huang, Tim Cooijmans, Adam Roberts, Aaron Courville, and Douglas Eck. 2017. Counterpoint by Convolution. In *Proceedings of ISMIR 2017*. https://ismir2017.smcnus.org/wp-content/uploads/2017/10/187_Paper.pdf
- Paul Hudak and Donya Quick. 2018. *The Haskell School of Music: From Signals to Symphonies*. Cambridge University Press.
- Hendrik Vincent Koops, José Pedro Magalhães, and W. Bas De Haas. 2013. A Functional Approach to Automatic Melody Harmonisation. In *Proceedings of the First ACM SIGPLAN Workshop on Functional Art, Music, Modeling & Design* (Boston, Massachusetts, USA) (FARM '13). ACM, 47–58. <https://doi.org/10.1145/2505341.2505343>
- John Leo and Youyou Cong. 2020. Music Tools. <https://github.com/halfaya/MusicTools>.

- José Pedro Magalhães and W. Bas de Haas. 2011. Functional modelling of musical harmony: an experience report. In *Proceedings of the 16th ACM SIGPLAN International Conference on Functional Programming (Tokyo, Japan) (ICFP '11)*. ACM, New York, NY, USA, 156–162.
- José Pedro Magalhães and Hendrik Vincent Koops. 2014. Functional Generation of Harmony and Melody. In *Proceedings of the Second ACM SIGPLAN Workshop on Functional Art, Music, Modeling & Design (FARM '14)*. ACM. <https://doi.org/10.1145/2633638.2633645>
- Ulf Norell. 2007. *Towards a practical programming language based on dependent type theory*. Ph.D. Dissertation. Chalmers University of Technology.
- Walter Piston and Mark DeVoto. 1987. *Harmony*. W. W. Norton & Company.
- Curtis Roads, John Strawn, Curtis Abbott, John Gordon, and Philip Greenspun. 1996. *The Computer Music Tutorial*. MIT Press, Cambridge, MA, USA.
- Dmitrij Szamozvancev and Michael B Gale. 2017. Well-typed music does not sound wrong (experience report). In *ACM SIGPLAN Notices*, Vol. 52. ACM, 99–104.