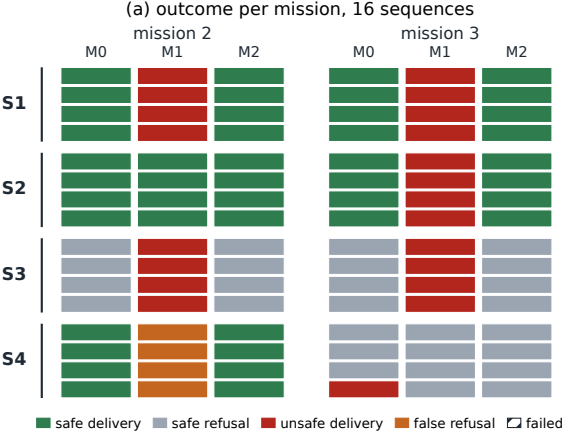
(a) outcome per mission, 16 sequences
mission 2
mission 3
M0
M1
M2
M0
M1
M2
S1
S2
S3
S4
safe delivery
safe refusal
unsafe delivery
false refusal
failed

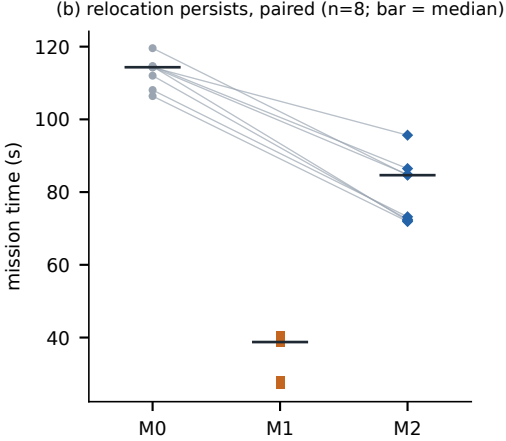
(b) relocation persists, paired (n=8; bar = median)
mission time (s)
120
100
80
60
40
M0
M1
M2