JS & PHP Lab Programs 2022-23

Vth Sem Bsc CS and BCA

Java Script Programs

1. Write a JavaScript program to check whether a given number is perfect, abundant or deficient. Use alert box to display the output.

USER INTERFACE

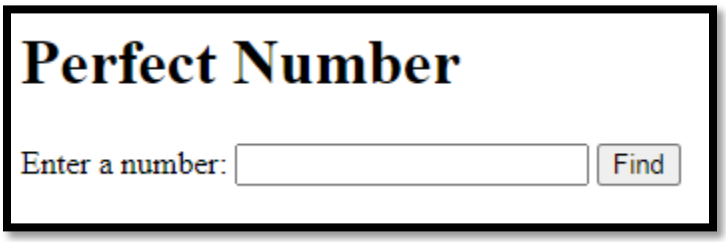

SOURCE CODE

```
<html>
<body>
    <h1>Perfect Number</h1>
    Enter a number:
    <input type="text" id="num" />
    <input type="button" value="Find" onClick="findPerfect()" />
    <script>
        function findPerfect()
        {
            var n = document.getElementById('num').value;
            var sum = 0;
            for (var i = 1; i < n; i++)
            {
                if (n % i == 0)
                {
                    sum = sum + i;
                }
            }
            if (sum == n)
                alert(n+" is a perfect number.");
            else if (sum > n)
                alert(n+" is a abundant number.");
```

```
            else
                alert(n+" is a deficient number.");
        }
    </script>
</body>
</html>
```

OUTPUT

2. Write a JavaScript program to check whether the given sides can form a triangle. If yes, find the type (isosceles, equilateral and scalene) and area of the triangle. Use prompt dialogue box to accept the sides.

USER INTERFACE

SOURCE CODE

```
<html>
    <head>

    </head>
    <body>
        <script>
            var a=parseInt(prompt("enter the first side of the triangle"));
            var b=parseInt(prompt("enter the second side of the
triangle"));
            var c=parseInt(prompt("enter the third side of the triangle"));
            if(a>=(b+c)||b>=(c+a)||c>=(a+b))
            alert("Cannot form a triangle");
            else
            {
                var s=(a+b+c)/2;
                var area=Math.sqrt(s*(s-a)*(s-b)*(s-c));
                if(a==b && b==c && a==c)
                    alert("Equilateral Triangle : Area = "+area);
                else if(a==b||b==c||c==a)
                    alert("Isosceles Triangle : Area = "+area);
                else
                    alert("Scalene Triangle : Area = "+area);
            }
        </script>
```

```
    </body>
</html>
```

OUTPUT

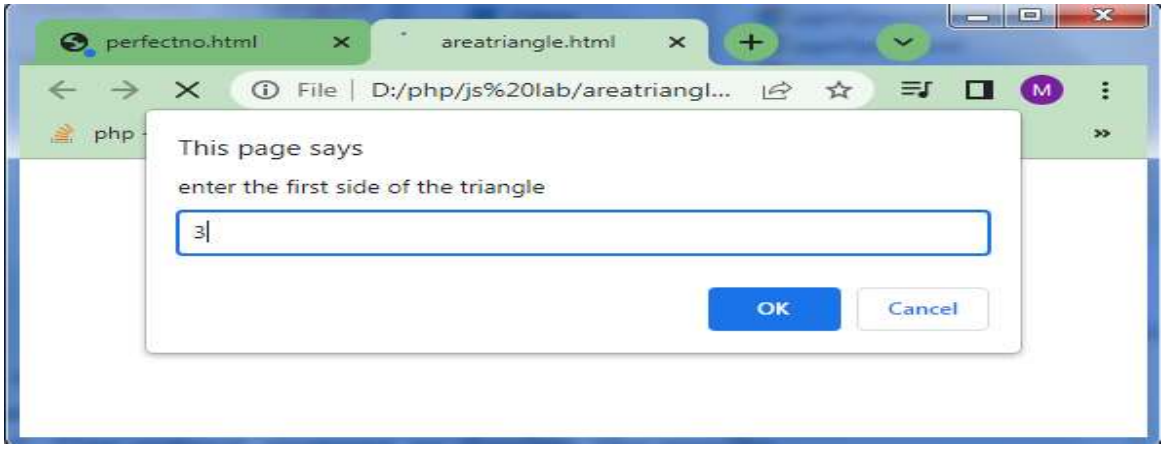

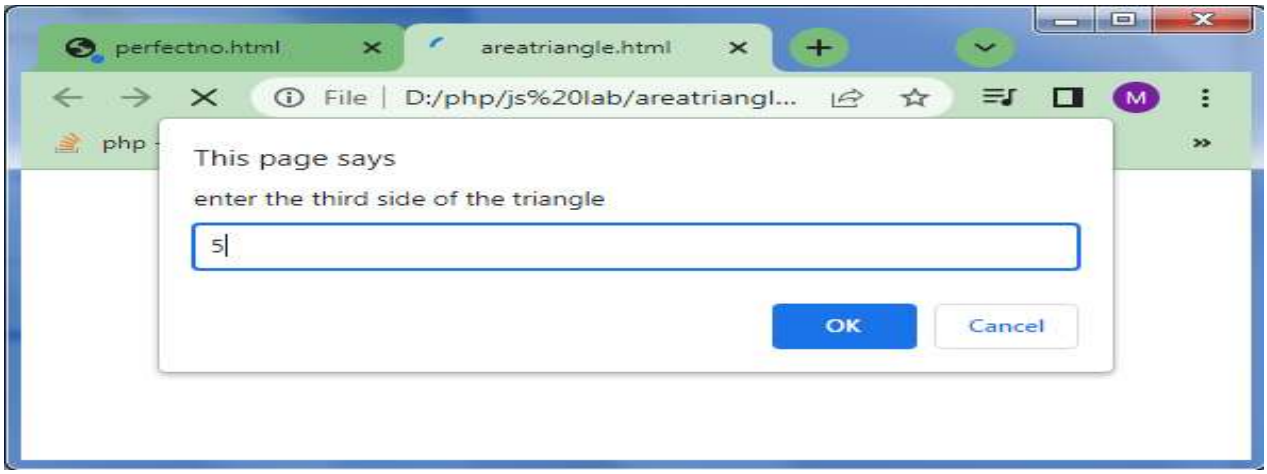

3. Design a form that accepts two integers. Provide 4 buttons for Add, Subtract, Multiply, Divide. Add JavaScript program to add, subtract, multiply and divide the given numbers when these buttons are clicked. Use output element to display the results.

USER INTERFACE

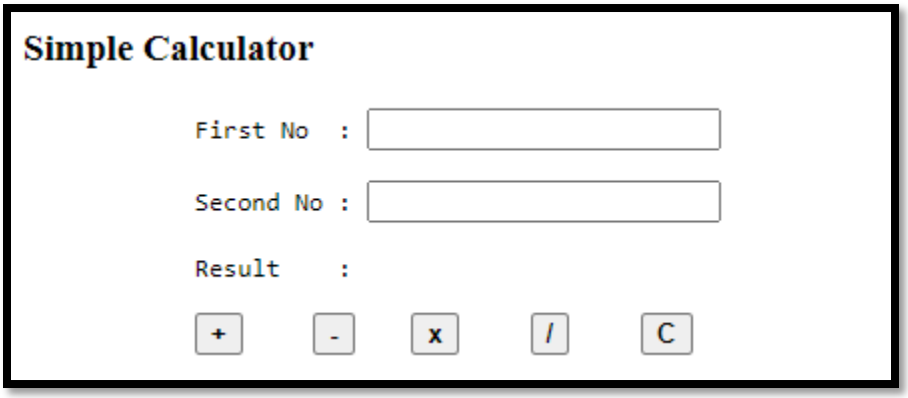

SOURCE CODE

```
<html>
    <head>
        <title>Calculator</title>
    </head>
    <body>
        <form>
            <h3>Simple Calculator</h3>
            <pre>
            First No  : <input type="text" id="first"/>

            Second No : <input type="text" id="second"/>

            Result    : <output id="result" for="first second"></output>
```

```
            <button type="button" onClick="add()"><b>+</b></button>
<button type="button" onclick="sub()"><b>-</b></button>    <button
type="button" onclick="mul()"><b>x</b></button>     <button type="button"
onclick="div()"><b>/</b></button>     <button
type="reset"><b>C</b></button>
            </pre>
        </form>
        <script>
            function add()
            {
                var a,b;
                a=parseInt(document.getElementById("first").value);
                b=parseInt(document.getElementById("second").value);
                document.getElementById("result").value=a+b;
            }
            function sub()
            {
                var a,b;
                a=parseInt(document.getElementById("first").value);
                b=parseInt(document.getElementById("second").value);
                document.getElementById("result").value=a-b;
            }
            function mul()
            {
                var a,b;
                a=parseInt(document.getElementById("first").value);
                b=parseInt(document.getElementById("second").value);
                document.getElementById("result").value=a*b;
            }
            function div()
            {
                var a,b;
                a=parseInt(document.getElementById("first").value);
                b=parseInt(document.getElementById("second").value);
                document.getElementById("result").value=a/b;
            }

        </script>
    </body>
</html>
```

OUTPUT

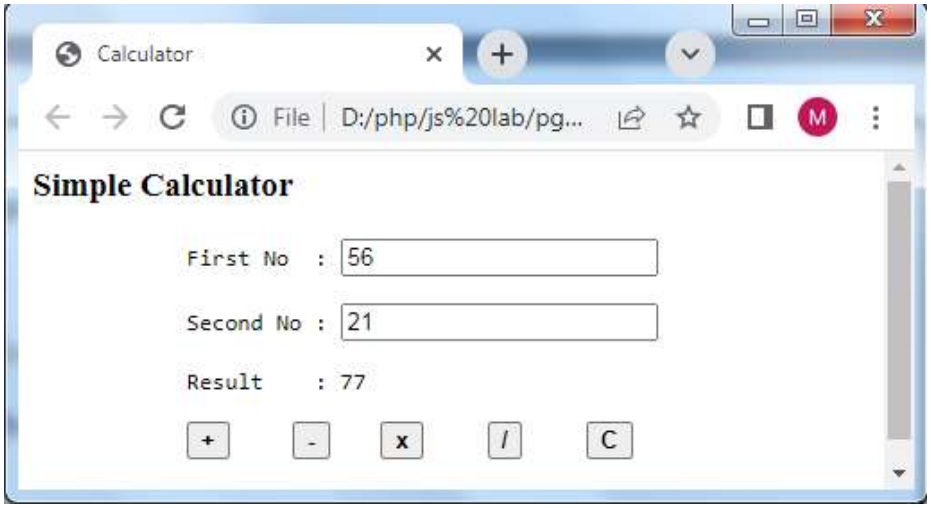

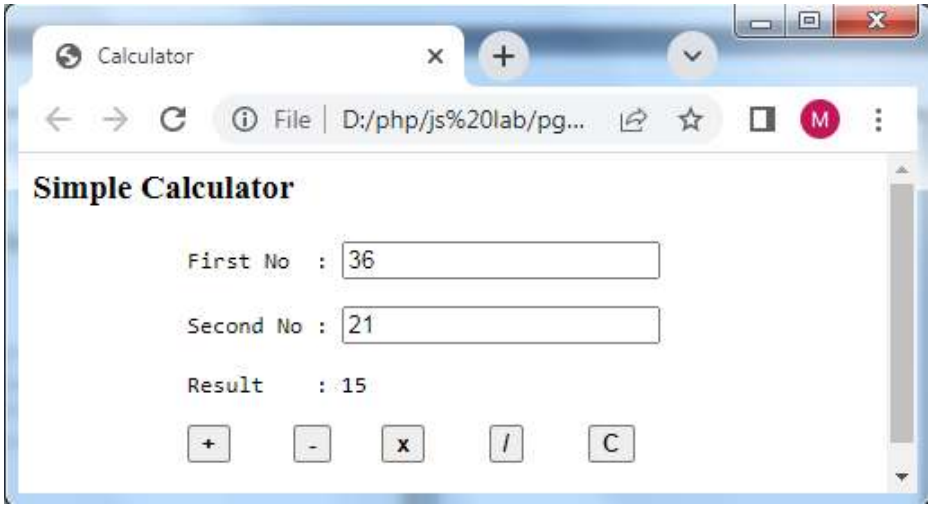

4. Write a JavaScript program to store different colors in an array and change the background color of the page using this array elements

USER INTERFACE

SOURCE CODE

```
<html>
    <head>
        <title>change bgcolor</title>
    </head>
    <body>
        <script>
            function colorset(val)
            {
            document.body.style.background=val;
            }
            var a=[];
            var n=prompt("How many colors : ");
            for(let i=0;i<n;i++)
            {
```

```
                a[i]=prompt("Enter color "+(i+1));
            }
            for(let i=0;i<n;i++)
            {
                document.write("<input type='button'
onmouseover='colorset(this.value)' value='"+a[i]+"'>");
            }
        </script>
    </body>
</html>
```

OUTPUT

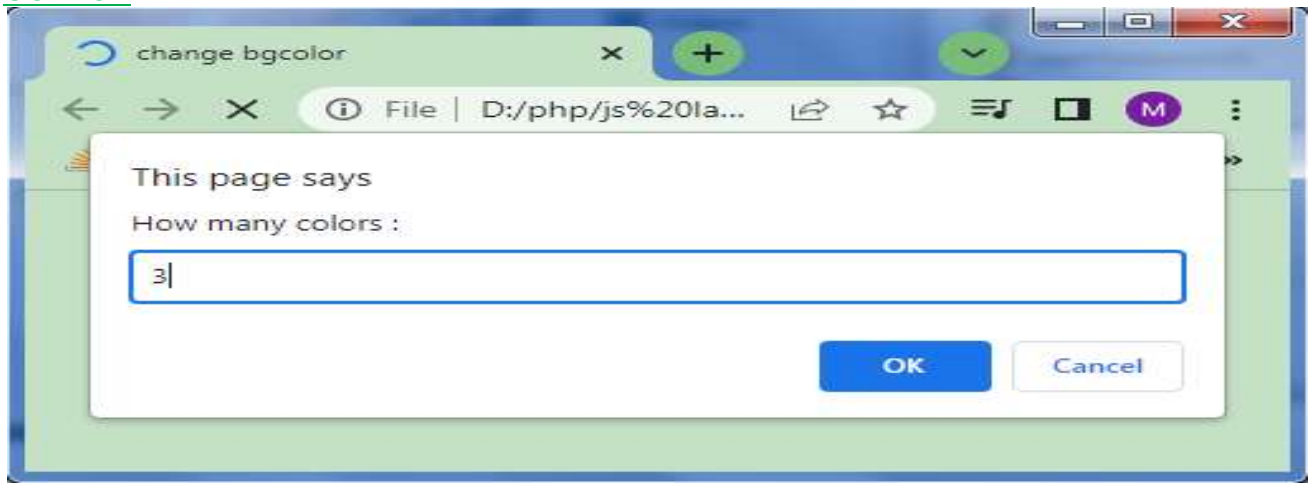

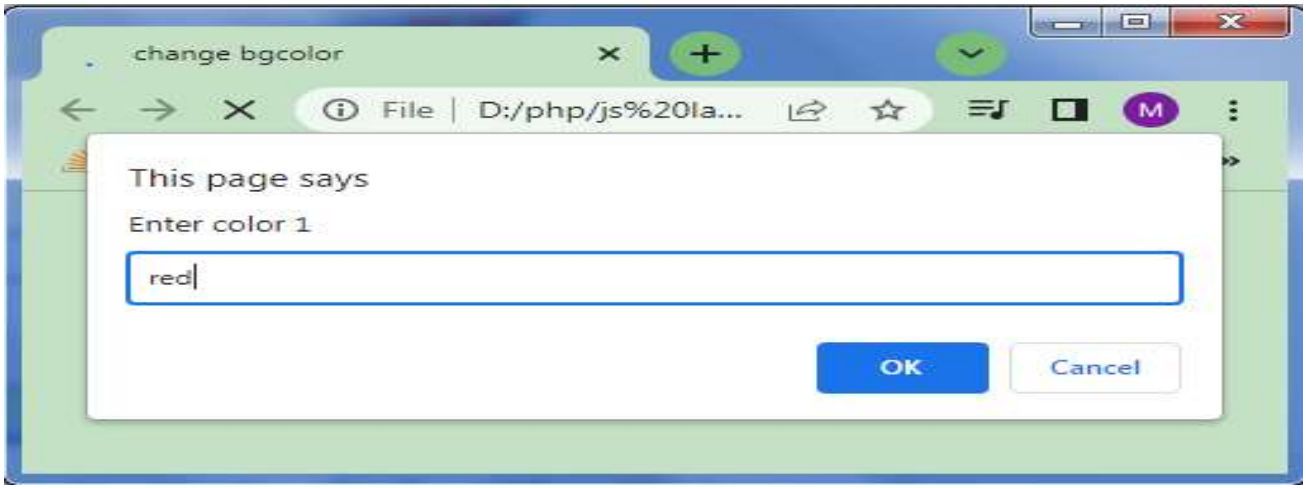

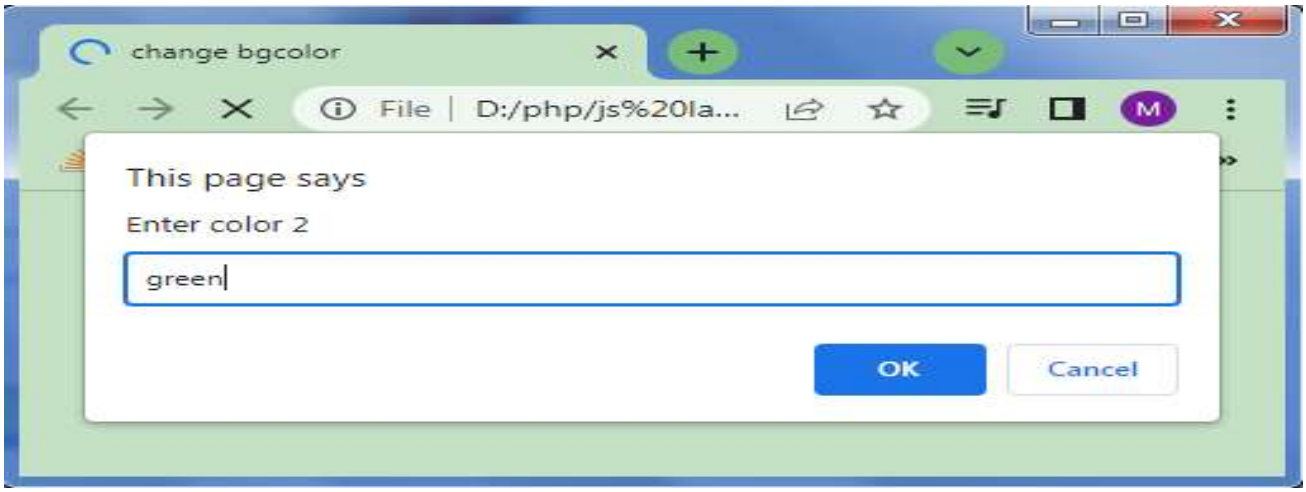

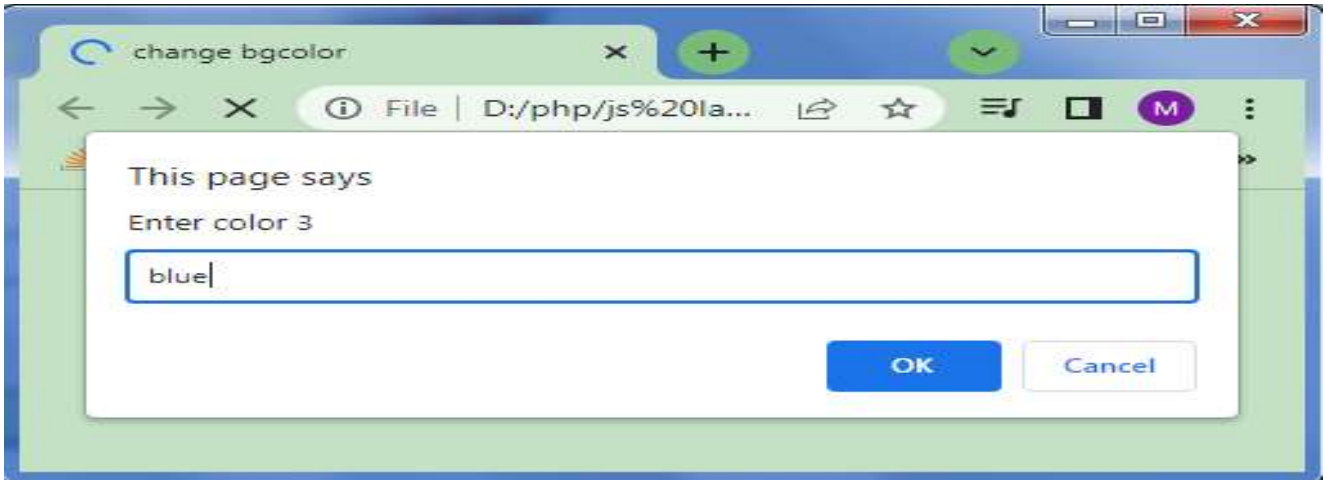

5. Write a JavaScript program to create clock with a timing event.

USER INTERFACE

SOURCE CODE

```
<html>
    <head>

    </head>
```

```
    <body>
        <div id="div1" style="font-style:bold;font-size:50px;background-
color:lightpink; color:blue; width:350px;height:80px"></div>
        <script>
            function fun()
            {
                var d=new Date();
                var str,h,m,s;
                h=d.getHours();
                m=d.getMinutes();
                s=d.getSeconds();
                if(h==0)
                {
                    h=12;
                    str="AM";
                }
                if(h>12)
                {
                    h=h-12;
                    str="PM";
                }
                h=(h<10)?"0"+h:h;
                m=(m<10)?"0"+m:m;
                s=(s<10)?"0"+s:s;
                document.getElementById("div1").innerHTML=h+" : "+m+" :
"+s+" "+str;
            }
            setInterval(fun,100);
        </script>
    </body>
</html>
```

OUTPUT

6. Write a JavaScript Program to validate email based on the following condition

- Mail id must contain the @ and . character
- There must be at least one character before and after the @.
- There must be at least two characters after . (dot).

7. Write a JavaScript program for Password validation based on the following condition

- Password and confirm password must be same
- Length of password must be greater than 8 characters

USER INTERFACE

SOURCE CODE

```
<html>
<head>
<title>
form validation
</title>
</head>

<script>
function validate()
{
if(form1.pswd.value.length<8)
{
alert("please provide your password atleast 8 characters ");
form1.pswd.focus();
return false;
}
if(form1.pswd.value!=form1.confirmpswd.value)
{
alert("passwords do not match");
form1.pswd.focus();
```

```
return false;
}
alert("submitted successfully");
return true;
}
</script>

<body><br><br><br><br>
<h3>Login Form</h3>
<form name=form1 onsubmit="return validate()">
<table><tr>
        <td>User Name</td>
        <td><input type ="text" id="name" required></td></tr>
    <tr>
        <td>Password</td>
        <td><input type ="password" id="pswd"></td></tr>
    <tr>
        <td>Confirm Password</td>
        <td><input type ="password" id="confirmpswd"></td></tr>
    <tr>
        <td><input type="submit" value="Submit"></td>
        <td><input type="reset" value="Reset"></td></tr></table>
</form>
</body>

</html>
```

OUTPUT

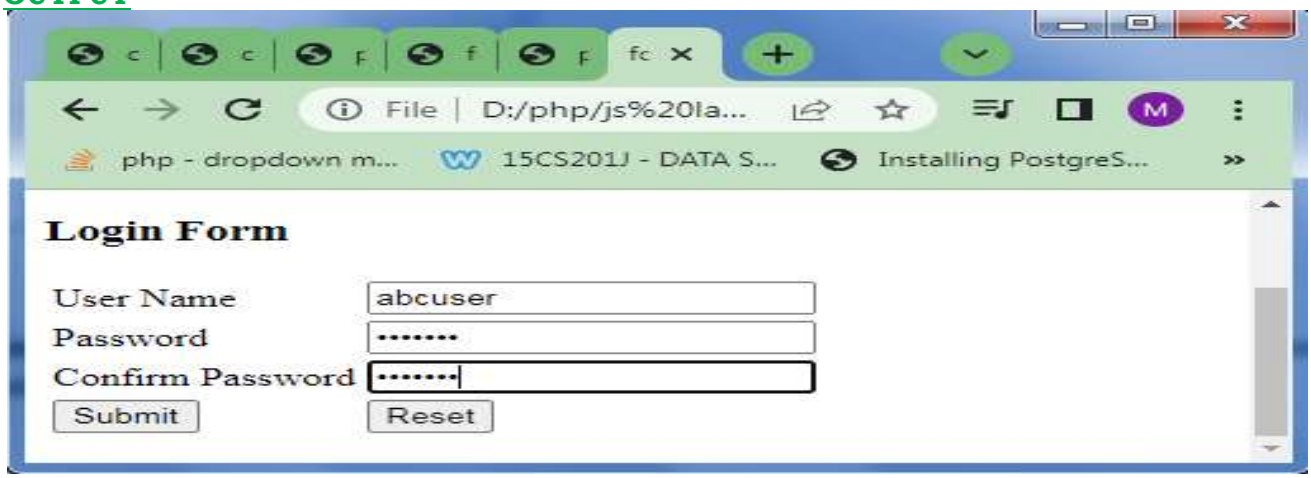

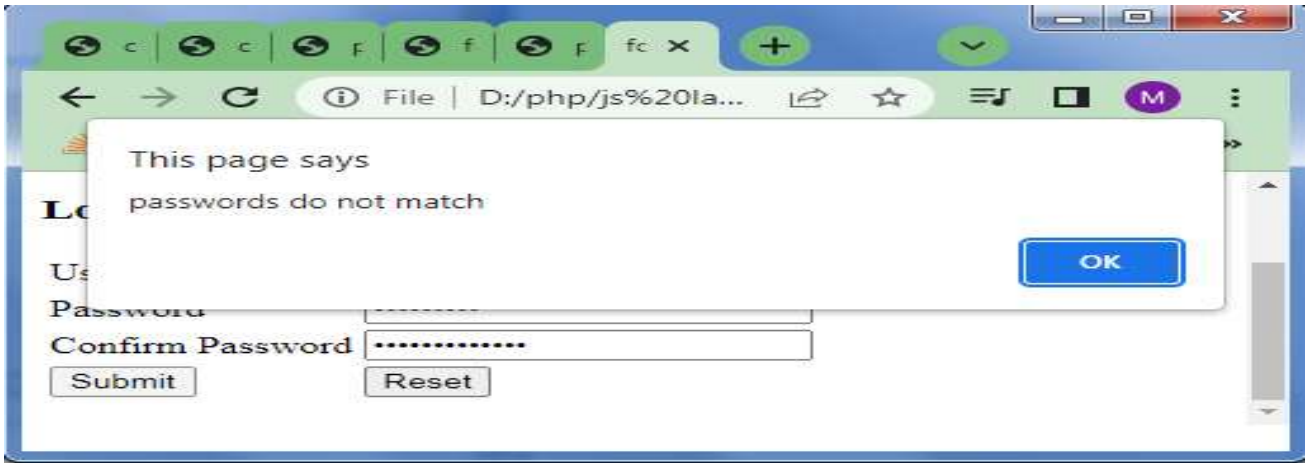

8. Write a JavaScript Program to create an Array and read values using Prompt popup box and display the sum of elements in an Alert Box

USER INTERFACE



SOURCE CODE

```
<html>
    <head>
        <title>sum of numbers</title>
    </head>
    <body>
        <button type="button" onclick="calcsum()">Sum of Numbers</button>
        <script>
            function calcsum()
            {
```

```
                var a=[],sum=0;
                var n=prompt("How many numbers : ");
                for(let i=0;i<n;i++)
                {
                    a[i]=parseFloat(prompt("Enter the number "+(i+1)));
                    sum=sum+a[i];
                }
                alert("Sum of the numbers = "+sum);
            }
        </script>
    </body>
</html>
```

OUTPUT

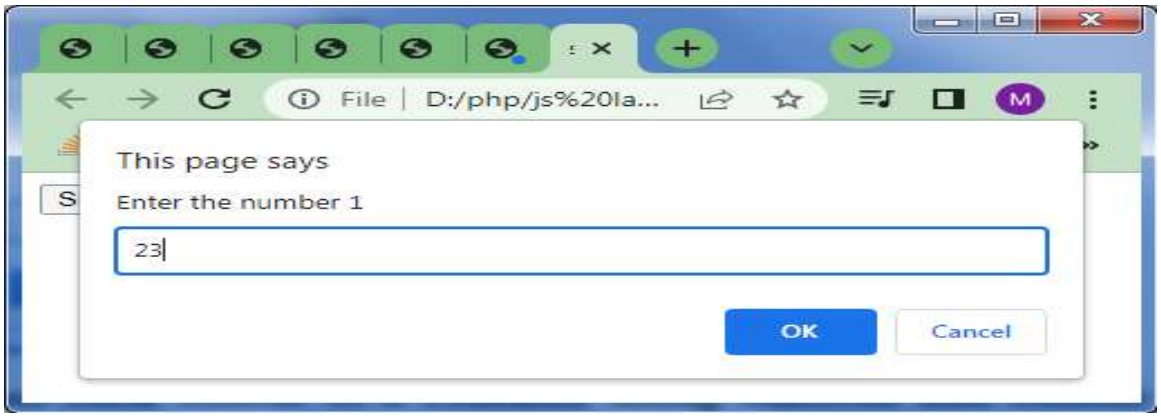

9. Change the text colour and back colour of a TextBox using onfocus and onBlur event

USER INTERFACE



SOURCE CODE

```
<html>
<head></head>
```

```
<body>
    Enter text :
    <input type="text" id="txtbox" onfocus="changecolor('white','blue')"
onblur="changecolor('lightgrey','black')">
    <script>
        function changecolor(bg,fg)
        {
            document.getElementById("txtbox").style.backgroundColor = bg;
            document.getElementById("txtbox").style.color = fg;
        }
    </script>
</body>
</html>
```

OUTPUT

10.Write a JavaScript program to display Capital of a country using onchange event. The country is selected from a select box and capital is displayed on a TextBox

USER INTERFACE

SOURCE CODE

```
<html>
    <head><title>countries and capitals</title></head>
<body>
    Select a country :<br><br>
    <select style="width:150px" onchange="getCapital(value)">
        <option value="0"></option>
        <option value="1">Australia</option>
        <option value="2">Poland</option>
        <option value="3">Mexico</option>
        <option value="4">Germany</option>
        <option value="5">India</option>
    </select>
    <br/><br><br>
    Capital: <br><br><input type="text" id="txtbox" style="width:150px">
    <script>
        function getCapital(i) {
            var capitals=["No Country Selected","Canberra","Warsaw","Mexico
City","Berlin","New Delhi"];
            document.getElementById("txtbox").value = capitals[i];
        }
    </script>
</body>
</html>
```

OUTPUT

11.Write a JavaScript program to find 1st January be a Sunday between a range of years.

USER INTERFACE

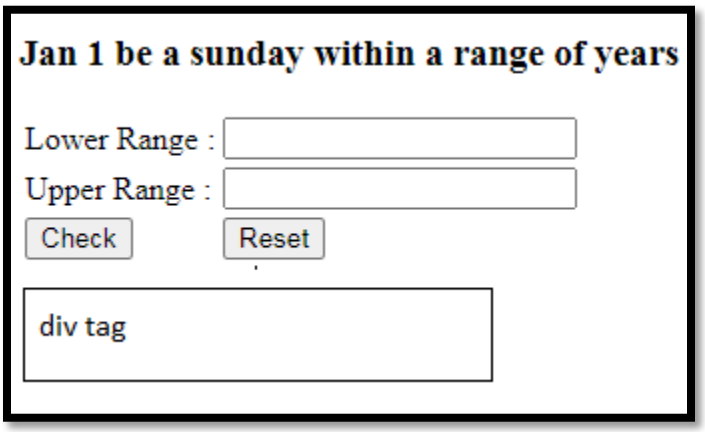

SOURCE CODE

```
<!DOCTYPE html>
<html>
<body>
<form name="frm">
    <table>
        <tr><td>Lower Range : </td>
            <td><input type="text" name="txt1"/></td></tr>
        <tr>
            <td>Upper Range : </td>
            <td><input type="text" name="txt2"/></td></tr>
        <tr><td><button type="button"
onclick="checkyear()">Check</button></td>
        <td><button type="reset">Reset</button></td></tr>
    </table>
```

```
    <div id="div1"></div>
</form>
<script>
    function checkyear()
    {
        var y1=document.frm.txt1.value;
        var y2=document.frm.txt2.value;
        var str="The years with jan 1 be a sunday :";
        for(var y=y1;y<=y2;y++)
        {
        var d=new Date(y,0,1);
        if(d.getDay()==0)
            str=str+" "+y;
        }
        document.getElementById("div1").innerHTML = str;
    }
</script>

</body>
</html>
```

OUTPUT

Php Programs

12.Create a PHP program to display the bio data of a person by reading the personal details using an HTML page.

USER INTERFACE

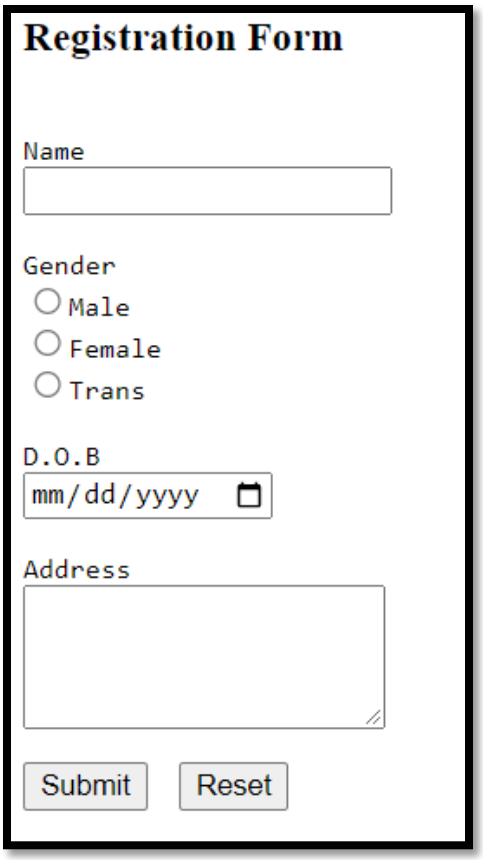

SOURCE CODE

Biodatareg.html

```
<html>
<head><title>biodata</title>
</head>
<body>
    <h3>Registration Form</h3>
<pre>
<form method="get" action="Biodataview.php">
Name
<input type="text" name="name"><br>
Gender
<input type="radio" name="gen"value="Male">Male
<input type="radio" name="gen"value="Female">Female
<input type="radio" name="gen"value="Trans">Trans<br>
D.O.B
<input type="date" name="dob"><br>
Address
<textarea cols=20 rows=4 name="ad"></textarea><br>
<input type="submit" value="Submit">  <input type="reset" value="Reset">
</pre></form>
</body>
</html>
```

Biodataview.php

```
<html>
<head><title>login</title>
</head>
<body>
<fieldset style="width:200px;color:blue"><legend>Biodata</legend>
<?php
$n=$_GET['name'];
$g=$_GET['gen'];
$d=$_GET['dob'];
$a=$_GET['ad'];
$str=<<<ABC
<pre>
Name    : $n
Gender  : $g
DOB     : $d
Address : $a
</pre>
ABC;
echo $str;
?>
</fieldset></body>
</html>
```

OUTPUT

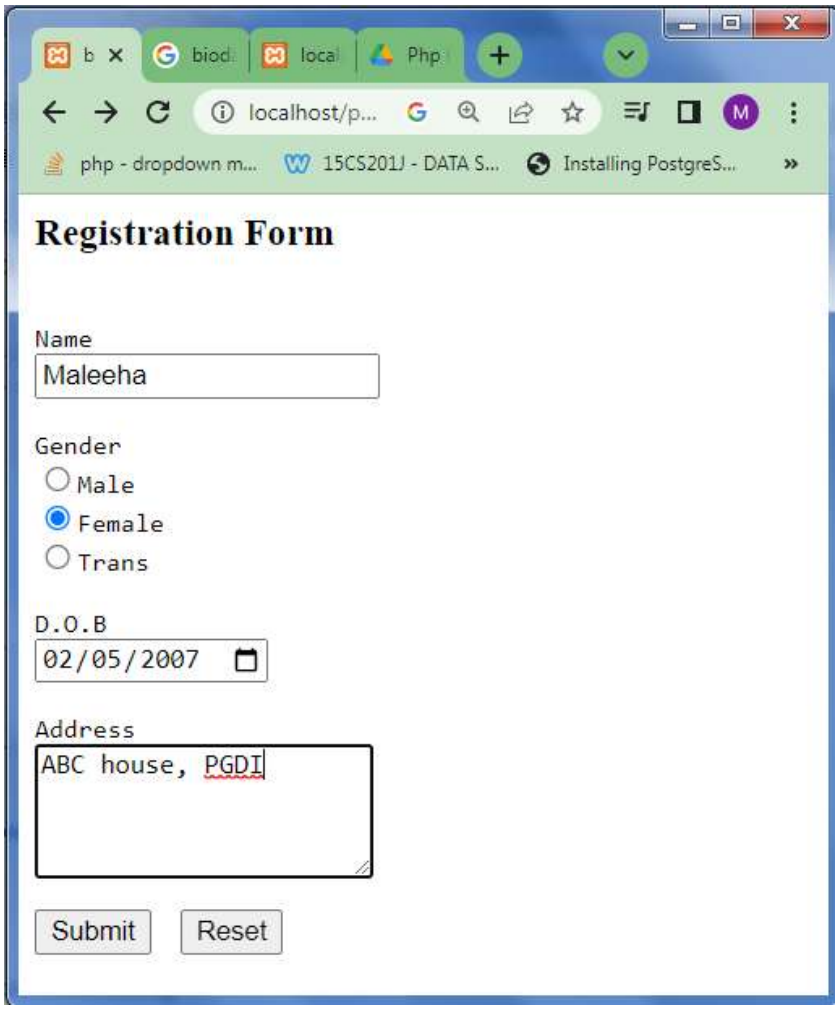
Registration Form
Name
Maleeha
Gender
Male
Female
Trans
D.O.B
02/05/2007
Address
ABC house, PGDI
Submit
Reset

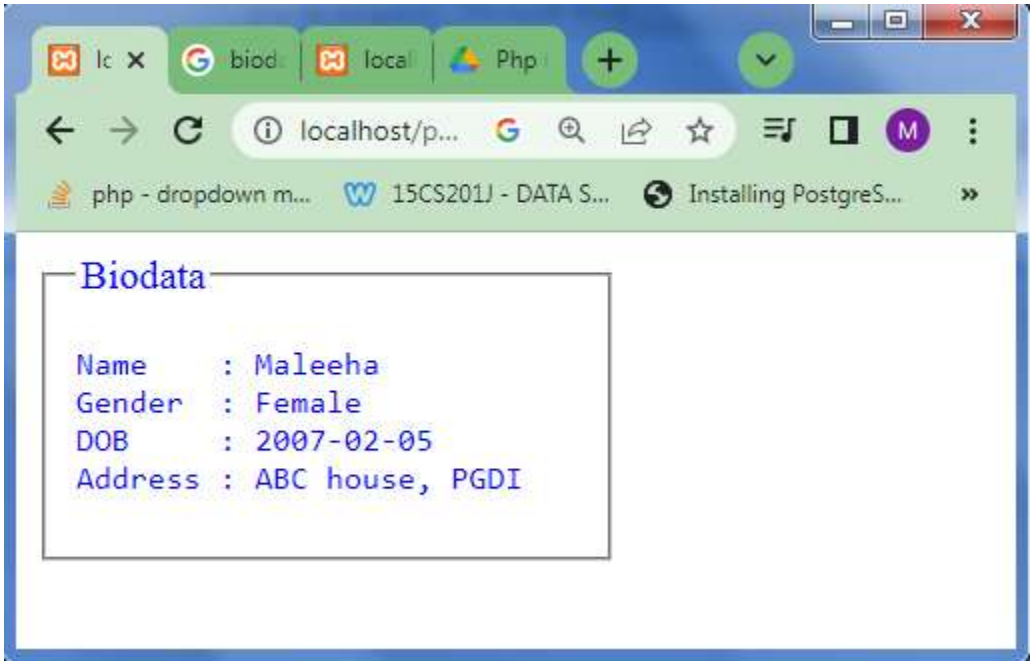
Biodata
Name : Maleeha
Gender : Female
DOB : 2007-02-05
Address : ABC house, PGDI

13.Write a PHP function to reverse a string

USER INTERFACE

Enter the string [ ] Reverse

Reverse String [ ]

SOURCE CODE

```
<html>
    <head><title>reverse string</title></head>
    <body>
    <?php
        if($_GET)
        {
            $str=$_GET['txt1'];
            $r=strrev($str);
        }
    ?>
        <form method="get" action="">
            Enter the string  <input type="text" name="txt1" value="<?php
echo @$str?>">
            <input type="submit" value="Reverse"><br><br>
            Reverse String <input type=text" value="<?php echo @$r?>">

        </form>
    </body></html>
```

OUTPUT

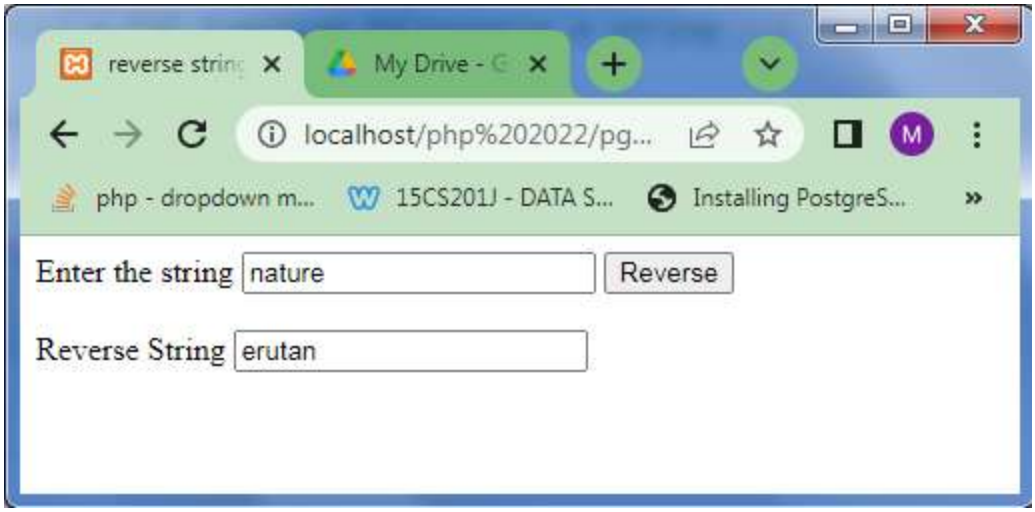

14.Write a PHP program to check whether a given number is perfect, abundant or deficient.

USER INTERFACE

SOURCE CODE

```
<html>
    <head><title>Perfect number</title></head>
    <body>
        <form method="post">
            <h2>To check whether the number is perfect, deficient or
abundant</h2>
            Enter a Number :
            <input type="text" name="txt">
            <input type="submit" value="Check">
        </form>
        <?php

        if($_POST)
        {
            $sum=0;
            $num=$_POST['txt'];
            for($i=1;$i<=$num/2;$i++)
            {
                if($num%$i==0)
                {
```

```
                $sum=$sum+$i;
            }
        }
        if($sum==$num)
        echo $num." is Perfect number";
        else if($sum>$num)
        echo $num." is Abundant number";
        else
        echo $num." is Deficient number.";
    }
    ?>
</body></html>
```

OUTPUT

15.Create a login page using database

USER INTERFACE

SOURCE CODE

Pgm15logindb.php

```
<?php session_start();?>
<html><head></head>
<body>
<form method="post"><pre>
    User Name
    <input type="text" name="usertxt"><br>
    Password
    <input type="password" name="pastxt"><br>
    <input type="submit" value="submit">
</pre>
</form>
<?php
if($_POST)
{
$conn=pg_connect("dbname=postgres user=postgres password=admin") or
die("could not connect");
$usr=$_POST['usertxt'];
$pd=$_POST['pastxt'];

$qry="select * from login where username='$usr' and password='$pd'";
$result= pg_query($conn,$qry)or die("coudnt perform query");
echo "<p style='color:red';>";
if(pg_num_rows($result)>0)
{
    $_SESSION['user']=$usr;
    header("Location:pgm15loginview.php");
}
else
echo("Invalid username or password..!");
```

```
}
echo "</p>";
?>
</body>
</html>
```

pgm15loginview.php

```
<?php session_start();
$user=$_SESSION['user'];
echo "<h1 style='color:red;'> Hi $user, you have successfully logged
in..!";
session_unset();
?>
```

OUTPUT

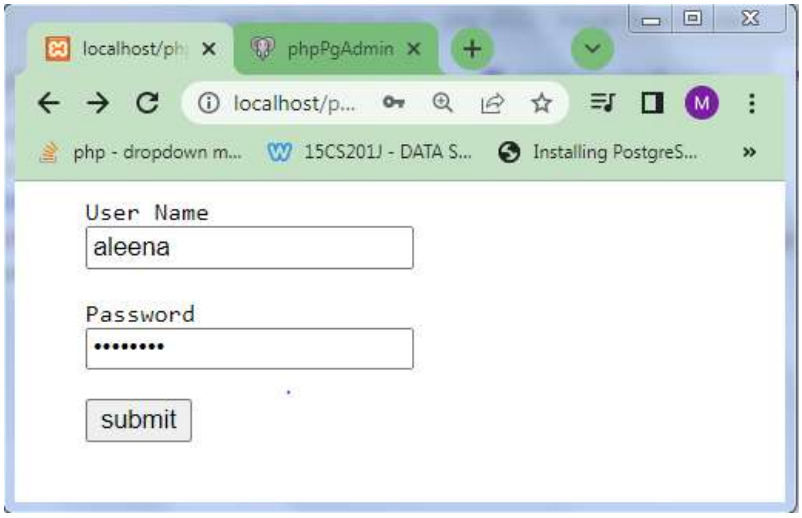

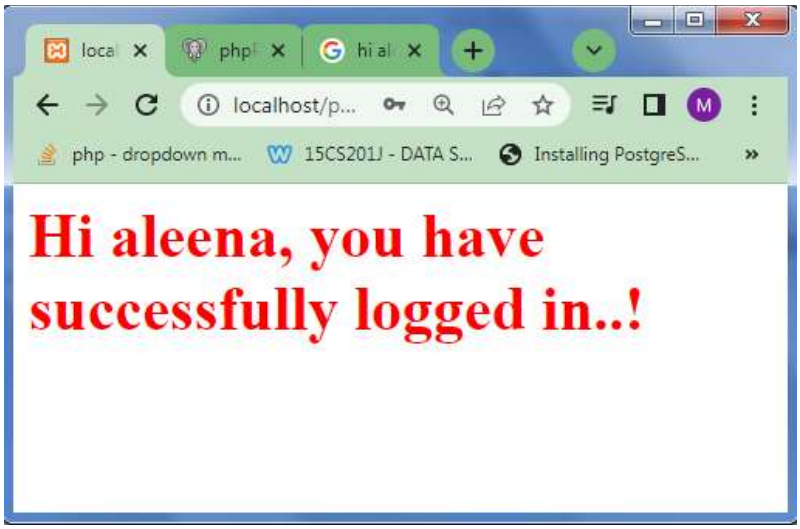

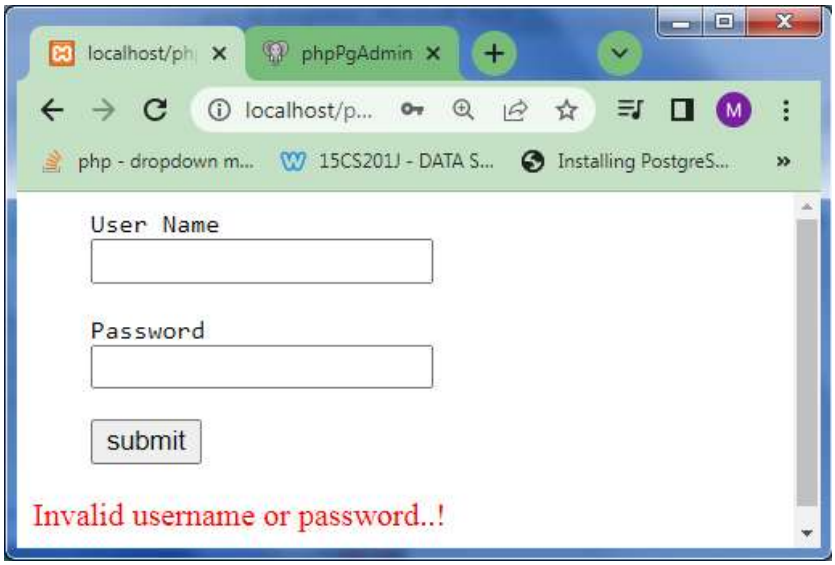

16.Create a table student with fields roll no, name, mark, grade. Insert some records in the table. Write a PHP program to display the mark list of a student by accepting the register no of the student.

USER INTERFACE

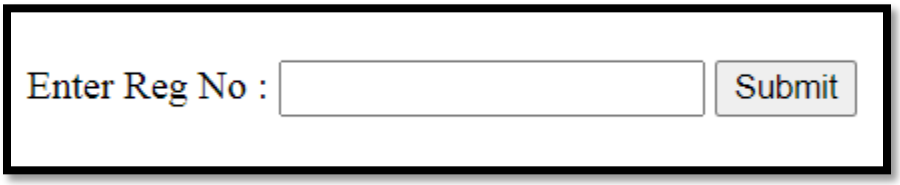

SOURCE CODE

```
<html>
<body>
<form action="pgm16result.php" method="get">
<br><br>Enter Reg No : <input type="text" name="regno">
<input type="submit">
</form>
</body>
</html>
```

pgm16result.php

```
<?php
$conn=pg_connect("dbname=postgres user=postgres password=admin") or
die("could not connect");
$regno=$_GET['regno'];
$qry="select * from student where regno=$regno";
```

```
$result=pg_query($conn,$qry) or die("couldn't perform query");
$row=pg_fetch_row($result);
$str=<<<ABC
<fieldset style='color:blue;width:200px;height:100px;'>
<legend>Mark List</legend><pre>
Reg No : $row[0]
Name   : $row[1]
Mark   : $row[2]
Grade  : $row[3]
</pre>
</fieldset>
ABC;
echo $str;
?>
```

OUTPUT

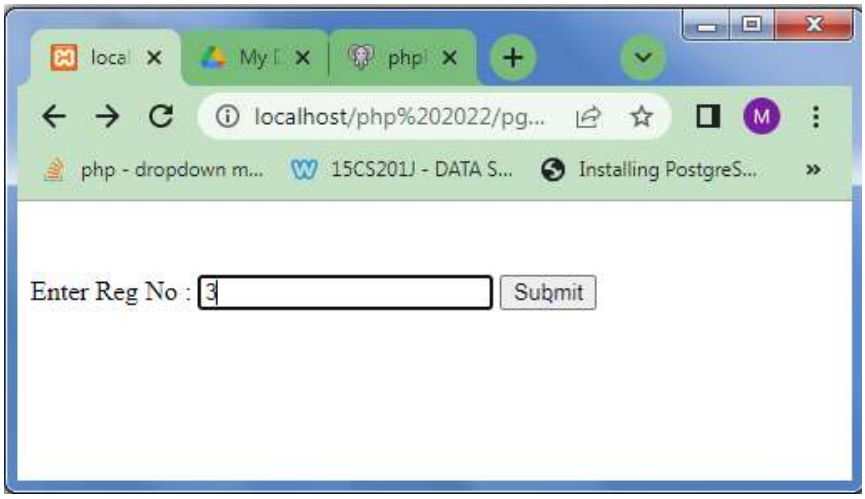

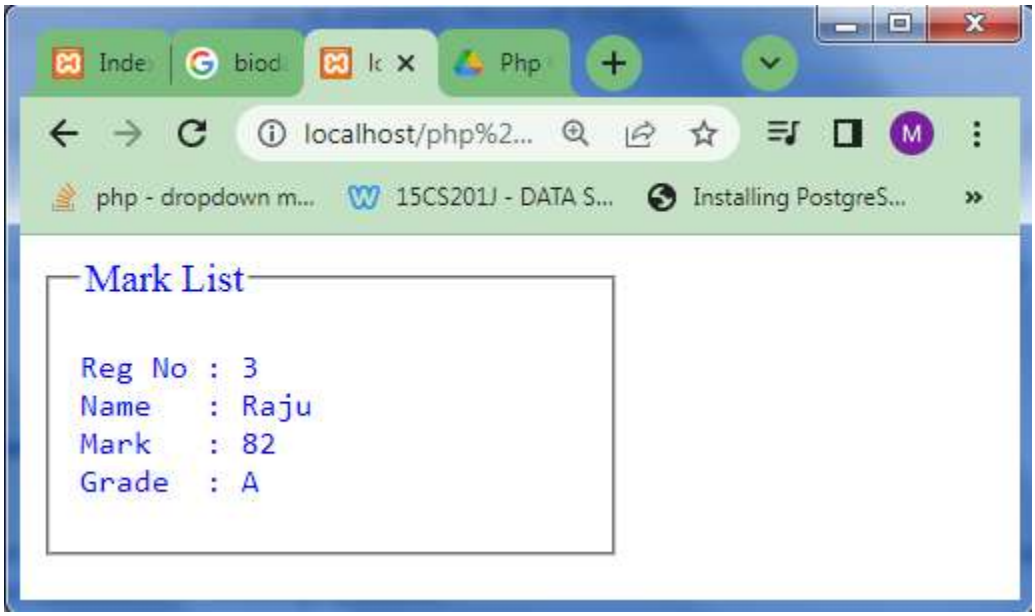

17.Write a PHP application to generate the pay slip of an employee by accepting name, basic salary and designation. The net salary will be calculated based on the following conditions.

USER INTERFACE

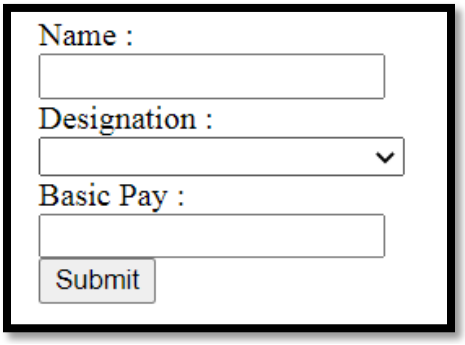

SOURCE CODE

```
<html>
    <body>
        <form method="post" action="pgm17salary.php">
            <ul type="none">
            <li>Name : </li><li><input type="text" name="nametxt"></li>
            <li>Designation :</li><li>
            <select name="pos">
            <option value="manager">Manager</option>
            <option value="supervisor">Supervisor</option>
            <option value="clerk">Clerk</option>
            <option value="peon">Peon</option>
            </select>
            <li>Basic Pay :</li><li><input type="text" name="paytxt"></li>
            <li><input type="submit" value="Submit"></li>
            </ul>
        </form>
    </body>
</html>
```

pgm17salary.php

```
<?php
$name=$_POST['nametxt'];
$bpay=$_POST['paytxt'];
$pos=$_POST['pos'];
switch($pos)
{
    case "manager": $all=1000; //allowance
```

```
                    $exall=500; //extra allowance
                    break;
    case "supervisor":$all=750; $exall=200;
                    break;
    case "clerk":   $all=500; $exall=100;
                    break;
    case "peon":    $all=250;$exall=0;
                    break;
}
$hra=25*$bpay/100;
$gross=$bpay+$hra+$exall+$all;
if($gross<=2500)
    $tax=0;
else if($gross<=4000)
    $tax=3;
else if($gross<=5000)
    $tax=5;
else
    $tax=8;
$tax=$tax*$gross/100;
$net=$gross-$tax;
$str=<<<ABC
<fieldset><legend>Salary Slip</legend>
<table><tr><td>Name<td>$name<tr><td>Designation<td>$pos
<tr><td>Basic Pay<td>$bpay<tr><td>Conveyance<td>$all
<tr><td>Extra <td>$exall<tr><td>HRA<td>$hra
<tr><td>Gross<td>$gross<tr><td>Tax<td>$tax
<tr><td>Net Salary<td>$net</tr></table></fieldset>
ABC;
echo $str;
?>
```

OUTPUT

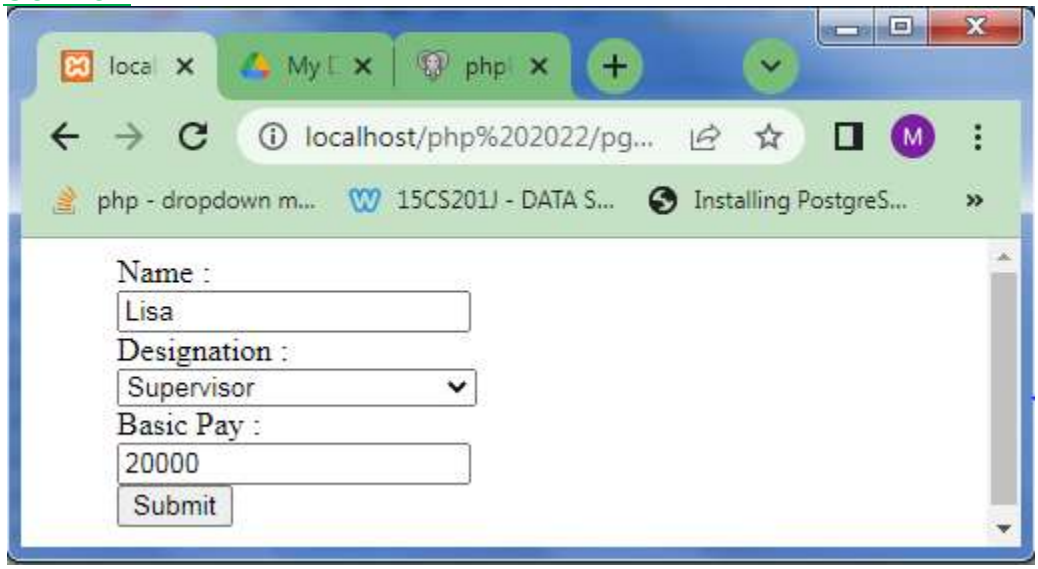

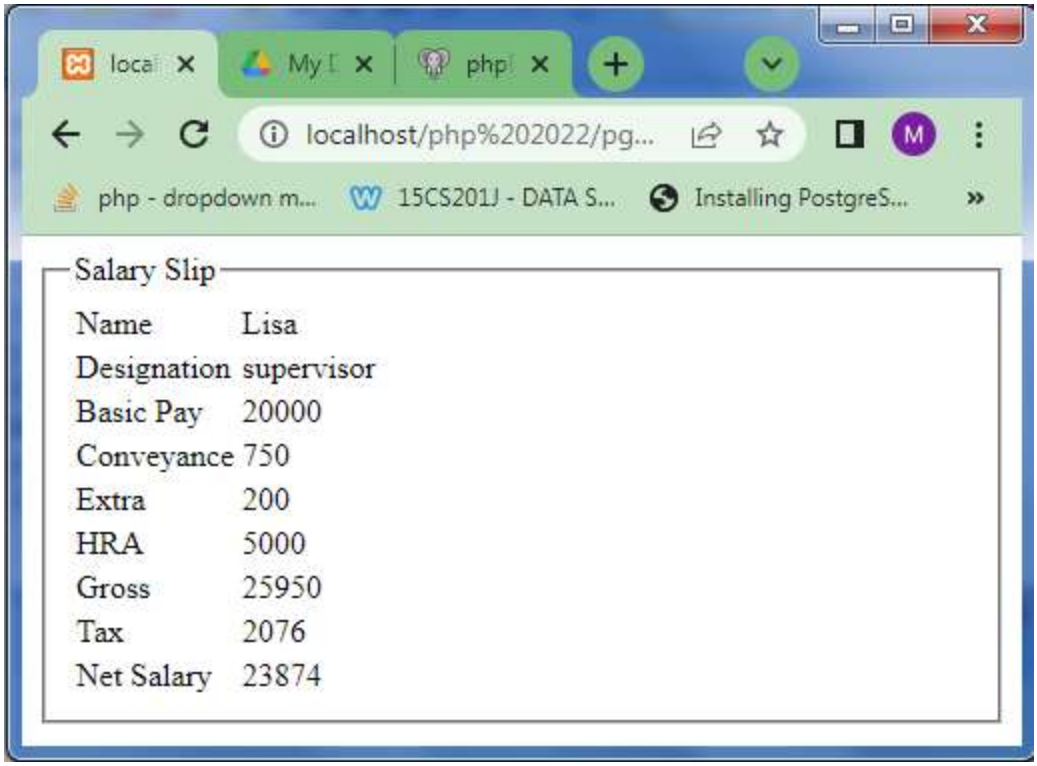

18.PHP program to store current date-time in a cookie and display the Last visited date-time on the web page upon revisiting the same web page.

UER INTERFACE

SOURCE CODE

```
<?php
/*calculate 60 days in the future: seconds * minutes * hours * days +
currenttime*/
$exp=60*60*24*60+time();
/*check if cookie exists*/
if(isset($_COOKIE['last_visit']))
{
$visit=$_COOKIE['last_visit'];
echo "<br><p style='color:purple;'><i>
You visited this page on </i><b>$visit</b></p>";
}
else
{
echo "<br><p style='color:blue;'><i>
You are visiting this page first time..</i></p>" ;
}
//create cookie
setcookie('last_visit',date("d-M-Y   h:i:s A"),$exp);
```

```
?>
```

OUTPUT

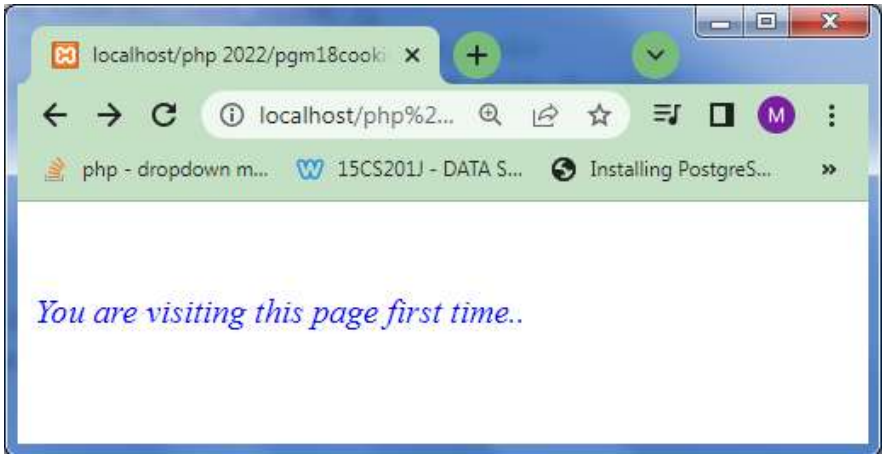

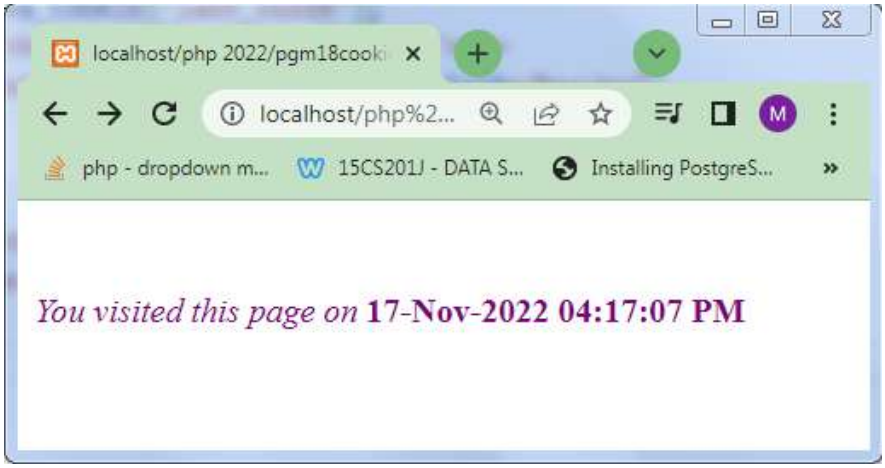

19.Create a table product with fields itemcode, itemname, unitprice. Write PHP program to insert 5 records into the table and display it in a table format.

USER INTERFACE

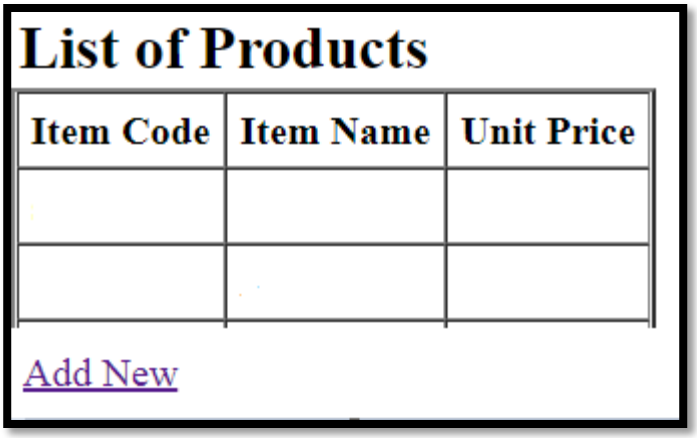

SOURCE CODE

pgm19productadd.php

```
<html>
    <body>
        <br>
        <form method="post" action="">
        <h2>Add Product</h2>
        <ul type="none">
            <li>Item Code</li>
            <li><input type="text" name="code"></li>
            <li>Item Name</li>
            <li><input type="text" name="name"></li>
            <li>Unit Price</li>
            <li><input type="text" name="price"></li>
            <li><input type="submit" value="Save">
            <input type="reset" value="Reset"></li>
        </ul>
        <a href="pgm19viewproduct.php">View</a>
        </form>
    </body>
    <?php
    if($_POST)
    {
    $c=$_POST['code'];
    $n=$_POST['name'];
    $p=$_POST['price'];
    $con=pg_connect("dbname=postgres user=postgres password=admin") or
die("coudn't connect");
    $result=pg_query($con,"insert into product values('$c','$n',$p)");
```

```
    if(pg_affected_rows($result)>0)
    echo "Successfully Inserted";
    else
    echo "not inserted";
    pg_close($con);
    }
    ?>

</html>
```

pgm19viewproduct.php

```
<html><body>
<h2>List of Products</h2>
<table border="2px" cellspacing="0" cellpadding="5px">
<tr><th>Item Code</th><th>Item Name</th><th>Unit Price</th></tr>
<?php
$con=pg_connect("dbname=postgres user=postgres password=admin") or
die("coudn't connect");
$res=pg_query($con,"select * from product");
while($row=pg_fetch_row($res))
{
   $str=<<<ABC
   <tr><td>$row[0]</td><td>$row[1]</td><td>$row[2]</td></tr>
   ABC;
   echo $str;
}
pg_close($con);
?>
</table>
<br>
<a href="pgm19productadd.php">Add New</a></body></html>
```

OUTPUT

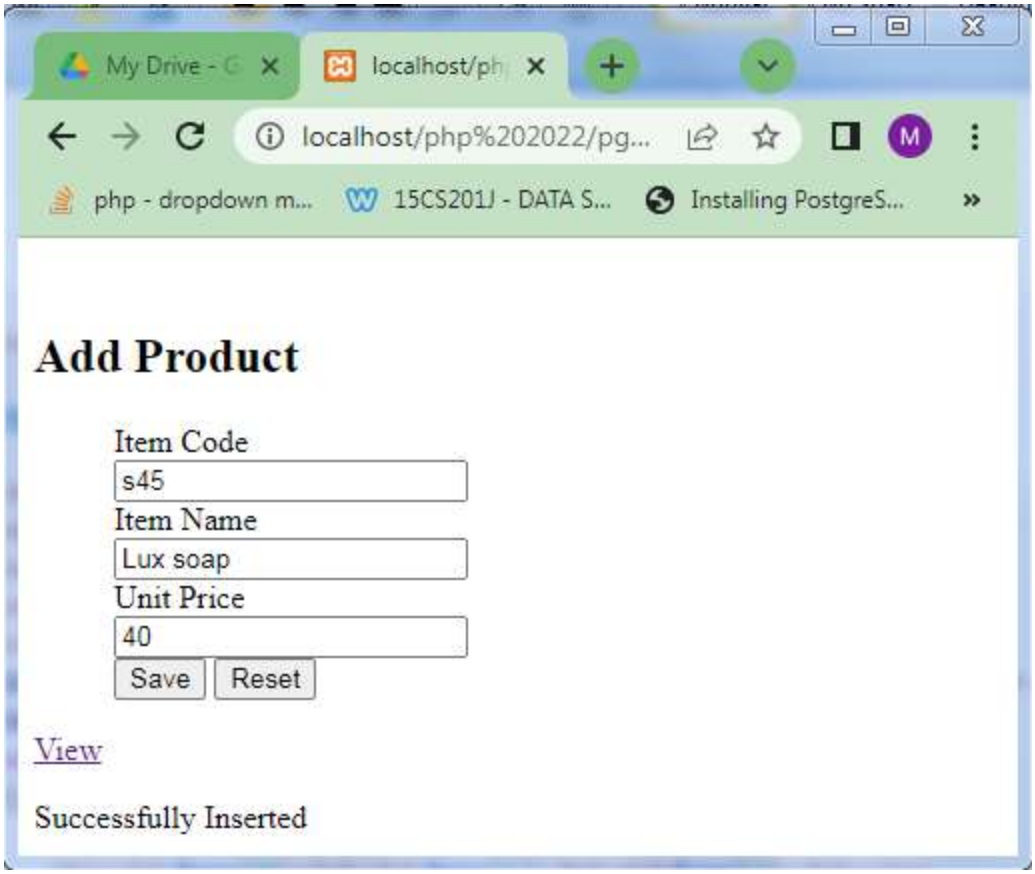
My Drive - G
localhost/ph
localhost/php%202022/pg...
php - dropdown m...
15CS201J - DATA S...
Installing PostgreS...
Add Product
Item Code
s45
Item Name
Lux soap
Unit Price
40
Save
Reset
View
Successfully Inserted

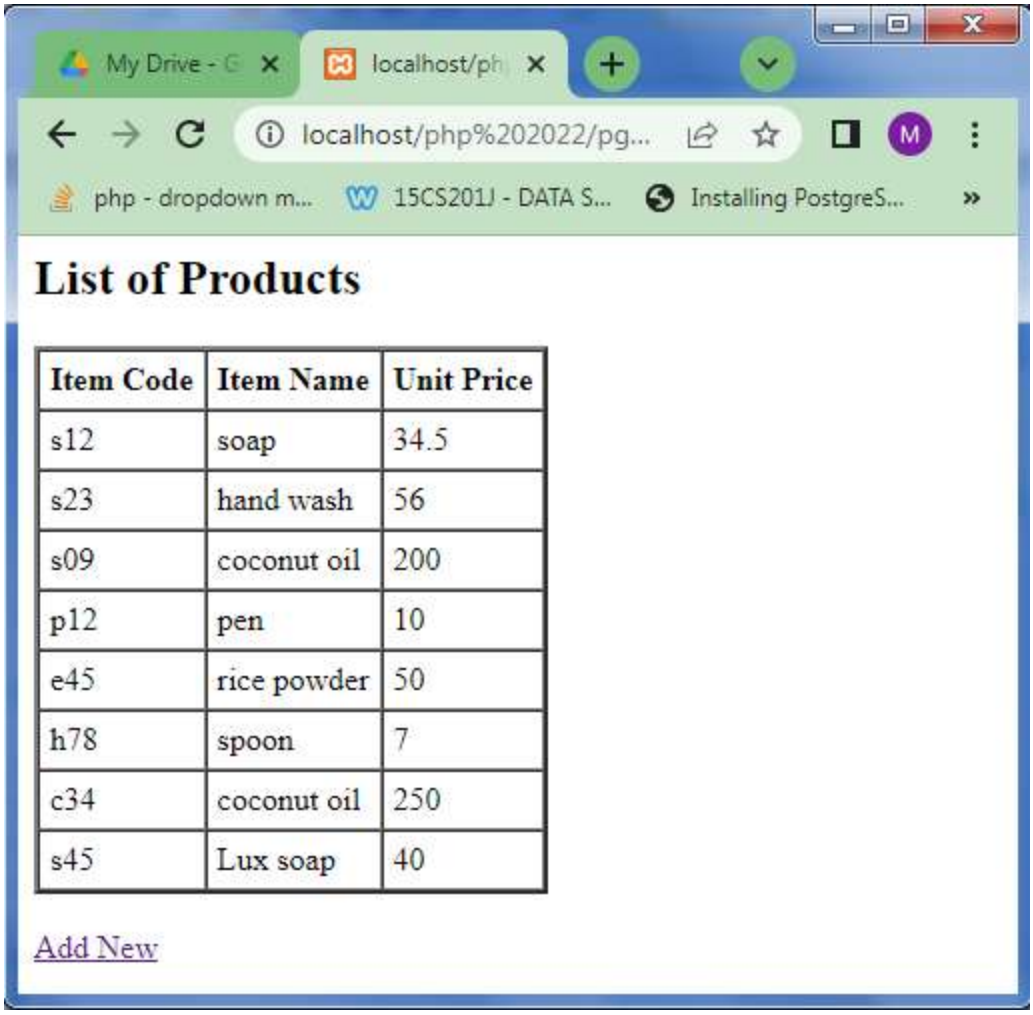

Item Code	Item Name	Unit Price
s12	soap	34.5
s23	hand wash	56
s09	coconut oil	200
p12	pen	10
e45	rice powder	50
h78	spoon	7
c34	coconut oil	250
s45	Lux soap	40

20.Create a table bank with the following fields accno, cust_name, balance. Insert some Records. Design HTML page to accept Account Number and amount using TextBoxes and type of transaction (Deposit or Withdrawal) using Radio Button. Write PHP program to update balance according to the transaction.

USER INTERFACE

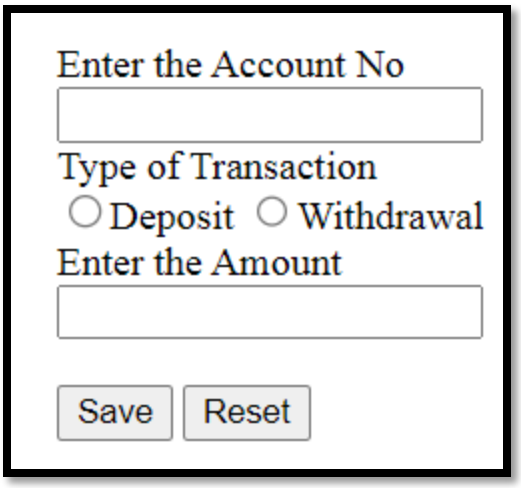

SOURCE CODE

```
html>
    <body>
    <br>
    <form action="" method="post">
    <ul type="none">
        <li>Enter the Account No</li>
        <li><input type="text" name="acc" required></li>
        <li>Type of Transaction</li>
        <li><input type="radio" name="tran" value="dep" required>Deposit
        <input type="radio" name="tran" value="wit"
required>Withdrawal</li>
        <li>Enter the Amount</li>
<li><input type="text" name="amt" required></li>
<li><input type="submit" value="Save">
<input type="reset" value="Reset"></li>
    </ul>
</form>
<?php
if($_POST)
{
$ac=$_POST['acc'];
$amt=$_POST['amt'];
$t=$_POST['tran'];
$str;
$con=pg_connect("dbname=postgres user=postgres password=admin") or
die("coudn't connect");
if($t=='dep')
{
    $result=pg_query($con,"update bank set balance=balance+$amt where
accno='$ac'");
    if(pg_affected_rows($result)>0)
        echo "Successfully deposited";
    else
```

```
        echo "Invalid accno";
}
if($t=='wit')
{
    $r=pg_query($con,"select * from bank where accno='$ac'");
    if(pg_num_rows($r)>0)
    {
    $row=pg_fetch_array($r);
    $result=pg_query($con,"update bank set balance=balance-$amt where
accno='$ac' and balance>=$amt");
    if(pg_affected_rows($result)>0)
            echo "Successfully Withdrawn";
    else
        echo "Withdrawal amount is greater than balance";
    }
    else
    echo "Invalid accno";
}
pg_close($con);
}
?>
</body>
</html>
```

OUTPUT

Table : bank

accno	custname	balance
SBICLT456	Adam	4000
SBITVM005	Radha	5000
SBITNR001	Lisa	20845

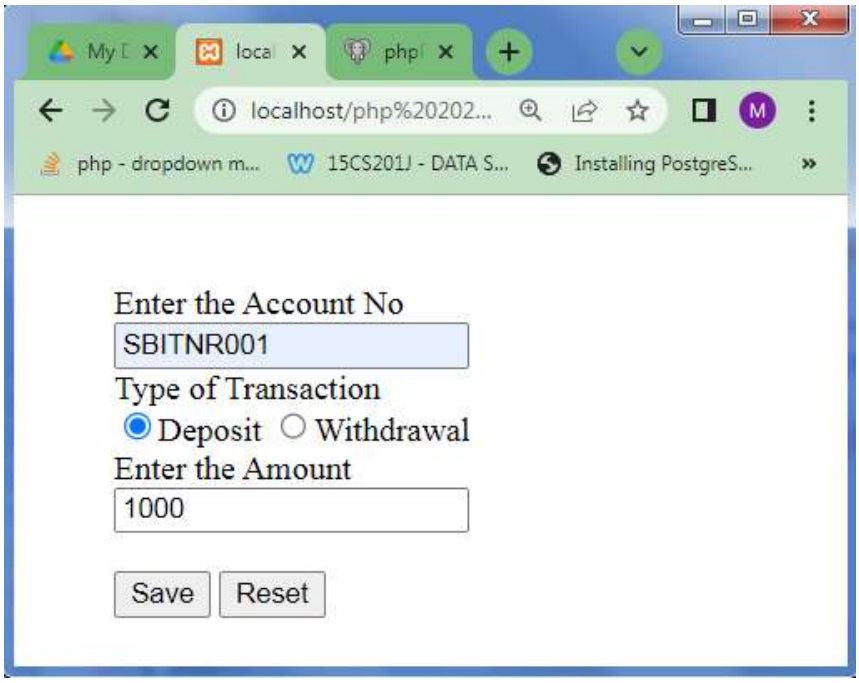
localhost/php%20202...
php - dropdown m...
15CS201J - DATA S...
Installing PostgreS...
Enter the Account No
SBITNR001
Type of Transaction
Deposit
Withdrawal
Enter the Amount
1000
Save
Reset

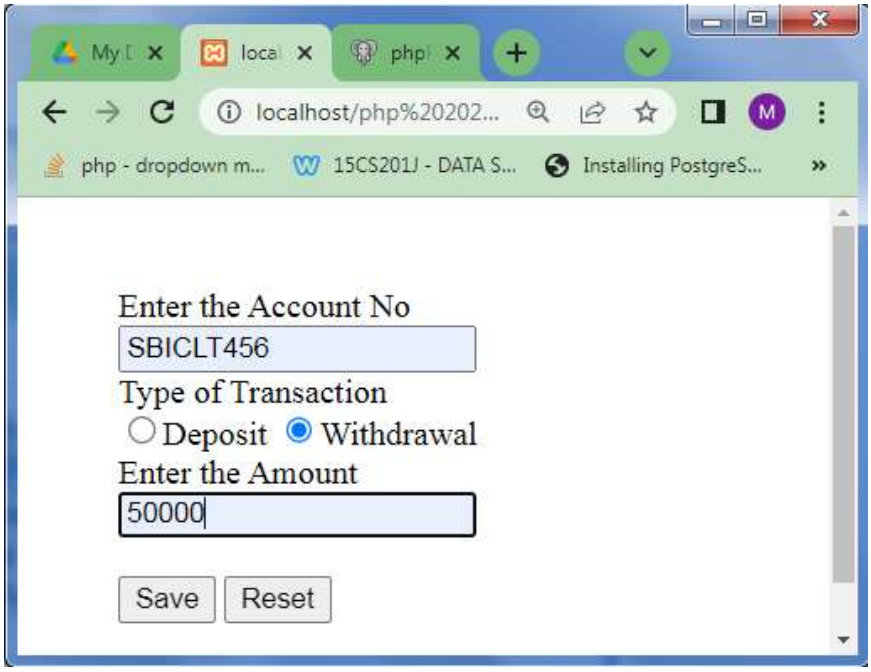
localhost/php%20202...
php - dropdown m...
15CS201J - DATA S...
Installing PostgreS...
Enter the Account No
SBICLT456
Type of Transaction
Deposit
Withdrawal
Enter the Amount
50000
Save
Reset

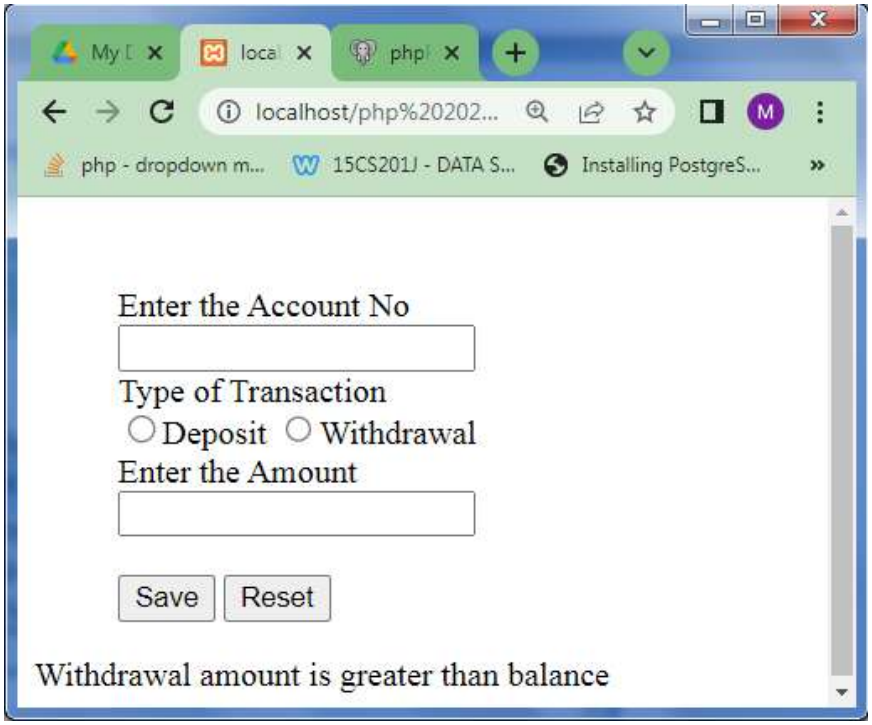

21.Write an HTML page to display a list of fruits in a list box. Write php program to display the selected fruits in a webpage.

USER INTERFACE

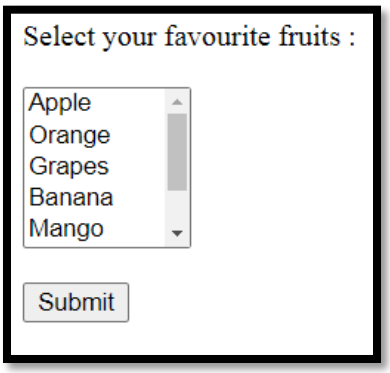

SOURCE CODE

```
<html>
    <body><form method="post">
    Select your favourite fruits :<br><br>
    <select name="fruits[]" multiple size="5">
    <option value="Apple">Apple</option>
    <option value="Orange">Orange</option>
    <option value="Grapes">Grapes</option>
    <option value="Banana">Banana</option>
    <option value="Mango">Mango</option>
    <option value="Guava">Guava</option>
    <option value="Watermelon">Watermelon</option>
```

```
    </select><br><br>
    <input type="submit" value="Submit">
</form>
<?php
if(isset($_POST['fruits']))
{
    $f=$_POST['fruits'];
    echo "<p style='color:red;'><b>Selected Fruits : </b>";
    foreach($f as $val)
    {
        echo "<i>$val  </i>";
    }
}
?>
</body>
</html>
```

OUTPUT

22.Write a PHP program to create an array and store 10 names in the array. Do the following operations.

a. Display the contents using for each statement.

b. Display the array in a sorted order.

c. Display the array without the duplicate elements

d. Remove the last element and display

e. Display the array in reverse order

f. Search an element in the given array.

USER INTERFACE

SOURCE CODE

```
<html>
    <body>
        <h2>Array Operations</h2>
    <?php
    function display($x,$str)
    {
        echo "<p><b>$str</b>";
        foreach($x as $v)
        {
```

```
            echo "$v ,";
        }
        echo "</p>";
    }

$arr=array("red","green","blue","yellow","green","pink","olive","blue","whi
te","orange");
    display($arr,"Array elements are : ");
    $a2=$arr;
    sort($a2);
    display($a2,"Sorted array is : ");
    $a2=array_unique($arr);
    display($a2,"Array without duplicates elements : ");
    array_pop($arr);
    display($arr,"Array after removing last item : ");
    $a2=$arr;
    rsort($a2);
    display($a2,"Array in Descending order : ");
    $str=<<<ABC
    <form method='post'>
    <b>Search Element : </b><input type='text' name='txt'>
    <input type='submit'></form>
    ABC;
    echo $str;
    if(isset($_POST['txt']))
    {
        $y=$_POST['txt'];
        $x=array_search($y,$arr);
        if($x===false)
        {
        echo "$y is not found..!";
        }
        else
        echo "$y is found at $x";

    }
    ?>
    </body> </html>
```

OUTPUT

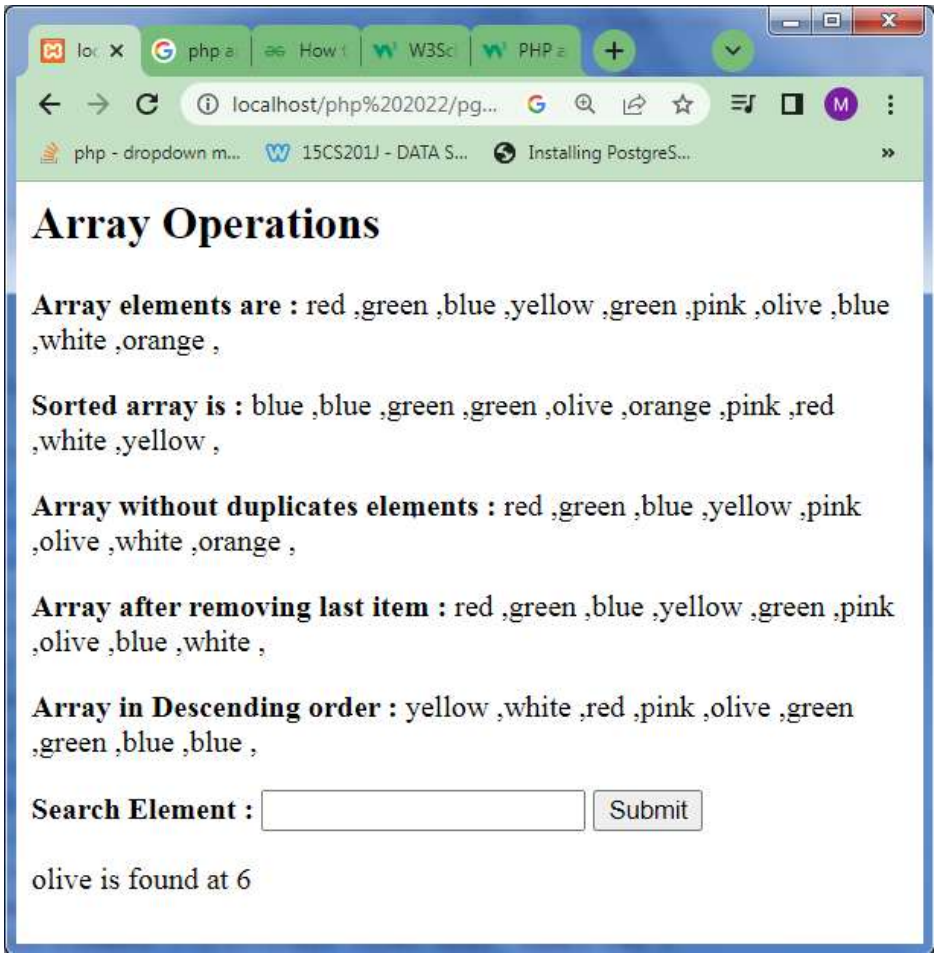

23.Display Multiplication table using PHP and AJAX

USER INTERFACE

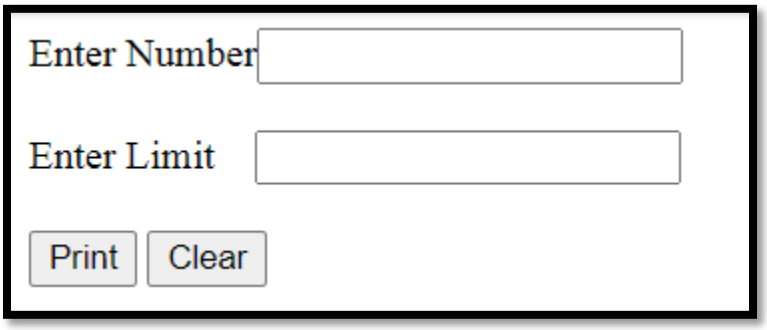

SOURCE CODE

pgm23multable.php

```
<html>
    <head>

    </head>
```

```
    <body>
        <form>
        Enter Number<input type="text" id="txt1" name="text1"><br><br>
        Enter Limit    <input type="text" id="txt2"
name="text2"><br><br>
        <input type="button" value="Print" onclick="display()">
        <input type="reset" value="Clear">
        <br><br>
        <div id="div1"></div></form>
        <script>
    function display()
    {
        x=document.getElementById("txt1").value;
        n=document.getElementById("txt2").value;
        var req=new XMLHttpRequest();
        req.onreadystatechange=function(){
            if(this.readyState==4&&this.status==200)
            {

document.getElementById("div1").innerHTML=this.responseText;
            }
        };
        req.open("GET","pgm23table.php?x="+x+"&n="+n,true);
        req.send();
    }
</script>
    </body>
    </html>
```

pgm23table.php

```
<?php
if(isset($_GET['x']))
{
    $x=$_GET['x'];
    $n=$_GET['n'];
    echo "<table border=1 width=200px cellpadding=15 cellspacing=0>
    <caption>Multpication Table of $x up to $n</caption>";
    for($i=1;$i<=$n;$i++)
    {
        $r=$i*$x;
        echo "<tr><td>$i * $x</td><td>$r</td></tr>";
    }
    echo "</table>";
}
```

```
?>
```

OUTPUT

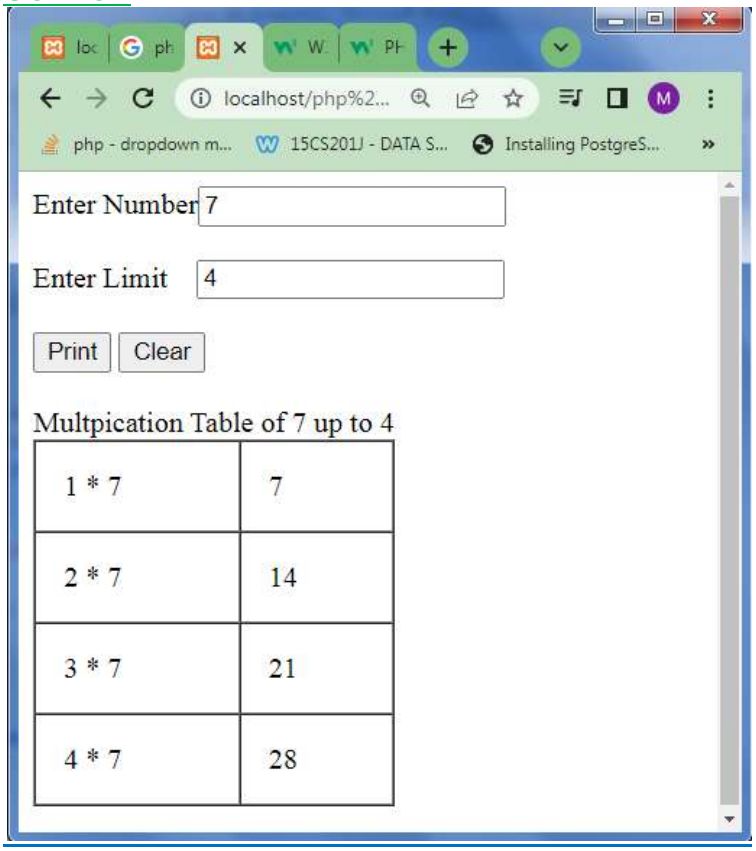

24.Write a PHP script to upload the file to the server through HTML Page