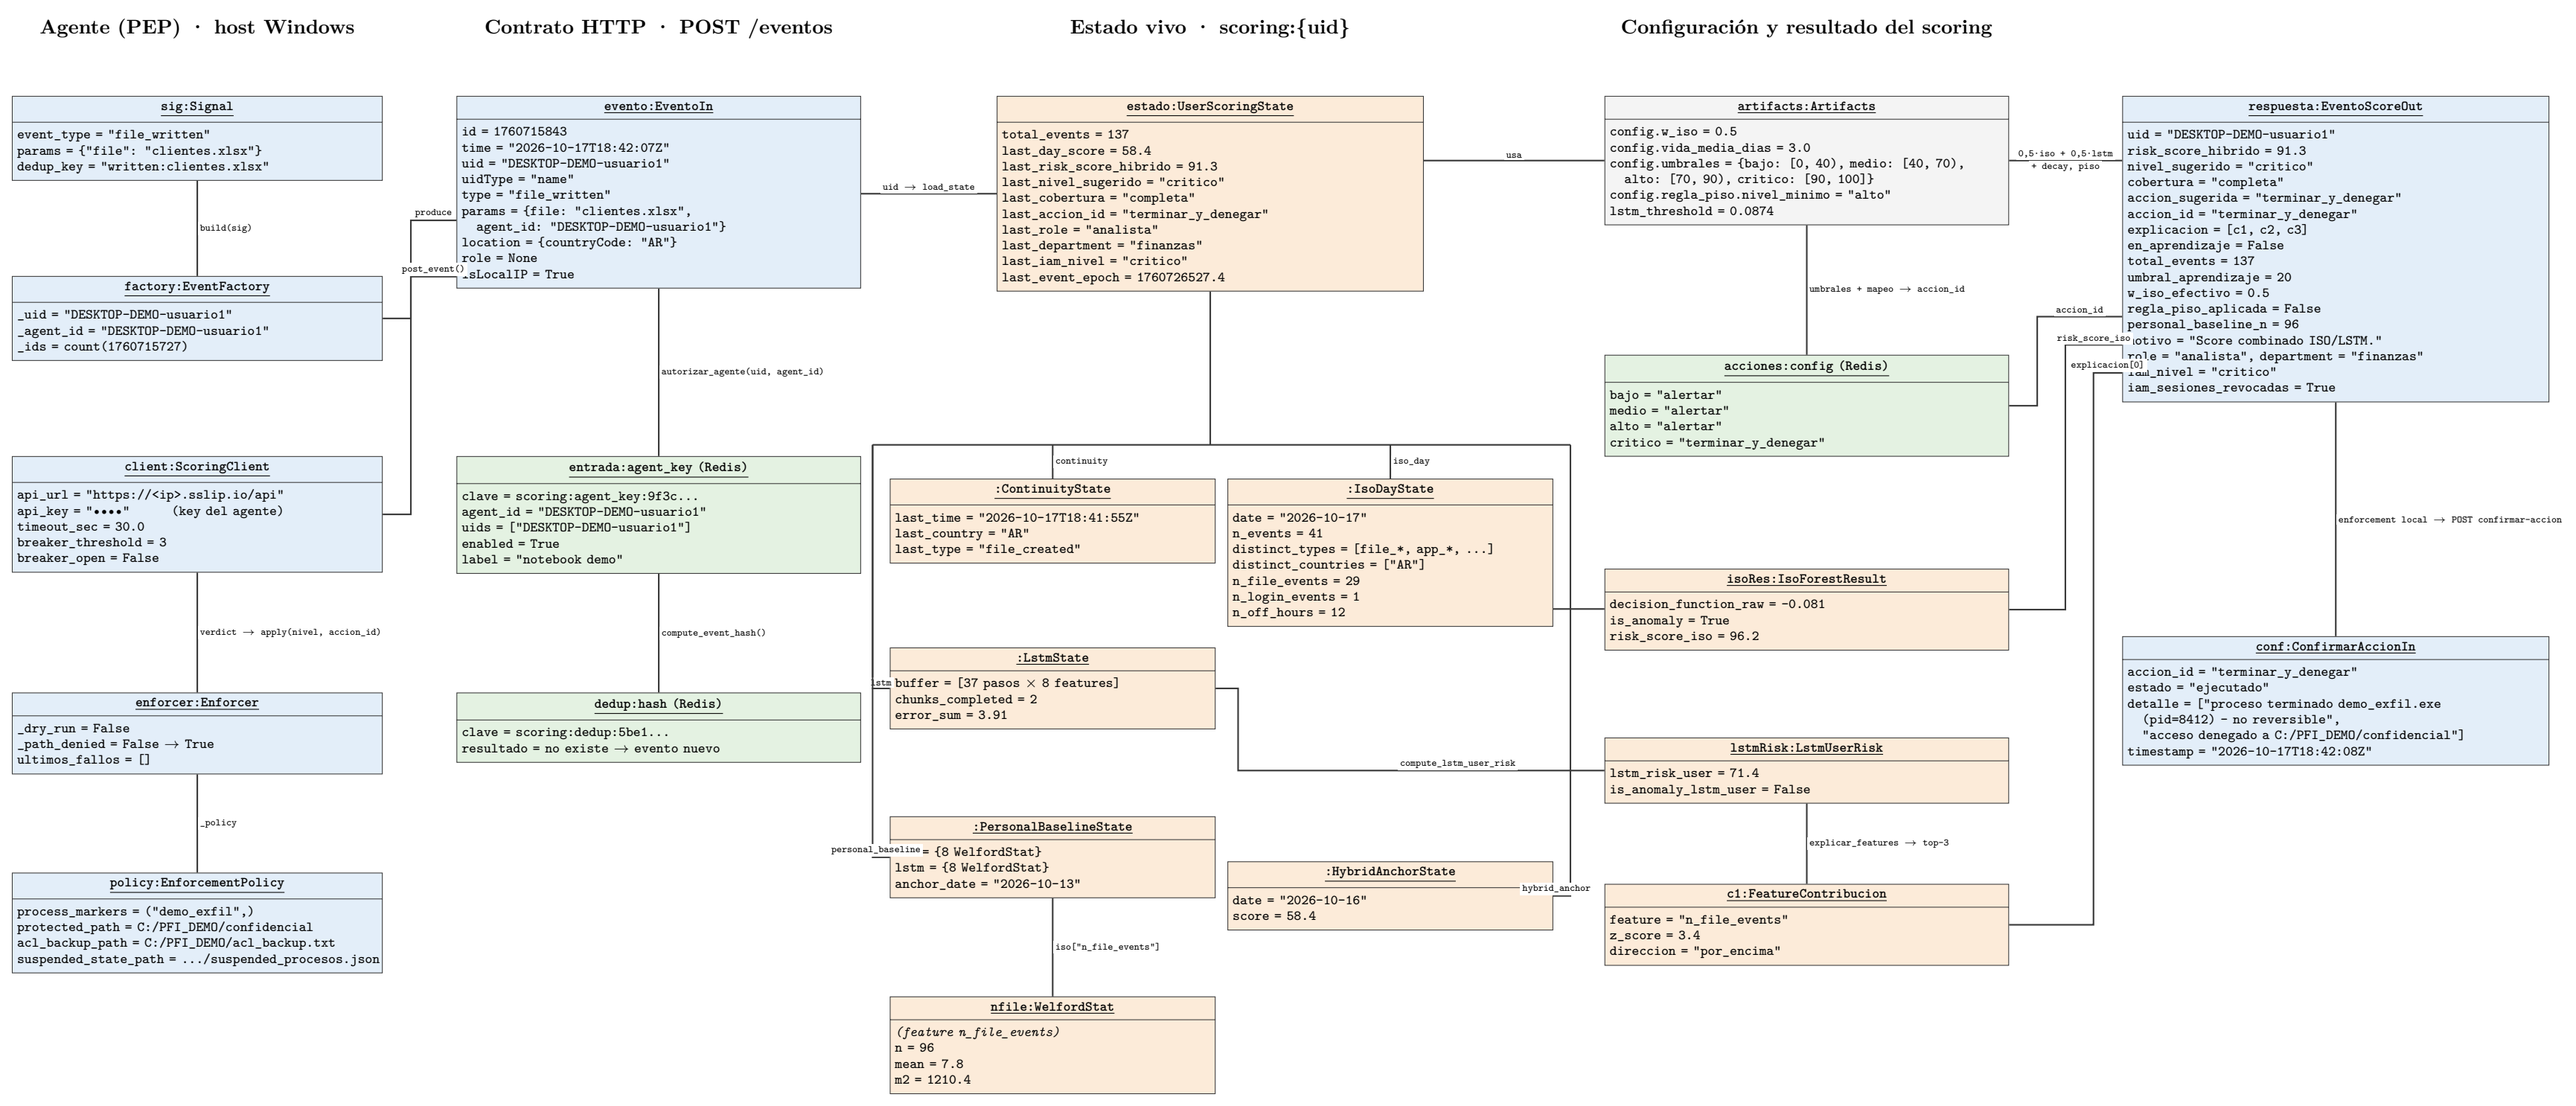

Agente (PEP) · host Windows
Contrato HTTP · POST /eventos
Estado vivo · scoring:{uid}
Configuración y resultado del scoring
sig:Signal
event_type = "file_written"
params = {"file": "clientes.xlsx"}
dedup_key = "written:clientes.xlsx"
build(sig)
factory:EventFactory
_uid = "DESKTOP-DEMO-usuario1"
_agent_id = "DESKTOP-DEMO-usuario1"
_ids = count(1760715727)
produce
post_event()
client:ScoringClient
api_url = "https://<ip>.sslip.io/api"
api_key = "••••" (key del agente)
timeout_sec = 30.0
breaker_threshold = 3
breaker_open = False
verdict → apply(nivel, accion_id)
enforcer:Enforcer
_dry_run = False
_path_denied = False → True
ultimos_fallos = []
_policy
policy:EnforcementPolicy
process_markers = ("demo_exfil",)
protected_path = C:/PFI_DEMO/confidencial
acl_backup_path = C:/PFI_DEMO/acl_backup.txt
suspended_state_path = .../suspended_procesos.json
evento:EventoIn
id = 1760715843
time = "2026-10-17T18:42:07Z"
uid = "DESKTOP-DEMO-usuario1"
uidType = "name"
type = "file_written"
params = {file: "clientes.xlsx",
agent_id: "DESKTOP-DEMO-usuario1"}
location = {countryCode: "AR"}
role = None
_sLocalIP = True
autorizar_agente(uid, agent_id)
entrada:agent_key (Redis)
clave = scoring:agent_key:9f3c...
agent_id = "DESKTOP-DEMO-usuario1"
uids = ["DESKTOP-DEMO-usuario1"]
enabled = True
label = "notebook demo"
compute_event_hash()
dedup:hash (Redis)
clave = scoring:dedup:5be1...
resultado = no existe → evento nuevo
uid → load_state
estado:UserScoringState
total_events = 137
last_day_score = 58.4
last_risk_score_hibrido = 91.3
last_nivel_sugerido = "critico"
last_cobertura = "completa"
last_accion_id = "terminar_y_denegar"
last_role = "analista"
last_department = "finanzas"
last_iam_nivel = "critico"
last_event_epoch = 1760726527.4
continuity
:ContinuityState
last_time = "2026-10-17T18:41:55Z"
last_country = "AR"
last_type = "file_created"
iso_day
:IsoDayState
date = "2026-10-17"
n_events = 41
distinct_types = [file_*, app_*, ...]
distinct_countries = ["AR"]
n_file_events = 29
n_login_events = 1
n_off_hours = 12
lstm
:LstmState
buffer = [37 pasos × 8 features]
chunks_completed = 2
error_sum = 3.91
compute_lstm_user_risk
personal_baseline
:PersonalBaselineState
= {8 WelfordStat}
lstm = {8 WelfordStat}
anchor_date = "2026-10-13"
iso["n_file_events"]
nfile:WelfordStat
(feature n_file_events)
n = 96
mean = 7.8
m2 = 1210.4
:HybridAnchorState
date = "2026-10-16"
score = 58.4
hybrid_anchor
usa
artifacts:Artifacts
config.w_iso = 0.5
config.vida_media_dias = 3.0
config.umbrales = {bajo: [0, 40), medio: [40, 70),
alto: [70, 90), critico: [90, 100]}
config.regla_piso.nivel_minimo = "alto"
lstm_threshold = 0.0874
umbrales + mapeo → accion_id
acciones:config (Redis)
bajo = "alertar"
medio = "alertar"
alto = "alertar"
critico = "terminar_y_denegar"
isoRes:IsoForestResult
decision_function_raw = -0.081
is_anomaly = True
risk_score_iso = 96.2
lstmRisk:LstmUserRisk
lstm_risk_user = 71.4
is_anomaly_lstm_user = False
explicar_features → top-3
c1:FeatureContribucion
feature = "n_file_events"
z_score = 3.4
direccion = "por_encima"
0,5·iso + 0,5·lstm
+ decay, piso
respuesta:EventoScoreOut
uid = "DESKTOP-DEMO-usuario1"
risk_score_hibrido = 91.3
nivel_sugerido = "critico"
cobertura = "completa"
accion_sugerida = "terminar_y_denegar"
accion_id = "terminar_y_denegar"
explicacion = [c1, c2, c3]
en_aprendizaje = False
total_events = 137
umbral_aprendizaje = 20
w_iso_efectivo = 0.5
regla_piso_aplicada = False
personal_baseline_n = 96
motivo = "Score combinado ISO/LSTM."
role = "analista", department = "finanzas"
iam_nivel = "critico"
iam_sesiones_revocadas = True
accion_id
risk_score_iso
explicacion[0]
enforcement local → POST confirmar-accion
conf:ConfirmarAccionIn
accion_id = "terminar_y_denegar"
estado = "ejecutado"
detalle = ["proceso terminado demo_exfil.exe
(pid=8412) - no reversible",
"acceso denegado a C:/PFI_DEMO/confidencial"]
timestamp = "2026-10-17T18:42:08Z"