



# POLITECNICO MILANO 1863

SOFTWARE ENGINEERING II

**Travlendar+**

DESIGN

DOCUMENT

Authors:

*Edoardo D'Amico  
Gabbolini Giovanni  
Parroni Federico*

1<sup>st</sup> November 2017

# Indice

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Purpose . . . . .	3
1.2	Scope . . . . .	3
1.3	Definitions, Acronyms, Synonyms . . . . .	3
1.3.1	Synonyms . . . . .	3
1.3.2	Definitions . . . . .	3
1.3.3	Acronyms . . . . .	4
1.4	Revision history . . . . .	4
1.5	Document structure . . . . .	4
<b>2</b>	<b>Architectural Design</b>	<b>5</b>
2.1	Overview . . . . .	5
2.2	Component View . . . . .	7
2.3	Deployment View . . . . .	9
2.4	Runtime View . . . . .	10
2.4.1	Note on Runtime Views . . . . .	16
2.5	Component Interfaces . . . . .	16
2.6	Selected architectural styles and patterns . . . . .	16
2.6.1	Selected design patterns . . . . .	16
2.7	Other Design Decisions . . . . .	17
2.7.1	API Wrappers Class Diagrams . . . . .	17
<b>3</b>	<b>User Interface Design</b>	<b>18</b>
<b>4</b>	<b>Requirement Traceability</b>	<b>19</b>
4.1	Goal 1 . . . . .	19
4.2	Goal 2 . . . . .	20
4.3	Goal 3 . . . . .	20
4.4	Goal 4 . . . . .	20
4.5	Goal 5 . . . . .	21
4.6	Goal 6 . . . . .	21
4.7	Goal 7 . . . . .	22
4.8	Goal 8 . . . . .	22
4.9	Goal 9 . . . . .	22
4.10	Goal 10 . . . . .	23

---

<b>5</b>	<b>Implementation Integration and TestPlan</b>	<b>24</b>
5.1	User Authentication . . . . .	24
5.2	Appointments management . . . . .	25
5.3	External Api Data Retrieving . . . . .	25
5.4	Static Schedule Management . . . . .	25
5.5	Dynamic Schedule Management . . . . .	26
5.6	Synchronization . . . . .	26

# Chapter 1

## Introduction

### 1.1 Purpose

### 1.2 Scope

Travlendar+ is an application that aims to ease the management of the daily appointments of a registered user by providing a desired schedule for those. The application runs within the context of a restricted geographic area and thus should consider only the travel means available in this scope. The application is able to interact with different data sources, in particular Travel Means APIs **FARE DEFINIZIONE** and User device GPS, and to arrange the appointments by exploiting these information. Once the schedule is computed, the application gives to the user the possibility to buy tickets for the involved travel means, then he/she can run it and follow directions provided by the application.

### 1.3 Definitions, Acronyms, Synonyms

#### 1.3.1 Synonyms

#### 1.3.2 Definitions

**Definition 1.3.1.** the user data include:

- schedules;
- appointments;

- user parameters.

**Definition 1.3.2.** A device is a PC, a Tablet or a Smartphone in which run the last version of his O.S.;

**Definition 1.3.3.** A Schedule is a set of time-ordered and not overlapping appointments where their starting times are fixed and they're linked to each other by a path covered with a specific transportation mean;

### 1.3.3 Acronyms

- API: Application Programming Interface;

## 1.4 Revision history

## 1.5 Document structure

## Chapter 2

# Architectural Design

### 2.1 Overview

Travlendar+ has a multi-tier architecture.

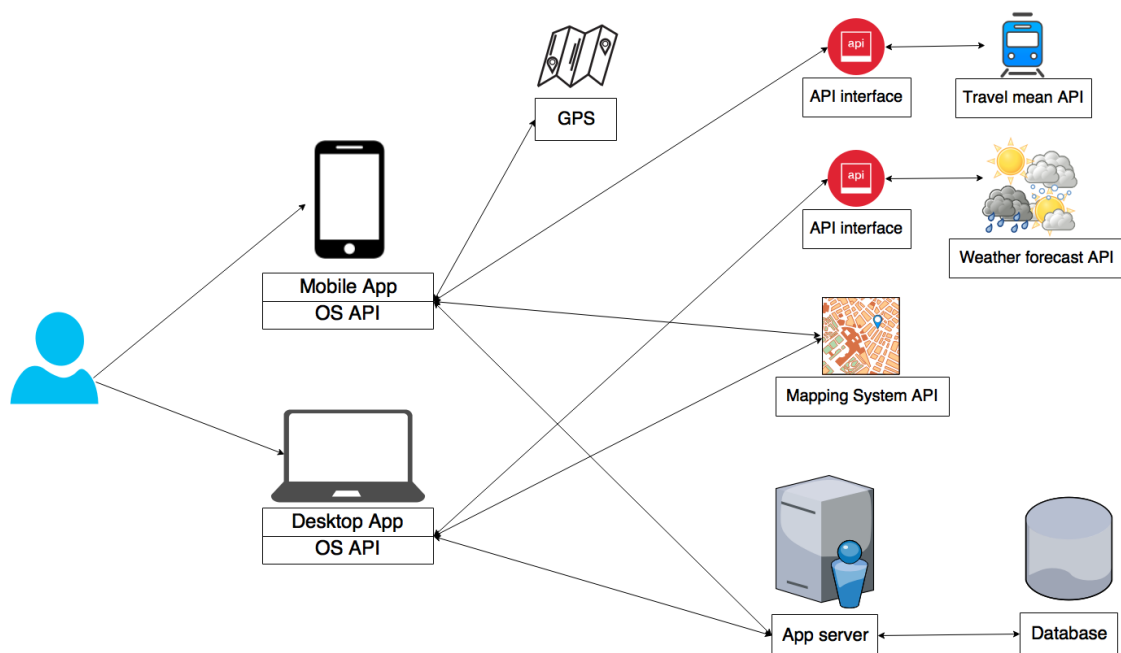


Figura 2.1: High level components

User can interact directly with both version of the application: desktop and mobile, both laying on their respective OS APIs. The schedule computation is performed locally

on the device in which the application runs by querying the GPS of the device and the external APIs:

- Mapping Service API
- Travel Means APIs
- Wheather Forecasts APIs

The communication between these components happens through different interfaces (wrappers), in order to improve the capability of the system to be expanded. In this way we provide a common pattern for the data acquired from the APIs, so that new ones can be easily included without the need of drastic changes on the central core. In the architecture there are two more components: the Application server, that offers authentication and sinchronization services and the Database used to grant the durability of the data. At the end of the registration phase a new record is allocated in the Database and it will be used for check the identity of a user during the login phase. The Database also stores the user data (1.3.1) so that they can be sinchronized in all the devices in which the user is logged in.

### **INSERIRE FOTO STACK PARRO**

The figure above represents the stack architecture of our application and shows the hierarchy of the layers. Each level can communicate with the upper and lower layer.

## 2.2 Component View

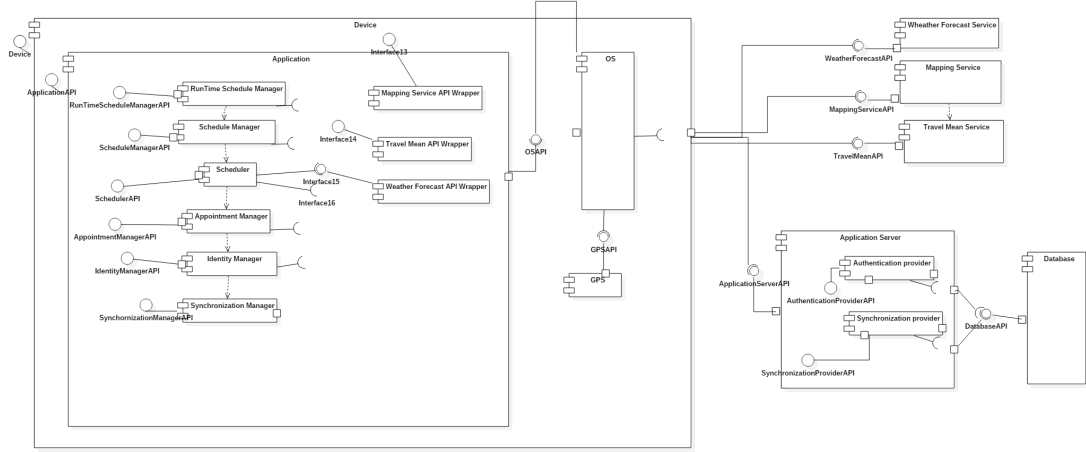


Figure 2.2: Component diagram

The application <sup>1</sup> includes several components:

- Identity Manager: it requests a service to the authentication provider either for the login or the registration of a user.
- Appointment Manager: handles all the operations affecting appointment like modification, deletion and creation.
- Scheduler: it computes and saves the schedules of the user.
- Schedule Manager: handles all the operations affecting the schedule like showing and selecting the schedule to be run, notifying the user if a better schedule involving shared means has been found, buying the ticket for the means within the schedule.
- Runtime Schedule Manager: shows the directions and the progress of the running schedule.
- Synchronization Manager: it requests a synchronization to the Synchronization provider when needed.

<sup>1</sup>in the image is reported only the mobile version of the application since the desktop version is identical to it, with the only difference that it can't exploit GPS services, so for maintaining the graphic clear only one of the two is reported.



- Mapping Service API Wrapper: manipulates data retrieved from a mapping service (e.g. Google Maps) in a format recognized by the application.
- Travel Mean API Wrapper: manipulates data retrieved from a travel mean API service (e.g. Mobike, ATM, etc) in a format recognized by the application.
- Weather Forecast API Wrapper: manipulates data retrieved from a weather forecast API service (e.g. Dark Sky) in a format recognized by the application.

The application Server is composed by the following two components:

- Authentication Provider: it handles the registration and the login phase of the user.
- Synchronization Provider: it has the purpose of synchronizing the user data (1.3.1) in the database when something is changed.

The three components representing services (Weather Forecast API, Travel Mean API, Mapping Service API) aren't included in the system because they are external services but they have been represented since our system is using the interfaces exposed from them.

### 2.3 Deployment View

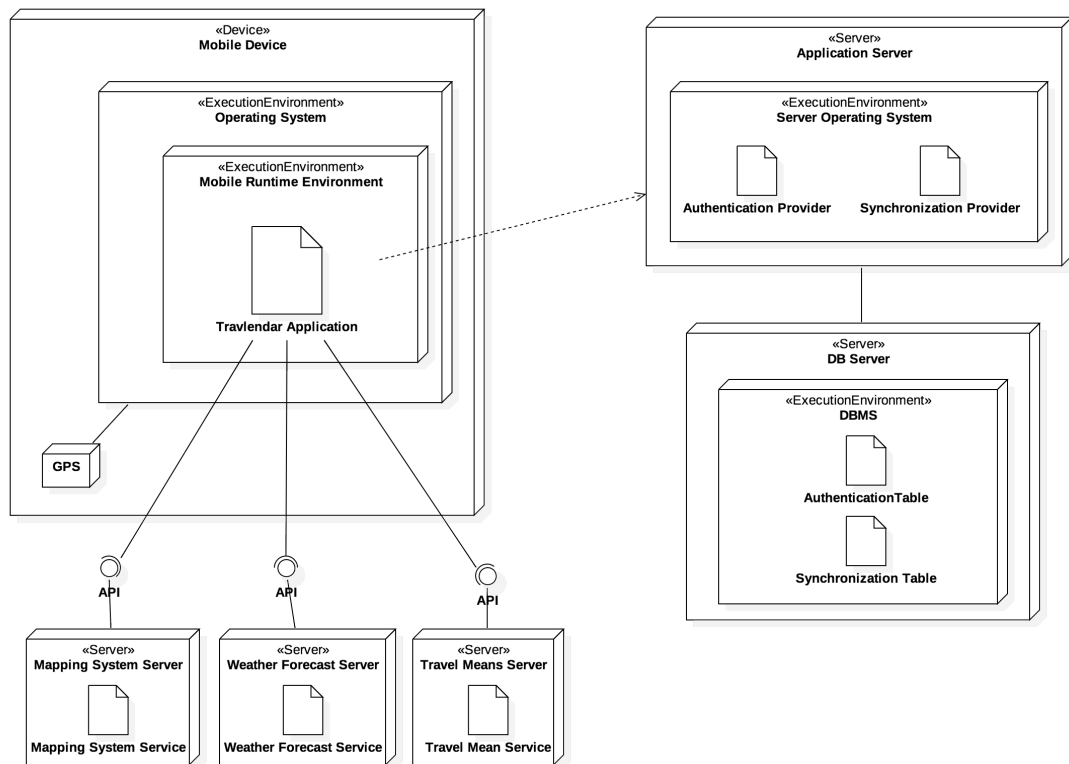


Figura 2.3: Deployment Diagram

## 2.4 Runtime View

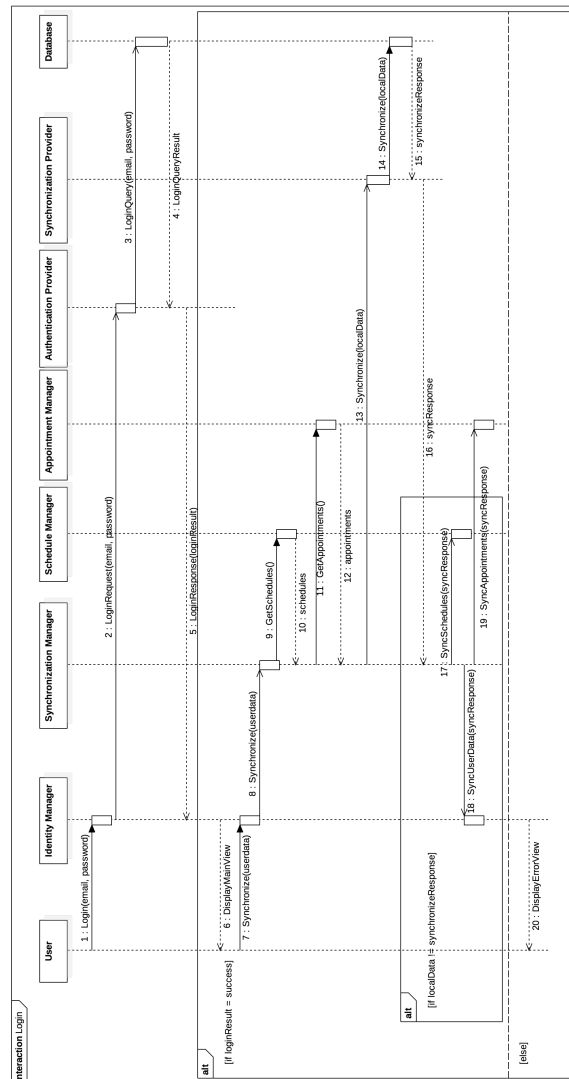


Figura 2.4: Login runtime view

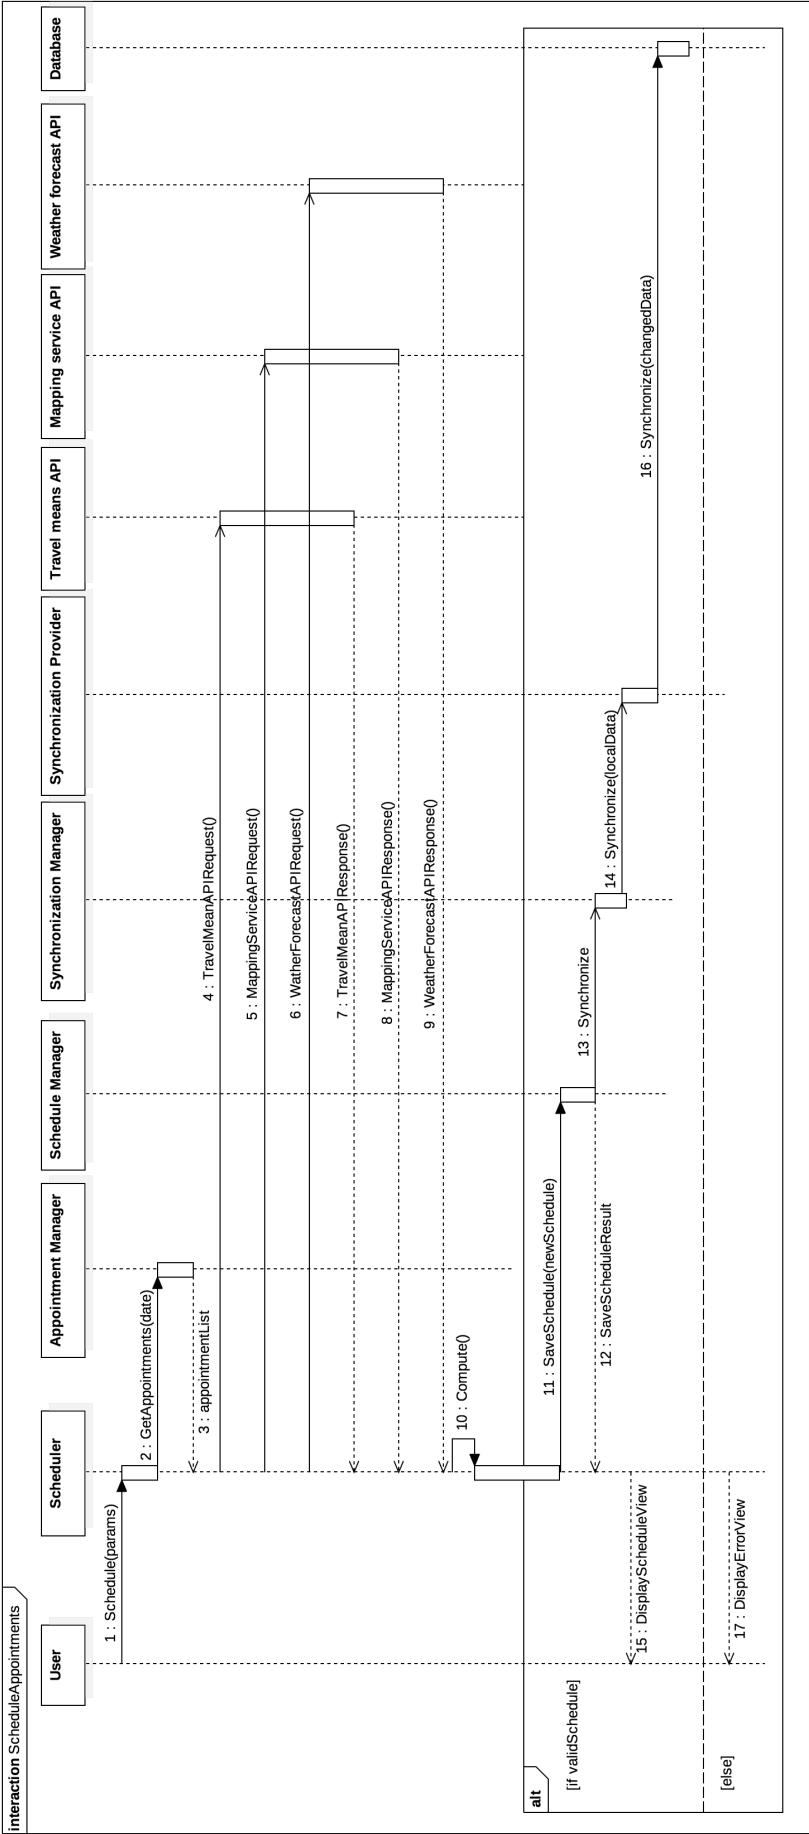


Figura 2.5: Schedule appointments runtime view

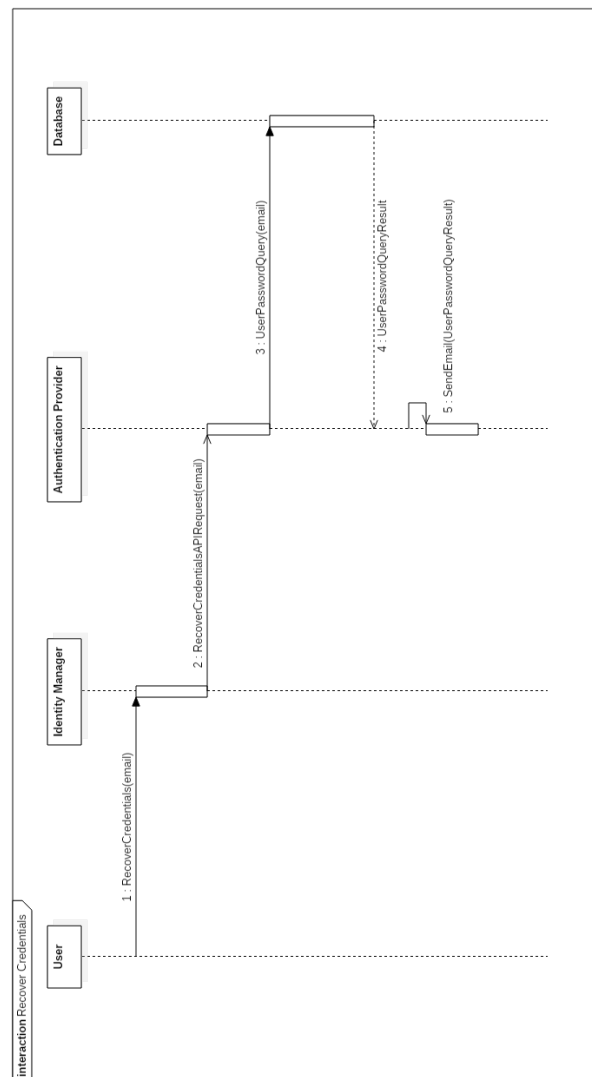


Figure 2.6: Recover Credentials Runtime View

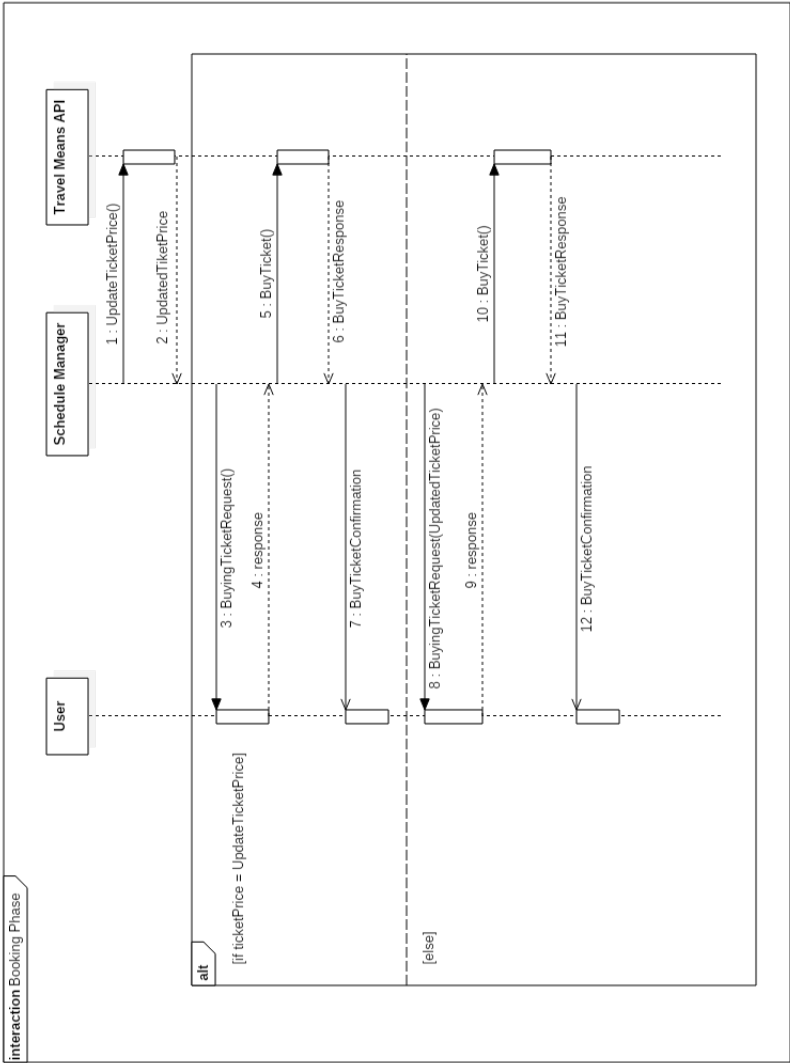


Figure 2.7: Booking Phase Runtime View

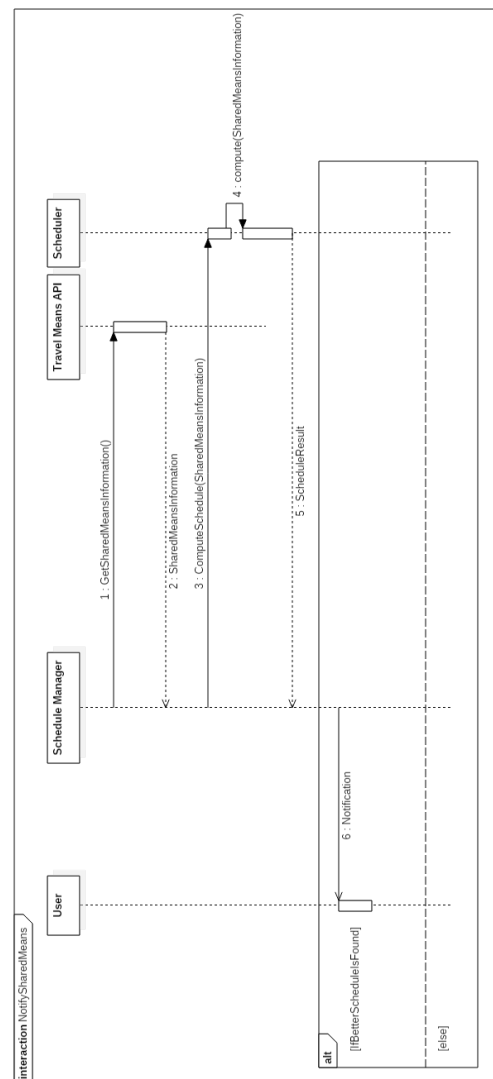


Figure 2.8: Notify Shared Means Runtime View

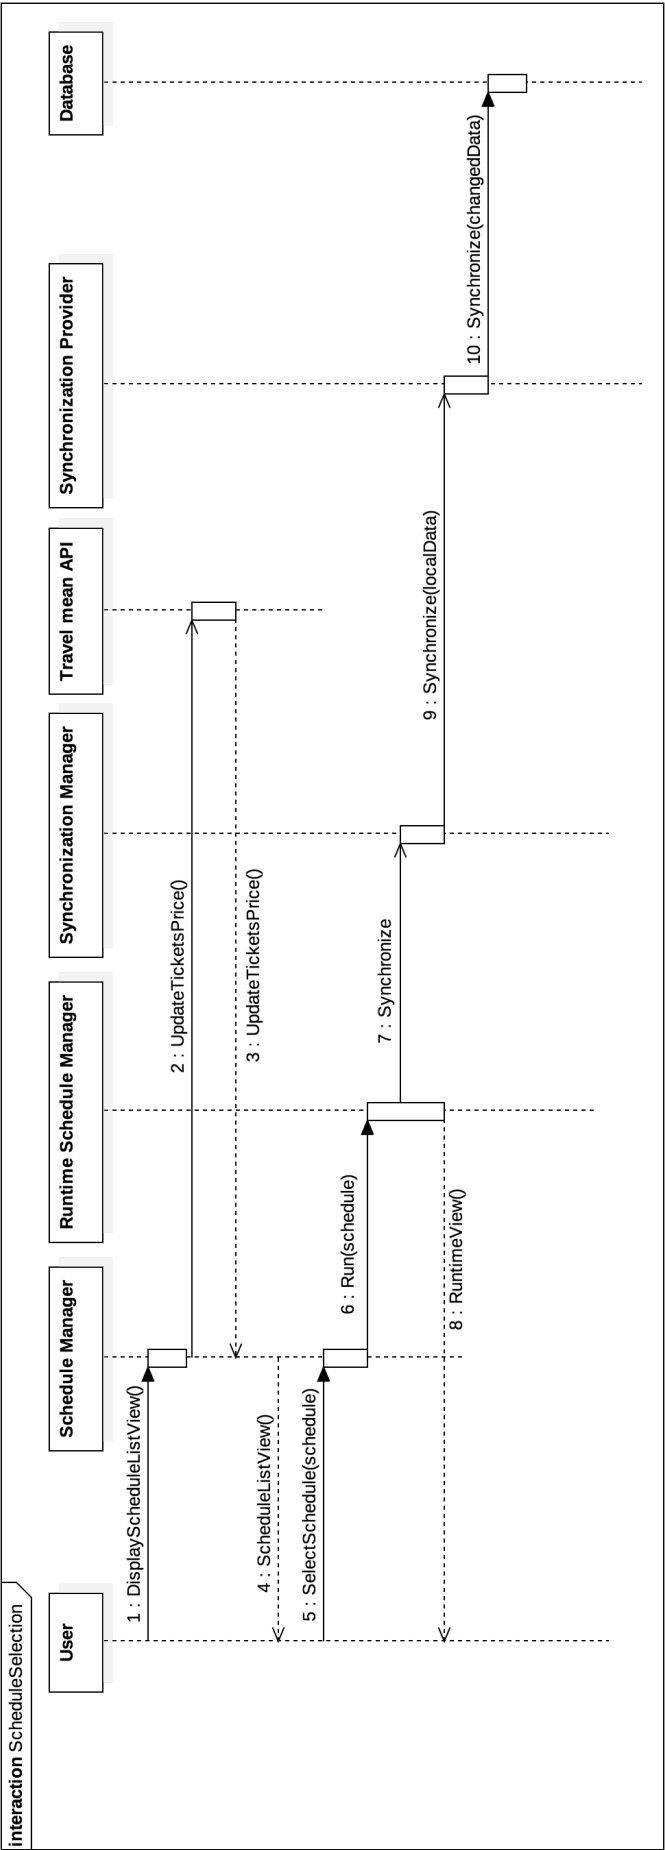


Figura 2.9: Schedule selection runtime view



### 2.4.1 Note on Runtime Views

In the diagrams the interaction involving Application Server, Application and API wrappers since they are not informative to show the behaviour of the application.

above only the interactions between internal components are shown.

## 2.5 Component Interfaces

## 2.6 Selected architectural styles and patterns

### 2.6.1 Selected design patterns

- MVC: all the classes of the application will adopt this pattern
- Adapter: API wrappers will adopt this pattern
- Client-Server: the application running on a device represents the client part, requesting services to the Travlendar server
- OAuth: standard adopted by the exposed APIs of the server, in order to get authorization to make request from different clients
- Restful API: a particular kind of APIs that encapsulate the request/response body in a JSON string
- Singleton: restricts the instantiation of a class to one object. This is useful when exactly one object is needed to coordinate actions across the system. Some classes of our system can be built on this pattern, like the Travel Mean.

## 2.7 Other Design Decisions

### 2.7.1 API Wrappers Class Diagrams

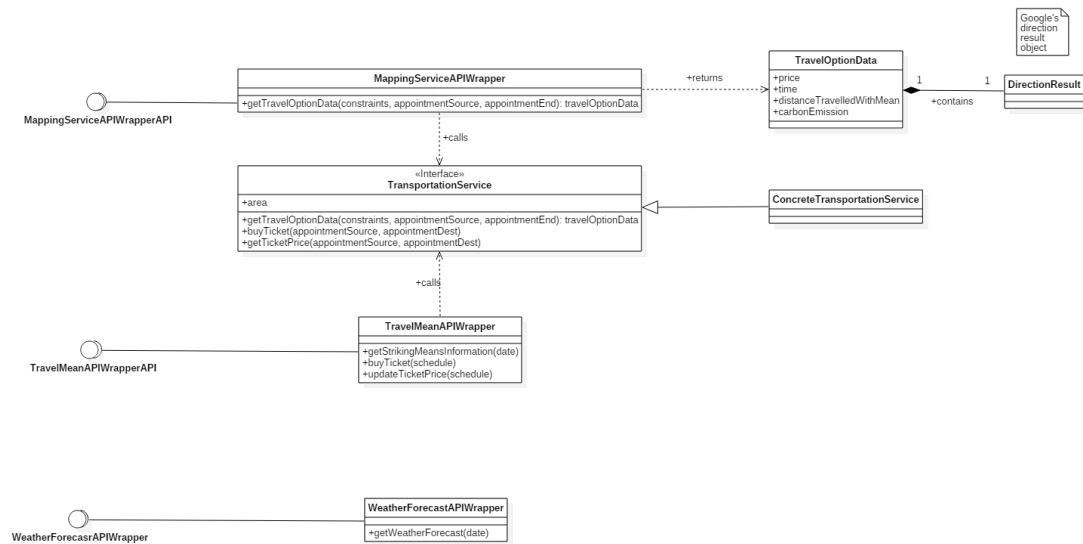


Figure 2.10: API wrapper class diagram

## Chapter 3

# User Interface Design

We refer to chapter 3.1.1 of the RASD, where we have given a complete overview of how the user interfaces will look like.

## Chapter 4

# Requirement Traceability

In each section section we will describe how the requirements of each goal are mapped in the design elements described above.

### 4.1 Goal 1

- *The system S.B.A to handle a registration phase in which the user will provide an e-mail and a password*
  - Login Interface
  - Identity Manager
  - Authentication Provider
  - Database
- *The system S.B.A. to verify the e-mail given by the user by sending a confirmation e-mail to his address*
  - Login Interface
  - Identity Manager
  - Authentication Provider
  - Database
- *The system should let the user to specify his parameters*
  - User Account Interface

## 4.2 Goal 2

- *The system S.B.A. to recognize a registered user given an e-mail and a password*
  - Login Interface
  - Identity Manager
  - Authentication Provider
  - Database
- *The system S.B.A. to retrieve information from the user about his registration informations, i.e. his e-mail and password*
  - Login Interface
  - Identity Manager
  - Authentication Provider
  - Database

## 4.3 Goal 3

- *The system should be able to retrieve an e-mail address from the user*
  - Login Interface
- *The system should be able to send the password of a user to his e-mail given it*
  - Authentication Provider
  - Database

## 4.4 Goal 4

- *The system S.B.A. to retrieve information from the user about his appointments*
  - Appointment CRUD interface. **agg alle def**
- *The system S.B.A. to store an appointment in his memory*
  - Appointment Manager

## 4.5 Goal 5

- *The system should let the user change the parameters and the constraints of an inserted appointment*
  - Appointment CRUD interface. **agg alle def**
  - Appointment Manager
- *The system S.B.A to rewrite the appointment in his memory with his new parameters*
  - Appointment Manager

## 4.6 Goal 6

- *Allow the user to set the constraints of the schedule*
  - Schedule Interface
- *Allow the user to set the optimization criteria for the schedule*
  - Schedule Interface
- *Allow the user to set the variables for the schedule*
  - Schedule Interface
- *The system S.B.A. to gather information from external APIs about:*
  - *travel options with related travel option data;*
  - *weather forecast;*
  - *strike days;*
  - *delays.*
  - Mapping Service API Wrapper
  - Travel Mean API Wrapper
  - Weather Forecast API Wrapper

- *The system S.B.A. to select the best travel option according to the optimization criteria taking into account:*
  - *user constraint;*
  - *user parameters;*
  - *travel option data;*
  - *weather forecast;*
  - *information about strike day;*
  - *information about delays.*
  - Scheduler
- *The system S.B.A to store valid schedules requested by the user*
  - Schedule Manager

#### 4.7 Goal 7

- *The system should let the user accept a schedule from the saved ones*
  - Schedule List Interface
  - Schedule Manager

#### 4.8 Goal 8

- *The system S.B.A to book a travel mean through external API offered by third part application in which the user is signed*
  - Schedule Manager
  - Travel Mean API Wrapper

#### 4.9 Goal 9

- *The system S.B.A to retrieve the position of the user from his GPS*
  - GPSAPI

- Runtime Schedule Manager
- *The system S.B.A. to retrieve from an external API the directions to give to the user for reach the next appointment*
  - Mapping Service API Wrapper
  - Runtime Schedule Manager
- *The system S.B.A. to retrieve from an external API the Graphical representation of the path that will be travelled by the user*
  - Mapping Service API Wrapper
  - Runtime Schedule Manager

#### 4.10 Goal 10

- *The system should be able to send notifications to the user*
  - Schedule Manager
- *The system should be able to retrieve information about the availability of shared travel means from external APIs without the user request*
  - Mapping Service API Wrapper
  - Schedule Manager



## Chapter 5

# Implementation Integration and TestPlan

In the next sections we will show the timeline of the implementation integration and testplan. This timeline is led by the functionalities, for each one we first implement the components needed, and then we proceed with the integration and with the test of the functionality.

### 5.1 User Authentication

Implemented and integrated Components:

- Authentication Provider
- Database
- Identity Manager

Functionality tested:

- User Registration
- User Login
- Recover credentials
- SetUserParameters
- GetUserParameters

## 5.2 Appointments management

Implemented and integrated components:

- Appointment manager

Functionality tested:

- Appointment creation
- Appointment editing
- Appointment deletion
- Appointments retrieving

## 5.3 External Api Data Retrieving

Implemented and integrated components:

- Mapping Service API Wrapper
- Travel Mean API Wrapper
- Weather Forecast API Wrapper

Functionality tested:

- Weather forecast data retrieving
- Strike day information retrieving
- Travel option data retrieving
- Get ticket price
- Purchase ticket

## 5.4 Static Schedule Management

Implemented and integrated components:

- Scheduler

- Schedule Manager

Functionality tested:

- Compute a schedule
- Schedules retrieving
- Schedule selection
- Schedule editing
- Schedule deletion
- Schedule price updating

## **5.5 Dynamic Schedule Management**

Implemented and integrated components:

- Runtime Schedule Manager

Functionality tested:

- Directions retrieving
- Dynamic directions displaying

## **5.6 Synchronization**

Implemented and integrated components:

- Synchronization provider
- Synchronization Manager

Functionality tested:

- Synchronize