

(Xampp control panel)Linux ->Xampp 的 shell

第一次設定密碼:

```
mysqladmin -user=root password "1234"
```

windows 第一次設定密碼:

```
C:\xampp\mysql\bin>mysqladmin -u root  
password "1234"
```

Windows 修改密碼:

```
C:\xampp\mysql\bin>mysqladmin -u root -p  
password "4321"
```

```

MariaDB [mysql]> select host,user,password from user;
+-----+-----+-----+
| host      | user | password                                     |
+-----+-----+-----+
| localhost | root | *83720DFAB1779994C5BB08206C154266D924A54D |
| localhost |      |                                             |
| localhost | pma  |                                             |
+-----+-----+-----+
3 rows in set (0.00 sec)

MariaDB [mysql]> delete from user
-> where user = "pma";
Query OK, 1 row affected (0.00 sec)

MariaDB [mysql]> select host,user,password from user;
+-----+-----+-----+
| host      | user | password                                     |
+-----+-----+-----+
| localhost | root | *83720DFAB1779994C5BB08206C154266D924A54D |
| localhost |      |                                             |
+-----+-----+-----+

```

另用 xampp control panel 裡的 Shell 設定密碼時，會出現 user 是 pma 將它刪除


```

MariaDB [mysql]> select host,user,password from user;
+-----+-----+-----+
| host      | user | password                                     |
+-----+-----+-----+
| localhost | root | *83720DFAB1779994C5BB08206C154266D924A54D |
| localhost |      |                                             |
+-----+-----+-----+
2 rows in set (0.00 sec)

MariaDB [mysql]> delete from user
-> where user = " ";
Query OK, 1 row affected (0.00 sec)

MariaDB [mysql]> select host,user,password from user;
+-----+-----+-----+
| host      | user | password                                     |
+-----+-----+-----+
| localhost | root | *83720DFAB1779994C5BB08206C154266D924A54D |
+-----+-----+-----+
1 row in set (0.00 sec)

```

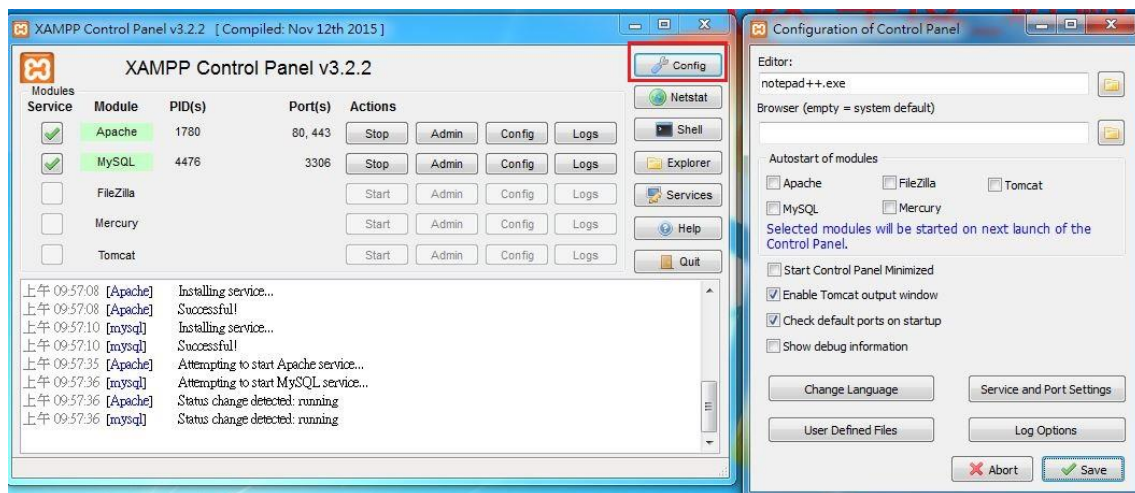

如果想直接從 config 點選裡頭的任何檔案直接變成 notepad++檔案顯示的話，直接點選框起來的 config 並設定 Editor：直接改成 notepad++.exe