

How Often Is a Swallowed Failure a Bug? A Tri-Source Study of Except-Handler Failure-Routing in AI/ML Codebases

Yufei Yang Chen*

Sun Yat-sen University, Guangzhou, China
fei76161@gmail.com

Abstract

Exception handlers that turn a failure into a success-shaped value — an LLM judge outage becoming a legitimate 0.0 — yield wrong answers with no crash and no log. We call this *failure-routing* and study the part a syntactic tool can see: failures routed inside an `except` handler. A six-rule AST detector over eight pinned AI/ML packages reports 621 findings from the 524,229 lines it scans; 371 (59.7%) lie outside the union of four syntactic linters (250/621 = 40.3%), which covers 0 of the 19 `contextlib.suppress` findings.

A stratified sample ($n = 80$) was labelled twice, both rounds by LLM agents, not humans; they agreed on all 80, which reflects shared bias, not annotation quality. Twelve (15.0%; 20.0% weighted by the sampling design) are genuine defects, 64 (80.0%) deliberate contracts and 4 (5.0%) false positives from a detector bug the labelling exposed; all 12 defects sit in one package.

“Maintainers fixed it, so it was real” fails structurally for defects nobody notices. Three truth sources ask orthogonal questions: consequence labelling (15% defect); spontaneous maintainer behaviour (13 fixed of 478 labelable sites, 2.7%; 2,128 tracked); and reaction when told (16/43 = 37.2% of the author’s fix PRs accepted). All three are *directionally* consistent with “nobody noticed”, and that disjointness survives 10 of 12 defensible rebasings of arm 2. No verdict follows: the arms count differently constituted populations — labelled findings, tracked sites (only 38.7% of them detector findings), author-selected PRs — so no rate is common to them. This is quantified non-identifiability, not impossibility; we name the datum that would close it. Recall is 3 of 14 in-scope ground-truth defects; 9 of 14 (64.3%) route failure outside any handler, beyond our subfamily. Such detectors are *search-space reducers*, not oracles.

1 Introduction

Most software failures announce themselves. An exception propagates, a process exits, a stack trace reaches a log. The failures this paper studies do none of this. A handler catches a timeout from a model API and returns 0.0, and the caller cannot distinguish that from a model that genuinely scored zero. A decode error is caught and an empty string returned, and the code downstream sees a document with no content rather than one that failed to load. Execution continues, the caller receives a value of the expected type, and a wrong answer proceeds in the shape of a right one. We call this *failure-routing*: the handler does not merely swallow the failure, it routes it into the success path. This paper studies the subfamily a syntactic tool can see — failures routed inside an `except` handler.

The consequence is that the usual evidence of a defect is missing by construction. A crash produces a bug report; a plausible wrong number rarely produces one. Nobody files the issue, nobody writes the regression test, and the standard warrant for a static-analysis finding — that a maintainer read it and fixed it — is least available exactly where the pattern is most dangerous. Detecting these handlers is the easy half of the problem. Establishing that what we detected are defects is the hard half, and it is the half we do not fully solve.

This work began with a narrower observation. A widely used Python linter recommends a refactoring that moves the pattern outside the detection scope of every linter we tested, including the one that recommends it.

***Disclosure.** The author of this paper is also the author of `failroute`, the detector evaluated here, and of the `semgrep` rule reported in the RQ1 coverage measurement. Results unfavourable to the detector are reported alongside the favourable ones; see in particular the RQ3 recall audit.

The SIM105 observation.

- `ruff`'s SIM105 rule recommends rewriting `try/except/pass` into `contextlib.suppress(...)`. The two forms are semantically identical.
- After the rewrite, the construct is out of reach of the linters we tested, and not only of the rule sets we happened to select: in our corpus all 19 `contextlib.suppress` findings are invisible to the union of `ruff`, `bandit`, `pylint` and `flake8+bugbear`, and enabling every one of `ruff`'s 969 rules, or `pylint`'s full default message set, adds no rule that reports it (Section 4.2). A `semgrep` rule *we wrote* covers 18 of the 19; citing it requires stating the rule is ours.
- A widely adopted refactoring therefore moves an entire defect shape outside the detection scope of the tools while leaving its runtime consequences unchanged.

Research questions.

- **RQ1** How prevalent is except-handler failure-routing in AI/ML Python, and how much of it do the syntactic linters practitioners already run reach? (Section 4.2)
- **RQ2** What fraction of the detector's findings are genuine defects, as opposed to deliberate contracts or tool artefacts? (Section 4.3)
- **RQ3** What fraction of known ground-truth defects does the detector reach, and how much of the phenomenon can *any* handler-shaped detector reach? (Section 4.4)
- **RQ4** What does systematic labelling of findings do to the detector itself? (Section 4.6)

The methodological centre of the paper sits between RQ2 and RQ3: once the answer to RQ2 is unfavourable, what evidence could possibly settle whether the undetected remainder is real (Section 4.5)?

Contributions.

1. A taxonomy of six failure-routing shapes and an AST detector for them (Section 2).
2. A reproducible prevalence and cross-tool coverage measurement over 8 pinned packages (Section 4.2).
3. A labelled stratified sample ($n = 80$) giving a precision estimate for this detector family on real code (Section 4.3). The estimate is unfavourable to the tool, and the labelling was performed by LLM agents; both facts are disclosed and analysed rather than buried.
4. A tri-source triangulation for defect families where standard validation fails structurally (Section 4.5) — and a quantified non-identifiability result: its three arms count differently constituted populations, so no rate is common to them, and no matched-population substitute exists. We specify the datum that would settle the question.
5. A recall audit against maintainer-merged fixes (Section 4.4) that doubles as a construct-validity measurement: 64.3% of ground-truth defects do not route through an except-handler at all.
6. Evidence that systematic labelling is itself a detector-improvement method: it exposed a defect that accounted for 100% of one rule's real-world findings (Section 4.6).

2 The pattern family

Six shapes, all reducible to “*a failure became a value the caller cannot distinguish from success*”, are listed in Table 1. The taxonomy is defined by the semantics of the Python constructs involved rather than fitted to the corpus studied here: four of the six shapes account for all 621 findings reported in Section 4.2, and the two that never fire on this corpus are retained because a shape's absence from one corpus is not evidence that the shape does not occur. Both are exercised by the tool's unit corpus.

3 The detector

The tool is the instrument, not the subject, so we describe it only to the extent needed to interpret the study. `failroute` 0.8.0 parses each file to an AST and applies six rules through a shared registry, emitting text, JSON or SARIF; individual rules can be disabled per project under `[tool.failroute]`.

Unit of analysis. One finding is one `except` handler — or, for the `silent-suppress` rule, one `contextlib.suppress` statement — reported at the line where it starts. Findings are sorted by line, with a stable per-handler registry order for findings that share a line, so the output order is deterministic.

Table 1: The six failure-routing shapes.

Rule	Shape	Consequence
<code>no-action</code>	<code>except ...: pass</code>	caller never learns the operation failed
<code>silent-fallback</code>	handler returns/assigns a constant without re-raising	judge outage becomes a legitimate 0.0
<code>masked-exception</code>	catch-all conditionally re-raises <i>and</i> falls back to a constant	outcome depends on which branch ran
<code>silent-suppress</code>	<code>with contextlib.suppress(...)</code>	same semantics as <code>except+discard</code> ; invisible to the linters we tested
<code>implicit-fallback</code>	handler neither re-raises, returns, nor records — falls through to implicit <code>None</code>	“did nothing” becomes a legitimate <code>None</code>
<code>name-shadowing</code>	<code>except E as e:</code> rebinds <code>e</code> inside the handler	Python deletes the binding on exit → <code>NameError</code> ; original exception lost

What counts as silence. A handler is treated as *recording* the failure, and therefore as not routing it, if its body re-raises; calls `exit` or `_exit`; calls a logger-like name at a severity in {error, warning, warn, exception, critical, fatal}; or calls `warnings.warn` / `warnings.warn_explicit`. A bare `print()` or a `logger.debug()` does not qualify, because progress text is not a failure record. “Logger-like” means a base-name list (`logger`, `logging`, `log`, `_logger`, `_log`, `sentry_sdk`) plus a suffix heuristic, since real codebases name loggers `audit_logger`, `err_log` and `self._log`. Handler bodies are traversed through control flow but *not* into nested function, lambda or class bodies, so a `return None` inside a callback defined in a handler does not silence it.

What counts as a fallback value. A fixed constant set (`None`, `False`, 0, 0.0, "", [], {}, ()), whose ambiguous members (`True`, 1, 1.0) are marked as such because they are legitimate in boolean scorers, plus namespace-qualified sentinels such as `Status.UNKNOWN` and any project-specific values configured under `[tool.failroute]`. Bare names are deliberately not matched, so `return result` can never fire.

Exemptions. Three gates remove a site before any rule runs. The first is the caught type: absorbing `KeyboardInterrupt`, `SystemExit` or `GeneratorExit` is how a process is meant to end, and absorbing `StopIteration`, `StopAsyncIteration` or `CancelledError` is the documented iterator and cancellation idiom, so a handler catching only those is exempt — and a tuple handler is exempt only when every member is. The second is an opt-out marker in the handler’s own lines: `# failroute: ignore` or `# pragma: no cover`. The third is configuration: a rule disabled under `[tool.failroute]` never fires. All three gates are applied once, in the dispatcher, rather than re-implemented per rule.

The heuristics deliberately err on the side of reporting: a finding is meant to be worth a look, not to be a verdict. That design choice is part of why the precision measured in Section 4.3 is what it is.

Quality gates. A 158-test suite green across a 3 OS × 5 Python-version CI matrix (Ubuntu, macOS, Windows; Python 3.9–3.13), `mypy -strict`, and a hand-labelled unit corpus (v6, 68 samples: 36 positive / 32 negative) whose labels were written independently of tool output, held to precision = recall = 1.0 in CI.

Construct validity of the 1.0 figure. That 1.0 is evidence the detector matches its own specification, **not** evidence it finds real defects. Section 4.3 is the external-validity measurement, and Section 4.4 bounds how much of the phenomenon the handler-shaped operationalisation can reach at all.

4 Study

Statistical reporting. Two-sided intervals are Wilson score intervals with $z = 1.959964$; cells with a zero numerator additionally carry the exact one-sided 95% Clopper–Pearson upper bound $1 - \alpha^{1/n}$, and are labelled as such wherever they appear. The recorded cells — every interval quoted for the labelled sample, the per-package and per-rule breakdowns, the four-tool union, the recall audit and the triangulation — are produced by `tools/compute_intervals.py` and stored in `paper/intervals.json`;

the five-tool union interval is the one figure derived from the same formula outside that file. Several denominators below are complete enumerations of a finite set rather than samples — all 621 findings, all 478 labelled tracked sites (the subset of the 2,128 the pipeline could label, Section 4.5), all 14 in-scope fixes, all 43 family PRs — so their intervals are read as *superpopulation* intervals: uncertainty about the rate in the wider AI/ML population that the corpus and the ledgers stand for, not sampling error inside the enumeration. That wider population is not a neutral one, and the two statements belong together: the eight packages were chosen because the author had prior contribution history in them (Section 6), so these intervals quantify uncertainty around a convenience-selected corpus rather than around AI/ML Python at large.

4.1 Corpus

Eight AI/ML packages fetched as pinned PyPI source distributions (not git clones), each recorded with URL, SHA-256, upload time and extracted tree hash in `paper/corpus-lock.json`. Table 2 lists them. Together the eight sdists hold 2,354 `.py` files and 563,270 lines; the scan roots the detector actually reads hold 2,124 files and 524,229 lines, and every prevalence figure in this paper is a ratio over the latter. Fetching is pinned rather than merely scripted: `tools/fetch_corpus.py` resolves each package to the version recorded in `paper/corpus-manifest.json`, checks the downloaded archive’s SHA-256 against the same manifest, and exits non-zero on mismatch, so a re-fetch either reproduces these inputs or fails loudly. A fresh fetch into a clean directory on 2026-09-02 reproduced all eight archives byte-identically (8/8 SHA-256 matches against `corpus-lock.json`).

Table 2: Pinned corpus. Per-package counts are the files *inside each scan root* — the subtree the detector actually scans — so the column sums to the total shown (2,124 `.py` files / 524,229 lines). The eight pinned sdists contain **2,354** `.py` files / **563,270** lines in total; the difference is content outside the scan roots (tests, examples, vendored code).

Package	Version	Scan root	.py files	Lines
<code>inspect_ai</code>	0.3.260	<code>src/inspect_ai</code>	755	198,351
<code>pydantic_ai_slim</code>	2.36.0	<code>.</code>	298	119,534
<code>deepteam</code>	1.0.9	<code>deepteam</code>	588	71,305
<code>trl</code>	1.12.0	<code>trl</code>	155	65,727
<code>garak</code>	0.16.0	<code>garak</code>	201	38,328
<code>smolagents</code>	1.26.0	<code>src/smolagents</code>	20	13,355
<code>uqlm</code>	0.6.5	<code>uqlm</code>	91	12,605
<code>fickling</code>	0.1.12	<code>fickling</code>	16	5,024
Total (scanned)			2,124	524,229

4.2 RQ1 — Prevalence and cross-tool coverage

`failroute` (v0.8.0) reports **621** findings. Baselines were run on the *same* pinned trees; Table 3 lists the tools, their versions and the rule sets they were invoked with.

Matching protocol. Each baseline was invoked with only the rules that address this family — `ruff` S110/S112, `bandit` B110/B112, `pylint` W0702/W0703/W0705/W0706, `flake8` E722 with `bugbear` B001/B017 — and every report was reduced to a (file, line) pair. A `failroute` finding counts as *covered* by a baseline when that baseline reported any of its selected rules in the same file within ± 1 line of it ($TOL = 1$ in `tools/coverage_union.py`), and as covered by the *union* when any baseline covers it. Co-location is deliberately a weak criterion — it asks whether a tool flagged the same handler, not whether it expressed the same property — and the caveat at the end of this subsection states what that costs.

One asymmetry in that rule list we disclose rather than defend: `pylint` is granted W0703 (broad `except`), whose direct `ruff` analogue BLE001 was *not* selected, so `ruff` was the only baseline denied its broad-except rule. Re-running with BLE001 added, `ruff`’s co-located findings rise from 72 to 127 (410 findings in total rather than 76), the four-tool union from 250 to 255 of 621 (40.3% to 41.1%) and `failroute`-only from 371 to 366 (59.7% to 58.9%); `silent-suppress` stays at 0/19 either way, since BLE001 fires on `except` clauses and the shape in question has none. We keep the narrower

selection as the headline because that is what the publicly tagged artefact set reproduces, and report the symmetric variant here so that no conclusion rests on the choice: the two differ by 0.8 percentage points. The symmetric run is `tools/coverage_union.py -ruff-select S110,S112,BLE001`, and its output is committed as `bench/corpus-coverage-union-ruff-ble001.json`.

Table 3: Cross-tool comparison on the pinned corpus. The `semgrep` row is *not* a shipped-rule baseline: its rule set (`tools/semgrep-rules/exception-handling.yaml`) was written by us, so it shows what a syntactic-pattern engine *can* express given rules, not what users get by default. +19 is the number of `failroute` findings newly co-located once `semgrep` is added to the union (mostly the `contextlib.suppress` shape: 18 of 19). Versions are those installed in the reproduction environment and are the versions that produced the committed artefacts. Two provenance notes. `pyproject.toml` pins `ruff==0.16.5`, one patch above the 0.16.4 measured here; we could not test 0.16.5, but 0.16.0 and 0.16.4 produce *set-identical* hits for both rule selections (76 findings for S110/S112 and 410 for S110/S112/BLE001), so the row is stable across the patch releases we could compare. And `semgrep` does not appear in `pyproject.toml` at all: the five-tool row is a frozen artefact (`bench/corpus-coverage-union-5tool.json`), not a step the documented install reproduces.

Tool	Version	Rules	Findings	Co-located ± 1 line
<code>failroute</code>	0.8.0	all six	621	—
<code>ruff</code>	0.16.4	S110, S112	76	72
<code>bandit</code>	1.9.4	B110, B112	67	63
<code>pylint</code>	4.0.8	W0702, W0703, W0705, W0706	529	245
<code>flake8+bugbear</code>	7.3.0 / 25.11.29	E722, B001, B017	268	124
<code>semgrep</code> (our rules)	1.175.0	hand-written, 6 shapes	—	+19

Union of the four syntactic linters covers 250 of 621 (40.3%, 95% Wilson interval 36.5–44.2). `failroute`-only: 371 (59.7%). Adding our `semgrep` rules raises the union to 269 (43.3%, 39.5–47.2) and lowers the `failroute`-only count to 352 (56.7%). Table 4 breaks both figures down by rule and Figure 1 plots them.

Table 4: Coverage by rule; “Covered by 4” is the four shipped linters, “Covered by 5” adds our self-written `semgrep` rule. `implicit-fallback` and `name-shadowing` fire zero times on this corpus; they remain in the tool because the unit corpus exercises them. On `silent-suppress`: none of the four selected rule sets reports any of the 19 findings, and neither does `ruff` with all 969 of its rules enabled nor `pylint` with its full default message set — across the five files holding those 19, `ruff` emits 414 messages in 48 distinct rules and `pylint` 123 in 18, and the only ones falling within ± 1 line are line-length complaints (E501, `line-too-long`) on five of them, none a rule about a silenced failure. Only a rule we wrote reaches them (18/19).

Rule	Total	Covered by 4	Covered by 5	<code>failroute</code> -only vs 4-tool union
<code>silent-fallback</code>	386	175	176	211
<code>no-action</code>	213	72	72	141
<code>silent-suppress</code>	19	0	18	19
<code>masked-exception</code>	3	3	3	0
<code>implicit-fallback</code>	0	—	—	—
<code>name-shadowing</code>	0	—	—	—

Two observations that cut against the tool.

1. `pylint` is a stronger baseline than `ruff`, by a factor that depends on which `ruff` rules the comparison allows. Against `ruff`’s S110/S112 alone — the selection our own earlier benchmark used — the gap is $3.40\times$ (72 vs 245 co-located findings). Given `ruff`’s broad-except rule BLE001, symmetric to the W0703 `pylint` is granted here, it falls to $1.93\times$ (127 vs 245). A benchmark against `ruff` alone is therefore only as informative as the rule list it states: the $3.40\times$ figure is an artefact of a two-rule selection, and we quote it here to retract it rather than to use it.
2. `masked-exception` is fully covered. All 3 findings co-locate with a `pylint` broad-except warning. That rule contributes no coverage novelty here, and with $n = 3$ the 100% estimate is statistically meaningless (interval 43.9–100.0).

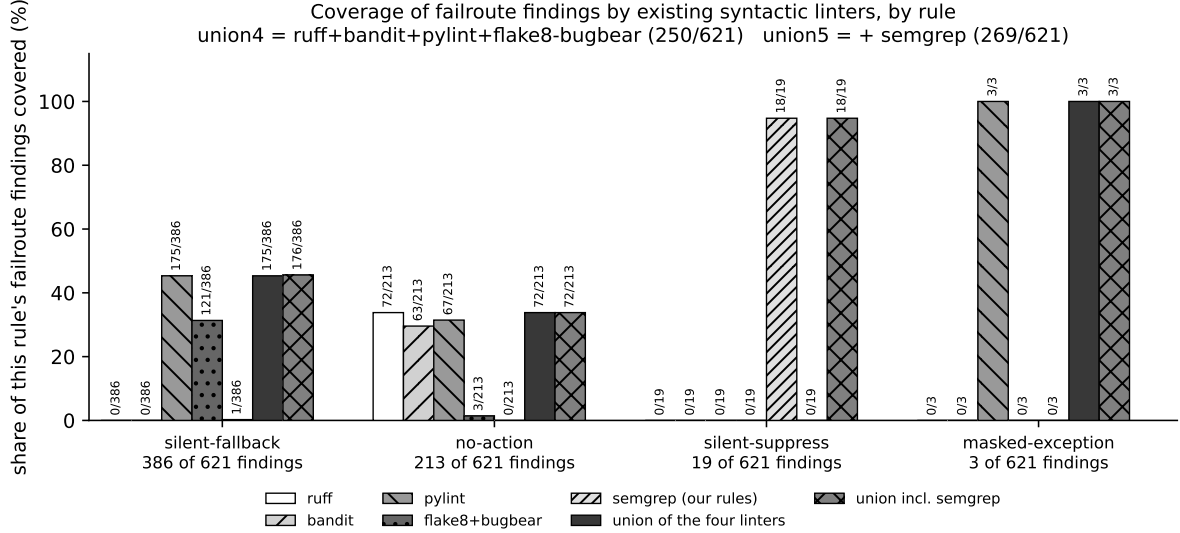


Figure 1: Per-rule coverage by tool, including the four-linter union and the five-tool union. **silent-suppress** is the one rule where the selected rule sets, **ruff**’s full 969-rule set and **pylint**’s full default set all return zero coverage.

Methodological caveat on “coverage”. Co-location at ± 1 line means a syntactic tool *flags the same handler*, **not** that it expresses the same property. **pylint** W0703 fires on **except Exception:** regardless of what the handler does; it does not distinguish “re-raises” from “returns 0.0”. 40.3% is therefore an *upper bound* on what the syntactic tools actually say, and the semantic novelty is correspondingly higher than 59.7%. We report the conservative number.

4.3 RQ2 — What fraction are real defects?

Method. Stratified random sample over (rule $\times$ package), fixed seed (20260831), every stratum guaranteed ≥ 1 draw, remainder allocated proportionally. $n = 80$. The guarantee makes the allocation deliberately *non-proportional*: across the frame’s 19 strata the sampling fraction runs from 8.9% to 50%, so the unweighted share 12/80 is a property of the sample and not an unbiased estimate of the frame’s defect share. Weighting each stratum by its frame size gives **20.0%** (130 expected defects in the frozen v0.7.0 finding frame); weighting by package instead gives 19.9%, so the granularity of the weighting does not matter, only that the design is respected. Weighting *raises* the estimate, because the single defect-bearing stratum (**silent-fallback** $\times$ **deepteam**, all 12 of its draws defective) was sampled at 9.2% while zero-defect strata were sampled at up to 50%. We report the unweighted shares in Table 5, since they are what the sample directly shows, and the weighted or package-specific estimate wherever a population inference is drawn (Sections 4.5 and 6). The draw is deterministic *given its input frame*: `tools/draw_sample.py` at that seed reproduces `paper/sample.jsonl` from the v0.7.0 finding set it was drawn from, and selects a different sample if it is run against the v0.8.0 frame — which is why the script is excluded from the reproduction path (Section 9). Each finding was labelled by reading the surrounding source in the pinned tree into one of three classes: **DEFECT** (the converted failure produces a wrong caller-visible outcome with no signal), **CONTRACT** (deliberate, and either documented, commented, or expressed in the return type), **FALSE POSITIVE** (the detector is wrong about the code).

Labelling was performed by LLM agents. Two rounds were run, both by LLM agents (not human raters), and they agreed on 80/80 items. We do not report this as label quality, and we do not claim the two rounds were independent: identical agreement between two runs of the same model family is evidence of *shared bias*, not of reliability, and nothing in the artefact set demonstrates independence beyond the two runs being separate. What is committed is both label sets — `paper/annotations.csv` (first round, rationales recorded in Chinese) and `paper/annotations-second-pass.csv` (second round, rationales in English) — so the agreement can be checked item by item rather than taken on trust. The

sample remains useful as (a) a debugging instrument (Section 4.6) and (b) the consequence arm of the triangulation in Section 4.5, where its limits are part of the design.

Sampling frame. The draw was taken from the *v0.7.0 finding set* ($n = 659$). Two subsequent corrections changed the frame: labelling itself exposed the **implicit-fallback** bug whose 10 findings were all false ($659 \rightarrow 649$), and the v0.8.0 precision fixes removed 28 more ($649 \rightarrow 621$, Section 4.6). Of the 80 sampled coordinates, 72 survive in the 621 set. Of the 8 deleted items, 4 — the **implicit-fallback** findings — were labelled FALSE POSITIVE and 4 — those removed by the precision fixes — were labelled CONTRACT; *zero labelled DEFECT was lost*. The label proportions below therefore hold *within the v0.7.0 frame*, and the surviving sample is not random with respect to the 621 frame.

Result (v0.7.0 frame, LLM-labelled). Table 5 reports the three shares, Table 6 breaks them down by rule and Table 7 by package — the breakdown the triangulation in Section 4.5 has to respect, because the defect share turns out to be a property of packages rather than a corpus-wide constant.

Table 5: RQ2 headline: the shares of the drawn sample. 12 of the 80 findings (15.0%, Wilson lower bound 8.8%) are defects. This is an *unweighted* sample share; because the design guarantees every stratum at least one draw, weighting each stratum by its frame size raises the estimate of the frame’s defect share to 20.0% (Method, above). All three shares are stated for the v0.7.0 sample frame. Restricting to the 76 of the 80 that are still findings in that frame — once the four **implicit-fallback** false positives are gone — the shares are $12/76 = 15.8\%$ DEFECT and $64/76 = 84.2\%$ CONTRACT with no false positive left: the labelling pass closed the loop on the one detector bug it found. The v0.8.0 frame retains 72 of the 80, as the sampling-frame paragraph above sets out.

Label	n	Share	95% Wilson interval
CONTRACT	64	80.0%	70.0–87.3
DEFECT	12	15.0%	8.8–24.4
FALSE POSITIVE	4	5.0%	2.0–12.2

Table 6: Labelling by rule. All 12 defects come from **silent-fallback** (24.5% of that rule’s sample, interval 14.6–38.1); all 4 false positives come from **implicit-fallback**.

Rule	n	DEFECT	CONTRACT	FALSE POS.
silent-fallback	49	12	37	0
no-action	23	0	23	0
implicit-fallback	4	0	0	4
silent-suppress	3	0	3	0
masked-exception	1	0	1	0

Table 7: Labelling by package. The “upper” column is the exact one-sided 95% Clopper–Pearson upper bound on the defect rate for zero-defect cells; small- n cells are wide and must not be read as strong evidence. The pooled row is the seven packages other than **deepteam**. This is the breakdown the triangulation of Section 4.5 has to respect: the defect share is a property of packages, not a corpus-wide constant.

Package	n	DEFECT	CONTRACT	FALSE POS. / defect bound
deepteam	14	12	1	1 FP; defect rate 85.7% (60.1–96.0)
inspect_ai	41	0	40	1 FP; upper 7.0%
pydantic_ai_slim	11	0	10	1 FP; upper 23.8%
trl	4	0	4	0; upper 52.7%
garak	3	0	3	0; upper 63.2%
fickling	3	0	2	1 FP; upper 63.2%
smolagents	2	0	2	0; upper 77.6%
uqlm	2	0	2	0; upper 77.6%
<i>all but deepteam</i>	66	0	63	3 FP; upper 4.4%

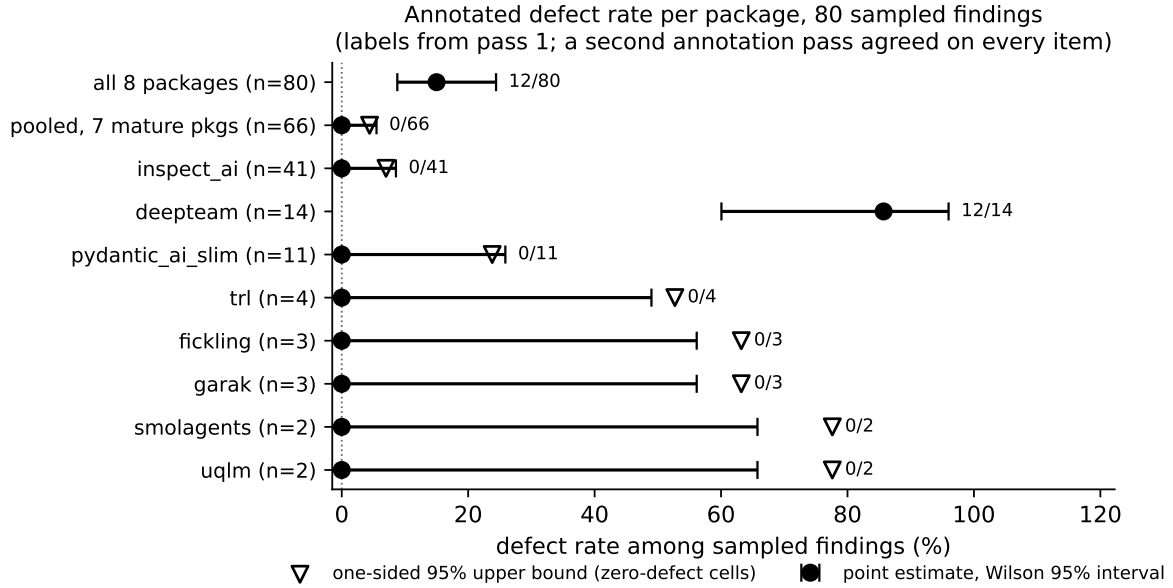


Figure 2: Measured defect rate per package with Wilson 95% intervals. Zero-defect cells are drawn as exact one-sided 95% Clopper–Pearson upper bounds (triangles). The visual point is the spread, not the ordering.

All 12 defects are in **deepteam**. Across the other seven packages, 0 of 66 sampled findings were defects (pooled one-sided 95% upper bound 4.4%), the spread plotted in Figure 2.

The 12 defects are not 12 independent bugs. They are **three homogeneous families** replicated across metric classes:

1. **Silent criteria degradation (4/12).** `try:`

```
self.system_prompt = model.get_system_prompt()
except:
```

```
self.system_prompt = "". A custom or misconfigured LLM that lacks the method silently scores every subsequent case under empty criteria. (This family was reported upstream by the present author before the labelling pass, as confident-ai/deepteam#270 — an issue, not a pull request. It was still open, its single comment from a non-maintainer and no maintainer response, when this paper was prepared. It records the author’s own prior observation; it is not external validation of the label or of the tool.)
```

2. **Dead comparison (5/12).** `try: self.score == 1 except: self.success = False`. The guarded statement is a pure comparison expression that cannot raise, so the handler is dead code — and `self.success` is never assigned on the success path.

3. **Fail-open security verdict (3/12).** `is_vulnerable()` iterates results inside a `try`; on any error it returns `vulnerable = False`. In a red-teaming tool, “not vulnerable” is the most dangerous possible default: an infrastructure failure is converted into a clean security conclusion.

Conversely, the 64 contracts are overwhelmingly *deliberate and legible*: TUI widget lookups that may not be mounted, optional-dependency probes, idempotent cleanup in `finally`, and predicate functions whose `Optional/bool` return type *is* the contract. Many carry an explicit comment stating the intent (e.g. `inspect_ai`’s “fail open — better to skip the barrier than to hang teardown”).

Two findings in the sample are worth citing as **positive** examples of the discipline this paper argues for: `pydantic-ai`’s `is_private_ip` fails *closed* on an unparseable address (“Invalid IP address, treat as potentially dangerous” → `return True`), and its `_run_tool` explicitly routes a caught exception onto a queue *so that the consumer re-raises it* rather than letting it vanish.

4.4 RQ3 — Recall audit and construct validity

An unusual ground truth is available: upstream fixes in this defect family that the projects’ own maintainers reviewed and merged. Of 75 merged pull requests authored by the present author, **16** are failure-routing fixes — every exclusion adjudicated by reading the PR diff (52 earlier title-only judge-

ments were re-checked against diffs in a dedicated pass; 49 stood, 3 flipped). For each family fix, the file was fetched at the merge commit’s *first parent* (i.e. immediately pre-fix) and scanned. Table 8 classifies the 16, and every pull request is cited with its repository owner so that the classification can be checked against the public record.

Table 8: Classification of the 16 family fixes (paper/merged-pr-recall.csv, all rows diff-read). “Handler-shape gap” means design-reachable: a shape outside the current six that could be expressed without changing the handler-level design.

	Class	<i>n</i>	Cases
Out of scope for recall		2	one TypeScript-side change (language scope); one TypeScript-side pre-fix crash exhibiting no family shape
Detected		3	cvs-health/uqlm#450, Ishannaik/agent-sweep#197, truera/trulens#2653
Handler-shape gap		2	UKGovernmentBEIS/inspect_ai#5068 (post-handler state mutation), #4906 (tenacity RetryError masking) — both adjudicated as candidate patterns, not shipped
Non-handler routing		9	NaN values reaching aggregates, silently filtered lists, branch-level Score(0.0) returns, implicit-None contract violations, silently stripped characters, silently dropped symbols, laundered verdicts

Recall on the corrected denominator: 3 of 14 = 21.4% (95% Wilson interval 7.6–47.6). The ceiling for *any* handler-shaped detector on this ground truth is 5 of 14 = 35.7%, because **9 of 14 = 64.3% (38.8–83.7) of the defects route the failure outside any except-handler**. Figure 3 plots the split by defect family.

This is the paper’s construct-validity result, and it bounds the whole approach: the phenomenon named in the title is larger than the subfamily the tool (and every handler-shaped detector) operationalises. We state this as a boundary *and* a roadmap — dataflow-shaped failure-routing is future work — and we scope all claims in this paper to the except-handler subfamily accordingly.

Detection recall on merged fixes that belong to the failure-routing family

repo	PR	fix title (truncated)	detected	rule matched	note
uqlm	#462	fix(longform): surface NLI retry exhau	NO	—	miss reason: pre-fix defect is NaN produced by exhausted retries reachi...
inspect_ai	#5068	fix(view): raise a friendly error on A	NO	—	miss reason: handler converts failure via post-handler state mutation (...)
uqlm	#459	fix(panel): keep one failed judge from	NO	—	miss reason: failed judge’s NaN entered panel aggregates via data flow,...
PyRIT	#2466	FIX: reject selected attack techniques	NO	—	miss reason: unresolvable techniques were dropped by silent list filter...
PyRIT	#2460	FIX: surface auth config fetch failure	N/A	—	TypeScript (web UI): failroute is Python-only -> out of language scope
uqlm	#450	fix(generation): preserve prompt-respo	YES	no-action	matched: uqlm/utlis/response_generator.py:252(no-action)
inspect_ai	#4906	Report the sandbox’s error when remote	NO	—	miss reason: failure masking lives inside tenacity retry semantics (opa...
inspect_evals	#2167	fix(swe_lancer): exclude samples with	NO	—	miss reason: broken invariant was converted to Score(value=0.0) by an o...
unstructured	#4438	fix: fallback character-set detection	NO	—	diff-read J1 FLIP: pre-fix decoded file-like objects with errors="ignor...
PyRIT	#2309	FIX: preserve unknown characters in Br	NO	—	diff-read J1 FLIP: unmapped braille symbols were silently dropped, corr...
trulens	#2653	fix(feedback): validate structured-JSO	YES	no-action	diff-read J1 FLIP: pre-fix silently normalized out-of-scale JSON scores...
uqlm	#425	fix(nil): guard against ZeroDivisionEr	NO	—	miss reason: pre-fix code crashed (ZeroDivisionError propagated); the f...
uqlm	#418	fix(white_box): return NaN instead of	N/A	—	pure-additive fix: pre-fix defect is a non-handler implicit-None (func...
agent-sweep	#195	fix(scan): stop claiming findings were	NO	—	H-batch (family yes, diff-read): _write_text swallows OSError and calle...
agent-sweep	#197	fix(scan): report unparseable lines an	YES	silent-fallback	H-batch (family yes, diff-read): unparseable lines / unreadable files s...
inspect_ai	#4908	Treat malformed multi-letter GRADE ver	NO	—	H-batch (family yes, diff-read): malformed multi-letter GRADE verdicts ...

Recall 3/16 = 18.8% (Wilson 95%: 6.6-43.0%) against all 16 family fixes; 3/14 = 21.4% (Wilson 95%: 7.6-47.6%) against the 14 in-scope subset (out-of-scope rows carry detected=n/a). Denominators recounted from paper/merged-pr-recall.csv by tools/compute_intervals.py.

Figure 3: Recall by defect family against the merged-fix ground truth.

Side observation. In the pre-fix UKGovernmentBEIS/inspect_ai #5068 file the detector flagged a *different, unfixed silent-fallback* at line 356. Real code contains same-family defects that no one has reported.

4.5 RQ3b — A tri-source triangulation

The precision result invites the obvious rebuttal: *if 85% of findings are not defects, the detector is noise*. The equally obvious defence — *the defects are real, maintainers just have not noticed them* — is exactly what a false-positive-heavy tool would say, and on spontaneous behaviour alone it is unfalsifiable. We triangulate three truth sources that ask *orthogonal questions* — of, as it turns out, *non-commensurable populations*, which is what bounds the conclusion below. Table 9 sets out the three, with the ground truth each one rests on.

Table 9: The three truth sources and the ground truth each rests on; the datasets behind arms 2 and 3 are described in the text below the table.

Arm	Measures	Value	Wilson 95% CI
1 — consequence labelling (Table 5)	“if triggered, how bad is it?”	12/80 = 15.0% defect, all in one package	8.8–24.4
2 — maintainer spontaneous behaviour	“did anyone notice without prompting?”	13/478 = 2.7% of family sites ever fixed	1.6–4.6
3 — maintainer reaction when told	“when surfaced, do they accept?”	16/43 = 37.2% of our family fix PRs merged	24.4–52.1

Ground truth behind arms 2 and 3. Arm 2’s ground truth is a maintainer-behaviour dataset over the same eight pinned packages, published as `paper/arm2-tracked-sites.csv`. The pipeline behind it tracked 2,128 `try` sites across ten releases of each package and labelled 478 of them `FIXED/SURVIVED`, discarding 1,650 (77.5%) as too young (924), vanished (681) or mutated (45); none of the 13 `FIXED` sites traces to an author report — the 9 PR-attributed fixes match no author PR, and the 4 unattributed ones were cleared by package and content check. Two properties of that population bound what arm 2 can be compared against. Its tracking criterion (a handler carrying no raise, log or warn signal) is weaker than the six rules of Section 3, so only 185 of the 478 rows (38.7%) carry a `failroute` rule at the release where they were first observed. And its package mix is 59.4% `deepteam`, against 22.5% of the 621 findings. Arm 3’s ground truth is the merged/closed record of family fix PRs authored by the present author: the 16 merged members are itemised in `paper/merged-pr-recall.csv` — 8 of them in packages outside the tracked eight — and the 27 closed-unmerged members are itemised, with per-PR closure reasons, in `paper/h1_arm3_classification.csv` (copied into this artefact set from the unreleased companion repository so the composition is third-party checkable): 19 self-closed, 1 bot-closed, 3 closed without reaching the merits, 2 substantively accepted, and 2 adverse on the merits. Excluding the 19 self-closures, acceptance is $16/24 = 66.7\%$ (46.7–82.0) at PR level — one closure (`cvs-health/uqlm#427`) shares its defect substance with a counted merge (`#462`) and two more are duplicates of other submissions, so the 43 PRs overcount distinct defects (40 distinct; see Limitation 3).

Verdict: directionally consistent, not established. The phrase “directionally consistent” is used in one operational sense throughout: no arm exhibits what the strong false-positive reading requires — all contracts and maintainer rejection on the merits — and the two arms that quantify maintainer behaviour line up the same way, spontaneous repair near zero and acceptance when told at 37.2%. With that fixed, the natural headline reading is arithmetic: arm 3’s interval lower bound (24.4%) lies above arm 2’s upper bound (4.6%), the intervals are disjoint, and disjointness is read as supporting “nobody noticed” over “false positive”. The arithmetic is right and the reading is not: what the two denominators count is different, and neither count is warranted.

The arms are not commensurable. Arm 2’s denominator is 478 tracked sites; arm 3’s is 43 defect candidates pre-screened by the author, of whose 16 merged members 8 lie in packages outside the tracked eight. A site-level rate and a self-selected-candidate rate answer different questions about different populations. The gap is not only one of selection: the tracked-site criterion is weaker than the detector’s, so 61.3% of arm 2’s rows carry no `failroute` rule at all, while arm 1’s defect share is measured on findings. No interval comparison across the three arms can support a population-level verdict.

The composition axis, resolved. Whether the intervals are disjoint depends on two quantities: n , the number of tracked sites that are genuine defects, and $k \leq 13$, the number of the 13 spontaneous fixes that landed on defect sites. $k=13$ is the binding corner, since a smaller k only lowers the arm-2 rate.

For n , an earlier version of this paper rebased arm 2 with its own unweighted 15.0% share ($n \approx 72$), obtained $13/72 = 18.1\%$ (10.87–28.48), found that this *overlaps* arm 3, and withdrew the verdict on that basis. That rebasing does not survive scrutiny, for two reasons that point the same way. The 15.0% is an unweighted sample share from a design that allocates deliberately unequally — every stratum is guaranteed one draw and the sampling fraction runs 8.9% to 50% — so it is not an unbiased estimate of the frame’s defect share; weighting by that design gives 20.0% (each rule $\times$ package stratum weighted by its frame size) or 19.9% (weighting by package), so the granularity does not matter, only that the design is respected. And a global share of any kind is the wrong shape for this corpus: Table 7 places all 12 defects in **deepteam**, while the 478 tracked sites are 59.4% **deepteam** against 22.5% of the 621 findings. Applying **deepteam**’s own labelled rate ($12/14 = 85.7\%$) to its 284 tracked sites gives $n \approx 243$; its Wilson lower bound alone gives $n \geq 171$. Table 10 crosses that axis with the risk-set convention. In 10 of the 12 cells the intervals remain disjoint, and disjointness needs only $n \geq 86$, i.e. 18.0% of the 478. **The two cells that overlap are both the unweighted 15.0% share applied to a near-complete risk set.** The composition axis therefore does not leave the verdict undecidable; it decides it in the direction of the reported arithmetic.

Why no verdict follows anyway. Every cell of Table 10 answers a counterfactual — what arm 2’s rate would be *if* the tracked sites had the defect composition of the findings. That transfer is not merely unmeasured, it is unsupported: the two populations are not the same objects, and Limitation 2 says n cannot be measured from spontaneous behaviour at all, which is precisely the family’s defining problem. The second degree of freedom is weaker still. Which tracked sites belong in the risk set is a convention this paper did not state: the 478 are the sites the pipeline could label, and 1,650 of 2,128 (77.5%) were discarded. Widening the risk set only widens the gap (Table 10, third and fourth blocks), but the numerator convention does not follow. Counting every vanished site as maintainer action puts arm 2 at $694/1204 = 57.6\%$ (54.83–60.40), entirely *above* arm 3’s 24.4–52.1 — maintainers repairing more of these sites when nobody asks than when asked. That reading is not credible, and nothing in the data excludes it. The comparison is therefore not delicate but ill-posed, and we report the directional agreement without a verdict.

Table 10: The arm-2/arm-3 comparison across *both* degrees of freedom: the risk-set convention (row blocks — which tracked sites count at all) and the defect-share estimator (rows within a block — how many of them are defects). $k=13$ throughout, the binding corner. Arm 3 is fixed at 16/43 (24.38–52.14) and “disjoint” means the arm-2 upper bound lies below 24.38, which requires $n \geq 86$. Intervals are printed to two decimals because the boundary is not a rounding artefact: at $n=86$ the arm-2 upper bound is 24.1636 and at $n=85$ it is 24.4282. The most conservative composition cell — **deepteam** at its Wilson lower bound 60.1% and every other package taken as zero — is $n=171$ (4.50–12.57), still disjoint. Weighting by package rather than by stratum moves the second estimator from 20.0% to 19.9% ($n=95$, 8.17–22.02), also disjoint: the granularity of the weighting does not matter, only that the design is respected. Ten of the twelve cells are disjoint; the two that are not are both the unweighted 15.0% share on a near-complete risk set. Arm 2 as reported (13/478, 1.60–4.60) is not a row here: it treats every tracked site as an opportunity to fix a defect, which no estimator in the table supports.

Risk set	Defect-share estimator	n	k/n	Wilson 95% CI	Disjoint?
478 (as reported)	unweighted 12/80 = 15.0%	72	18.1%	10.87–28.48	no
	design-weighted by stratum = 20.0%	96	13.5%	8.09–21.80	yes
	package composition, $284 \times 12/14$	243	5.3%	3.15–8.94	yes
523 (+ mutated)	unweighted 15.0%	78	16.7%	10.01–26.46	no
	design-weighted 20.0%	105	12.4%	7.38–20.04	yes
	package composition, $284 \times 12/14$	243	5.3%	3.15–8.94	yes
1,204 (+ vanished)	unweighted 15.0%	181	7.2%	4.25–11.90	yes
	design-weighted 20.0%	241	5.4%	3.18–9.01	yes
	package composition, $470 \times 12/14$	403	3.2%	1.89–5.44	yes
2,128 (all tracked)	unweighted 15.0%	319	4.1%	2.40–6.85	yes
	design-weighted 20.0%	426	3.1%	1.79–5.15	yes
	package composition, $621 \times 12/14$	532	2.4%	1.43–4.14	yes

No commensurable substitute exists. The natural repair — compare only sites that are both tracked and PR-reported — is empty: none of the 16 merged family fixes maps to any of the 478 tracked sites (zero exact file matches; the tracked population and the author-reported population are near-disjoint,

a consequence of the recall audit’s 3 of 14 in-scope detections and of the 8 out-of-corpus fixes). The closest available approximation is package-level: in `uqlm`, 0 of 12 tracked family sites were spontaneously fixed through the tracked window (Wilson 95% 0.0–24.2; exact one-sided upper bound 22.1) while 5 of 5 author-reported `uqlm` family fixes were merged (Wilson 95% 56.6–100.0). Same maintainer team — but different site sets, author-selected, and n too small to exclude almost anything. We report it as context, not as a test.

What survives. Three things, each weaker than a verdict.

(i) Directly, the itemised closure record (`paper/h1_arm3_classification.csv`) shows that maintainer engagement with surfaced family defects was mostly, but not uniformly, favourable. Of the 24 non-self-closed outcomes — 16 merged, 7 maintainer-closed, 1 bot-closed — the 16 merges and two closures accepted the substance: the gap reported in `Giskard-AI/giskard-oss#2614` was fixed upstream, though not by the pull request the ledger names — `#2623`, a third party’s restatement of the same change, was itself closed unmerged, and the change landed as `#2647` (merged 2026-08-03, described in its own body as a formatted follow-up of `#2623`); and `cvs-health/uqlm#427` was closed on process grounds with its substance partially re-landed via merged `#462`. Three never reached the merits: two AI-assistance-policy closures of the same `HypothesisWorks/hypothesis` diff, and one duplicate. And **two were adverse on the merits**. In `cvs-health/uqlm#452` the maintainer questioned the reachability of the failure and the question was never resolved — the closest thing in the record to a dispute of the defect’s existence. `vllm-project/vllm-metal#541` was declined as speculative hardening rather than a documented gap. The direct evidence against the *strong* false-positive reading is therefore real but mixed: favourable in 18 of the 24 outcomes at PR level, adverse on the merits in 2, non-merits or non-maintainer in 4 — and all of it on an author-selected subset.

(ii) Spontaneous repair of tracked family sites is rare (2.7%) whatever their composition — but by Limitation 2 that rarity is equally consistent with “mostly contracts”.

(iii) The datum that would settle “nobody noticed” against “false positive” — maintainer reaction to a *random* sample of findings — does not exist and cannot be retro-constructed. We state the question as open and record that datum as a design requirement for future work.

The five limitations, stated with the result.

1. Arm 1 is LLM-judged (two rounds, same model family, 80/80 agreement = shared bias, not quality).
2. Arm 2’s SURVIVED label is only readable as “nobody acted”, never as “deliberate contract” — for this family the two are indistinguishable, which is precisely why spontaneous behaviour cannot validate the detector.
3. Arm 3’s selection bias is irreducible: acceptance applies only to the self-selected reports, not to the detector’s findings at large.
4. The arms are not commensurable: arm 2 counts tracked sites, arm 3 counts author-selected defect candidates, and 8 of the 16 merged candidates lie outside the tracked packages. No interval comparison between them yields a population-level verdict (Verdict, above; Table 10).
5. Arm 2’s denominator is a convention rather than a measurement: 478 of the 2,128 sites the pipeline tracked, the other 1,650 discarded as too young, vanished or mutated; and only 38.7% of the 478 carry a `failroute` rule, so arm 1’s finding-level defect share does not transfer to them. Neither the exclusion boundary nor the composition of what it retains is measured (Table 10).

4.6 RQ4 — Labelling as a detector-improvement method

All four false positives in the sample were `implicit-fallback`, and all four had the *same* root cause: `_has_top_level_terminal()` inspected only *direct* statements of the handler body, so a `return/raise` nested inside an exhaustive `if/else` was invisible. Table 11 lists the four real shapes that triggered it.

Table 11: The four shapes that exposed the detector bug.

Package	Function	Shape
<code>deepteam</code>	<code>simulate_baseline_attacks</code>	<code>if ignore_errors: return [...] else: raise</code>
<code>fickling</code>	<code>check_pickle</code>	nested <code>try/except</code> , every path returns
<code>inspect_ai</code>	<code>grok generate</code>	<code>if/elif/else</code> , every branch returns or raises
<code>pydantic_ai</code>	<code>execute_output_function</code>	<code>if wrap: raise ToolRetryError else: raise</code>

We implemented a recursive exhaustiveness analysis (`_always_terminates`) covering `if/else`, `with`,

`try/except/finally` and `match`, added six regression tests derived from the four real shapes (each failing before the fix), and re-ran the corpus.

implicit-fallback findings on the 524,229 lines the detector actually reads: 10 → 0. Total findings: 659 → 649 (v0.7.0). The v0.8.0 precision release removed 28 more findings through four audited fixes (tuple-typed handlers, `warnings.warn` recognised as a signal, `StopAsyncIteration` added to the ignore list, conservative optional-dependency probe): **649 → 621**, with every deletion traceable to a labelled category or a mechanical criterion — no labelled DEFECT was removed. The test suite grew over the same period, from 124 to 130 (the six regression tests of this subsection) and then to **158** (twenty-eight more with the v0.8.0 precision release).

Two things follow. First, the rule’s entire real-world yield was false. Second, **a stratified labelling pass is not only an evaluation instrument but the only method we applied that exposed a defect in our own detector.** The unit corpus (68 samples, precision = recall = 1.0) never exposed this bug, because the corpus was written by the same person, with the same blind spot, as the detector.

5 Discussion

A detector this imprecise is still useful, but not as an oracle. On our corpus a maintainer following up every finding would read 621 handlers to reach ~120 genuine defects (84–134), essentially all of them three copy-paste families in a single package. That 120 is a cross-frame extrapolation rather than a measurement, and a deliberately package-aware one: it applies `deepteam`’s labelled rate (12/14) to its 140 findings and counts the other seven packages as zero, because Table 7 gives no warrant for spreading a global share across them. The ~93 that a global 15.0% would imply is exactly the homogeneous extrapolation that the per-package breakdown rules out. The 15.0% share is itself measured on the v0.7.0 sample frame while the 621 count is v0.8.0, and Section 6 carries the caveat. As an *alarm*, that is unusable. As a *search-space reducer* it is a different proposition: the eight pinned sdist contains 563,270 lines, of which 524,229 sit inside the scan roots the detector actually reads and produces the 621 from. Against those 524,229 lines the reduction is a factor of 844 (2.93 orders of magnitude); the 907 that 563,270 would give pairs the findings with lines the detector never read. And a reading of 80 sampled handlers found a systematic fail-open security verdict in a red-teaming tool.

The triangulation reframes the negative precision result — as a non-identifiability result. 15% defects is bad for an alarm and unremarkable for a search tool; the interesting fact is that the family’s defining property — silence — also disables the usual external check on the number. Spontaneous repair of tracked family sites was 2.7%; when the author surfaced adjudicated defect candidates, acceptance was 37.2%. These numbers measure different populations and cannot be combined into a verdict (Section 4.5) — but not for the reason an earlier version of this paper gave. The interval comparison is not fragile: 10 of the 12 defensible rebasings of arm 2 leave the intervals disjoint, and the two that do not are both the unweighted 15.0% share, which the sampling design and the package breakdown alike discredit. The comparison fails for a plainer reason. Its three arms count three different kinds of object — labelled findings, tracked sites of which only 38.7% carry a `failroute` rule at all, and author-selected pull requests — so there is no population whose rate all three estimate. That is a limit of the data and not a theorem about the family, which is why we call it *non-identifiability* rather than impossibility: the paper can name the observation that would identify it. What the triangulation establishes is narrower: for this family neither spontaneous behaviour nor triangulation around it can validate a detector; the reason is quantifiable (a two-dimensional sensitivity, Table 10); and the missing datum is nameable — maintainer reaction to a random sample of findings.

Yield tracks codebase maturity, not rule design. The strongest predictor of whether a finding is a defect was not *which* rule fired but *which package* it fired in. The mature, heavily-reviewed packages had essentially no defects and a large number of carefully-commented intentional contracts; the one package with a systematic problem had it replicated across dozens of near-identical files. This suggests triage effort should be allocated per-package after a cheap pilot sample, not uniformly.

The `contextlib.suppress` blind spot is real. 0/19 of the findings are visible to the four selected rule sets, and none is reported by `ruff` with all 969 of its rules enabled or by `pylint` with its full default message set either; a popular lint rule actively drives code toward that shape. Only a `semgrep` rule we wrote reaches them (18/19).

Adoption, honestly. The tool is published on PyPI as `failroute`; at the 2026-09-01 measurement freeze it had **1 star and 0 forks**. We claim no adoption and no impact beyond the measurements in this paper; the maintainer-behaviour dataset and the triangulation method are the contributions we ask the reader to weigh.

On “tool proposes, human adjudicates”. We report a case where we ran the detector over a well-maintained red-teaming framework, sampled twelve semantic findings, traced each, concluded all twelve were deliberate contracts, and *filed nothing*. Given the base rate measured here — 15% unweighted, 20.0% weighted by the sampling design — that outcome is what the numbers predict, not an anomaly.

6 Threats to validity

The first five items are the limitations the triangulation verdict in Section 4.5 depends on, and are cited there by name; the rest are the study’s other threats.

- **Limitation 1 — the labelling arm is LLM-judged.** Both labelling rounds were performed by LLM agents, not human raters; the rounds agreed on 80/80 items, which we read as *shared bias of one model family, not as inter-rater reliability*. No Cohen’s κ is possible between two runs of the same rater species. All arm-1 proportions inherit this limit. The committed artefacts record the labels and the rationales but not the model identity or version, so a third party cannot re-run the labelling bit for bit. We were not able to recover that identity and therefore do not name a model: every “defect rate” in this paper is an LLM-adjudicated rate under an unrecoverable model configuration, and the weighted variants of it inherit exactly that limit.
- **Limitation 2 — SURVIVED is ambiguous in this family.** In the maintainer-behaviour dataset, SURVIVED can only be read as “nobody acted”; it can *not* be read as “maintainers consider it a deliberate contract”, because for silent defects the two are observationally identical. Any number derived from arm 2 inherits this reading restriction.
- **Limitation 3 — arm-3 selection bias is irreducible.** The author chose which defects to report as PRs; acceptance (16/43) applies only to that self-selected set and cannot be extrapolated to the detector’s findings. Reporting only merged PRs would have made this worse; the 27 closed-unmerged family PRs are counted in the denominator and are itemised, with closure reasons, in `paper/h1_arm3_classification.csv` (copied from the unreleased companion repository so the composition is checkable). Three counting caveats: one of the 8 non-self-closures was a *bot* action, not a maintainer judgement; two of the 27 are duplicates of other submissions and one more shares its defect substance with a counted merge, so the 43 PRs overcount distinct defects; and 8 of the 16 merged fixes lie in packages outside the tracked eight — arm 3’s population is not arm 2’s. On the distinct-defect denominator those three rows come out, leaving 40 defects and an acceptance of 16/40 = 40.0% (26.3–55.4). We keep 16/43 as the headline because each of the 43 is a separate maintainer decision, and state 16/40 beside it so that neither reading has to be inferred.
- **Limitation 4 — the triangulation’s arms are not commensurable.** Arm 1 counts labelled findings, arm 2 counts tracked sites, arm 3 counts author-selected defect candidates, and 8 of arm 3’s 16 merged candidates lie outside the tracked packages. No rate is common to the three, so the interval comparison supports no population-level verdict however it is rebased; we report directional consistency only.
- **Limitation 5 — arm 2’s denominator is a convention, and its population is not the detector’s.** The pipeline tracked 2,128 sites and labelled 478 of them, discarding 1,650 (77.5%) as too young (924), vanished (681) or mutated (45); nothing in the data selects among the resulting risk sets (Table 10). Its tracking criterion — a handler carrying no raise, log or warn signal — omits the detector’s three exemption gates and its fallback-value analysis, and never considers `contextlib.suppress` at all, so only 185 of the 478 rows (38.7%) carry a `failroute` rule. Arm 1’s defect share is measured on findings and does not transfer to that population, which is why every cell of Table 10 is a counterfactual rather than an estimate.
- **Sample size.** $n = 80$ of the v0.7.0 frame (659). Per-rule and per-package cells are small (`masked-exception` $n = 1$). Wilson intervals are reported throughout instead of bare point estimates.
- **Sample frame changed under the sample.** The draw came from v0.7.0’s 659; 72/80 coordinates survive in v0.8.0’s 621, and the deletions removed zero labelled DEFECTs — but the surviving 72 are no longer a random sample of the current frame. Label proportions are stated for the v0.7.0

frame only.

- **Package selection is not random.** The eight packages were chosen because the author had prior contribution history in them. `deepteam` in particular is a package where the author had *already found* a defect family, which inflates the overall defect rate. The seven-package 0/66 figure is the more conservative read.
- **Recall ground truth is authored by the same person.** The 16 merged family fixes were written and submitted by the author; a maintainer merge records that the change was acceptable to the project — it is not a maintainer finding that the pre-fix behaviour was a defect, and it says nothing about representativeness. The family adjudication of all 75 merged PRs was done by reading diffs (52 earlier title-only judgements were re-verified from diffs in a dedicated pass, with 3 corrections).
- **Co-location $\neq$ equivalent detection** (Section 4.2 caveat). Reported conservatively as an upper bound on baseline coverage.
- **The fifth baseline tool is ours.** The `semgrep` rule counted in the five-tool union was written by the author; coverage attributed to it is self-supplied.
- **Construct validity (Section 4.4).** The detector operationalises the except-handler subfamily only; 64.3% of ground-truth defects lie outside it. All prevalence/recall claims are scoped to the subfamily.
- **Version pinning is a snapshot.** All findings are relative to the pinned versions in `paper/corpus-lock.json`; upstream may have fixed or introduced instances since.

7 Related work

Failure handling as an empirical object. Exception handling has a long empirical literature in statically typed languages: Cabral and Marques’ field study of Java and .NET [6] documented how often exceptions are caught and swallowed; Sawadpong et al. [20] characterised exception-handling *defects*; and de Pádua and Shang quantified the prevalence of named exception-handling anti-patterns over a large corpus [4] and revisited developer practice through exception-flow analysis [3]. That line of work asks *whether* anti-patterns occur and *how often*, and it is our closest neighbour: we inherit its premise that handling shape is measurable, and change the question. On a corpus of Python AI/ML packages, the same syntactic shapes that read as anti-patterns are predominantly *intended contracts* — in our stratified sample of 80 sites, 80.0% carried a contract reading and 5.0% were outright false positives, with the defect share concentrated almost entirely in one package. A prevalence number without a per-site defect/contract breakdown does not by itself support a triage decision; supplying that breakdown is what the present measurement adds.

Why generic rules get muted. A second body of work explains the reception of such numbers. Developers report false positives and noise as the leading reason they ignore or abandon static analysis [12]; Ruthruff et al. made *actionability* an experimental target rather than a slogan [16]; Google’s Tricorder and FindBugs-Fixit programmes showed that an analysis only survives at scale when it is filtered, prioritised and paired with a suppression path [2, 17, 18]. User-centred and follow-up studies reach the same ordering from the other side: what developers need is a warning they can act on [9, 22], and the mitigation of false positives remains an open problem rather than a solved one [10]. WarningsGuru operationalised relevance with statistical bug models [15], and Hu et al. recently measured the other end of the same pipe — which warnings developers actually suppress, and on what grounds [11]. Crisan and McNutt frame linting as a sociotechnical activity [7]. Our contribution is not another relevance filter: it is a *semantic* account of why a particular family of syntactic matches is disproportionately non-actionable, so that a suppression decision can be justified by code shape rather than by developer fatigue.

Silent failure in machine-learning systems. The systems literature supplies the stakes. Sculley et al. named the pipeline coupling and glue-code debt that makes ML behaviour brittle [21]; Polyzotis et al. proposed continuous data validation as the corrective at the data boundary [14]; the ML Test Score encoded a rubric that tests the pipeline rather than the model alone [5]; Amershi et al. and Paleyes et al. documented that the failures arrive at integration and deployment time, not training time [1, 13]; Sambasivan et al. traced how a data problem cascades through a high-stakes system until it surfaces as an unexplained outcome [19]; and Dixit reported silent data corruption at scale in production hardware, where no exception is raised at all [8]. Zhang et al. position testing and robustness techniques across that same spectrum [23].

Increment over the two closest studies. Read side by side, de Pádua and Shang [4] and Hu et al. [11] bound the problem on either side: the first measures how often a handling shape appears, the second measures what developers do once a tool points at it. Neither asks, *per site*, whether the flagged construct is a defect, an intended contract, or a tool artefact — and neither reports what a purely syntactic linter fails to see at all. This paper supplies both measurements for Python AI/ML code: a labelled 80-site sample (12 DEFECT / 64 CONTRACT / 4 FALSE POSITIVE, with the defect mass concentrated in one package), and a cross-tool comparison showing that four widely used syntactic linters jointly cover 40.3% of the 621 routed-failure sites we detect, with one entire pattern — `contextlib.suppress`-style silent suppression — at 0/19 to shipped rules. The increment is therefore empirical and narrow: the *meaning* of a flagged handler, and the *coverage boundary* of the tools practitioners actually run.

8 Conclusion

Except-handler failure-routing is a real and prevalent shape in AI/ML Python: 621 instances in the 524k lines the detector actually reads, 59.7% of them outside the reach of four mainstream syntactic linters, and none of the 19 `contextlib.suppress` variants reached by any rule those four ship or by `ruff`'s full 969-rule set. But prevalence is not defectiveness. In an LLM-labelled stratified sample, 15% were genuine defects and 80% were deliberate contracts, with the defects concentrated entirely in a single package; weighting that sample by its own design raises the defect share to 20.0%.

The methodological contribution is a quantified non-identifiability result. For a defect family whose defining property is silence, “did maintainers fix it?” is a broken validation instrument — spontaneous repair of tracked family sites was 2.7% — and the natural workaround fails too: triangulating against maintainer reaction when told (37.2% acceptance of author-reported candidates) compares populations that are not merely differently selected but differently constituted, so no rate is common to the three arms. The interval disjointness that appears to support the “nobody noticed” reading is in fact robust — it survives 10 of the 12 defensible rebasings of arm 2 — and is still worth nothing, because the denominators do not count the same objects, and there is no matched-population substitute. What remains is honest but narrower: directionally consistent observations, a closure record in which maintainer adjudication of surfaced family defects was favourable in 18 of 24 outcomes but adverse on the merits in two (an unresolved reachability challenge and a scope decline), and an open question whose missing datum we name — maintainer reaction to a random sample of findings. And the recall audit supplies the honest boundary: 3 of 14 ground-truth defects detected, and 64.3% of them route the failure outside any handler — the phenomenon is larger than the subfamily we, and every handler-shaped detector, can see.

We think the useful conclusion is not “this class is undetectable” but that detectors for it should be designed, evaluated and *deployed* as search-space reducers with an explicit human adjudication step — and that the labelling pass which establishes that should be run early, because in our case it was also the fastest way to find a bug in the detector itself.

9 Reproduction and artefacts

Every number in this paper is produced by the scripts in `tools/` against the pinned corpus in `paper/corpus-lock.json`. All paths below are relative to the root of the public repository <https://github.com/feiiiiii5/failroute> (MIT licence); the detector itself is released as `failroute` on PyPI, <https://pypi.org/project/failroute/>. The version studied is 0.8.0 (PyPI), and the immutable tag `v0.8.0` pins the detector release. The artefact set the tables are computed from, however — the arm-2 dataset `paper/arm2-tracked-sites.csv`, the `rebase*` cells of `tools/compute_intervals.py`, and the symmetric-baseline variant of `coverage_union.py` — post-dates that tag, so the reproduction below checks out a pinned commit instead: `d14e020`, the first commit that contains the complete set. A reproducer who checks out `v0.8.0` still regenerates the 621 findings, the 158 tests and the 250/621 union (all three re-verified on 2026-09-04), but `compute_intervals.py` at that tag exits 0 while silently writing a 41-cell ledger that contains no triangulation group at all, and the symmetric-baseline command below fails there with an unrecognised-argument error — so the tag alone under-reproduces this paper without warning.

```
git clone https://github.com/feiiiiii5/failroute && cd failroute
```

```

git checkout d14e020 # pinned commit: every artefact the tables use
python -m venv .venv && . .venv/bin/activate
pip install '[test,paper]' # pytest + matplotlib + 4 linters + bugbear
python tools/fetch_corpus.py # pinned sdists -> paper/corpus/
# version+sha256 pinned in paper/corpus-manifest.json; fetch verifies each
# archive against paper/corpus-lock.json and exits non-zero on mismatch
# (it rewrites only the lock's generated_at_utc timestamp; the eight
# archive digests are what must match)
PYTHONPATH=src python -m pytest # 158 tests
PYTHONPATH=src python tools/rescan_corpus.py --out bench/rescan-paper
# rescan with the current detector (total 621). Writes to bench/; do NOT
# re-export over paper/scan/, which is the frozen v0.7.0 baseline
python tools/coverage_union.py --findings-dir bench/rescan-f2
# -> bench/corpus-coverage-union.json ; union 250/621 = 40.3%
# bench/rescan-f2 is the committed 621-finding export the paper's figure
# was computed from; --findings-dir bench/rescan-paper (your own rescan)
# gives the same number. The default --findings-dir paper/scan is the
# frozen v0.7.0 set, whose union figure is deprecated.
python tools/coverage_union.py --ruff-select S110,S112,BLE001 \
--findings-dir bench/rescan-f2 --out /tmp/union-symmetric.json
# the symmetric baseline variant quoted in RQ1 (ruff also gets its
# broad-except rule): ruff 127 co-located, union 255/621 = 41.1%;
# committed as bench/corpus-coverage-union-ruff-ble001.json
python tools/make_figures.py # -> paper/figures/ (3 figures)
python tools/j1_adjudicate.py # diff-read family adjudication
python tools/compute_intervals.py # -> paper/intervals.json

```

Three further pipeline commands are deliberately *not* part of the reproduction path, because each overwrites a hand-curated artefact without regenerating it faithfully: `draw_sample.py` (the committed `paper/sample.jsonl` was drawn from the pre-fix 659 frame; re-drawing changes which 80 findings the published labels describe), `merged_pr_recall.py` (drops the hand-written `note` column), and `compare_linters_corpus.py` (drops the merged `semgrep` results). See `paper/ARTIFACT.md` §0.2 and §5.5–5.6 before running any of them.

Key artefacts, and the thing each one pins down:

- `paper/corpus-lock.json` — pinned inputs.
- `paper/sample.jsonl` — the 80-item draw.
- `paper/annotations.csv` — labels and rationale.
- `paper/annotations-second-pass.csv` — second automated pass.
- `paper/merged-pr-recall.csv` — recall ground truth (all rows diff-read).
- `paper/j1-trulens2653-prefix.py` — pre-fix evidence for the `trulens#2653` detection.
- `bench/corpus-coverage-union-5tool.json` — cross-tool coverage including the self-written `semgrep` rule.
- `paper/intervals.json` — Wilson intervals.
- `paper/h1_arm3_classification.csv` — the arm-3 closed-PR ledger (160 diff-read rows; 27 family), copied byte-identically from the companion repository.
- `paper/arm2-tracked-sites.csv` — the arm-2 tracked-site dataset: all 2,128 rows over the eight packages with all five labels, the version span and observation count each label rests on, and the PR each FIXED row is attributed to. Projected field-for-field from the companion repository's maintainer-behaviour dataset; code snippets and commit-level attribution are deliberately excluded, so the labels are auditable but not re-derivable from this artefact alone.

Two things a reproducer must know.

1. If the checkout path contains non-ASCII characters, an *editable* install of this package does not work (the generated `.pth` pointer is mangled), so every CLI invocation must carry `PYTHONPATH=src`.
2. The scanner exits with status 1 whenever it finds anything, even when the run succeeded and the export was written. Under `set -e` or in CI, a successful scan looks like a failure.

Availability and ethics. The corpus is eight publicly distributed PyPI source distributions, each used under its own licence; nothing was taken from a private source. The maintainer-behaviour ground truth is a set of public GitHub issue and pull-request records, every one cited by its public number, and the two datasets derived from them are committed to the public repository and itemised in the list above, so that the classification can be audited row by row. The study analyses publicly recorded artefacts of professional work on public repositories, and uses no non-public data about identifiable individuals. The author’s conflict of interest — writing both the detector under evaluation and one of the five baselines — is disclosed on the title page, and the results unfavourable to the tool are reported alongside the favourable ones.

References

- [1] Saleema Amershi, Andrew Begel, Christian Bird, Robert DeLine, Harald Gall, Ece Kamar, Nachiappan Nagappan, Besmira Nushi, and Thomas Zimmermann. Software engineering for machine learning: A case study. In *2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP)*, pages 291–300, 2019. doi: 10.1109/ICSE-SEIP.2019.00042.
- [2] Nathaniel Ayewah and William Pugh. The google findbugs fixit. In *Proceedings of the 19th international symposium on Software testing and analysis*, pages 241–252, 2010. doi: 10.1145/1831708.1831738.
- [3] Guilherme Bicalho de Pádua and Weiyi Shang. Revisiting exception handling practices with exception flow analysis. In *2017 IEEE 17th International Working Conference on Source Code Analysis and Manipulation (SCAM)*, pages 11–20, 2017. doi: 10.1109/SCAM.2017.16.
- [4] Guilherme Bicalho de Pádua and Weiyi Shang. Studying the prevalence of exception handling anti-patterns. In *2017 IEEE/ACM 25th International Conference on Program Comprehension (ICPC)*, pages 328–331, 2017. doi: 10.1109/ICPC.2017.1.
- [5] Eric Breck, Shanqing Cai, Eric Nielsen, Michael Salib, and D. Sculley. The ml test score: A rubric for ml production readiness and technical debt reduction. In *2017 IEEE International Conference on Big Data (Big Data)*, pages 1123–1132, 2017. doi: 10.1109/BigData.2017.8258038.
- [6] Bruno Cabral and Paulo Marques. Exception handling: A field study in java and .net. In *ECOOP 2007 — Object-Oriented Programming*, Lecture Notes in Computer Science, pages 151–175. Springer Berlin Heidelberg, Berlin, Heidelberg, 2007. doi: 10.1007/978-3-540-73589-2_8.
- [7] Anamaria Crisan and Andrew M McNutt. Linting is people! exploring the potential of human computation as a sociotechnical linter of data visualizations. In *Proceedings of the Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, pages 1–10, 2025. doi: 10.1145/3706599.3716230.
- [8] Harish Dixit. Keytone: Silent data corruptions at scale. In *2023 IEEE 29th International Symposium on On-Line Testing and Robust System Design (IOLTS)*, pages 1–2, 2023. doi: 10.1109/IOLTS59296.2023.10224872. Two-page keynote abstract; title reproduced exactly as registered by IEEE, where “Keytone” is a typographical error for “Keynote”.
- [9] Lisa Nguyen Quang Do, James R. Wright, and Karim Ali. Why do software developers use static analysis tools? a user-centered study of developer needs and motivations. *IEEE Transactions on Software Engineering*, 48:835–847, 2022. doi: 10.1109/TSE.2020.3004525.
- [10] Zhaoqiang Guo, Tingting Tan, Shiran Liu, Xutong Liu, Wei Lai, Yibiao Yang, Yanhui Li, Lin Chen, Wei Dong, and Yuming Zhou. Mitigating false positive static analysis warnings: Progress, challenges, and opportunities. *IEEE Transactions on Software Engineering*, 49:5154–5188, 2023. doi: 10.1109/TSE.2023.3329667.
- [11] Huimin Hu, Yingying Wang, Julia Rubin, and Michael Pradel. An empirical study of suppressed static analysis warnings. *Proceedings of the ACM on Software Engineering*, 2:290–311, 2025. doi: 10.1145/3715729.

- [12] Brittany Johnson, Yoonki Song, Emerson Murphy-Hill, and Robert Bowdidge. Why don't software developers use static analysis tools to find bugs? In *2013 35th International Conference on Software Engineering (ICSE)*, pages 672–681, 2013. doi: 10.1109/ICSE.2013.6606613.
- [13] Andrei Paleyes, Raoul-Gabriel Urma, and Neil D. Lawrence. Challenges in deploying machine learning: A survey of case studies. *ACM Computing Surveys*, 55:1–29, 2022. doi: 10.1145/3533378.
- [14] Neoklis Polyzotis, Martin Zinkevich, Sudip Roy, Eric Breck, and Steven Whang. Data validation for machine learning. In *Proceedings of the Machine Learning and Systems Conference (MLSys) 2019*, 2019. URL https://proceedings.mlsys.org/paper_files/paper/2019/hash/928f1160e52192e3e0017fb63ab65391-Abstract.html.
- [15] Louis-Philippe Querel and Peter C. Rigby. Warningsguru: integrating statistical bug models with static analysis to provide timely and specific bug warnings. In *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pages 892–895, 2018. doi: 10.1145/3236024.3264599.
- [16] Joseph R. Ruthruff, John Penix, J. David Morgenthaler, Sebastian Elbaum, and Gregg Rothermel. Predicting accurate and actionable static analysis warnings. In *Proceedings of the 30th international conference on Software engineering*, pages 341–350, 2008. doi: 10.1145/1368088.1368135.
- [17] Caitlin Sadowski, Jeffrey Van Gogh, Ciera Jaspan, Emma Soderberg, and Collin Winter. Tricorder: Building a program analysis ecosystem. In *2015 IEEE/ACM 37th IEEE International Conference on Software Engineering*, pages 598–608, 2015. doi: 10.1109/ICSE.2015.76.
- [18] Caitlin Sadowski, Edward Aftandilian, Alex Eagle, Liam Miller-Cushon, and Ciera Jaspan. Lessons from building static analysis tools at google. *Communications of the ACM*, 61:58–66, 2018. doi: 10.1145/3188720.
- [19] Nithya Sambasivan, Shivani Kapania, Hannah Highfill, Diana Akrong, Praveen Paritosh, and Lora M Aroyo. “everyone wants to do the model work, not the data work”: Data cascades in high-stakes ai. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pages 1–15, 2021. doi: 10.1145/3411764.3445518.
- [20] Puntitra Sawadpong, Edward B. Allen, and Byron J. Williams. Exception handling defects: An empirical study. In *2012 IEEE 14th International Symposium on High-Assurance Systems Engineering*, pages 90–97, 2012. doi: 10.1109/HASE.2012.24.
- [21] D. Sculley, Gary Holt, Daniel Golovin, Eugene Davydov, Todd Phillips, Dietmar Ebner, Vinay Chaudhary, Michael Young, Jean-François Crespo, and Dan Dennison. Hidden technical debt in machine learning systems. In *Advances in Neural Information Processing Systems 28 (NeurIPS 2015)*, 2015. URL https://proceedings.neurips.cc/paper_files/paper/2015/hash/86df7dcfd896fcdf2674f757a2463eba-Abstract.html.
- [22] Rahul Yedida, Hong Jin Kang, Huy Tu, Xueqi Yang, David Lo, and Tim Menzies. How to find actionable static analysis warnings: A case study with findbugs. *IEEE Transactions on Software Engineering*, 49:2856–2872, 2023. doi: 10.1109/TSE.2023.3234206.
- [23] Jie M. Zhang, Mark Harman, Lei Ma, and Yang Liu. Machine learning testing: Survey, landscapes and horizons. *IEEE Transactions on Software Engineering*, 48:1–36, 2022. doi: 10.1109/TSE.2019.2962027.