

Failure-Routing in AI/ML Python Except-Handlers: Corpus Measurements and Validation Limits

Yufei Yang Chen*

School of Cyber Science and Technology, Sun Yat-sen University, Shenzhen, China
fei76161@gmail.com

Abstract

Exception handlers can turn operational failures into success-shaped values, such as an LLM judge outage becoming a legitimate 0.0. We study this pattern in eight pinned AI/ML Python packages. `failroute` 0.8.0 reports 621 candidates over 524,229 scanned lines; 366 are not co-located with the selected rules of four syntactic linters. Co-location does not establish equivalent detection, and candidates are not confirmed defects.

A revised predicate reduces the list to 476 findings and raises four-linter co-location from 41.1% to 52.9%. In an exploratory join of 140 LLM-labelled observations, 104 match that frame: 12 of 48 co-located and 1 of 56 non-co-located observations carry DEFECT labels. The supplementary 60 were purposively selected and labels are clustered, so this contrast is descriptive. The original 80 labels include 12 DEFECT labels in three repeated function families in one package; five concern discarded comparisons whose failure-conversion mechanism is unestablished. All 12 original labels occur among the 134 candidates reported by `flake8`'s E722 rule, but this does not confirm the labels or estimate E722's precision.

Two LLM labelling rounds agree completely, but their independence and accuracy are unestablished. Thirteen of 478 tracked sites were classified as fixed, and 16 of 43 selected family-fix pull requests were merged. These sources describe different selected records and do not identify a common defect rate. In a curated merged-fix set, the detector matches 3 of 14 in-scope cases; nine route failure outside handlers. The study documents how predicate refinement changes candidate and co-location counts, while the available evidence does not establish a change in confirmed-defect yield. Its output is a review queue requiring adjudication.

1 Introduction

Many software failures announce themselves. An exception propagates, a process exits, a stack trace reaches a log. Some failures do none of this. A handler catches a timeout from a model API and returns 0.0, and the caller cannot distinguish that from a model that genuinely scored zero. A decode error is caught and an empty string returned, and the code downstream sees a document with no content rather than one that failed to load. Execution continues, the caller receives a value of the expected type, and a wrong answer proceeds in the shape of a right one. We call this *failure-routing*: the handler does not merely swallow the failure, it routes it into the success path. This paper studies local exception-handling code: primarily failures routed inside an `except` handler, plus the adjacent `contextlib.suppress` form. One registered rule concerns exception masking rather than a success-shaped result; we distinguish it below.

The consequence is that the usual evidence of a defect may be missing by construction. A crash can produce a bug report; a plausible wrong number may not. An issue or regression test may never be filed, so the standard warrant for a static-analysis finding — that a maintainer read and fixed it — is least available for some of the failures this pattern is meant to describe. Detecting these handlers is the easy half of the problem. Establishing that what we detected are defects is the hard half, and it is the half we do not fully solve.

***Author contribution.** The author originated the `failroute` idea and directed the study, including its research questions and key decisions. AI language tools assisted software development, testing, data analysis, and the drafting and revision of the text. The author takes responsibility for the final work. The detector and supplementary `semgrep` rule were developed within this project; their evaluation includes results unfavourable to them. Corpus labels were produced by LLM agents rather than human annotators; the paper states their provenance and limitations.

This work began with a narrower observation about Ruff’s `SIM105` rule: its recommended refactoring can move a handler pattern outside the detection scope of the selected lint rules studied here.

The `SIM105` observation.

- `ruff`’s `SIM105` rule recommends rewriting a simple `try/except/pass` block with `contextlib.suppress(...)`. In a straightforward rewrite the two forms suppress the same specified exception; their behaviour need not be identical in every surrounding context.
- After the rewrite, the construct is out of reach of the linters we tested, and not only of the rule sets we happened to select: in our corpus all 19 `contextlib.suppress` findings are invisible to the union of `ruff`, `bandit`, `pylint` and `flake8+bugbear`, and enabling every one of `ruff`’s 969 rules, or `pylint`’s full default message set, adds no rule that reports it (Section 4.2). The project’s supplementary `semgrep` rule covers 18 of the 19; citing that figure requires stating that the rule is ours.
- The direct refactoring can preserve the intended suppression behaviour while placing the rewritten construct outside the rule sets observed here; whether a given instance is defective remains a separate question.

Research questions.

- **RQ1** How many local exception-handling candidates occur in the eight pinned AI/ML Python packages, and how often are they co-located with findings from the selected syntactic lint rules? (Section 4.2)
- **RQ2** What labels do two LLM-based rounds assign to sampled findings, and what do those labels establish about defect status? (Section 4.3)
- **RQ3** How many fixes in the curated maintainer-merged reference set match the detector, and how many route failure outside an except-handler? (Section 4.4)
- **RQ4** What detector change followed review of the sampled labels? (Section 4.6)
- **RQ5** How does a revised predicate change the findings and their co-location with selected lint rules, and what can the available labels show? (Section 4.7)

Contributions.

1. A taxonomy of five silent-continuation or failure-to-value shapes and one adjacent exception-masking shape, with an AST detector for them (Section 2).
2. A reproducible count and cross-tool co-location measurement over eight pinned packages (Section 4.2).
3. A stratified sample ($n = 80$) with LLM labels and an analysis of their limitations (Section 4.3); the labels do not establish precision against independently confirmed defects.
4. A comparison of three differently selected evidence sources (Section 4.5) showing that these data do not identify a common defect rate; we specify a future measurement that could address the gap.
5. A comparison with a curated maintainer-merged reference set (Section 4.4): the detector matches three of fourteen in-scope fixes, while nine route failure outside an except-handler.
6. Four sampled findings labelled FALSE POSITIVE shared a control-flow shape; the resulting correction removed ten candidates emitted by one rule on this corpus (Section 4.6).
7. A finite-set comparison of predicate refinement (Section 4.7): findings fell from 621 to 476, while four-linter co-location rose from 41.1% to 52.9%. In 104 joined, selected observations, 12 of 48 co-located and 1 of 56 non-co-located records carried LLM DEFECT labels. The labels are clustered and the supplementary records were purposively selected, so this contrast does not establish which group contains more defects.
8. A simple baseline comparison: `flake8 -select E722` returns 134 candidates and includes all 12 original DEFECT-labelled observations in the sample. This is a finite label-set comparison, not an estimate of E722’s precision or coverage of confirmed defects (Section 4.2).

2 The pattern family

The six registered shapes are listed in Table 1. Five concern a caught failure that is suppressed or routed into a normal-looking value or continuation. `name-shadowing` is different: it can replace the original exception with a `NameError`, masking the cause without producing a success-shaped value. We include it as an adjacent exception-handling hazard, not as evidence of silent success. The taxonomy is defined by the semantics of the Python constructs involved rather than fitted to the corpus studied here: four

of the six shapes account for all 621 findings reported in Section 4.2, and the two that never fire on this corpus are retained because a shape’s absence from one corpus is not evidence that the shape does not occur. Both are exercised by the tool’s unit corpus.

Table 1: Five silent-continuation or failure-to-value shapes and one adjacent exception-masking shape.

Rule	Shape	Consequence
no-action	except ...: pass	handler emits no direct failure signal
silent-fallback	handler returns/assigns a constant without re-raising	judge outage becomes a legitimate 0.0
masked-exception	catch-all conditionally re-raises <i>and</i> falls back to a constant	outcome depends on which branch ran
silent-suppress	with contextlib.suppress(...)	suppresses specified exceptions; invisible to the linters we tested
implicit-fallback	handler neither re-raises, returns, nor records — falls through to implicit None	“did nothing” becomes a legitimate None
name-shadowing	except E as e: rebinds e inside the handler	Python deletes the binding on exit; a later use can raise NameError or UnboundLocalError

3 The detector

The tool is the instrument, not the subject, so we describe it only to the extent needed to interpret the study. **failroute** 0.8.0 parses each file to an AST and applies six rules through a shared registry, emitting text, JSON or SARIF; individual rules can be disabled per project under `[tool.failroute]`.

Unit of analysis. One finding is one **except** handler — or, for the **silent-suppress** rule, one **contextlib.suppress** statement — reported at the line where it starts. Findings are sorted by line, with a stable per-handler registry order for findings that share a line, so the output order is deterministic.

What counts as silence. The tool treats a failure as explicitly signalled, rather than silently routed, if its handler re-raises; calls **exit** or **_exit**; calls **warnings.warn** or **warnings.warn_explicit**; or calls a logger-like name. Two properties of that test matter for reading Section 4.3.

First, the test is *not* uniform across handler kinds. A **catch-all** handler (bare **except:** or **except Exception:**) must call a method named in {**error**, **warning**, **warn**, **exception**, **critical**, **fatal**}; a **typed** handler qualifies on *any* method of a logger-like object, **debug** and **info** included — and, because the test matches the object rather than the method’s meaning, on method names that are not logging calls at all. **capture_exception** on a logger-like object also qualifies. A bare **print()** never does. Thus **logger.debug()** prevents a finding for a typed handler under this syntactic test but not for a catch-all handler. The asymmetry is deliberate: a typed clause documents the failure its author anticipated. It does not establish that a debug message reaches the caller. Section 4.7 shows the asymmetry matters in this sample: every original LLM DEFECT label sits on a bare handler, which falls through the strict half of this test rather than the lenient half.

Second, the test is not global. Only **silent-fallback** and **implicit-fallback** consult it; **no-action**, **masked-exception** and **name-shadowing** report without asking whether the handler recorded anything.

“Logger-like” means a base-name list (**logger**, **logging**, **log**, **_logger**, **_log**, **sentry_sdk**) plus a suffix heuristic, since real codebases name loggers **audit_logger**, **err_log** and **self._log**. Handler bodies are traversed through control flow but *not* into nested function, lambda or class bodies, so a **return None** inside a callback defined in a handler does not silence it.

What counts as a fallback value. A fixed constant set (**None**, **False**, 0, 0.0, "", [], {}, ()), whose ambiguous members (**True**, 1, 1.0) are marked as such because they are legitimate in boolean scorers, plus namespace-qualified sentinels such as **Status.UNKNOWN** and any project-specific values configured under `[tool.failroute]`. Bare names are deliberately not matched, so **return result** can never fire.

Exemptions. Three gates remove a site before any rule runs. The first is the caught type. A handler catching only `KeyboardInterrupt`, `SystemExit` or `GeneratorExit` is exempt. The same applies to `StopIteration`, `StopAsyncIteration` or `CancelledError`; a tuple handler is exempt only when every member is. These exceptions can occur in shutdown, iteration and cancellation handling, where suppression may be intentional; the tool does not determine whether it is appropriate at a given site. The exemption can therefore also hide a genuine mistake. The second gate is an opt-out marker in the handler’s own lines: `# failroute: ignore` or `# pragma: no cover`. The third is configuration: a rule disabled under `[tool.failroute]` never fires. All three gates are applied once, in the dispatcher, rather than re-implemented per rule.

The heuristics deliberately err on the side of reporting: a finding is meant to be worth a look, not to be a verdict. Section 4.3 reports LLM labels for a sample; those labels do not measure precision against confirmed defects.

Quality gates. The v0.8.0 release has 158 tests and a CI matrix covering Ubuntu, macOS and Windows with Python 3.9–3.13, plus `mypy -strict`. Its v6 unit-fixture corpus contains 36 positive and 32 negative cases; CI checks each against its expected result.

Construct validity. Fixture agreement shows that the detector implements its tested specification; it does not show that its findings are real defects. Section 4.3 is a limited within-corpus label audit, not an external validation against confirmed defects.

4 Study

Statistical reporting. The paper reports finite-set counts and descriptive proportions. The weighted RQ2 projection estimates the number of LLM DEFECT labels in its corrected sampling frame; it is not an estimate of confirmed defects. The package, co-location, and PR comparisons have different sampling or selection processes and are not used to infer population rates or causal effects. No confidence intervals are reported because the available labels and selected records do not support the population claims such intervals might suggest.

4.1 Corpus

Eight AI/ML packages fetched as pinned PyPI source distributions (not git clones), each recorded with URL, SHA-256, upload time and extracted tree hash in `paper/corpus-lock.json`. Table 2 lists them. Together the eight sdists hold 2,354 `.py` files and 563,270 lines; the scan roots the detector actually reads hold 2,124 files and 524,229 lines; finding-density figures are calculated over those scan roots. Fetching is pinned rather than merely scripted: `tools/fetch_corpus.py` resolves each package to the version recorded in `paper/corpus-manifest.json`, checks the downloaded archive’s SHA-256 against the same manifest, and exits non-zero on mismatch, so a re-fetch either reproduces these inputs or fails loudly. A fresh fetch into a clean directory on 2026-09-02 reproduced all eight archives byte-identically (8/8 SHA-256 matches against `corpus-lock.json`).

Table 2: Pinned corpus. Per-package counts are the files *inside each scan root* — the subtree the detector actually scans — so the column sums to the total shown (2,124 `.py` files / 524,229 lines). The eight pinned sdists contain **2,354** `.py` files / **563,270** lines in total; the difference is content outside the scan roots (tests, examples, vendored code).

Package	Version	Scan root	<code>.py</code> files	Lines
<code>inspect_ai</code>	0.3.260	<code>src/inspect_ai</code>	755	198,351
<code>pydantic_ai_slim</code>	2.36.0	<code>.</code>	298	119,534
<code>deepteam</code>	1.0.9	<code>deepteam</code>	588	71,305
<code>trl</code>	1.12.0	<code>trl</code>	155	65,727
<code>garak</code>	0.16.0	<code>garak</code>	201	38,328
<code>smolagents</code>	1.26.0	<code>src/smolagents</code>	20	13,355
<code>uqlm</code>	0.6.5	<code>uqlm</code>	91	12,605
<code>fickling</code>	0.1.12	<code>fickling</code>	16	5,024
Total (scanned)			2,124	524,229

A second, style-opposite corpus tests whether the headline comparison survives outside bare-`except` code. Eight infrastructure packages were fetched as pinned PyPI sdists (URL, SHA-256, upload time and tree hash in `paper/corpus-lock-control.json`, same schema as above): `attrs` 26.1.0, `httpx` 0.28.1, `requests` 2.34.2 and `urllib3` 2.7.0 (the four zero-bare-`except` packages of Section 4.8), plus `click` 8.5.0 (CLI), `pydantic` 2.13.5 (validation), `anyio` 4.15.1 (concurrency) and `msgpack` 1.2.2 (serialisation) — chosen for domain diversity before any scan ran, explicitly avoiding the HTTP-client stack that three of the first four share. Only each package body is scanned (scan roots recorded in the lock file), the same definition as above. Section 4.8 reports the comparison.

4.2 RQ1 — Corpus counts and cross-tool co-location

`failroute` (v0.8.0) reports **621** findings. Baselines were run on the *same* pinned trees; Table 3 lists the tools, their versions and the rule sets they were invoked with.

Matching protocol. Each baseline was invoked with only the rules that address this family — `ruff` S110/S112, `bandit` B110/B112, `pylint` W0702/W0703/W0705/W0706, `flake8` E722 with `bugbear` B001/B017 — and every report was reduced to a (file, line) pair. A `failroute` finding counts as *covered* by a baseline when that baseline reported any of its selected rules in the same file within ± 1 line of it (TOL = 1 in `tools/coverage_union.py`), and as covered by the *union* when any baseline covers it. Co-location is deliberately a weak criterion — it asks whether a tool flagged the same handler, not whether it expressed the same property — and the caveat at the end of this subsection states what that costs.

A blind spot in the baseline harness and its correction. The initial harness passed each scan root to `pylint` as a single directory argument. `pylint` walks a directory as a *package* and does not descend into one with no `__init__.py`, so every module under such a directory is silently never analysed — no message, no error, exit 0. Here 152 of the 2,124 scanned files (7.2%) sit under one (`inspect_ai` 123, `deepteam` 20, `garak` 9), and RQ1’s exact selection emits 34 messages across 20 of them that the directory invocation reported as zero. Handing `pylint` the file list recovers them and perturbs nothing else: on the files it already reached, the two invocations agree message for message (0 lost, 0 gained, per package), so the correction is a pure addition to the baseline. Every figure in this paper uses the corrected invocation, and it moves the four-linter union from 250 to 255 of 621 and `failroute`-only from 371 to 366 — it *reduces* the detector’s measured novelty, which is the direction a self-inflicted error should be reported in. The other three baselines have no equivalent blind spot: `ruff`, `bandit` and `flake8` are filesystem walkers, and over those same 152 files their directory and explicit-file invocations return identical hit sets — 6,879 messages under `ruff -select ALL`, 104 under `bandit` with every test enabled, and 2,375 under `flake8`’s default selection, identical both ways. Under RQ1’s own narrow selections those same files yield 5, 0 and 0, which is why the blind spot cost only `pylint` anything. The control corpus of Section 4.8 contains no `__init__`-less directory at all (0 of 263 files), so it was never exposed. `-recursive=y` and `-init-hook` were both tested; neither recovers a single message.

One asymmetry in that rule list we disclose rather than defend: `pylint` is granted W0703 (broad `except`), whose direct `ruff` analogue BLE001 was *not* selected, so `ruff` was the only baseline denied its broad-`except` rule. Re-running with BLE001 added, `ruff`’s *own* co-located findings rise from 72 to 127 (410 findings in total rather than 76), but the four-tool union does not move: 255 of 621 and `failroute`-only 366 under either selection, because every finding BLE001 newly reaches is one `pylint`’s W0718 already reaches. `silent-suppress` stays at 0/19 either way, since BLE001 fires on `except` clauses and the shape in question has none. The asymmetry therefore costs the union nothing and bears only on the per-tool comparison below; we keep the narrower selection as the headline because that is what the publicly tagged artefact set reproduces. The symmetric run is `tools/coverage_union.py -ruff-select S110,S112,BLE001`, and its output is committed as `bench/corpus-coverage-union-ruff-ble001.json`.

The four selected syntactic linter rule sets co-locate with 255 of 621 findings (41.1%); 366 (58.9%) have no such co-location. Adding our `semgrep` rules raises the co-located count to 274 (44.1%) and lowers the unmatched count to 347 (55.9%). These are exact corpus counts under the stated matching rule, not estimates of equivalent detection. Table 4 breaks them down by rule and Figure 1 plots them.

Table 3: Cross-tool comparison on the pinned corpus. The `semgrep` row is *not* a shipped-rule baseline: its rule set (`tools/semgrep-rules/exception-handling.yaml`) was written by us, so it shows what a syntactic-pattern engine *can* express given rules, not what users get by default. +19 is the number of `failroute` findings newly co-located once `semgrep` is added to the union (mostly the `contextlib.suppress` shape: 18 of 19). Versions are those installed in the reproduction environment and are the versions that produced the committed artefacts. Three provenance notes. `pyproject.toml` pins `ruff==0.16.5`, one patch above the 0.16.4 that produced the committed artefact; 0.16.0, 0.16.4 and 0.16.5 all produce *set-identical* hits for both rule selections (76 findings and 72 co-located for S110/S112; 410 and 127 for S110/S112/BLE001), so the row is stable across every patch release we can install. The `pylint Findings` cell is the one count in this table that depends on the analysis environment rather than on the corpus: `pylint` resolves imported names, so a handler that re-raises before a later `except Exception` is correctly left alone when the caught type is importable and reported as W0706 when it is not. With `click` present, `pylint` reports 563 findings; without `click`, as in the documented install, it reports 564 and the hidden-file count above reads 35 across 21. Table 3 gives these values in that order. Co-location is unaffected — 255, and identical rule by rule, either way — so no figure in this paper moves. And `semgrep` does not appear in `pyproject.toml` at all: the five-tool row is a frozen artefact (`bench/corpus-coverage-union-5tool.json`), not a step the documented install reproduces. Its generator, `tools/run_semgrep_baseline.py`, reads the v0.7.0 frame and writes over that artefact, so it reproduces neither the row nor the file: do not run it against the committed export.

Tool	Version	Rules	Findings	Co-located ± 1 line
<code>failroute</code>	0.8.0	all six	621	—
<code>ruff</code>	0.16.4	S110, S112	76	72
<code>bandit</code>	1.9.4	B110, B112	67	63
<code>pylint</code>	4.0.8	W0702, W0703, W0705, W0706	563/564	255
<code>flake8+bugbear</code>	7.3.0 / 25.11.29	E722, B001, B017	268	124
<code>semgrep (our rules)</code>	1.175.0	hand-written, 6 shapes	—	+19

Table 4: Per-rule co-location counts under the stated ± 1 -line criterion. The four-tool union includes `ruff`, `bandit`, `pylint`, and `flake8` with `bugbear`; the next column adds the project’s supplementary `semgrep` rule. The two zero-count families remain in the detector but do not occur in this corpus. For `silent-suppress`, none of the selected rules, nor the full `ruff` and `pylint` rule sets, reports a relevant warning on the 19 findings; the project rule co-locates with 18.

Rule	Findings	Four-tool union	With semgrep	Not co-located with four
<code>silent-fallback</code>	386	180	181	206
<code>no-action</code>	213	72	72	141
<code>silent-suppress</code>	19	0	18	19
<code>masked-exception</code>	3	3	3	0
<code>implicit-fallback</code>	0	—	—	—
<code>name-shadowing</code>	0	—	—	—

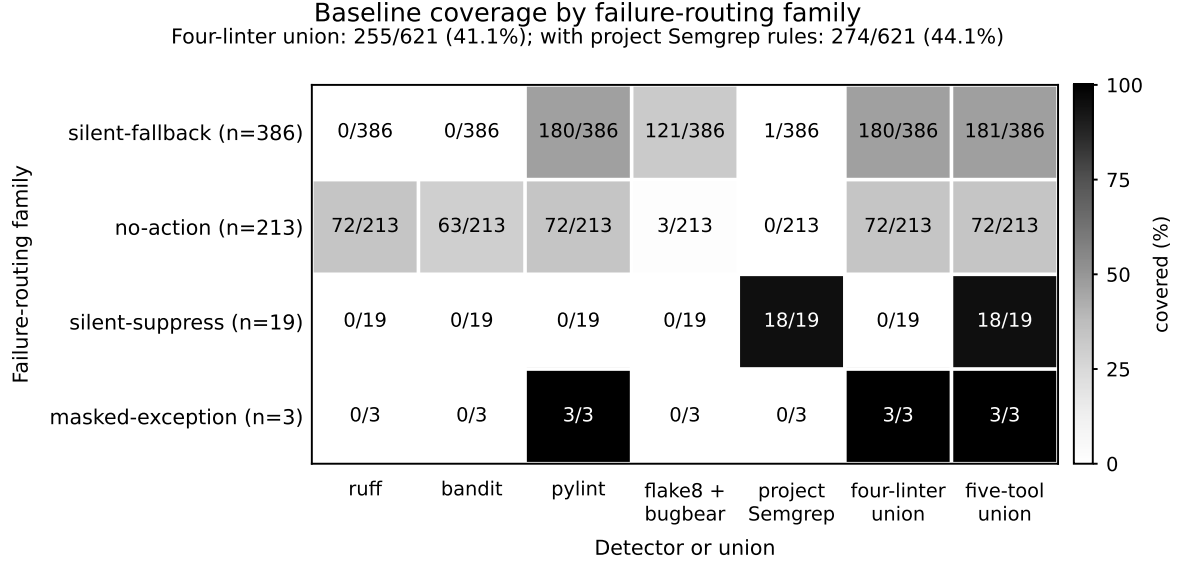


Figure 1: Coverage of the 621 pinned findings by rule family and detector. Each cell gives covered findings / family total; shading encodes the coverage share. The four-linter union covers 255/621 findings; adding the project’s supplementary `semgrep` rules covers 274/621. `silent-suppress` is the one family where the four linters, `ruff`’s full 969-rule set and `pylint`’s full default set all return zero coverage.

Two observations that cut against the tool.

1. `pylint` is a stronger baseline than `ruff`, by a factor that depends on which `ruff` rules the comparison allows. Against `ruff`’s S110/S112 alone, the gap is $3.54\times$ (72 vs 255 co-located findings). Adding `ruff`’s broad-except rule BLE001, symmetric to the W0703 `pylint` rule, reduces the gap to $2.01\times$ (127 vs 255). The comparison depends on the stated rule selection; we report both rather than treating the narrower one as representative of `ruff`’s broad-except coverage.
2. `masked-exception` is fully covered. All 3 findings co-locate with a `pylint` broad-except warning. That rule contributes no coverage novelty here; this finite count is specific to the pinned corpus.

A simple baseline for candidate-list length. The union above asks which detector findings a linter flags near the same line; it does not compare candidate-list lengths. Across the same eight scan roots, `flake8 -select E722` reports **134** bare-except candidates, including all **12** original LLM DEFECT-labelled sites. Its list is $4.63\times$ shorter than the 621-finding v0.8.0 list and $3.55\times$ shorter than the 476-finding refactored list. These are list-size comparisons at equal coverage of the twelve original labels, not equal recall of confirmed defects. The sample was drawn from `failroute` findings, not from E722’s candidate list, so it cannot estimate E722’s label yield or precision.

`ruff`’s broad-except rule BLE001 is a useful contrast: it returns 334 candidates and co-locates with none of the 12 original LLM DEFECT-labelled sites. BLE001 fires on `except Exception:`, not bare `except;`; all 12 labels in the frozen sample are attached to bare handlers. This is a finite overlap result, not evidence that E722 detects confirmed defects better than BLE001.

Both counts come from `tools/e722_baseline.py`, which fails loudly if either linter is unusable rather than reporting an empty hit set, and are committed as `bench/e722-baseline.json`.

Methodological caveat on co-location. Co-location at ± 1 line means that a selected lint rule flags the same handler; it does not show that the warning expresses the failure-routing property studied here. A broad-except warning can co-locate for a different reason. We therefore report the 255/621 co-location count as such and do not infer semantic coverage or novelty from it.

4.3 RQ2 — What do the LLM labels say about sampled findings?

Method. We drew a stratified random sample across (rule $\times$ package), with fixed seed 20260831, at least one draw per stratum, and proportional allocation of the remaining draws; the sample contains

$n = 80$ findings. The draw came from an earlier 659-candidate export. Review then identified ten false-positive **implicit-fallback** findings, leaving a 649-candidate corrected frame; the four sampled findings from that rule were all false positives and are not included in the frame projection below. Weighting the remaining 76 observations by stratum size gives a projection of 130 LLM DEFECT labels (20.0%) in the 649-candidate frame. This is a projection of labels, not confirmed defects, and we make no claim about confirmed-defect prevalence. The 28 further precision fixes that produced the v0.8.0 frame removed four additional sampled CONTRACT findings; only 72 of the original 80 labels remain in that frame, and this surviving subset is not representative of the current 621-finding set.

The unweighted 12/80 share describes only the drawn sample. Each sampled finding was assigned one of three labels by reading nearby source in the pinned tree: **DEFECT** (the converted failure produces a wrong caller-visible outcome with no signal), **CONTRACT** (the behaviour appears deliberate and is documented, commented, or expressed in the return type), or **FALSE POSITIVE** (the detector is wrong about the code).

Labelling was performed by LLM agents. Two rounds were run, both by LLM agents (not human raters), and they agreed on 80/80 items. This agreement is compatible with shared model bias; it does not establish label accuracy or independence. The artefacts establish two separate runs, not independent human adjudication. What is committed is both label sets — `paper/annotations.csv` (first round, rationales recorded in Chinese) and `paper/annotations-second-pass.csv` (second round, rationales in English) — so the agreement can be checked item by item rather than taken on trust. The sample remains useful as (a) a debugging instrument (Section 4.6) and (b) the consequence arm of the triangulation in Section 4.5, where its limits are part of the design.

Meaning of a DEFECT label. DEFECT denotes the frozen LLM judgement, not an independently confirmed failure-routing mechanism. Five of the twelve original labels concern a discarded comparison and an unassigned state; their failure-conversion mechanism is unestablished. The other seven have the mechanisms described in Section 6. We retain the original labels for reproducibility; they do not establish defect yield.

Result (80 sampled findings, LLM-labelled). Table 5 reports the sample labels; Tables 6 and 7 show their distribution by rule and package. All counts describe this sample; they do not establish a package-level or corpus-wide defect rate.

Table 5: LLM-assigned labels in the original 80-finding sample. Frequencies describe this sample and are not a defect-rate estimate.

LLM label	n	Share of sample
CONTRACT	64	80.0%
DEFECT	12	15.0%
FALSE POSITIVE	4	5.0%

Table 6: LLM labels by detector rule in the 80-finding sample. All twelve DEFECT labels are in **silent-fallback**; all four FALSE POSITIVE labels are in **implicit-fallback**.

Rule	n	DEFECT	CONTRACT	FALSE POS.
silent-fallback	49	12	37	0
no-action	23	0	23	0
implicit-fallback	4	0	0	4
silent-suppress	3	0	3	0
masked-exception	1	0	1	0

All 12 DEFECT labels are in `deepteam`; none of the 66 sampled findings from the other seven packages carried that label. These are sample counts, not evidence that the other packages have zero defects.

The 12 DEFECT-labelled sites are not 12 independent observations: they fall into three repeated code families:

Table 7: LLM labels by package in the original 80-finding sample. All twelve DEFECT labels are in **deepteam**; all four FALSE POSITIVE labels are in **implicit-fallback**. Counts are descriptive of this sample.

Package	n	DEFECT	CONTRACT	FALSE POS.
deepteam	14	12	1	1
inspect_ai	41	0	40	1
pydantic_ai_slim	11	0	10	1
trl	4	0	4	0
garak	3	0	3	0
fickling	3	0	2	1
smolagents	2	0	2	0
uqlm	2	0	2	0
<i>all but deepteam</i>	66	0	63	3

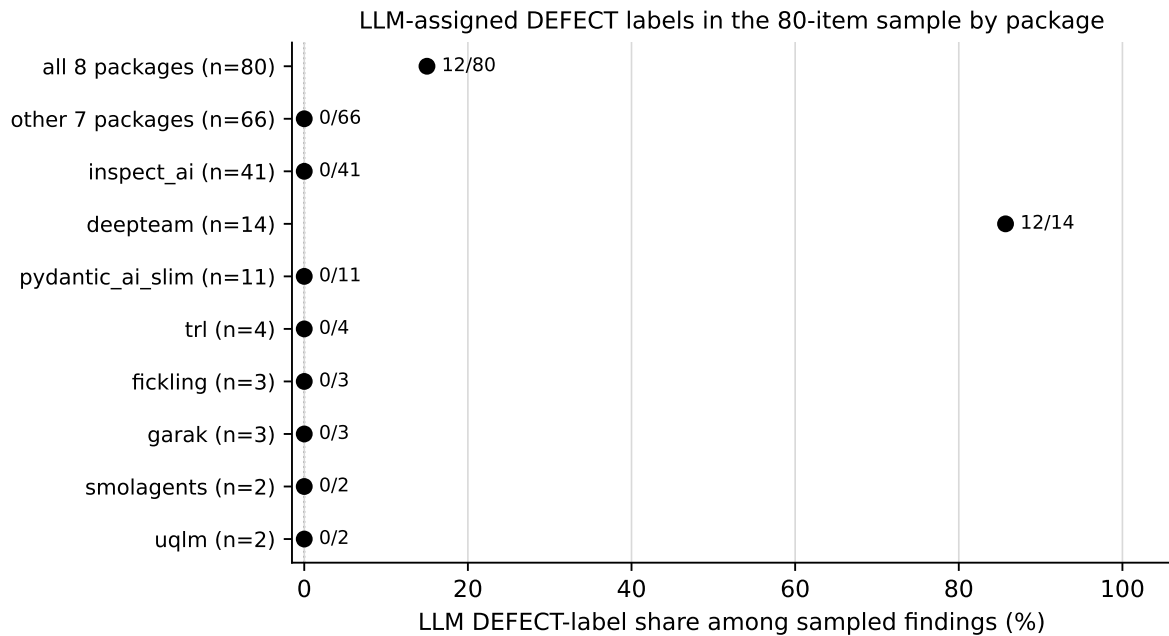


Figure 2: Share of sampled records assigned the LLM DEFECT label by package. The plotted shares and counts describe the 80-item sample; they are not package-level defect-rate estimates.

1. **Silent criteria degradation (4/12).** A handler catches an error from `model.get_system_prompt()` and assigns an empty string. If a custom or misconfigured model lacks that method, later evaluations may run without the intended criteria. The author’s issue on this pattern predates the LLM labelling pass; it is not independent validation of the label.
2. **Discarded comparison (5/12).** A handler evaluates `self.score == 1` but discards the result, then assigns `self.success = False`. The conversion mechanism is unestablished: the observed score values did not raise, although attribute access or overloaded equality can raise for other objects.
3. **Potentially fail-open security verdict (3/12).** A handler catches an error while iterating results and returns `vulnerable = False`. In a red-teaming tool, this could turn an operational failure into a false `not vulnerable` result; this interpretation remains an LLM label, not an independent adjudication.

Handler forms in the labelled sample. The 80 sampled findings include 13 bare `except:` handlers; 12 carry DEFECT labels. The remaining forms are 18 `except Exception:` handlers, 46 narrowly typed handlers, and 3 `contextlib.suppress` sites; none in these groups carries an original DEFECT label. These counts are descriptive of the sample. The three findings in the suppress group are too few to support a useful comparison, and all labels retain the limitations above.

Sensitivity to repeated findings. The twelve original DEFECT labels come from three repeated function families. The unit used to group copies changes the descriptive share: grouping by package and enclosing function gives 3 of 68 groups (4.4%); grouping by exact signature gives 5 of 71 (7.0%); grouping by package, file, and function gives 12 of 78 (15.4%), because copies in separate files remain separate groups. No one grouping is established as the correct independent unit. These sensitivity counts reinforce that the 12/80 observation-level share is not a confirmed-defect rate, and the 20.0% stratum-weighted projection does not correct for within-family repetition.

The 64 CONTRACT labels include TUI widget lookups that may not be mounted, optional-dependency probes, idempotent cleanup in `finally`, and predicate functions whose `Optional/bool` return type is part of the contract. Some have comments that state the intended fallback; the label itself remains an LLM judgement.

Two sampled `pydantic-ai` handlers illustrate why local shape alone is insufficient: one returns `True` for an unparseable address, while another places a caught exception on a queue for the consumer to re-raise.

4.4 RQ3 — Reference-set match and construct scope

A curated reference set of upstream fixes in this defect family is available; the projects’ maintainers reviewed and merged those changes. This is not an exhaustive defect census or an independent adjudication of every merge. Of the 75 pull requests submitted from the author’s account that were merged *as of the 2026-09-01 measurement freeze*, **16** are failure-routing fixes — every exclusion adjudicated by reading the PR diff (52 earlier title-only judgements were re-checked against diffs in a dedicated pass; 49 stood, 3 flipped). For each family fix, the file was fetched at the merge commit’s *first parent* (i.e. immediately pre-fix) and scanned. Table 8 classifies the 16, and every pull request is cited with its repository owner so that the classification can be checked against the public record.

In the curated reference set, the detector matches 3 of 14 in-scope fixes (21.4%). At most 5 of 14 (35.7%) use a handler shape potentially reachable by this detector; nine of 14 (64.3%) route failure outside an except-handler. This is coverage of the curated set, not a population recall estimate. Figure 3 plots the split by defect family.

This is the construct-scope result for the curated reference set. It shows that the failure-routing cases in that set include patterns outside the local exception-handling subfamily this tool operationalises. We state this as a boundary *and* a roadmap — dataflow-shaped failure-routing is future work — and scope the detector’s results to handlers and `contextlib.suppress` sites accordingly.

Side observation. In the pre-fix `UKGovernmentBEIS/inspect_ai #5068` file the detector flagged a *different, unfixed* `silent-fallback` candidate at line 356. That finding was not adjudicated as a defect in this recall audit.

Detection on merged fixes in the failure-routing reference set

Repository	PR	Detected	Rule	Note (abridged)
uqlm	#462	NO	—	miss reason: pre-fix defect is NaN produced by exhausted retries reachi...
inspect_ai	#5068	NO	—	miss reason: handler converts failure via post-handler state mutation (...)
uqlm	#459	NO	—	miss reason: failed judge's NaN entered panel aggregates via data flow,...
PyRIT	#2466	NO	—	miss reason: unresolvable techniques were dropped by silent list filter...
PyRIT	#2460	N/A	—	TypeScript (web UI); failroute is Python-only -> out of language scope
uqlm	#450	YES	no-action	matched: uqlm/utils/response_generator.py:252(no-action)
inspect_ai	#4906	NO	—	miss reason: failure masking lives inside tenacity retry semantics (opa...
inspect_evals	#2167	NO	—	miss reason: broken invariant was converted to Score(value=0.0) by an o...
unstructured	#4438	NO	—	diff-read J1 FLIP: pre-fix decoded file-like objects with errors="ignor...
PyRIT	#2309	NO	—	diff-read J1 FLIP: unmapped braille symbols were silently dropped, corr...
trulens	#2653	YES	no-action	diff-read J1 FLIP: pre-fix silently normalized out-of-scale JSON scores...
uqlm	#425	NO	—	miss reason: pre-fix code crashed (ZeroDivisionError propagated); the f...
uqlm	#418	N/A	—	pure-additive fix; pre-fix defect is a non-handler implicit-None (funct...
agent-sweep	#195	NO	—	H-batch (family yes, diff-read): _write_text swallows OSError and calle...
agent-sweep	#197	YES	silent-fallback	H-batch (family yes, diff-read): unparseable lines / unreadable files s...
inspect_ai	#4908	NO	—	H-batch (family yes, diff-read): malformed multi-letter GRADE verdicts ...

In-scope matches: 3/14 = 21.4%; two cases are out of scope.

Figure 3: Matches in the curated merged-fix reference set. Shaded rows are matched; N/A denotes the two out-of-scope cases. Repository and pull-request identifiers locate each public change. This is not an estimate of population recall.

Table 8: Classification of the 16 family fixes (`paper/merged-pr-recall.csv`, all rows diff-read). “Handler-shape gap” means design-reachable: a shape outside the current six that could be expressed without changing the handler-level design.

	Class	<i>n</i>	Cases
	Out of scope for recall	2	<code>microsoft/PyRIT#2460</code> , a TypeScript-side change (language scope); <code>cvs-health/uqlm#418</code> , a pure-additive <i>Python</i> fix whose pre-fix defect is a non-handler implicit-None contract violation the six rules do not cover by design
Detected		3	<code>cvs-health/uqlm#450</code> , <code>Ishannaik/agent-sweep#197</code> , <code>truera/trulens#2653</code>
Handler-shape gap		2	<code>UKGovernmentBEIS/inspect_ai#5068</code> (post-handler state mutation), <code>#4906</code> (<code>tenacity</code> <code>RetryError</code> masking) — both adjudicated as candidate patterns, not shipped
Non-handler routing		9	NaN values reaching aggregates, silently filtered lists, branch-level <code>Score(0.0)</code> returns, implicit-None contract violations, silently stripped characters, silently dropped symbols, laundered verdicts

4.5 RQ3b — A tri-source triangulation

The original sample contains many CONTRACT and FALSE POSITIVE labels, but those are LLM judgements rather than independent defect adjudications. The remaining question is whether maintainer behaviour can distinguish deliberate contracts from defects that have not been noticed. We compare three evidence sources that measure different, non-commensurable populations. Table 9 sets out what each source records.

Table 9: Three evidence sources and the finite records each describes. The datasets behind arms 2 and 3 are described below.

Arm	Question	Observed record
1 — consequence labels	What did the LLM rounds label in the stratified sample?	12/80 (15.0%) DEFECT labels, all in one package
2 — spontaneous maintainer action	What was changed during the tracked window?	13/478 (2.7%) tracked sites classified FIXED
3 — maintainer response	What happened to the selected family-fix PRs?	16/43 (37.2%) selected PRs merged

Records behind arms 2 and 3. Arm 2 is a maintainer-behaviour dataset over the same eight pinned packages, published as `paper/arm2-tracked-sites.csv`. The pipeline behind it tracked 2,128 try sites across ten releases of each package and labelled 478 of them FIXED/SURVIVED, discarding 1,650 (77.5%) as too young (924), vanished (681) or mutated (45); none of the 13 FIXED sites traces to a PR submitted from the project account — the 9 PR-attributed fixes match no PR in that account’s record, and the 4 unattributed ones were cleared by package and content check. Two properties of that population bound what arm 2 can be compared against. Its tracking criterion (a handler carrying no raise, log or warn signal) is weaker than the six rules of Section 3, so only 185 of the 478 rows (38.7%) carry a `failroute` rule at the release where they were first observed. And its package mix is 59.4% `deepteam`, against 22.5% of the 621 findings. Arm 3 is the merged/closed record of family fix PRs submitted from the author’s account: the 16 merged members are itemised in `paper/merged-pr-recall.csv` — 8 of them in packages outside the tracked eight — and the 27 closed-unmerged members are itemised, with per-PR closure reasons, in `paper/h1_arm3_classification.csv` (copied into this artefact set from the unreleased companion repository so the composition is third-party checkable): 19 self-closed, 1 bot-closed, 3 closed without reaching the merits, 2 substantively accepted, and 2 adverse on the merits. Among the 24 PRs not self-closed, 16 merged, seven were maintainer-closed, and one was bot-closed. One closed PR (`cvs-health/uqlm#427`) shares its substance with merged PR `#462`, and two others duplicate separate submissions; therefore the 43 PRs are not 43 distinct candidate defects. These are descriptive outcomes in a project-selected set, not an acceptance-rate estimate.

Verdict: directionally consistent, not established. The three sources provide different kinds of evidence. The LLM labels describe consequences in a stratified sample but do not establish defect

status. A site that persists without a recorded fix may be either a contract or an unnoticed defect. Maintainers accepted many surfaced, project-selected reports, while two outcomes were adverse on the merits. Their denominators and selection processes do not define a common estimand. We therefore report the finite-record counts and leave the defect rate unresolved.

The arms are not commensurable. Arm 2’s denominator is 478 tracked sites; arm 3’s is 43 defect candidates pre-screened by the author, of whose 16 merged members 8 lie in packages outside the tracked eight. The counts answer different questions about different populations. The tracked-site criterion is also weaker than the detector’s, so 61.3% of arm 2’s rows carry no `failroute` rule at all, while arm 1’s labels are attached to findings. These records cannot support a population-level comparison.

Why we do not estimate a common rate. Arm 2 tracks 2,128 sites, but only 478 were classified FIXED or SURVIVED; 1,650 were excluded as too young, vanished or mutated. The records do not establish which tracked sites were genuine defects, or which excluded sites belong in a risk set. Arm 1’s stratified labels therefore cannot be transferred to arm 2 to estimate defect composition.

No matched sample is available. None of the 16 merged family fixes maps to the 478 tracked sites (zero exact file matches), so the records provide no matched site-level comparison. As context only, in `uqlm` none of 12 tracked family sites was classified FIXED, while all five project-selected family-fix PRs were merged. These are different sets and the PRs were selected by the project workflow; the counts do not estimate a common rate.

What these records support. Three limited observations.

(i) The itemised closure record (`paper/h1_arm3_classification.csv`) shows that maintainer engagement with surfaced family reports was mostly, but not uniformly, favourable. Of the 24 non-self-closed outcomes, 16 merged, seven were maintainer-closed, and one was bot-closed. Two additional closures accepted the substance: the gap reported in `Giskard-AI/giskard-oss#2614` was fixed upstream in a third-party restatement, and `cvs-health/uqlm#427` was partially re-landed through merged `#462`. Three closures never reached the merits, and two were adverse on the merits. All outcomes came from a project-selected set.

(ii) Thirteen of 478 tracked family sites were classified FIXED during the observation window. Because SURVIVED does not distinguish a contract from an unnoticed defect, this count cannot establish the underlying defect share.

(iii) A future study would need maintainer responses to a random sample of findings to distinguish unnoticed defects from false positives. Such a sample does not exist in these records and cannot be reconstructed retrospectively.

The three arms describe different units and selection processes. Their counts cannot be combined into a common defect-rate estimate; the validity limitations are detailed in Section 6.

4.6 RQ4 — Sample review and a detector correction

All four false positives in the sample were `implicit-fallback`, and all four had the *same* root cause: `_has_top_level_terminal()` inspected only *direct* statements of the handler body, so a `return/raise` nested inside an exhaustive `if/else` was invisible. Table 10 lists the four real shapes that triggered it.

Table 10: The four shapes that exposed the detector bug.

Package	Function	Shape
<code>deepteam</code>	<code>simulate_baseline_attacks</code>	<code>if ignore_errors: return [...] else: raise</code>
<code>fickling</code>	<code>check_pickle</code>	nested <code>try/except</code> , every path returns
<code>inspect_ai</code>	<code>grok generate</code>	<code>if/elif/else</code> , every branch returns or raises
<code>pydantic_ai</code>	<code>execute_output_function</code>	<code>if wrap: raise ToolRetryError else: raise</code>

We implemented a recursive exhaustiveness analysis (`_always_terminates`) covering `if/else`, `with`, `try/except/finally` and `match`, added six regression tests derived from the four real shapes (each failing before the fix), and re-ran the corpus.

implicit-fallback findings on the 524,229 lines the detector actually reads: 10 → 0. Total findings: 659 → 649 (v0.7.0). The v0.8.0 precision release removed 28 more findings through four audited fixes (tuple-typed handlers, `warnings.warn` recognised as a signal, `StopAsyncIteration` added to the ignore list, conservative optional-dependency probe): **649 → 621**, with every deletion traceable to a labelled category or a mechanical criterion — no labelled DEFECT was removed. The

test suite grew over the same period, from 124 to 130 (the six regression tests of this subsection) and then to **158** (twenty-eight more with the v0.8.0 precision release).

The corrected recursive control-flow analysis reduced this rule’s ten candidates in the corpus to zero; the four sampled false positives exposed the shared cause. More broadly, the stratified labelling pass revealed a detector defect that the unit fixture corpus did not expose.

4.7 RQ5 — What changed under predicate refinement

Provenance and evaluation scope. Sections 3–4.6 use `failroute` 0.8.0, pinned by the v0.8.0 tag. RQ5 evaluates the released `failroute` 0.9.1, pinned by v0.9.1; a rescan of the pinned corpus reproduces the 476-finding export in `bench/rescan-v2/` (verified 2026-09-07). The refactor was developed against the same corpus and all 140 labels used in this evaluation, with no held-out set. The results below are therefore descriptive of this development corpus and do not establish performance on unseen data.

What changed. v0.8.0’s `silent-fallback` rule asks whether the handler’s body returns or assigns a member of a fixed constant set. That is a syntactic proxy for the failure-to-value pattern in Section 2; it cannot tell whether the value is an intentional part of the function’s contract. The refactor replaces the constant test with three further heuristics. **(1) Value-range membership:** if the enclosing function’s declared return type admits the substituted value, the tool treats this as possible contract evidence and downgrades the finding — applied only to the return channel and only to explicitly declared ranges, never to an assignment into object state. A type annotation alone neither establishes intent nor lets the caller distinguish a failed operation from a legitimate value of the same type. **(2) Exception–predicate isomorphism:** whether the handler’s work is structurally the same as a `-> bool` predicate the codebase already declares. **(3) Data-flow consequence:** whether the substituted value escapes the call (returned) or outlives it (assigned to object state), a proxy for possible caller-visible consequences rather than proof of them. Every finding now also carries a severity (INFO, LOW, MEDIUM, HIGH), an isomorphism class, and a static `covered_by` list predicting which lint rules flag this handler. That list is a table derived by running the four baselines over generated probes rather than by reading rule names (`tools/lint_mapping_probe.py` → `bench/lint-rule-mapping.json`). The original shape-based mapping got three conditions wrong; Result 2 reports the correction and its effect.

Result 1: fewer findings, and more of them already linted. Findings fall from 621 to **476** (617 to 472 distinct handler sites; four sites are reported twice in *each* frame, because the assign channel emits one finding per assigned target while the finding identifier is derived from the handler alone — an identifier collision in the refactored detector, noted rather than hidden). The four-linter union’s co-location with those findings **rises** from 255/621 = 41.1% to 252/476 = **52.9%**; the unmatched count falls from 366 (58.9%) to **224** (47.1%). These are exact counts in the pinned corpus under the stated matching rule.

The refactor is not a pruning of the old frame, and treating it as one would overstate its coherence. Over distinct sites, **184 disappeared, 39 appeared and 433 persisted**. Of the 184 dropped sites, 155 (84.2%) had been `failroute`-only; of the 39 added, 15 (38.5%) were. The losses concentrate in `silent-fallback` (177 of 184, plus 4 `no-action` and 3 `silent-suppress`); the additions are all `silent-fallback`. `silent-suppress` falls from 19 findings to 16, so RQ1’s “0 of the 19” is a property of v0.8.0 and does not carry over to this frame. On these counts, the refinement reduced the candidate list and also reduced the number of findings not co-located with selected linters. The available label set cannot establish whether that trade-off improved confirmed-defect detection.

Result 2: exploratory label comparison. RQ1 measures candidate-list co-location; RQ2 reports LLM labels for a different sample. Neither alone establishes which findings are defects. We joined all 140 labels to the refactored frame on (package, file, line) — the handler’s coordinates, deliberately *not* including the rule name, because the refactor can reclassify a handler without dropping it and one label in the sample was reclassified from `implicit-fallback` to `silent-fallback` — 104 join and 36 do not; all 36 come from the frozen 80 and are 33 CONTRACT plus 3 FALSE POSITIVE, so **no observation carrying an LLM DEFECT label was removed**, and only one of the 36 sits within two lines of a surviving finding — the failures to join are deletions, not line drift.

Because the labels are clustered and the 60 supplementary observations were purposively selected, the table describes this joined set only. It does not establish a population-level difference or incremental defect yield.

Table 11: LLM DEFECT labels by lint co-location among the 104 observations that join to the refactored frame. The static mapping and empirical co-location agree on all 104; the label shares describe this clustered, partly purposive set only.

Co-location	LLM DEFECT labels	<i>n</i>	Sample share
A linter reaches the finding	12	48	25.0%
No linter reaches the finding	1	56	1.8%

The static covered_by field was unsound. We measured the whole mapping and fixed it. The inference credited `bandit:B110` and `ruff:S110` to every handler with an inert body, without looking at what the handler catches. Both rules are broad-only. Before the mapping was measured, the faulty inference called 87 of 476 findings (18.3%) novel against co-location’s 224 (47.1%), and 137 findings it called statically covered were flagged by no linter at all. One of them is `garak/analyze/ci_calculator.py:40`, whose handler is a literal `except (ValueError, TypeError): pass`. Running all four baselines on that single file returns *nothing* — `ruff` reports “All checks passed!”, `bandit` and `flake8` return no rows, `pylint` scores the file 10.00/10. This is a defect in our own mapping; it made the lint baselines appear to cover more findings than they actually did and understated failroute’s measured novelty. We report the correction rather than silently changing the comparison.

We did not patch the witness; we measured the mapping. `tools/lint_mapping_probe.py` generates 68 probes — eleven caught-type forms (bare; `Exception`; `BaseException`; `builtins.Exception`; a tuple of two narrow names; a tuple mixing `Exception` with a narrow name, with a dotted name, and with a name no resolver can read; a single narrow name; a dotted narrow name; and a caught type that is a call expression) crossed with six body forms (`pass`, `...`, `continue`, a returned constant, an assigned constant, a discarded comparison), plus both `contextlib.suppress` forms — runs all four baselines over them, attributes every hit to the case whose function span contains it, and writes the matrix to `bench/lint-rule-mapping.json`. Every rule carries a positive control, so a selector that silently matches nothing fails the run instead of being recorded as “never fires”. That guard paid for itself twice. `ruff` rejects an unknown selector with exit code 2 rather than an empty result set. And `pylint` accepts W0703 — the retired id RQ1’s baseline enables — and reports those messages as W0718: enabling only W0703 emits W0718 and nothing else, and over the corpus RQ1’s exact selection emits 423 W0718, 134 W0702 and 6 W0706, which is the 563 of Table 3. A reproducer who counts W0703 messages finds zero and would reasonably conclude the broad-except rule never ran.

The measurement found *three* wrong conditions, not the one we started from:

- **Caught type, ruff.** S110 and S112 fire when the handler is bare or catches `Exception/ BaseException`, including inside a tuple of any composition.
- **Caught type, bandit.** B110 and B112 are narrower still: bare, or *exactly* `except Exception:`. They do not fire on `except BaseException:`, on `except builtins.Exception:`, or on any tuple. Gating all four rules on one “broad” predicate — the obvious fix — would have moved the over-credit rather than removed it, and left `pydantic_ai/_agent_graph.py:205`, an `except BaseException: pass`, wrongly credited.
- **Body form.** S110 and B110 are literally “try-except-pass”: they fire on a body of `pass` and not on a body of `...`, even for a bare handler. This detector’s own notion of an inert body accepts both forms, so the distinction had to be made in the mapping rather than inherited from that flag. On this corpus that third condition changes no number — all 146 over-credited findings have a `pass` body — but it is a real defect and the probe pins it.

Correcting the caught-type conditions then exposed an error in the *opposite* direction, which is the argument for measuring rather than patching. The predicate deciding whether a handler catches `Exception` gave up entirely when any member of a caught tuple was not statically resolvable, so `except (anyio.get_cancelled_exc_class(), Exception):` — three instances in `inspect_ai` — was classified as narrow and kept only its body-form credit (`bandit:B110`, `ruff:S110`), losing the two caught-type credits that do fire on it (`pylint:W0718`, `ruff:BLE001`); and `bandit:B110` should not have been there either, since B110 fires on no tuple at all. That error over-states novelty. Leaving it in place would have made the corrected figure look better for the tool than the truth.

The correction is held by 36 tests, and a suite that passes proves nothing about itself, so `tools/refix_replay.py` rebuilds the pre-correction predicate in a scratch tree and runs the same 36 against it: **21 fail**. Red before the change and green after it, on identical tests — the suite constrains the mapping rather than accompanying it.

Before and after. The correction removes credit from **146** findings and adds it to 3. Of the 146, **137** become statically novel and 9 stay covered because a rule that genuinely fires on them is still credited. All 146 are **no-action** findings — 93 at INFO, 48 at MEDIUM and **5 at HIGH**. Statically novel findings go from 87 (18.3%) to **224 (47.1%)**, and HIGH findings with no lint coverage from 20 to **25**. What the detector *reports* does not change at all — 476 findings before and after — and neither do the empirical co-location figures (252 covered, 224 novel), because those come from running the linters rather than from inferring anything about them. That the statically novel count and the empirically novel one are now the same number is not a coincidence; see the next paragraph. `tools/rq5_refactor_delta.py` recomputes the whole comparison from the preserved pre-fix export; `tools/lint_mapping_probe.py -check-parity` re-derives the mapping and fails if the shipped inference drifts from it; and 36 tests pin the same conditions, including the reverse direction (a narrow handler must lose the credit, and widening it to bare must restore it).

A residual we had not eliminated — and then did. Five findings of the 476 disagreed with the empirical measure. All five are `except Exception:` handlers that return or assign a constant; the corrected inference credits `pylint:W0718` and `ruff:BLE001`, `BLE001` does fire at exactly that line, and yet the co-location run recorded no linter there at all. Three explanations were tested and ruled out: it is not a parse failure (`pylint` rates `model/_providers/openai.py` 9.96/10 with no fatal or syntax message, and the file’s single `except Exception` is the one it declines to flag); it is not an inline pragma (none of the four files contains the string “pylint”); and it is not the `as` binding, which real code uses and the probe originally did not — tested directly, `W0718` fires on `except Exception:`, on `except Exception as e:` and on the same handler that uses `e`, and does not fire on a bare `except:`. The synthetic case that matches these five *does* earn `W0718` in the probe, so the discriminating condition was something about their context. It was our harness, not the linter: all four files sit under a directory with no `__init__.py`, and the directory-based invocation of `pylint` described in Section 4.2 did not analyse them. Handed the files directly, `pylint` emits `W0718` at the disputed line in every one of the five. Two corrections follow. First, with the harness fixed, the static `covered_by` mapping and empirical co-location agree on all 476 findings: 224 are novel by both criteria. Second, this reverses the direction of the residual bias. `W0718` is in RQ1’s selected `pylint` rules and fires on all five disputed handlers, so the directory-based run under-counted linter coverage and overstated novelty by five findings (229 before correction, 224 after). None of the five was labelled, so the 12-of-48 versus 1-of-56 crosstab is unchanged.

The corrected static mapping agrees with empirical co-location on all 476 findings. The mapping repair changed coverage classifications but did not change the LLM-label join: none of the five disputed handlers carried an original DEFECT label. Among the original labels, no narrow-typed handler carried that label; one of 23 purposively selected supplementary labels on narrow-typed handlers did. This contrast does not support generalisation.

Result 3: contribution of the isomorphism layer. Of the 476 findings the isomorphism layer classified **none** as isomorphic: 254 non-isomorphic, 206 unknown, and 16 with no class at all (the **silent-suppress** findings, which have no handler). A layer that never produces a positive classification contributed nothing to the separation measured above; whatever the refactor achieved came from layer 1 (declared value ranges) and layer 3 (escape channel). Severities across the frame: 208 HIGH, 126 MEDIUM, 129 INFO, 13 LOW.

Result 4: what the refactor did accomplish. All 13 observations carrying LLM DEFECT labels survive it, and all 13 receive HIGH severity; this describes label disposition, not confirmed defects. Of the 122 CONTRACT labels, 33 were dropped and 25 reduced to INFO or LOW: 58 of 122, 47.5%. Restricting to the case layer 1 was built for, contracts whose enclosing function *declares* a None-admitting return type, 35 of 38 (92.1%) were dropped or reduced; for a literal `-> None`, 22 of 23 (95.7%). Not all of them, and the exceptions are the interesting part: three declared-contract findings still report at HIGH or MEDIUM, and **two** labelled FALSE POSITIVES survive at HIGH. One is `pydantic_ai/ui/_event_stream.py:293`, an async generator whose handler propagates the error elaborately and which the refactor reports *twice*. The other is `fickling/polyglot.py:150`, which the frozen sample labelled as an **implicit-fallback** over-call and the refactor now reports as **silent-fallback** instead, still at HIGH. The second one is visible only because the join in Result 2 keys on the handler’s coordinates and not on the rule name: a rule-inclusive join counts a reclassified handler as a deletion

and quietly reports one surviving false positive instead of two. And 55 of the 122 CONTRACT labels sit in functions with no declared return annotation at all, so layer 1 cannot apply to them by construction. That is the ceiling on how much noise this design can remove: without type information, the declared-contract test has nothing to read.

The 60 supplementary labels. RQ2’s 80 labels were drawn from the v0.7.0 frame; 72 survive into v0.8.0 and fewer into this one, which is too small a base for a crosstab. We labelled 60 further findings, written to `paper/annotations-v2-additions.csv` — a new file. The frozen `annotations.csv` and `annotations-second-pass.csv` are unchanged and remain SHA-locked; nothing in RQ2 was re-labelled to suit this section. Method: candidates were drawn from the refactored frame with priority on sites whose status the refactor changed and on sites no linter reaches; each was labelled by reading the pinned corpus source, and the detector’s own severity, isomorphism and `covered_by` values were recorded into the row *after* the rationale was written, so the rationale is not a restatement of the verdict; every row carries its rationale, the enclosing signature, and a flag for whether the site is new in this frame. One row is marked in its own rationale as the weakest of the 60 — a borderline CONTRACT that a second annotator could reasonably call DEFECT — rather than being quietly resolved. The outcome was 1 DEFECT, 58 CONTRACT, 1 FALSE POSITIVE. Labels were written by an LLM agent, the same process as RQ2’s, and inherit every limitation RQ2 states about it, including that agreement between runs of one model family is compatible with shared bias, not proof of accuracy; we did not run the 60 twice. The 60 are *not* a random sample, so the 140-label figures support a within-sample description only, not a wider inference.

The one DEFECT label in the novel remainder. The single DEFECT label among the 56 non-co-located observations is `garak/probes/dan.py:134`, a narrow-typed handler from the supplementary round. It is one LLM label from a purposively selected sample, not an independently confirmed finding or an estimate of defect share. It shows only that the observed novel cell was not empty of DEFECT labels.

Reproducing this subsection.

```
.venv/bin/python tools/rescan_corpus.py --out bench/rescan-v2 --with-context
.venv/bin/python tools/coverage_union.py --findings-dir bench/rescan-v2 \
  --out bench/corpus-coverage-union-v2.json \
  --emit-per-finding bench/corpus-coverage-per-finding-v2.jsonl
.venv/bin/python tools/coverage_union.py --findings-dir bench/rescan-f2 \
  --out bench/corpus-coverage-union-621frame.json \
  --emit-per-finding bench/corpus-coverage-per-finding-621.jsonl
.venv/bin/python tools/e722_baseline.py          # -> bench/e722-baseline.json
.venv/bin/python tools/rq5_refactor_delta.py    # -> bench/rq5-refactor-delta.json
PYTHONPATH=src .venv/bin/python tools/lint_mapping_probe.py --check-parity
# -> bench/lint-rule-mapping.json; re-runs all four baselines over 68
# generated probes and exits non-zero if the shipped covered_by table
# drifts from what those baselines actually do
.venv/bin/python tools/pinned_rescan.py --out /tmp/pinned-v080
# -> re-scans the pinned corpus with the v0.8.0 detector, from a git
# worktree at that tag, using that tree’s own src and exporter; prints
# PINNED_TOTAL=621 plus the per-rule and per-package counts. This is what
# the claims asserting v0.8.0’s historical scan results now run through.
PYTHONPATH=src .venv/bin/python tools/refix_replay.py
# -> rebuilds the pre-correction covered_by_for in a scratch tree and runs
# the 36 mapping tests against it; prints REFIX_REPLAY 21 failed, 15
# passed. The fail-to-pass half of the correction’s evidence.
```

The checked-in exports make both frames reproducible without overwriting the frozen v0.7.0 scan: `bench/rescan-f2/` contains the 621-finding v0.8.0 frame, and `bench/rescan-v2/` contains the 476-finding refactored frame. Running the corresponding `coverage_union.py` commands reproduces the reported per-rule and per-tool counts.

4.8 Control-corpus comparison

Design. The main corpus is dominated by one handler shape: 134 bare `except:` clauses, 131 of them in a single package, holding all 12 original DEFECT-labelled sites. Any claim of the form “the lint baseline already covers the defects” may therefore be an artefact of code style rather than a general fact. The control corpus inverts the style: across its eight package bodies (263 `.py` files, 109,400 lines, 842 handlers) there is exactly one bare `except`, in `msgpack/fallback.py:812`, whose handler resets the buffer and re-raises — so even the single E722 candidate is a non-defect. The detector build is the frozen 0.9.x predicate, unmodified; the four baselines run with RQ1’s exact rule selection and ± 1 -line matching. The four first packages contribute 243 handlers and 0 bare clauses; the four added for domain diversity contribute 599 handlers and the 1 re-raising bare clause.

Result: the trivial baseline behaves differently across these corpora. Table 12 contrasts the selected packages. Finding density is 21.0% (476/2,270) in the main corpus, 15.6% (38/243) in the four-package control core, and 18.3% (154/842) across all eight control packages. These are descriptive densities in purposively selected corpora, not estimates for broader classes of software. `flake8 -select E722` returns 134 candidates on the main corpus, including all 12 original DEFECT-labelled sites; on the control corpus it returns one candidate, which is a re-raise and carries no DEFECT label.

Result: no misses were adjudicated in the read set. Of the control corpus’s 243 handlers the tool reports 38; 114 unreported handlers contain a `raise` and need no review; the remaining 91 silent-and-unreported handlers were each read. None was adjudicated a miss under the stated protocol: the cases were optional-import and capability probes, `StopIteration` protocol handling, `dict.get` and `list.index` sentinels, documented best-effort fallbacks (`requote_uri`, `get_unicode_from_response`), data-model protocol returns (`NotImplemented`), and CLI exit paths. This is an exhaustive review of that finite read set by one annotator, not proof of zero misses in related code.

The four diversity packages agree. `click` (31 findings, 13 HIGH), `anyio` (45 findings, 1 HIGH), `pydantic` (40 findings, 1 HIGH) and `msgpack` (0 findings) reproduce the pattern: 12 of the 15 HIGH findings are `except Exception` capability probes already covered by BLE001/W0718 (Windows-console shims, stream predicates, `TaskGroup` propagation with explicit re-raise paths). The 3 uncovered HIGH findings are contracts on reading: `click/core.py:161` is a `list.index` probe returning infinity as the documented sort key; `click/types.py:269` converts the user’s `ValueError` via `self.fail`, which raises `UsageError` — the exception escapes through a call rather than a `raise` statement, a shape no callee-local rule can see (the detector’s `exception_escapes` check looks only for the exception object in a returned value or a side-channel call; we refer to this as the `exception_escapes` case); `pydantic/v1/_hypothesis_plugin.py:125` is a `contextlib.suppress(Exception)` digit search in hypothesis test-support code, confirming the SIM105-adjacent blind spot of Section 4.2 from the other side.

Another case the handler-local view cannot decide. `connectionpool.py:812` names a new false-positive mechanism: **state-flag amplification**. The finding is `clean_exit = False` (set alongside `release_this_conn = False`), a control-flow flag consumed in `finally` and after the handler; the **amplifies** criterion (“the value outlives the call”) promotes it to HIGH exactly as it would a substituted return value. Telling the two apart requires knowing where the variable is consumed, which lies outside the handler. Like the `exception_escapes` case above and the three constructed probes in the Discussion, it is documented here and left in the code: each is an instance of the limit the paper argues, and patching them would weaken the evidence they constitute.

Reproducing this subsection.

```
PYTHONPATH=src .venv/bin/python tools/control_rescan.py --check
# -> verifies bench/control-rescan/<pkg>.jsonl against a fresh fetch
# (SHA-256 checked per paper/corpus-lock-control.json) and re-scan;
# prints CHECK-OK per package, exits non-zero on any drift.
```

Table 12: Style-opposite corpora, same detector build and baseline selection. Densities are findings per handler inside the scan roots. The E722 row reports coverage of the original 80-item LLM-labelled sample only; one supplementary LLM DEFECT label lies outside E722. Control-corpus readings were made by one annotator and are not the same label process as Group A.

	Group A	B core (4 pkgs)	B all (8 pkgs)
Handlers	2,270	243	842
Bare except :	134	0	1 (re-raise)
Findings	476 (21.0%)	38 (15.6%)	154 (18.3%)
HIGH	208	6	21
Unique HIGH (covered_by empty)	25	2	5
E722 candidates	134	0	1
E722 coverage of original 80-sample labels	12/12	—	—
Recorded DEFECT labels	12/80 + 1/60	0 of 38	0 of 38, 0 of 15 new HIGH

5 Discussion

The detector is a review queue, not an alarm. On these pinned trees, `flake8 -select E722` returns 134 candidates and contains all twelve DEFECT-labelled sites in the original sample of 80. This is a shorter candidate list containing all twelve labels from the original sample, not proof that E722 captures all confirmed defects. The supplementary sample adds one DEFECT label outside E722, but it comes from the same LLM process and is not an independently confirmed increment. The records do not establish a true defect yield for either detector. They do support a practical evaluation rule: compare against simple lint baselines, report the rule selection, and require independent adjudication before calling findings defects. One original sample label describes a fail-open security verdict in a red-teaming tool; that case illustrates why the construct merits study, not that this detector has measured its prevalence.

The triangulation identifies a limit of the validation design. The label share, cluster share, observed maintainer fixes and project-selected PR outcomes describe different units and selected records. None identifies the defect composition of the tracked sites or a common denominator across arms. The evidence therefore supports separate descriptive observations, not a shared defect rate. A future study would need independent contract adjudication and maintainer responses to a random sample of findings.

Labels cluster by package. In the original sample, all twelve DEFECT labels occur in one package and three copied families; the other seven packages have none. This association does not establish a causal effect of codebase maturity or rule design. It supports reporting package-level composition in future samples, rather than treating every finding as an independent bug.

Four layers of overfitting, stated against ourselves. The refactor was assessed against data available during its development; it is in-sample engineering evidence, not out-of-sample validation. First, the acceptance gates demand no-regression on the same corpus the patches were developed against, so every patch is fitted to its own test set by construction. Second, all 140 labels (80 + 60) were available during development; there is no held-out set, and the 60 supplementary labels were drawn precisely from sites whose status the refactor changed. Third, several counterexamples that changed the interpretation — the constructed probes below, the state-flag mechanism of Section 4.8, and the mapping defects of Section 4.7 — were identified during subsequent review of this project. Fourth: callee-local analysis cannot define “the caller cannot distinguish” without caller intent, so its separation criterion is necessarily a syntactic proxy, and proxies fitted on one style fail on the next. In the selected control corpus, the single annotator assigned no DEFECT label to any of the 38 core findings; this does not establish that the detector has no unique contribution on other code.

The limits of caller context. Under the study’s definition, whether a handler violates a contract can depend on what its caller expects. This paper does not build a call graph or recover caller intent, so it does not establish whether caller context would resolve any particular finding. A future evaluation should compare a reproducible interprocedural analysis against independent contract adjudication.

Constructed probes of the predicate boundary. Three minimal probes were checked against the frozen 0.9.1 build on 2026-09-06: (1) a boolean predicate returning `False` on a database timeout is missed when its handler catches a specific exception; (2) an `Optional`-returning function returning `None` on a Redis error is likewise missed; and (3) a validation loop with the `try` outside the loop and a `return False` handler is reported at HIGH. The first two expose possible false negatives; the third exposes a possible false positive. Together with the `exception_escapes` case and state-flag amplification (both in Section 4.8), they document limits of the evaluated intra-procedural predicate. They were not changed in this study.

The `contextlib.suppress` blind spot is real. 0/19 of the findings are visible to the four selected rule sets, and none is reported by `ruff` with all 969 of its rules enabled or by `pylint` with its full default message set either. `Ruff`’s SIM105 rule recommends a refactoring to `contextlib.suppress`; our supplementary `semgrep` rule co-locates with 18 of the 19 findings.

6 Threats to validity

The first five items are the limitations on which the triangulation verdict in Section 4.5 depends; the rest are the study’s other threats.

- **Limitation 1 — the labelling arm is LLM-judged.** Both labelling rounds were performed by LLM agents, not human raters; the rounds agreed on 80/80 items. Agreement between these automated runs does not establish independent adjudication or label accuracy and is compatible with shared model bias. All arm-1 proportions inherit this limit. The committed artefacts record the labels and the rationales but not the model identity or version, so a third party cannot re-run the labelling bit for bit. We were not able to recover that identity and therefore do not name a model: every DEFECT proportion in this paper is an LLM label share under an unrecoverable model configuration, and the weighted projection inherits exactly that limitation.
- **Limitation 2 — SURVIVED is ambiguous in this family.** In the maintainer-behaviour dataset, SURVIVED can only be read as “nobody acted”; it can *not* be read as “maintainers consider it a deliberate contract”, because for silent defects the two are observationally identical. Any number derived from arm 2 inherits this reading restriction.
- **Limitation 3 — arm-3 selection and unit.** The 43 reports were selected through the project workflow and include 19 self-closures, one bot closure, 16 merges, and seven maintainer closures. Thus 16/43 is the merge share of project-selected PR records, not a maintainer-acceptance rate. The record is frozen at 2026-09-01; two submissions duplicate other submissions, one shares substance with a counted merge, and 8 of the 16 merged fixes lie outside the tracked packages. A merge records acceptance of a code change, not independent confirmation of a defect or representativeness.
- **Limitation 4 — the triangulation’s arms are not commensurable.** Arm 1 counts labelled findings, arm 2 counts tracked sites, arm 3 counts project-selected pull requests, and 8 of arm 3’s 16 merged cases lie outside the tracked packages. The records therefore do not support a shared population-level rate; we report only their separate finite-set observations.
- **Limitation 5 — arm 2’s denominator is a convention, and its population is not the detector’s.** The pipeline tracked 2,128 sites and labelled 478 of them, discarding 1,650 (77.5%) as too young (924), vanished (681) or mutated (45); nothing in the data selects among the resulting risk sets. Its tracking criterion — a handler carrying no raise, log or warn signal — omits the detector’s three exemption gates and its fallback-value analysis, and never considers `contextlib.suppress` at all, so only 185 of the 478 rows (38.7%) carry a `failroute` rule. Arm 1’s defect share is measured on findings and does not transfer to that population.
- **Sample size.** $n = 80$ of the v0.7.0 frame (659). Per-rule and per-package cells are small (`masked-exception` $n = 1$); proportions describe the sample and should not be read as population rates.
- **Sample frame changed under the sample.** The draw came from v0.7.0’s 659; 72/80 coordinates survive in v0.8.0’s 621, and the deletions removed zero labelled DEFECTs — but the surviving 72 are no longer a random sample of the current frame. Label proportions are stated for the v0.7.0 frame only.
- **Package selection is not random.** The eight packages were chosen because the author had prior contribution history in them. `deepteam` in particular is a package where a candidate defect family had already been reported from the author’s account. This prior selection may inflate the overall

DEFECT-label share. The seven-package 0/66 figure gives the comparison without that package.

- **Curated reference set shares the project’s submission pipeline.** The 16 merged family fixes were submitted from the author’s account as part of a project that used AI-assisted software development; per-PR divisions of work are not documented. A maintainer merge records that the change was acceptable to the project — it is not a maintainer finding that the pre-fix behaviour was a defect, and it says nothing about representativeness. The family adjudication of all 75 merged PRs was done by reading diffs (52 earlier title-only judgements were re-verified from diffs in a dedicated pass, with 3 corrections).
- **Co-location $\neq$ equivalent detection** (Section 4.2 caveat). A nearby warning may concern a different property, while a warning farther than one line away may still be relevant. The reported co-location count is neither a measured semantic coverage rate nor a strict bound on one.
- **The fifth baseline tool is ours.** The semgrep rule counted in the five-tool union was developed within this project; coverage attributed to it is self-supplied.
- **Construct validity (Section 4.4).** The detector operationalises local handlers and `contextlib.suppress`; 64.3% of fixes in the curated reference set lie outside those shapes. The corpus counts and reference-set recall are scoped to the pinned records.
- **Control scope is two styles, not the ecosystem.** The control comparison covers a zero-bare-except infrastructure style against the main AI/ML style; both are Python, both are PyPI. The conclusion carried by Section 4.8 is scoped to those two corpora, this detector build, and this adjudication protocol. A third style, another detector, or another annotator could move it, and the finite read-set labels do not estimate defect prevalence in disciplined code.
- **Control adjudication is single-annotator.** The 38 findings and the 91 recall-side handlers were read once, by one annotator, with history, issue-record and test evidence taken only for the 2 unique HIGH findings; the remaining 36 + 91 rest on in-source contract evidence (docstrings, guarded read sites, explicit fallback comments, re-raise paths). Borderline CONTRACT-vs-DEFECT calls were resolved toward CONTRACT wherever a documented policy existed; the direction of that bias is stated so a re-adjudication can test it. These readings do not establish independent human adjudication.
- **Known predicate limits remain in the shipped version.** The three constructed probes of the Discussion, and the state-flag amplification and `exception_escapes` cases of Section 4.8, document false-negative and false-positive modes of the 0.9.1 predicate. They are examples of its limits, not an exhaustive list.
- **Five DEFECT labels have an unestablished mechanism.** In five labelled sites, the `try` body contains the discarded comparison `self.score == 1`; tested values did not raise, but attribute access or overloaded equality can raise or have side effects for other objects. `silent-fallback` flags the handler’s assignment shape without showing that this comparison converts a failure into a wrong caller-visible value. The frozen LLM labels remain DEFECT, but these five cases are not confirmed instances of the stated failure-conversion mechanism. The function `is_successful` has no caller in the pinned source distribution, and the initial value of `self.success` depends on an external `BaseMetric` implementation unavailable in the reproduction environment. The runtime path therefore remains unverified. The labels were not re-adjudicated; this limitation changes their interpretation, not the frozen annotation record.
- **Version pinning is a snapshot.** All findings are relative to the pinned versions in `paper/corpus-lock.json`; upstream may have fixed or introduced instances since.

7 Related work

Failure handling as an empirical object. Exception handling has a long empirical literature in statically typed languages: Cabral and Marques’ field study of Java and .NET [6] documented how often exceptions are caught and swallowed; Sawadpong et al. [20] characterised exception-handling *defects*; and de Pádua and Shang quantified the prevalence of named exception-handling anti-patterns over a large corpus [4] and revisited developer practice through exception-flow analysis [3]. That line of work asks *whether* anti-patterns occur and *how often*, and it is our closest neighbour: we inherit its premise that handling shape is measurable, and change the question. On a corpus of Python AI/ML packages, the same syntactic shapes can receive different readings in context. In our 80-item sample, 64 observations received a CONTRACT label, 12 a DEFECT label, and 4 a FALSE POSITIVE label from LLM agents. These are judgements from one labelling process, not confirmed contracts or defects,

and the sample does not estimate their prevalence. The present study makes that uncertainty explicit rather than treating shape counts as defect counts.

Why generic rules get muted. A second body of work explains the reception of such numbers. Developers report false positives and noise among the reasons they ignore or abandon static analysis [12]; Ruthruff et al. made *actionability* an experimental target rather than a slogan [16]; Google’s Tricorder and FindBugs-Fixit programmes illustrate the value of filtering, prioritisation and a suppression path in deployed analysis tools [2, 17, 18]. User-centred and follow-up studies reach the same ordering from the other side: what developers need is a warning they can act on [9, 22], and the mitigation of false positives remains an open problem rather than a solved one [10]. WarningsGuru operationalised relevance with statistical bug models [15], and Hu et al. recently measured the other end of the same pipe — which warnings developers actually suppress, and on what grounds [11]. Crisan and McNutt frame linting as a sociotechnical activity [7]. Our case study examines why some syntactic matches may reflect intentional fallback contracts, and where local code shape alone cannot settle that question. The available labels do not establish the relative actionability of this detector and its baselines.

Silent failure in machine-learning systems. The systems literature supplies the stakes. Sculley et al. named the pipeline coupling and glue-code debt that makes ML behaviour brittle [21]; Polyzotis et al. proposed continuous data validation as the corrective at the data boundary [14]; the ML Test Score encoded a rubric that tests the pipeline rather than the model alone [5]; Amershi et al. and Paleyes et al. documented challenges during integration and deployment as well as model development [1, 13]; Sambasivan et al. traced how a data problem cascades through a high-stakes system until it surfaces as an unexplained outcome [19]; and Dixit reported silent data corruption at scale in production hardware, where no exception is raised at all [8]. Zhang et al. position testing and robustness techniques across that same spectrum [23].

How this study differs from the cited work. The studies by de Pádua and Shang [4] and Hu et al. [11] examine, respectively, the frequency of handling shapes and developers’ responses to warnings. This paper adds a limited case study of LLM labels for sampled Python AI/ML findings and of co-location with selected syntactic lint rules: 12 of 80 sampled findings carry DEFECT labels, concentrated in one package, while four selected lint-rule sets co-locate with 255 of 621 candidates. The added evidence is descriptive and does not confirm the labels or estimate prevalence.

8 Conclusion

Across eight pinned AI/ML Python packages, the v0.8.0 detector reported 621 local exception-handling candidates in 524,229 scanned lines. Four selected syntactic linter rule sets were not co-located with 366 candidates under a ± 1 -line criterion. This is a finite-corpus comparison; co-location does not establish equivalent detection, and the candidates are not confirmed defects.

In the original 80-finding sample, LLM agents assigned 12 DEFECT, 64 CONTRACT, and 4 FALSE POSITIVE labels. The DEFECT labels cluster in three repeated code families in one package, and five of the twelve have an unestablished failure-conversion mechanism. The labels are not independent adjudications. Against the curated merged-fix reference set, the detector matches three of 14 in-scope cases; nine route failure outside an except-handler. This set does not estimate recall over the software ecosystem.

The refined predicate reduced the candidate count to 476 and increased four-linter co-location from 41.1% to 52.9%. Among 140 LLM-labelled observations, 104 joined the refined frame; 12 of 48 co-located and 1 of 56 non-co-located observations carried DEFECT labels. The additional 60 observations were selected purposively, labels are clustered, and the refactor was developed against the same corpus and labels. The comparison is descriptive and does not establish incremental defect yield.

The simple `flake8 -select E722` rule produced 134 candidates and included all twelve original DEFECT-labelled sites. This is equal coverage of the twelve labels in a shorter candidate list, not evidence of equal coverage of confirmed defects or of E722’s precision. The practical implication is to treat static-analysis output as a review queue, compare against simple baselines, and require independent adjudication before calling a candidate a defect. A stronger validation study would use independent contract adjudication, held-out packages, and a sampling design that draws from both detector and baseline findings.

9 Reproduction and artefacts

The empirical counts and comparisons are generated from scripts in `tools/` against the pinned corpus in `paper/corpus-lock.json`; manual adjudications are recorded in the accompanying ledgers. All paths below are relative to the root of the public repository <https://github.com/feiiiiii5/failroute> (MIT licence); the detector itself is released as `failroute` on PyPI, <https://pypi.org/project/failroute/>. RQ1–RQ4 analyse `failroute` 0.8.0; RQ5 analyses 0.9.1. The pinned commit `3b4c567` contains the underlying datasets, exports and scripts for the reported numerical results, including the post-release ledgers and corrected baseline invocation. The figure PDFs in this submission have later layout edits but unchanged plotted counts; they are included in the arXiv source package. The v0.8.0 release tag alone does not reproduce every table. The committed `bench/rescan-f2/` export records the 621-finding frame; `bench/rescan-v2/` records the 476-finding refactored frame (freshly reproduced 2026-09-07).

The pinned 0.8.0 suite contains 158 tests; the 0.9.1 release contains 221 tests. All 15 release test jobs across Ubuntu, macOS and Windows and Python 3.9–3.13 passed, along with the quality job. The 0.8.0 unit corpus v6 has 36 positive and 32 negative fixtures. For 0.9.1, the revised 34/34 fixture set is labelled v7; five narrow-type `contextlib.suppress` cases changed to negative and three other cases changed in the opposite direction. Every corpus scan reported here was run on macOS arm64; the CI matrix exercises tests, not scans.

```
git clone https://github.com/feiiiiii5/failroute && cd failroute
git checkout 3b4c567 # pinned commit: every artefact the tables use
python -m venv .venv && . .venv/bin/activate
pip install '[test,paper]' # pytest + matplotlib + 4 linters + bugbear
python tools/fetch_corpus.py # pinned sdist -> paper/corpus/
# version+sha256 pinned in paper/corpus-manifest.json; fetch verifies each
# archive against paper/corpus-lock.json and exits non-zero on mismatch
# (it rewrites only the lock's generated_at_utc timestamp; the eight
# archive digests are what must match)
PYTHONPATH=src python -m pytest # 221 tests (0.9.1 suite)
PYTHONPATH=src python tools/rescan_corpus.py --out bench/rescan-paper --with-context
# The detector at this commit is 0.9.1, so a fresh rescan reproduces the
# RQ5 frame (total 476), not RQ1's 621: the 621 frame belongs to the
# v0.8.0 detector and is committed as bench/rescan-f2. Writes to bench/;
# do NOT re-export over paper/scan/, the frozen v0.7.0 baseline.
python tools/coverage_union.py --findings-dir bench/rescan-f2
# -> bench/corpus-coverage-union.json ; union 255/621 = 41.1%
# bench/rescan-f2 is the committed 621-finding v0.8.0 export every RQ1
# figure is read from. To reproduce RQ5's frame instead, point the same
# command at bench/rescan-v2 (or your own --out above): union 252/476 =
# 52.9%. The default --findings-dir paper/scan is the frozen v0.7.0 set,
# whose union figure is deprecated.
python tools/coverage_union.py --ruff-select S110,S112,BLE001 \
--findings-dir bench/rescan-f2 --out /tmp/union-symmetric.json
# the symmetric baseline variant quoted in RQ1 (ruff also gets its
# broad-except rule): ruff 127 co-located, union 255/621 = 41.1% ---
# the same union the narrow selection gives, as RQ1 explains;
# committed as bench/corpus-coverage-union-ruff-ble001.json
python tools/make_figures.py # -> paper/figures/ (3 figures;
# pinned code uses earlier layout, with the same plotted counts)
python tools/jl_adjudicate.py # diff-read family adjudication
```

Three further pipeline commands are deliberately *not* part of the reproduction path, because each overwrites a hand-curated artefact without regenerating it faithfully: `draw_sample.py` (the committed `paper/sample.jsonl` was drawn from the pre-fix 659 frame; re-drawing changes which 80 findings the published labels describe), `merged_pr_recall.py` (drops the hand-written `note` column), and `compare_linters_corpus.py` (drops the merged `semgrep` results). See `paper/ARTIFACT.md` §0.2 and §5.5–5.6 before running any of them.

Key artefacts, and the thing each one pins down:

- `paper/corpus-lock.json` — pinned inputs.
- `paper/sample.jsonl` — the 80-item draw.
- `paper/annotations.csv` — labels and rationale.
- `paper/annotations-second-pass.csv` — second automated pass.
- `paper/merged-pr-recall.csv` — curated merged-fix reference set (all rows diff-read). The repository and PR number, rather than the descriptive `pr_title` field, identify each change: the stored titles for `agent-sweep#197` and `inspect_ai#4908` do not match their final GitHub titles. The discrepancy does not alter classification or counts.
- `paper/j1-trulens2653-prefix.py` — pre-fix evidence for the `trulens#2653` detection.
- `bench/corpus-coverage-union-5tool.json` — cross-tool coverage including the self-written semgrep rule.
- `paper/intervals.json` — sample counts used by Figure 2; auxiliary interval calculations in the file are not reported as inferential results.
- `paper/annotations-v2-additions.csv` — the 60 supplementary labels of Section 4.7, with rationale, enclosing signature, the detector’s own severity / isomorphism / `covered_by` values, and a flag for whether the site is new in the refactored frame; the two frozen annotation files above are unchanged.
- `bench/corpus-coverage-per-finding-v2.jsonl` — the refactored 476-finding frame, one row per finding, carrying severity, isomorphism class and both novelty verdicts.
- `bench/corpus-coverage-union-v2.json` — the aggregate of that run: 476 findings, 252 covered, 224 failroute-only.
- `bench/corpus-coverage-per-finding-621.jsonl` — the same per-finding export for the v0.8.0 frame, regenerated from the in-tree `bench/rescan-f2/` so that RQ1 no longer depends on a scratch directory.
- `bench/corpus-coverage-union-621frame.json` — the aggregate of that run: 621 findings, 255 covered, 366 failroute-only, matching `bench/corpus-coverage-union.json` cell for cell.
- `bench/e722-baseline.json` — the E722 and BLE001 candidate counts and their overlap with the labelled defects.
- `bench/rq5-refactor-delta.json` — the frame difference and the label disposition under the refactor.
- `bench/lint-rule-mapping.json` — the measured matrix of which lint rule fires on which handler kind and body shape, from `tools/lint_mapping_probe.py`. This is the evidence the `covered_by` table is derived from rather than the table’s own assertion.
- `bench/corpus-coverage-per-finding-v2-pre-coverby-fix.jsonl` — the per-finding export as it stood *before* that correction. Preserved rather than regenerated: the over-crediting inference it records no longer exists in the source, so this file is the only record of what the earlier static-novelty figure of 18.3% was computed from, and the before/after comparison is a diff against it.
- `paper/h1_arm3_classification.csv` — the arm-3 closed-PR ledger (160 diff-read rows; 27 family), copied byte-identically from the companion repository.
- `paper/arm2-tracked-sites.csv` — the arm-2 tracked-site dataset: all 2,128 rows over the eight packages with all five labels, the version span and observation count each label rests on, and the PR each FIXED row is attributed to. Projected field-for-field from the companion repository’s maintainer-behaviour dataset; code snippets and commit-level attribution are deliberately excluded, so the labels are auditable but not re-derivable from this artefact alone.

Execution notes. The commands use `PYTHONPATH=src` to import the checked-out package reliably across environments. The v0.8.0 scanner exits with status 1 when it reports findings even if the scan and export succeeded; a reproducer must preserve the output and distinguish findings from execution errors. The 0.9.1 scanner provides separate severity and error exit statuses.

Availability and ethics. The corpus is eight publicly distributed PyPI source distributions, each used under its own licence; nothing was taken from a private source. The maintainer-behaviour record is a set of public GitHub issue and pull-request records, every one cited by its public number, and the two datasets derived from them are committed to the public repository and itemised in the list above, so that the classification can be audited row by row. The study analyses publicly recorded artefacts of professional work on public repositories, and uses no non-public data about identifiable individuals. The author’s conflict of interest — leading the project that produced both the detector under evaluation

and one of the five baselines — is disclosed on the title page, and the results unfavourable to the tool are reported alongside the favourable ones.

References

- [1] Saleema Amershi, Andrew Begel, Christian Bird, Robert DeLine, Harald Gall, Ece Kamar, Nachiappan Nagappan, Besmira Nushi, and Thomas Zimmermann. Software engineering for machine learning: A case study. In *2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP)*, pages 291–300, 2019. doi: 10.1109/ICSE-SEIP.2019.00042.
- [2] Nathaniel Ayewah and William Pugh. The google findbugs fixit. In *Proceedings of the 19th international symposium on Software testing and analysis*, pages 241–252, 2010. doi: 10.1145/1831708.1831738.
- [3] Guilherme Bicalho de Pádua and Weiyi Shang. Revisiting exception handling practices with exception flow analysis. In *2017 IEEE 17th International Working Conference on Source Code Analysis and Manipulation (SCAM)*, pages 11–20, 2017. doi: 10.1109/SCAM.2017.16.
- [4] Guilherme Bicalho de Pádua and Weiyi Shang. Studying the prevalence of exception handling anti-patterns. In *2017 IEEE/ACM 25th International Conference on Program Comprehension (ICPC)*, pages 328–331, 2017. doi: 10.1109/ICPC.2017.1.
- [5] Eric Breck, Shanqing Cai, Eric Nielsen, Michael Salib, and D. Sculley. The ml test score: A rubric for ml production readiness and technical debt reduction. In *2017 IEEE International Conference on Big Data (Big Data)*, pages 1123–1132, 2017. doi: 10.1109/BigData.2017.8258038.
- [6] Bruno Cabral and Paulo Marques. Exception handling: A field study in java and .net. In *ECOOP 2007 — Object-Oriented Programming*, Lecture Notes in Computer Science, pages 151–175. Springer Berlin Heidelberg, Berlin, Heidelberg, 2007. doi: 10.1007/978-3-540-73589-2_8.
- [7] Anamaria Crisan and Andrew M McNutt. Linting is people! exploring the potential of human computation as a sociotechnical linter of data visualizations. In *Proceedings of the Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, pages 1–10, 2025. doi: 10.1145/3706599.3716230.
- [8] Harish Dixit. Keytone: Silent data corruptions at scale. In *2023 IEEE 29th International Symposium on On-Line Testing and Robust System Design (IOLTS)*, pages 1–2, 2023. doi: 10.1109/IOLTS59296.2023.10224872. Two-page keynote abstract; title reproduced exactly as registered by IEEE, where “Keytone” is a typographical error for “Keynote”.
- [9] Lisa Nguyen Quang Do, James R. Wright, and Karim Ali. Why do software developers use static analysis tools? a user-centered study of developer needs and motivations. *IEEE Transactions on Software Engineering*, 48:835–847, 2022. doi: 10.1109/TSE.2020.3004525.
- [10] Zhaoqiang Guo, Tingting Tan, Shiran Liu, Xutong Liu, Wei Lai, Yibiao Yang, Yanhui Li, Lin Chen, Wei Dong, and Yuming Zhou. Mitigating false positive static analysis warnings: Progress, challenges, and opportunities. *IEEE Transactions on Software Engineering*, 49:5154–5188, 2023. doi: 10.1109/TSE.2023.3329667.
- [11] Huimin Hu, Yingying Wang, Julia Rubin, and Michael Pradel. An empirical study of suppressed static analysis warnings. *Proceedings of the ACM on Software Engineering*, 2:290–311, 2025. doi: 10.1145/3715729.
- [12] Brittany Johnson, Yoonki Song, Emerson Murphy-Hill, and Robert Bowdidge. Why don’t software developers use static analysis tools to find bugs? In *2013 35th International Conference on Software Engineering (ICSE)*, pages 672–681, 2013. doi: 10.1109/ICSE.2013.6606613.
- [13] Andrei Paleyes, Raoul-Gabriel Urma, and Neil D. Lawrence. Challenges in deploying machine learning: A survey of case studies. *ACM Computing Surveys*, 55:1–29, 2022. doi: 10.1145/3533378.

- [14] Neoklis Polyzotis, Martin Zinkevich, Sudip Roy, Eric Breck, and Steven Whang. Data validation for machine learning. In *Proceedings of the Machine Learning and Systems Conference (MLSys) 2019*, 2019. URL https://proceedings.mlsys.org/paper_files/paper/2019/hash/928f1160e52192e3e0017fb63ab65391-Abstract.html.
- [15] Louis-Philippe Querel and Peter C. Rigby. Warningsguru: integrating statistical bug models with static analysis to provide timely and specific bug warnings. In *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pages 892–895, 2018. doi: 10.1145/3236024.3264599.
- [16] Joseph R. Ruthruff, John Penix, J. David Morgenthaler, Sebastian Elbaum, and Gregg Rothermel. Predicting accurate and actionable static analysis warnings. In *Proceedings of the 30th international conference on Software engineering*, pages 341–350, 2008. doi: 10.1145/1368088.1368135.
- [17] Caitlin Sadowski, Jeffrey Van Gogh, Ciera Jaspan, Emma Soderberg, and Collin Winter. Tricorder: Building a program analysis ecosystem. In *2015 IEEE/ACM 37th IEEE International Conference on Software Engineering*, pages 598–608, 2015. doi: 10.1109/ICSE.2015.76.
- [18] Caitlin Sadowski, Edward Aftandilian, Alex Eagle, Liam Miller-Cushon, and Ciera Jaspan. Lessons from building static analysis tools at google. *Communications of the ACM*, 61:58–66, 2018. doi: 10.1145/3188720.
- [19] Nithya Sambasivan, Shivani Kapania, Hannah Highfill, Diana Akrong, Praveen Paritosh, and Lora M Aroyo. “everyone wants to do the model work, not the data work”: Data cascades in high-stakes ai. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pages 1–15, 2021. doi: 10.1145/3411764.3445518.
- [20] Puntitra Sawadpong, Edward B. Allen, and Byron J. Williams. Exception handling defects: An empirical study. In *2012 IEEE 14th International Symposium on High-Assurance Systems Engineering*, pages 90–97, 2012. doi: 10.1109/HASE.2012.24.
- [21] D. Sculley, Gary Holt, Daniel Golovin, Eugene Davydov, Todd Phillips, Dietmar Ebner, Vinay Chaudhary, Michael Young, Jean-François Crespo, and Dan Dennison. Hidden technical debt in machine learning systems. In *Advances in Neural Information Processing Systems 28 (NeurIPS 2015)*, 2015. URL https://proceedings.neurips.cc/paper_files/paper/2015/hash/86df7dcfd896fcaf2674f757a2463eba-Abstract.html.
- [22] Rahul Yedida, Hong Jin Kang, Huy Tu, Xueqi Yang, David Lo, and Tim Menzies. How to find actionable static analysis warnings: A case study with findbugs. *IEEE Transactions on Software Engineering*, 49:2856–2872, 2023. doi: 10.1109/TSE.2023.3234206.
- [23] Jie M. Zhang, Mark Harman, Lei Ma, and Yang Liu. Machine learning testing: Survey, landscapes and horizons. *IEEE Transactions on Software Engineering*, 48:1–36, 2022. doi: 10.1109/TSE.2019.2962027.