

# Failure-Routing in AI/ML Codebases: How Often Is a Swallowed Failure a Bug?

[TODO: authors and affiliations]

Draft — 2026-08-31. Not yet submitted to arXiv.

## Abstract

Exception handlers that convert a failure into a success-shaped value — an LLM judge that never ran becoming a legitimate 0.0 score, a parse error becoming “no results” — produce wrong answers with no crash and no log line. We call this pattern *failure-routing*. Syntactic linters cannot express it: `except Exception: return 0.0` is invisible to `ruff`, `bandit` and `flake8-bugbear`, and `ruff`’s own `SIM105` actively recommends rewriting `try/except/pass` into `contextlib.suppress(...)`, which is semantically identical and invisible to every linter we measured afterwards.

We build a six-rule AST detector for this family and apply it to eight pinned AI/ML packages (563,270 lines). It reports 649 findings, of which 396 (61.0%) are not co-located with any finding from the union of four syntactic linters; for the `contextlib.suppress` shape the figure is 27/27 (100%).

We then do what tool papers usually skip: we label a stratified random sample of the findings ( $n = 80$ ). The result is a negative one. Only 12 (15.0%, 95% Wilson interval 8.8–24.4) are genuine defects; 64 (80.0%, 70.0–87.3) are deliberate, frequently commented, design contracts; 4 (5.0%, 2.0–12.2) were false positives from a single detector bug that the labelling itself exposed. More strikingly, all 12 defects occur in one package, and in the seven other packages 0 of 66 sampled findings were defects (one-sided 95% upper bound 4.4%).

We further measure recall against an unusually direct ground truth: 10 upstream fixes in this defect family, authored by us and merged by the projects’ own maintainers. The detector finds 1 of 10 (95% Wilson interval 1.8–40.4).

The picture that emerges is that semantic failure-routing detection has *both* low precision and low recall on mature code, and that its yield is governed far more by codebase maturity than by rule design. We argue this does not make such detectors useless — it makes them *search-space reducers* rather than oracles, and we characterise the conditions under which the reduction pays for the triage it demands.

## 1 Introduction

### The `SIM105` observation.

- `ruff`’s `SIM105` rule recommends rewriting `try/except/pass` into `contextlib.suppress(...)`. The two forms are semantically identical.
- After the rewrite, no Python linter we tested reports the construct. In our corpus, all 27 `contextlib.suppress` findings are invisible to the union of `ruff`, `bandit`, `pylint` and `flake8+bugbear` (Section 4.2).
- A widely adopted refactoring therefore moves an entire defect shape out of the tools’ field of view while leaving its runtime consequences unchanged.

### Contributions.

1. A taxonomy of six failure-routing shapes and an AST detector for them (Section 2).
2. A reproducible prevalence and cross-tool coverage measurement over 8 pinned packages (Section 4.2).
3. A labelled stratified sample ( $n = 80$ ) giving the first precision estimate for this detector family on real code (Section 4.3) — the paper’s main empirical result, and a negative one.
4. A recall measurement against maintainer-merged fixes (Section 4.4).
5. Evidence that systematic labelling is itself a detector-improvement method: it exposed a defect that accounted for 100% of one rule’s real-world findings (Section 4.5).

## 2 The pattern family

Six shapes, all reducible to “a failure became a value the caller cannot distinguish from success”:

| Rule                           | Shape                                                                                         | Consequence                                                                           |
|--------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <code>no-action</code>         | <code>except ...: pass</code>                                                                 | caller never learns the operation failed                                              |
| <code>silent-fallback</code>   | handler returns/assigns a constant without re-raising                                         | judge outage becomes a legitimate 0.0                                                 |
| <code>masked-exception</code>  | catch-all conditionally re-raises <i>and</i> falls back to a constant                         | outcome depends on which branch ran                                                   |
| <code>silent-suppress</code>   | <code>with contextlib.suppress(...)</code>                                                    | same semantics as <code>except+discard</code> ; invisible to the linters we tested    |
| <code>implicit-fallback</code> | handler neither re-raises, returns, nor records — falls through to implicit <code>None</code> | “did nothing” becomes a legitimate <code>None</code>                                  |
| <code>name-shadowing</code>    | <code>except E as e:</code> rebinds <code>e</code> inside the handler                         | Python deletes the binding on exit → <code>NameError</code> ; original exception lost |

Table 1: The six failure-routing shapes.

## 3 Detector

The tool is the instrument, not the subject, so we describe it only to the extent needed to interpret the study. AST-based; six rules behind a shared registry; text/JSON/SARIF output; `# failroute: ignore` opt-out; `[tool.failroute]` per-rule configuration. Quality gates: 130 tests across 3 OS × 5 Python versions, `mypy -strict`, and a hand-labelled unit corpus (v6, 68 samples: 36 positive / 32 negative) whose labels were written independently of tool output, held to precision = recall = 1.0 in CI.

**Construct-validity caveat, stated up front.** That 1.0 is evidence the detector matches its own specification, **not** evidence it finds real defects. Section 4.3 is the external-validity measurement, and it tells a very different story.

## 4 Study

### 4.1 Corpus

Eight AI/ML packages fetched as pinned PyPI source distributions (not git clones), each recorded with URL, SHA-256, upload time and extracted tree hash in `paper/corpus-lock.json`.

| Package                       | Version | Scan root                   | .py files    | Lines          |
|-------------------------------|---------|-----------------------------|--------------|----------------|
| <code>inspect_ai</code>       | 0.3.260 | <code>src/inspect_ai</code> | 755          | 198,351        |
| <code>pydantic_ai_slim</code> | 2.36.0  | <code>.</code>              | 298          | 119,534        |
| <code>deepteam</code>         | 1.0.9   | <code>deepteam</code>       | 588          | 71,305         |
| <code>trl</code>              | 1.12.0  | <code>trl</code>            | 155          | 65,727         |
| <code>garak</code>            | 0.16.0  | <code>garak</code>          | 201          | 38,328         |
| <code>smolagents</code>       | 1.26.0  | <code>src/smolagents</code> | 20           | 13,355         |
| <code>uqlm</code>             | 0.6.5   | <code>uqlm</code>           | 91           | 12,605         |
| <code>fickling</code>         | 0.1.12  | <code>fickling</code>       | 16           | 5,024          |
| <b>Total</b>                  |         |                             | <b>2,354</b> | <b>563,270</b> |

Table 2: Pinned corpus. Reproducible by anyone with network access and no git history: re-running `tools/fetch_corpus.py` yields byte-identical inputs.

| Tool                       | Version          | Rules                  | Findings   | Co-located $\pm 1$ line |
|----------------------------|------------------|------------------------|------------|-------------------------|
| <b>failroute</b>           | see remark below | all six                | <b>649</b> | —                       |
| <b>ruff</b>                | 0.16.0           | S110, S112             | 76         | 72                      |
| <b>bandit</b>              | 1.9.4            | B110, B112             | 67         | 63                      |
| <b>pylint</b>              | 4.0.8            | W0702/3/5/6            | 529        | 248                     |
| <b>flake8+bugbear</b>      | 7.3.0 / 25.11.29 | E722, B001, B017       | 268        | 124                     |
| <b>semgrep</b> (our rules) | 1.175.0          | hand-written, 6 shapes | —          | +26                     |

Table 3: Cross-tool comparison on the pinned corpus. The **semgrep** row is *not* a shipped-rule baseline: its rule set (`tools/semgrep-rules/exception-handling.yaml`) was written by us, so it shows what a syntactic-pattern engine *can* express given rules, not what users get by default. +26 is the number of failroute findings newly co-located once semgrep is added to the union.

## 4.2 RQ1 — Prevalence and cross-tool coverage

failroute reports **649** findings. Baselines were run on the *same* pinned trees.

**Union of the four syntactic linters covers 253 of 649 (39.0%, 95% Wilson interval 35.3–42.8). failroute-only: 396 (61.0%).** Adding our **semgrep** rules raises the union to 279 and lowers the failroute-only count to 370 (57.0%).

| Rule                     | Total     | Covered by 4-linter union (95% CI)    | failroute-only |
|--------------------------|-----------|---------------------------------------|----------------|
| <b>silent-fallback</b>   | 400       | 178 (44.5%, 39.7–49.4)                | 222            |
| <b>no-action</b>         | 219       | 72 (32.9%, 27.0–39.3)                 | 147            |
| <b>silent-suppress</b>   | <b>27</b> | <b>0</b> (0.0%, one-sided upper 10.5) | <b>27</b>      |
| <b>masked-exception</b>  | 3         | 3 (100.0%, 43.9–100.0)                | 0              |
| <b>implicit-fallback</b> | 0         | —                                     | —              |

Table 4: Coverage by rule. Intervals are Wilson score intervals computed by `tools/compute_intervals.py`; zero-numerator cells are reported with a one-sided 95% upper bound.

### Two observations that cut against the tool.

1. **pylint** is a far stronger baseline than **ruff**. Comparing only against **ruff**’s S110/S112 — as our own earlier benchmark did — overstates novelty by roughly  $3.4\times$  (72 vs 248 co-located findings). Any paper in this space that benchmarks against **ruff** alone should be read with that in mind.
2. **masked-exception** is fully covered. All 3 findings co-locate with a **pylint** broad-except warning. That rule contributes no coverage novelty here, and with  $n = 3$  the 100% estimate is statistically meaningless (interval 43.9–100.0).

**Methodological caveat on “coverage”.** Co-location at  $\pm 1$  line means a syntactic tool *flags the same handler*, **not** that it expresses the same property. **pylint** W0703 fires on **except Exception:** regardless of what the handler does; it does not distinguish “re-raises” from “returns 0.0”. 39.0% is therefore an *upper bound* on what the syntactic tools actually say, and the semantic novelty is correspondingly higher than 61%. We report the conservative number.

## 4.3 RQ2 — What fraction are real defects?

**Method.** Stratified random sample over (rule  $\times$  package), fixed seed (20260831), every stratum guaranteed  $\geq 1$  draw, remainder allocated proportionally.  $n = 80$ . The draw is byte-reproducible (`tools/draw_sample.py`, SHA-256 recorded). Each finding was labelled by reading the surrounding source in the pinned tree into one of three classes: **DEFECT** (the converted failure produces a wrong caller-visible outcome with no signal), **CONTRACT** (deliberate, and either documented, commented, or expressed in the return type), **FALSE POSITIVE** (the detector is wrong about the code).

**Result.** All 12 defects are in **deepteam**. Across the other seven packages, 0 of 66 sampled findings were defects (pooled one-sided 95% upper bound 4.4%).

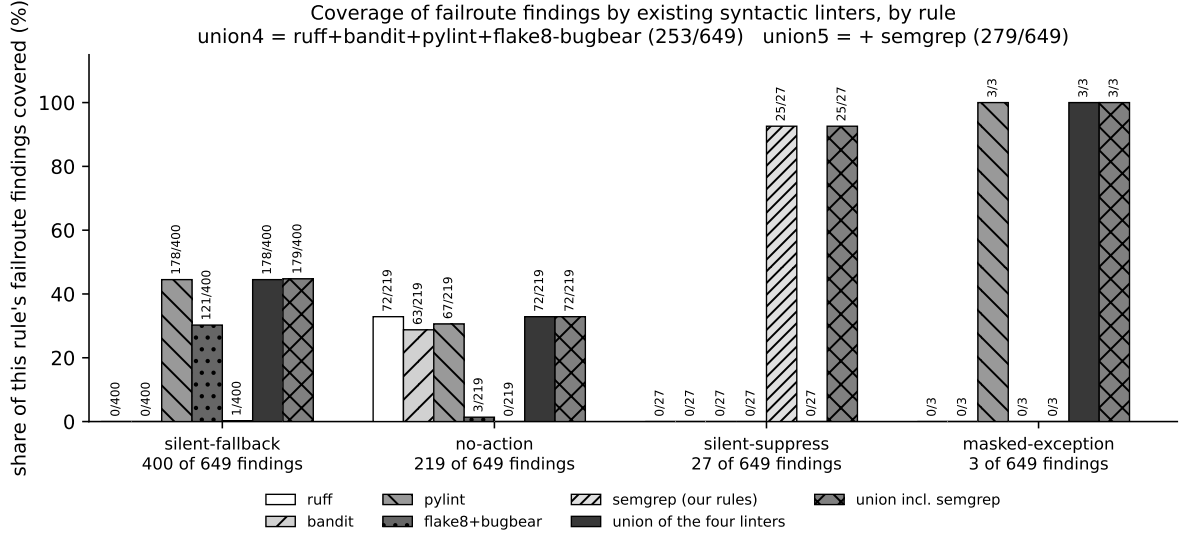


Figure 1: Per-rule coverage by tool, including the four-linter union and the five-tool union. The **silent-suppress** column is the paper’s cleanest coverage claim.

| Label          | <i>n</i> | Share | 95% Wilson interval |
|----------------|----------|-------|---------------------|
| CONTRACT       | 64       | 80.0% | 70.0–87.3           |
| DEFECT         | 12       | 15.0% | 8.8–24.4            |
| FALSE POSITIVE | 4        | 5.0%  | 2.0–12.2            |

Table 5: RQ2 headline: the precision of this detector family on mature code is 15.0%, with a lower bound of 8.8%.

| Rule                     | <i>n</i> | DEFECT | CONTRACT | FALSE POS. |
|--------------------------|----------|--------|----------|------------|
| <b>silent-fallback</b>   | 49       | 12     | 37       | 0          |
| <b>no-action</b>         | 23       | 0      | 23       | 0          |
| <b>implicit-fallback</b> | 4        | 0      | 0        | 4          |
| <b>silent-suppress</b>   | 3        | 0      | 3        | 0          |
| <b>masked-exception</b>  | 1        | 0      | 1        | 0          |

Table 6: Labelling by rule. All 12 defects come from **silent-fallback** (24.5% of that rule’s sample, interval 14.6–38.1); all 4 false positives come from **implicit-fallback**.

| Package                 | <i>n</i> | DEFECT    | CONTRACT | FALSE POS. / defect bound           |
|-------------------------|----------|-----------|----------|-------------------------------------|
| <b>deepteam</b>         | 14       | <b>12</b> | 1        | 1 FP; defect rate 85.7% (60.1–96.0) |
| inspect_ai              | 41       | 0         | 40       | 1 FP; upper 7.0%                    |
| pydantic_ai_slim        | 11       | 0         | 10       | 1 FP; upper 23.8%                   |
| trl                     | 4        | 0         | 4        | 0; upper 52.7%                      |
| garak                   | 3        | 0         | 3        | 0; upper 63.2%                      |
| fickling                | 3        | 0         | 2        | 1 FP; upper 63.2%                   |
| smolagents              | 2        | 0         | 2        | 0; upper 77.6%                      |
| uqlm                    | 2        | 0         | 2        | 0; upper 77.6%                      |
| <i>all but deepteam</i> | 66       | <b>0</b>  |          | upper <b>4.4%</b>                   |

Table 7: Labelling by package — the result that matters. The “upper” column is the one-sided 95% upper bound on the defect rate for zero-defect cells; small-*n* cells are wide and must not be read as strong evidence.

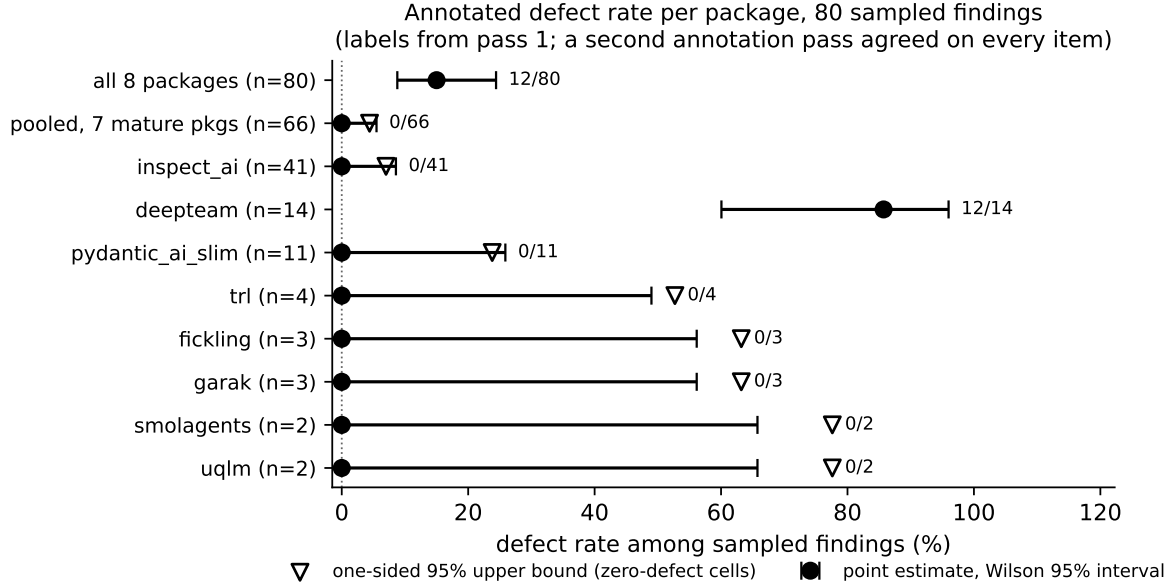


Figure 2: Measured defect rate per package with Wilson 95% intervals. Zero-defect cells are drawn as one-sided 95% upper bounds (triangles). The visual point is the spread, not the ordering.

The 12 defects are not 12 independent bugs. They are **three homogeneous families** replicated across metric classes:

1. **Silent criteria degradation (4/12).** `try:`  
`self.system_prompt = model.get_system_prompt()`  
`except:`  
`self.system_prompt = ""`. A custom or misconfigured LLM that lacks the method silently scores every subsequent case under empty criteria. (This family was independently reported upstream by the present author before this study, as `deepteam#270`; that report is partial external validation of the label, not of the tool.)
2. **Dead comparison (5/12).** `try: self.score == 1 except: self.success = False`. The guarded statement is a pure comparison expression that cannot raise, so the handler is dead code — and `self.success` is never assigned on the success path.
3. **Fail-open security verdict (3/12).** `is_vulnerable()` iterates results inside a `try`; on any error it returns `vulnerable = False`. In a red-teaming tool, “not vulnerable” is the most dangerous possible default: an infrastructure failure is converted into a clean security conclusion.

Conversely, the 64 contracts are overwhelmingly *deliberate and legible*: TUI widget lookups that may not be mounted, optional-dependency probes, idempotent cleanup in `finally`, and predicate functions whose `Optional/bool` return type *is* the contract. Many carry an explicit comment stating the intent (e.g. `inspect_ai`’s “fail open — better to skip the barrier than to hang teardown”).

Two findings in the sample are worth citing as **positive** examples of the discipline this paper argues for: `pydantic-ai`’s `is_private_ip` fails *closed* on an unparseable address (“Invalid IP address, treat as potentially dangerous” → `return True`), and its `_run_tool` explicitly routes a caught exception onto a queue *so that the consumer re-raises it* rather than letting it vanish.

#### 4.4 RQ3 — Recall against maintainer-merged fixes

An unusual ground truth is available: upstream fixes in this defect family that the projects’ own maintainers reviewed and merged. Of 70 merged pull requests authored by the present author, **10** are failure-routing fixes. For each, the file was fetched at the merge commit’s *first parent* (i.e. immediately pre-fix) and scanned.

**Detected: 1 of 10** (10.0%, 95% Wilson interval 1.8–40.4). Excluding one TypeScript change (out of language scope) and one non-handler implicit `None` (outside the six shapes by design): **1 of 8** (12.5%, 2.2–47.1).

The nine misses are informative, and they all say the same thing: **the conversion frequently happens outside the except block.**

| Missed case         | Where the conversion actually happens                                                   |
|---------------------|-----------------------------------------------------------------------------------------|
| uqlm #462, #459     | retry exhaustion $\rightarrow$ NaN enters the aggregate downstream                      |
| inspect_ai #4906    | tenacity.RetryError masks the underlying cause                                          |
| inspect_ai #5068    | state mutation <i>after</i> the handler ( <code>exists = True</code> )                  |
| inspect_evals #2167 | an ordinary <code>if</code> branch writes <code>Score(0.0)</code> on a broken invariant |
| PyRIT #2466         | silent list filtering, no exception involved                                            |
| uqlm #425           | pre-fix code crashed; the fix <i>added</i> the graceful path                            |

Table 8: Missed cases. Six rows cover the nine misses; three are duplicates of the same pattern within a package.

Detection recall on merged fixes that belong to the failure-routing family

| repo          | PR    | fix title (truncated)                   | detected | rule matched | note                                                                        |
|---------------|-------|-----------------------------------------|----------|--------------|-----------------------------------------------------------------------------|
| uqlm          | #462  | fix(longform): surface NLI retry exhaus | NO       | —            | miss reason: pre-fix defect is NaN produced by exhausted retries reachi...  |
| inspect_ai    | #5068 | fix(view): raise a friendly error on A  | NO       | —            | miss reason: handler converts failure via post-handler state mutation (...) |
| uqlm          | #459  | fix(panel): keep one failed judge from  | NO       | —            | miss reason: failed judge's NaN entered panel aggregates via data flow,...  |
| PyRIT         | #2466 | FIX: reject selected attack techniques  | NO       | —            | miss reason: unresolvable techniques were dropped by silent list filter...  |
| PyRIT         | #2460 | FIX: surface auth config fetch failure  | N/A      | —            | TypeScript (web UI); failroute is Python-only -> out of language scope      |
| uqlm          | #450  | fix(generation): preserve prompt-respo  | YES      | no-action    | matched: uqlm/utils/response_generator.py:252(no-action)                    |
| inspect_ai    | #4906 | Report the sandbox's error when remote  | NO       | —            | miss reason: failure masking lives inside tenacity retry semantics (opa...  |
| inspect_evals | #2167 | fix(swe_lancer): exclude samples with   | NO       | —            | miss reason: broken invariant was converted to Score(value=0.0) by an o...  |
| uqlm          | #425  | fix(nil): guard against ZeroDivisionEr  | NO       | —            | miss reason: pre-fix code crashed (ZeroDivisionError propagated); the f...  |
| uqlm          | #418  | fix(white_box): return NaN instead of   | N/A      | —            | pure-additive fix; pre-fix defect is a non-handler implicit-None (funct...  |

Recall 1/10 = 10.0% (Wilson 95%: 1.8-40.4%) against all 10 family fixes; 1/8 = 12.5% (Wilson 95%: 2.2-47.1%) against the 8 in-scope subset (out-of-scope rows carry detected=n/a). Denominators recounted from paper/merged-pr-recall.csv by tools/compute\_intervals.py

Figure 3: Recall by defect family against the merged-fix ground truth.

This is the paper’s second negative result, and it bounds the whole approach: **handler-shaped detection — ours included — cannot cover a defect family whose defining event is semantic rather than syntactic.**

**Side observation.** In the pre-fix `inspect_ai #5068` file the detector flagged a *different, unfixed* silent-fallback at line 356. Real code contains same-family defects that no one has reported.

## 4.5 RQ4 — Labelling as a detector-improvement method

All four false positives in the sample were `implicit-fallback`, and all four had the *same* root cause: `_has_top_level_terminal()` inspected only *direct* statements of the handler body, so a `return/raise` nested inside an exhaustive `if/else` was invisible. Four real shapes triggered it:

| Package     | Function                               | Shape                                                      |
|-------------|----------------------------------------|------------------------------------------------------------|
| deepteam    | <code>simulate_baseline_attacks</code> | <code>if ignore_errors: return [...] else: raise</code>    |
| fickling    | <code>check_pickle</code>              | nested <code>try/except</code> , every path returns        |
| inspect_ai  | <code>grok generate</code>             | <code>if/elif/else</code> , every branch returns or raises |
| pydantic_ai | <code>execute_output_function</code>   | <code>if wrap: raise ToolRetryError else: raise</code>     |

Table 9: The four shapes that exposed the detector bug.

We implemented a recursive exhaustiveness analysis (`_always_terminates`) covering `if/else`, `with`, `try/except/finally` and `match`, added six regression tests derived from the four real shapes (each failing before the fix), and re-ran the corpus.

**implicit-fallback findings on 563k lines: 10  $\rightarrow$  0. Total findings: 659  $\rightarrow$  649. Test count: 124  $\rightarrow$  130.** No other rule changed.

Two things follow. First, the rule’s entire real-world yield was false. Second, and this is the transferable point: **a stratified labelling pass is not only an evaluation instrument; it is the most efficient defect-finding method we applied to our own detector.** The unit corpus (68 samples, precision = recall = 1.0) never exposed this bug, because the corpus was written by the same person, with the same blind spot, as the detector.

## 5 Discussion

**A detector this imprecise is still useful, but not as an oracle.** On our corpus a maintainer following up every finding would read 649 handlers to reach  $\sim 97$  genuine defects (extrapolating the 15.0% point estimate — see the caveat in Section 6), of which the vast majority are three copy-paste families in a single package. As an *alarm*, that is unusable. As a *search-space reducer* over 563k lines, it is a different proposition: it narrowed the space by roughly 3.5 orders of magnitude, and a human reading 80 handlers found a systematic fail-open security verdict in a red-teaming tool.

**Yield tracks codebase maturity, not rule design.** The strongest predictor of whether a finding is a defect was not *which* rule fired but *which package* it fired in. The mature, heavily-reviewed packages had essentially no defects and a large number of carefully-commented intentional contracts; the one package with a systematic problem had it replicated across dozens of near-identical files. This suggests triage effort should be allocated per-package after a cheap pilot sample, not uniformly.

**The contextlib.suppress blind spot is real and growing.** 27/27 invisible to the linters we measured with their shipped rules, and a popular lint rule actively drives code toward that shape. This is the one place where the tool’s coverage claim is unambiguous — and it is a claim about *shipped default rule sets*, since the semgrep rules we wrote recover 25 of the 27.

**On “tool proposes, human adjudicates”.** We report a case where we ran the detector over a well-maintained red-teaming framework, sampled twelve semantic findings, traced each, concluded all twelve were deliberate contracts, and *filed nothing*. Given the 15% base rate measured here, that outcome is what the numbers predict, not an anomaly.

## 6 Threats to validity

- **Single human annotator, who is also the tool’s author.** A second independent annotation pass was performed, but by a *different automated agent*, not by a human. It reached the same label on 80/80 items (Cohen’s  $\kappa = 1.00$  between the two passes). We report that as agreement between two automated passes and nothing more: two language agents reading the same rule description and the same source share a prior, so perfect agreement does not remove the single-annotator threat, and no human inter-rater statistic is claimed anywhere in this paper.
- **Sample size.**  $n = 80$  of 649. Per-rule and per-package cells are small (**masked-exception**  $n = 1$ ). All proportions now carry Wilson score intervals; several cells (any  $n \leq 4$ ) have intervals wider than 45 percentage points and are reported as upper bounds only.
- **Package selection is not random.** The eight packages were chosen because the author had prior contribution history in them. **deepteam** in particular is a package where the author had *already found* a defect family, which inflates the overall defect rate. The seven-package 0/66 figure is the more conservative read.
- **Recall ground truth is authored by the same person.** The 10 merged fixes were written and submitted by the author; maintainer merge is independent validation of *the defect*, not of its representativeness.
- **Co-location  $\neq$  equivalent detection** (Section 4.2 caveat). Reported conservatively.
- **semgrep is not a shipped-rule baseline.** The retry run used **semgrep** 1.175.0 with a rule set we authored. It bounds what the engine can express, not what a default installation reports.
- **Version pinning is a snapshot.** All findings are relative to the pinned versions in **paper/corpus-lock.json**; upstream may have fixed or introduced instances since.

- **Partial reproduction.** The test suite, one package’s end-to-end scan, and the derived-statistics scripts were independently re-run and matched; the corpus fetch and the full 8-package re-scan were not re-verified in the same pass (see `paper/ARTIFACT.md`).

## 7 Related work

**Failure handling as an empirical object.** Exception handling has a long empirical literature in statically typed languages: Cabral and Marques’ field study of Java and .NET [5] documented how often exceptions are caught and swallowed; Sawadpong et al. [20] characterised exception-handling *defects*; and de Pádua and Shang quantified the prevalence of named exception-handling anti-patterns over a large corpus [3] and revisited developer practice through exception-flow analysis [7]. That line of work asks *whether* anti-patterns occur and *how often*. Our closest neighbour is it: we inherit the premise that handling shape is measurable, and change the question. On a corpus of Python AI/ML packages, the same syntactic shapes that read as anti-patterns are predominantly *intended contracts* — in our stratified sample of 80 sites, 80.0% carried a contract reading and 5.0% were outright false positives, with the defect share concentrated almost entirely in one package. Reporting a prevalence number without that breakdown is what makes the earlier literature unreadable as a triage instruction.

**Why generic rules get muted.** A second body of work explains the reception of such numbers. Developers report false positives and noise as the leading reason they ignore or abandon static analysis [12]; Ruthruff et al. made *actionability* an experimental target rather than a slogan [16]; Google’s Tricorder and FindBugs-Fixit programmes showed that an analysis only survives at scale when it is filtered, prioritised and paired with a suppression path [18, 2, 17]. User-centred and follow-up studies reach the same ordering from the other side: what developers need is a warning they can act on [9, 22], and the mitigation of false positives remains an open problem rather than a solved one [10]. WarningsGuru operationalised relevance with statistical bug models [15], and Hu et al. recently measured the other end of the same pipe — which warnings developers actually suppress, and on what grounds [11]. Crisan and McNutt frame linting as a sociotechnical activity [6]. Our contribution is not another relevance filter: it is a *semantic* account of why a particular family of syntactic matches is disproportionately non-actionable, so that a suppression decision can be justified by code shape rather than by developer fatigue.

**Silent failure in machine-learning systems.** The systems literature supplies the stakes. Sculley et al. named the pipeline coupling and glue-code debt that makes ML behaviour brittle [21]; Breck et al. proposed continuous data validation as the corrective at the data boundary [14]; the ML Test Score encoded “test the pipeline, not just the model” as a rubric [4]; Amershi et al. and Paleyes et al. documented that the failures arrive at integration and deployment time, not training time [1, 13]; Sambasivan et al. traced how a data problem cascades through a high-stakes system until it surfaces as an unexplained outcome [19]; and Dixit et al. measured silent corruption at the hardware layer where no exception is raised at all [8]. Zhang et al. position testing and robustness techniques across that same spectrum [23].

**Increment over the two closest studies.** Read side by side, de Pádua and Shang [3] and Hu et al. [11] bound the problem on either side: the first measures how often a handling shape appears, the second measures what developers do once a tool points at it. Neither asks, *per site*, whether the flagged construct is a defect, an intended contract, or a tool artefact — and neither reports what a purely syntactic linter fails to see at all. This paper supplies both measurements for Python AI/ML code: a labelled 80-site sample (12 DEFECT / 64 CONTRACT / 4 FALSE POSITIVE, with the defect mass concentrated in one package), and a cross-tool comparison showing that four widely used syntactic linters jointly cover 39.0% of the 649 routed-failure sites we detect, with one entire pattern — `contextlib.suppress`-style silent suppression — at 0/27. The increment is therefore empirical and narrow: the *meaning* of a flagged handler, and the *coverage boundary* of the tools practitioners actually run.

## 8 Conclusion

Failure-routing is a real and prevalent shape in AI/ML Python: 649 instances in 563k lines, 61% of them outside the reach of four mainstream syntactic linters and 100% of the `contextlib.suppress` variant outside the reach of all of them. But prevalence is not defectiveness. In a labelled stratified sample, 15% were genuine defects and 80% were deliberate contracts, with the defects concentrated entirely in a single package as three copy-paste families. Against maintainer-merged ground truth the detector’s recall was 1 in 10, because the failure-to-success conversion routinely happens outside the handler that a syntactic tool can see.

We think the useful conclusion is not “this class is undetectable” but that detectors for it should be designed, evaluated and *deployed* as search-space reducers with an explicit human adjudication step — and that the labelling pass which establishes that should be run early, because in our case it was also the fastest way to find a bug in the detector itself.

## Reproduction

Every number in this paper is produced by the scripts in `tools/` against the pinned corpus in `paper/corpus-lock.json`.

```
cd <repo-root>
.venv/bin/python tools/fetch_corpus.py          # pinned sdists -> paper/corpus/
PYTHONPATH=src .venv/bin/python -m failroute \
  --export-findings paper/scan/<pkg>.jsonl \
  --repo-name <pkg> paper/corpus/<pkg>/<scan_root>
# -> bench/corpus-linter-comparison.json
.venv/bin/python tools/compare_linters_corpus.py
# -> bench/corpus-coverage-union.json
.venv/bin/python tools/coverage_union.py
.venv/bin/python tools/draw_sample.py --n 80 --seed 20260831 # -> paper/sample.jsonl
.venv/bin/python tools/merged_pr_recall.py          # -> paper/merged-pr-recall.csv
.venv/bin/python tools/compute_intervals.py         # -> paper/intervals.json
.venv/bin/python -m pytest -q                      # 130 tests
```

Key artifacts, and the thing each one pins down:

- `paper/corpus-lock.json` — pinned inputs.
- `paper/sample.jsonl` — the 80-item draw.
- `paper/annotations.csv` — labels and rationale.
- `paper/annotations-second-pass.csv` — second automated pass.
- `paper/merged-pr-recall.csv` — recall ground truth.
- `bench/corpus-coverage-union.json` — cross-tool coverage.
- `paper/intervals.json` — Wilson intervals.

### Two things a reproducer must know.

1. If the checkout path contains non-ASCII characters, an *editable* install of this package does not work (the generated `.pth` pointer is mangled), so every CLI invocation must carry `PYTHONPATH=src`.
2. The scanner exits with status 1 whenever it finds anything, even when the run succeeded and the export was written. Under `set -e` or in CI, a successful scan looks like a failure.

## References

- [1] Saleema Amershi, Andrew Begel, Christian Bird, Robert DeLine, Harald Gall, Ece Kamar, Nachiappan Nagappan, Besmira Nushi, and Thomas Zimmermann. Software engineering for machine learning: A case study. In *2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP)*, pages 291–300, 2019.
- [2] Nathaniel Ayewah and William Pugh. The google findbugs fixit. In *Proceedings of the 19th international symposium on Software testing and analysis*, pages 241–252, 2010.

- [3] Guilherme Bicalho De Padua and Weiyi Shang. Studying the prevalence of exception handling anti-patterns. In *2017 IEEE/ACM 25th International Conference on Program Comprehension (ICPC)*, pages 328–331, 2017.
- [4] Eric Breck, Shanjing Cai, Eric Nielsen, Michael Salib, and D. Sculley. The ml test score: A rubric for ml production readiness and technical debt reduction. In *2017 IEEE International Conference on Big Data (Big Data)*, pages 1123–1132, 2017.
- [5] Bruno Cabral and Paulo Marques. Exception handling: A field study in java and .net. In *Lecture Notes in Computer Science*, pages 151–175, 2007.
- [6] Anamaria Crisan and Andrew M McNutt. Linting is people! exploring the potential of human computation as a sociotechnical linter of data visualizations. In *Proceedings of the Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, pages 1–10, 2025.
- [7] Guilherme B. De Padua and Weiyi Shang. Revisiting exception handling practices with exception flow analysis. In *2017 IEEE 17th International Working Conference on Source Code Analysis and Manipulation (SCAM)*, pages 11–20, 2017.
- [8] Harish Dixit. Keytone: Silent data corruptions at scale. In *2023 IEEE 29th International Symposium on On-Line Testing and Robust System Design (IOLTS)*, pages 1–2, 2023.
- [9] Lisa Nguyen Quang Do, James R. Wright, and Karim Ali. Why do software developers use static analysis tools? a user-centered study of developer needs and motivations. *IEEE Transactions on Software Engineering*, 48:835–847, 2022.
- [10] Zhaoqiang Guo, Tingting Tan, Shiran Liu, Xutong Liu, Wei Lai, Yibiao Yang, Yanhui Li, Lin Chen, Wei Dong, and Yuming Zhou. Mitigating false positive static analysis warnings: Progress, challenges, and opportunities. *IEEE Transactions on Software Engineering*, 49:5154–5188, 2023.
- [11] Huimin Hu, Yingying Wang, Julia Rubin, and Michael Pradel. An empirical study of suppressed static analysis warnings. *Proceedings of the ACM on Software Engineering*, 2:290–311, 2025.
- [12] Brittany Johnson, Yoonki Song, Emerson Murphy-Hill, and Robert Bowdidge. Why don’t software developers use static analysis tools to find bugs? In *2013 35th International Conference on Software Engineering (ICSE)*, pages 672–681, 2013.
- [13] Andrei Paleyes, Raoul-Gabriel Urma, and Neil D. Lawrence. Challenges in deploying machine learning: A survey of case studies. *ACM Computing Surveys*, 55:1–29, 2022.
- [14] Neoklis Polyzotis, Martin Zinkevich, Sudip Roy, Eric Breck, and Steven Whang. Data validation for machine learning. In *Proceedings of the Machine Learning and Systems Conference (MLSys) 2019*, 2019.
- [15] Louis-Philippe Querel and Peter C. Rigby. Warningsguru: integrating statistical bug models with static analysis to provide timely and specific bug warnings. In *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pages 892–895, 2018.
- [16] Joseph R. Ruthruff, John Penix, J. David Morgenthaler, Sebastian Elbaum, and Gregg Rothermel. Predicting accurate and actionable static analysis warnings. In *Proceedings of the 30th international conference on Software engineering*, pages 341–350, 2008.
- [17] Caitlin Sadowski, Edward Aftandilian, Alex Eagle, Liam Miller-Cushon, and Ciera Jaspán. Lessons from building static analysis tools at google. *Communications of the ACM*, 61:58–66, 2018.
- [18] Caitlin Sadowski, Jeffrey Van Gogh, Ciera Jaspán, Emma Soderberg, and Collin Winter. Tricorder: Building a program analysis ecosystem. In *2015 IEEE/ACM 37th IEEE International Conference on Software Engineering*, pages 598–608, 2015.
- [19] Nithya Sambasivan, Shivani Kapania, Hannah Highfill, Diana Akrong, Praveen Paritosh, and Lora M Aroyo. “everyone wants to do the model work, not the data work”: Data cascades in high-stakes ai. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pages 1–15, 2021.

- [20] Puntitra Sawadpong, Edward B. Allen, and Byron J. Williams. Exception handling defects: An empirical study. In *2012 IEEE 14th International Symposium on High-Assurance Systems Engineering*, pages 90–97, 2012.
- [21] D. Sculley, Gary Holt, Daniel Golovin, Eugene Davydov, Todd Phillips, Dietmar Ebner, Vinay Chaudhary, Michael Young, Jean-François Crespo, and Dan Dennison. Hidden technical debt in machine learning systems. In *Advances in Neural Information Processing Systems 28 (NeurIPS 2015)*, 2015.
- [22] Rahul Yedida, Hong Jin Kang, Huy Tu, Xueqi Yang, David Lo, and Tim Menzies. How to find actionable static analysis warnings: A case study with findbugs. *IEEE Transactions on Software Engineering*, 49:2856–2872, 2023.
- [23] Jie M. Zhang, Mark Harman, Lei Ma, and Yang Liu. Machine learning testing: Survey, landscapes and horizons. *IEEE Transactions on Software Engineering*, 48:1–36, 2022.