
1. Enable remote control in DeoVR on the oculus go. Settings Controller A Protection Developer Enable remote control

2. Find the IP address of the oculus go. (Your router web interface is usually the easiest way) This is harder to describe cause ever router interface is different.

Refer to your router documentation.

- 3. Enable DeoVR in the XTP settings by checking the checkbox that says DeoVR
- 4. Enter the IP address of the oculus go in to XTP settings
- 5. Click connect

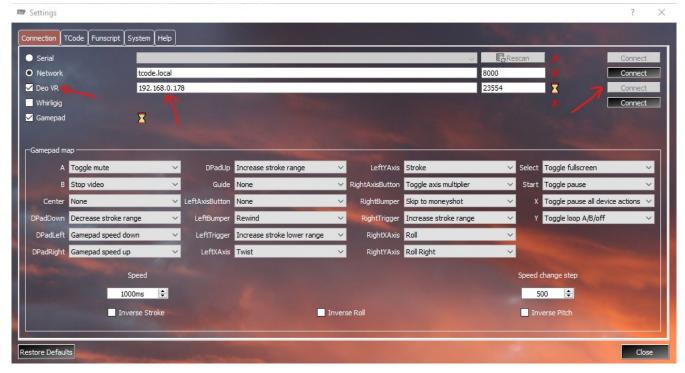


At this point XTP should connect to DeoVR.

When you start a video in DeoVR if a file with same name as the video thet DeoVR sends (Depending on where the video is, DeoVR sometimes sends an internally generated filename) is not found in the same directory or root of the library folder you have currently selected in XTP, you will get a pop up on the computer XTP is on asking you to select the funscript you want to sync to the video.

XTP will will save this funscript loction in your XTP settings for next use.

If for some reason you want to change this stored location.

While the video is playing in DeoVR, navigate to Edit > Change current deo script...



and select a new funscript.

KNOWN ISSUE:

Currently there is a bug when selecting a script for a video without a funscript already associated with it that's been a tad difficult to track down.

If the video is out of sync after selecting the funscript, shut down XTP by closing it natually. (if it crashes or is killed it wont save)

And restart then start the video again with the saved script location. It should be in sync from here on out.