Working with Data Templates

Thomas Claudius Huber
Software Developer

@thomasclaudiush www.thomasclaudiushuber.com

Module Outline

- Understand WinUI's flexible content model
- Define a look for customers in a ListView
- Work with x:Bind in a data template

Understand WinUI's Flexible Content Model

```
<Button Content="Add customer"/>


<Button>
  <Button.Content>
    <StackPanel Orientation="Horizontal">
      <SymbolIcon Symbol="AddFriend"/>
      <TextBlock Text="Add"/>
    </StackPanel>
  </Button.Content>
</Button>
```

Understand WinUI's Flexible Content Model

```
<Button Content="Add customer"/>


<Button>
  <Button.Content>
    <StackPanel Orientation="Horizontal">
      <SymbolIcon Symbol="AddFriend"/>
      <TextBlock Text="Add"/>
    </StackPanel>
  </Button.Content>
</Button>
```

Understand WinUI's Flexible Content Model

```
<Button Content="Add customer"/>


<Button>
  <StackPanel Orientation="Horizontal">
    <SymbolIcon Symbol="AddFriend"/>
    <TextBlock Text="Add"/>
  </StackPanel>
</Button>
```

Understand WinUI's Flexible Content Model

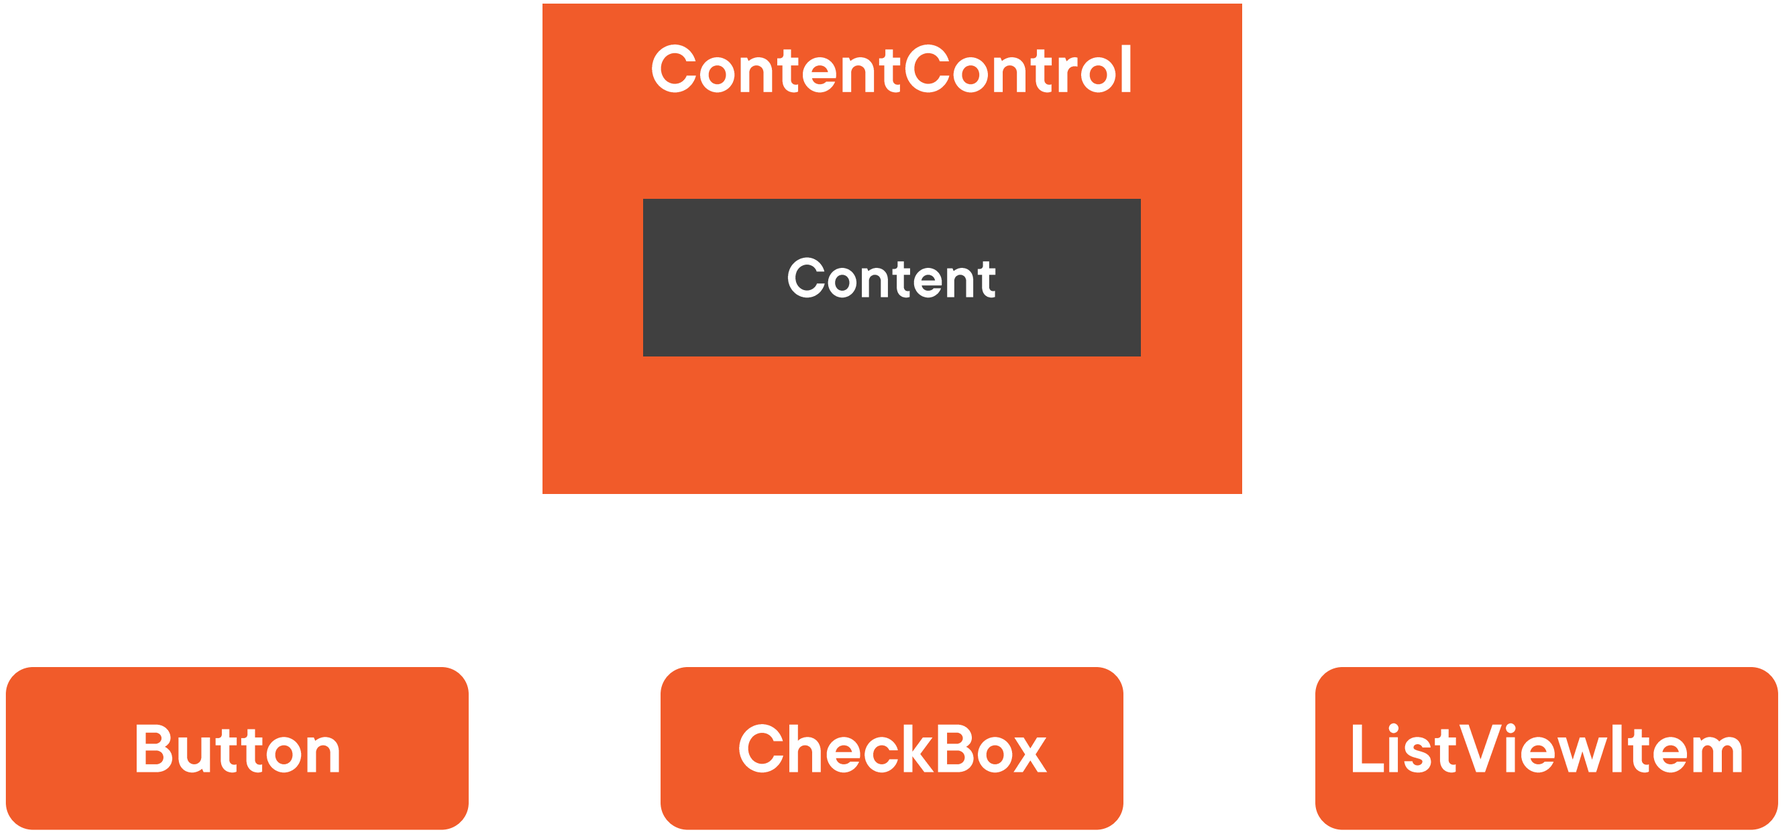

Understand WinUI's Flexible Content Model

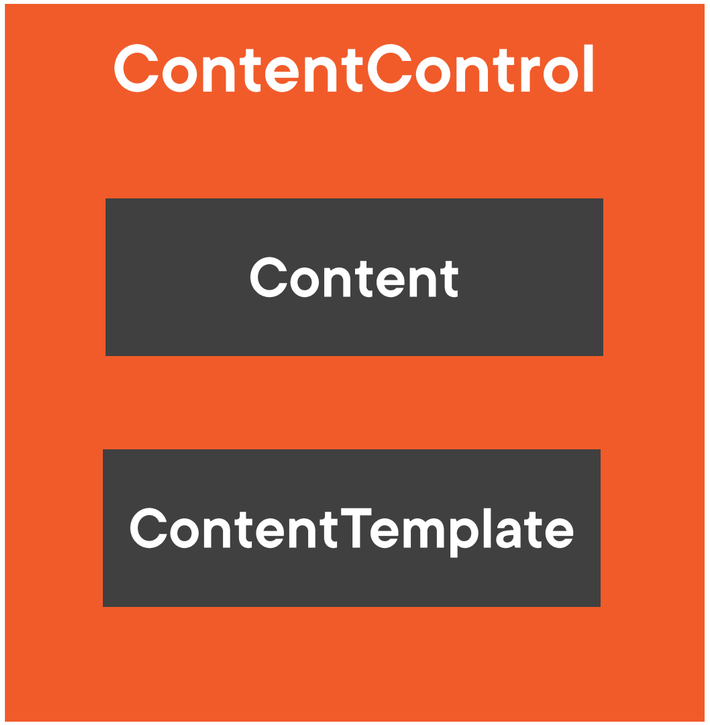

Assign a UIElement

- It is rendered

Assign any other object

- The result of its ToString method is rendered
- Use a DataTemplate
  to define a user interface
- In the DataTemplate, bind to
  the object of the Content property

Understand WinUI's Flexible Content Model

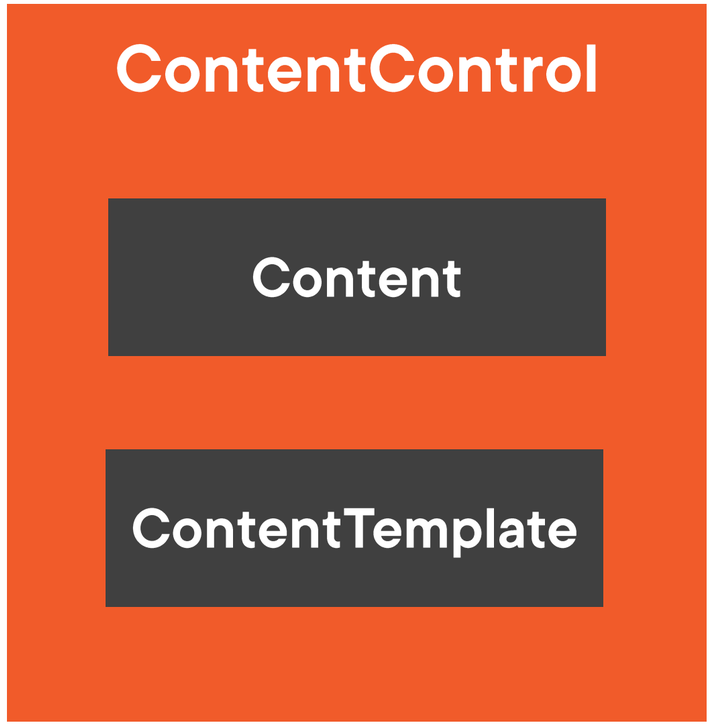

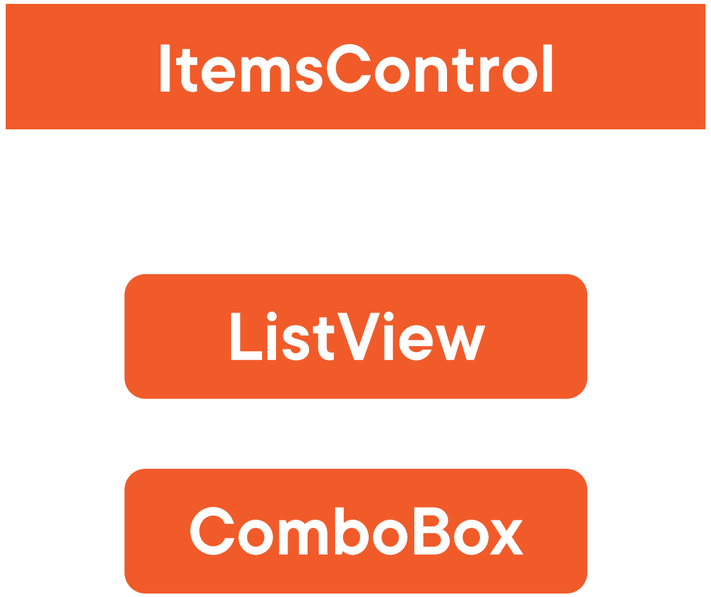

Understand WinUI's Flexible Content Model

ContentControl

Content

ContentTemplate

ItemsControl

ItemsSource

UIElements are rendered

For any other object the result of ToString is shown

Understand WinUI's Flexible Content Model

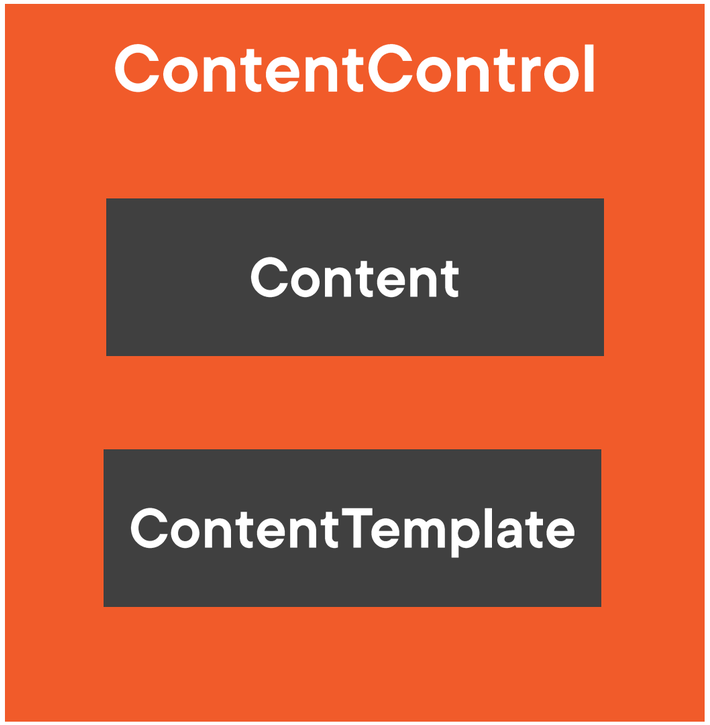

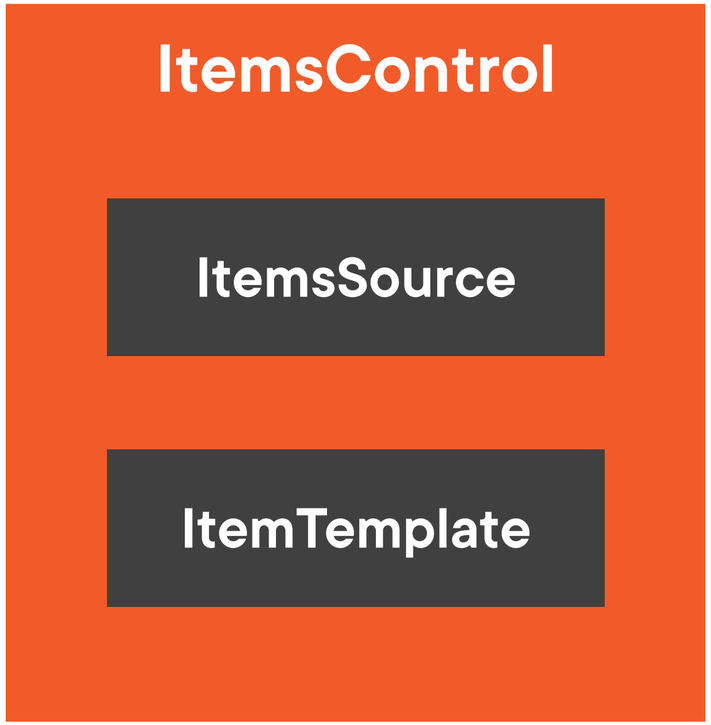

Demo

Use a data template with an ItemsControl

Demo

Work with x:Bind in a data template

Summary

WinUI's flexible content model

- ContentControl and ItemsControl
- UIElements are rendered
- For other objects ToString result is shown

Create and use data templates

Work with x:Bind in a data template

- Set the x:DataType attribute

Up Next:
Setting up Dependency Injection