

Network Data Analysis - Assignment 1

Felipe M. Megale, 100806980

February 2022

1 Pre-processing data

To complete the pre-processing of the original dataset, I used Pandas and Numpy. The first step for pre-processing the original file, after downloading it, was to remove all rows that had issues. Specifically speaking, this issue is not having either person name or ID. If either of these two information are missing, the row is removed from the original set. After removing those rows, I also removed those columns that did not have a label i.e., a question, and the two last questions that were further apart from the first 7. Furthermore, in order to have a more intelligible data set, I renamed the first column from "*Unnamed: 0*" to "*Name*". Then, I isolated all questions and for each one of them, I created a new data set comprised of three attributes: "*Name*", "*ID*", "*Question*". This resulted in 7 new data sets, one for each question, which were saved as CSV files. The questions are:

- "Which person you have hear of their voice or seen their faces?"
- "Which person you have met (in person+online) and exchange conversation?"
- "Which person you have collaborated with?"
- "Which person you have eye contact?"
- "Which peson you have eaten lunch with?"
- "Which person you have shared a ride?"
- "Which person you have taken at least two courses with?"

After having separated the questions, I processed the inputs of each question in each individual file. The reason for this was to simply adequate each person's input to comma-separated IDs by removing spaces and trailing characters such as commas and hyphens. Finally, for each of the 7 questions, I created 7 other files in the CSV format Gephi expects. For example, a line with the following values "*1,2,3,4,5*" means that node 1 is connected to nodes 2, 3, 4 and 5.

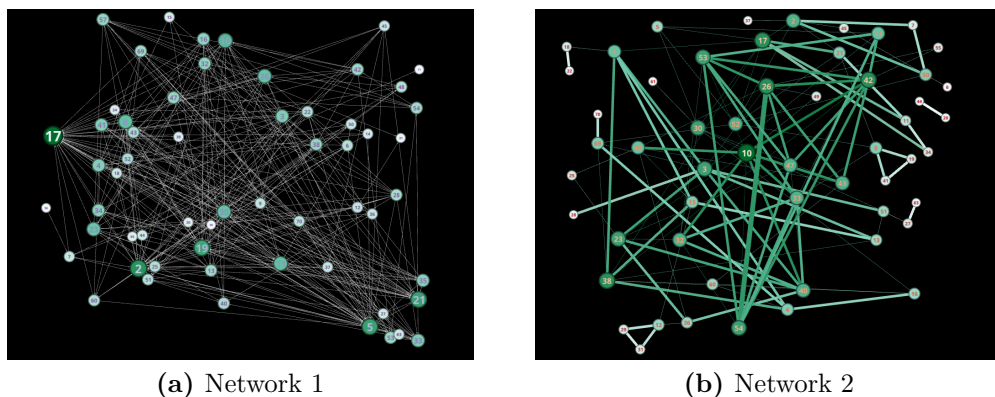


Figure 1: Networks 1 & 2

2 Analyses of 6 networks

2.1 Available networks

For this assignment, out of the 7 available networks, the ones I chose to work with are networks 1 through 5, and 7.


Before describing each network individually, one characteristic all of them share is that the edges in all 7 graphs are unweighted for the same reason. The questions asked *"which people?"*, meaning that for each person in the list, you only place an edge if the answer is yes. Because it is binary (edge or no edge), all graphs have unweighted edges. However, if we had a question asking *"how many times?"*, then there is a possibility of having weighted edges.

Also, when visualizing these networks in Gephi, if the degree of a node equals 0, then it is not rendered.


2.1.1 Network 1

The first network asks the following question: *"Which person you have hear of their voice or seen their faces?"*.

Directed or undirected? This network is an example of a directed graph. The reason for this is that in online conferences, it is not all participants who speak and/or have their computer cameras on. Therefore, I may see other people's faces and/or hear their voices, but they may not see or hear me.

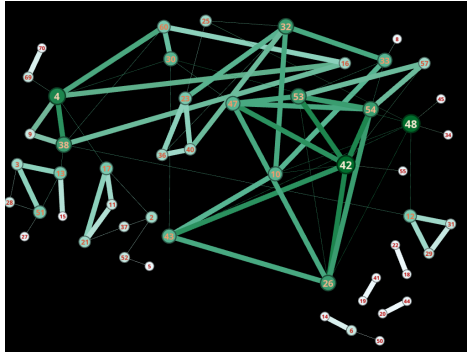

(a) Network 3

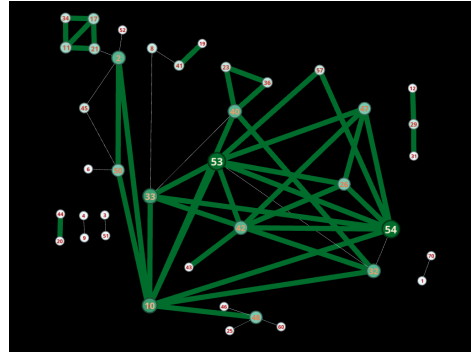

(b) Network 4

Figure 2: Networks 3 & 4

2.1.2 Network 2

The second network asks the following question: *"Which person you have met (in person+online) and exchange conversation?"*.

Directed or undirected? This network is an example of an undirected graph. In order to have a conversation, both parties must engage. If only one of them speak, there is no dialog. Therefore, is is not possible to exchange conversation.

2.1.3 Network 3


The third network asks the following question: *"Which person you have collaborated with?"*.

Directed or undirected? This is an undirected graph because collaboration must be enforced by both parties. It has to be a mutual agreement.


2.1.4 Network 4

The fourth network asks the following question: *"Which person you have eye contact?"*.

Directed or undirected? This network is undirected because in order to establish eye contact, two people must engage. There is no way for one person to look into someone else's eyes and not be looked back.

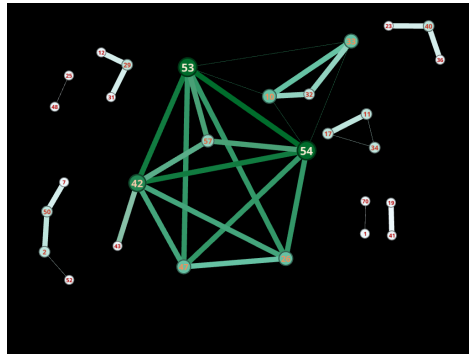

(a) Network 5

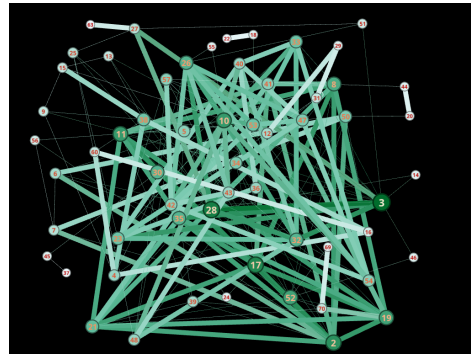

(b) Network 7

Figure 3: Networks 5 & 7

2.1.5 Network 5

The fifth network asks the following question: *"Which peson you have eaten lunch with?"*.

Directed or undirected? This is an undirected graph because eating lunch with another person implies that both people had to simultaneously engage in the activity.

2.1.6 Network 7

The seventh network asks the following question: *"Which person you have taken at least two courses with?"*.

Directed or undirected? This network is an undirected graph because you cannot be simultaneously enrolled in a course another person has not and consider that as taking a course together. Also, the course must be taken in the same year.

3 Statistics of 6 networks

In this section I will present some statistics about the 6 chosen networks. The results will be presented in tables. It is also noteworthy to reiterate that Gephi does not display nodes if their degree is 0.

3.1 Number of nodes

The number of nodes of each graph will be the amount of people who have at least one edge connecting them to another person.

Net. 1	Net. 2	Net. 3	Net. 4	Net. 5	Net. 6	Net. 7
123	123	123	123	123	123	123

Table 1: Number of nodes per network

3.2 Number of edges

The number of edges of each graph will be the amount of connections that exist between each person for each question.

Net. 1	Net. 2	Net. 3	Net. 4	Net. 5	Net. 6	Net. 7
123	123	123	123	123	123	123

Table 2: Number of edges per network

- 3.3 Edge density
- 3.4 Degree distribution
- 3.5 Average clustering coefficient
- 3.6 Number of nodes in strongly connected component (SCC)
- 3.7 Number of nodes in weakly connected component (WCC)
- 3.8 Average path length in SCC
- 3.9 Diameter of SCC
- 3.10 Community detection