

**Evidencias de bases De  
datos**

**Luis Felipe Sierra franco**

**Instructor**

**Luis Fernando**

**CENTRO DE TECNOLOGIA  
DE LA MANUFACTURA AVANZADA  
2025**

## Evidencias de trabajo con bases de datos

The image displays two screenshots of the SQL Server Enterprise Manager interface, showing the creation of two tables: 'Categorias' and 'Instructores'.

**Top Screenshot: 'Categorias' Table**

The 'Categorias' table is defined with the following columns:

| Move | Name        | Type          | Primary Key                         | Allow Nulls                         | Default Value | Remove | More A |
|------|-------------|---------------|-------------------------------------|-------------------------------------|---------------|--------|--------|
|      | CategoriaID | int           | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |               |        |        |
|      | Nombre      | nvarchar(100) | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |               |        |        |

The 'Scripts' pane shows the following SQL script:

```
1 CREATE TABLE [dbo].[Categorias] (
2   [CategoriaID] INT IDENTITY (1, 1) NOT NULL,
3   [Nombre] NVARCHAR (100) NULL,
4   PRIMARY KEY CLUSTERED ([CategoriaID] ASC)
5 );
6
7
```



**Bottom Screenshot: 'Instructores' Table**



The 'Instructores' table is defined with the following columns:


| Move | Name          | Type          | Primary Key                         | Allow Nulls                         | Default Value | Remove | More A |
|------|---------------|---------------|-------------------------------------|-------------------------------------|---------------|--------|--------|
|      | InstructorID  | int           | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |               |        |        |
|      | Nombre        | nvarchar(100) | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |               |        |        |
|      | Email         | nvarchar(100) | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |               |        |        |
|      | fecharegistro | date          | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | (getdate())   |        |        |

The 'Scripts' pane shows the following SQL script:

```
1 CREATE TABLE [dbo].[Instructores] (
2   [InstructorID] INT IDENTITY (1, 1) NOT NULL,
3   [Nombre] NVARCHAR (100) NULL,
4   [Email] NVARCHAR (100) NULL,
5   [fecharegistro] DATE DEFAULT (getdate()) NULL,
6   PRIMARY KEY CLUSTERED ([InstructorID] ASC)
7 );
8
9
```

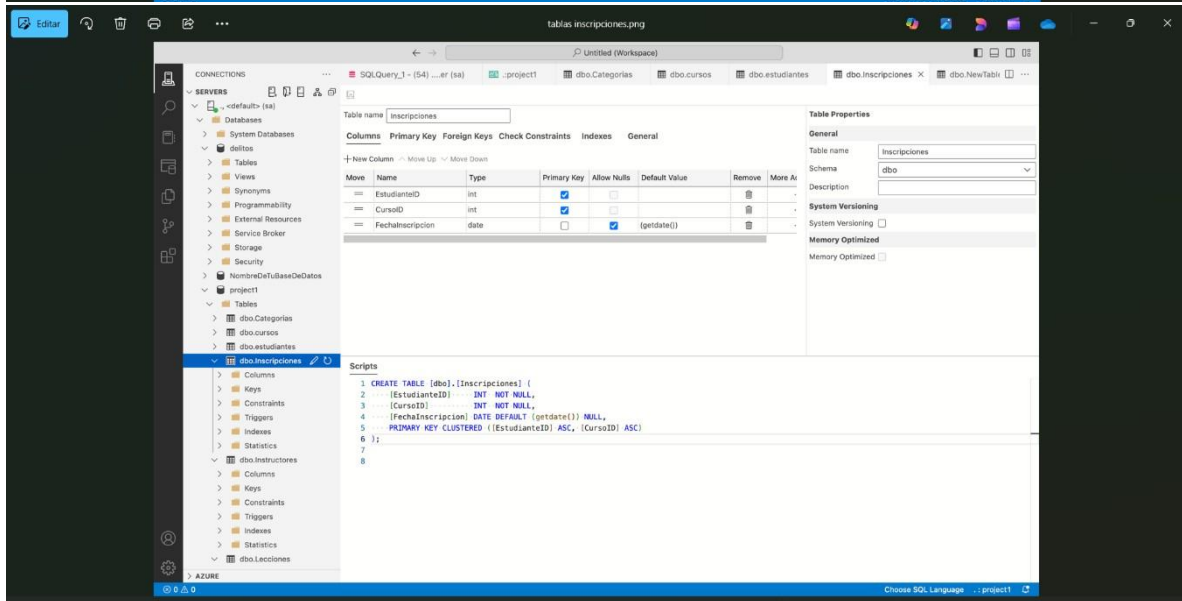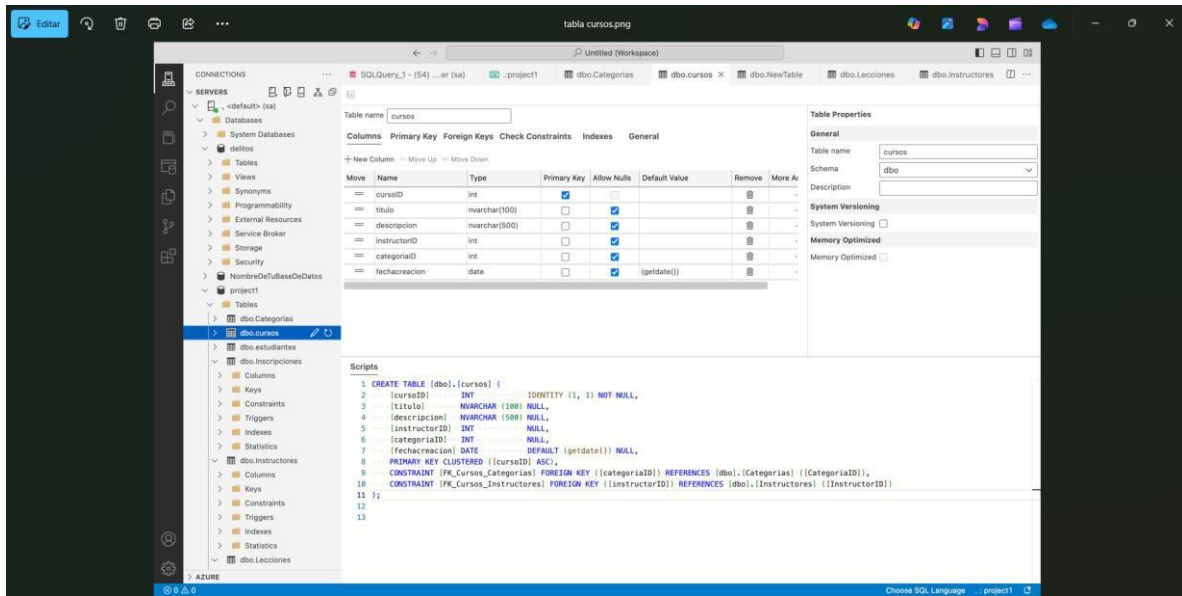

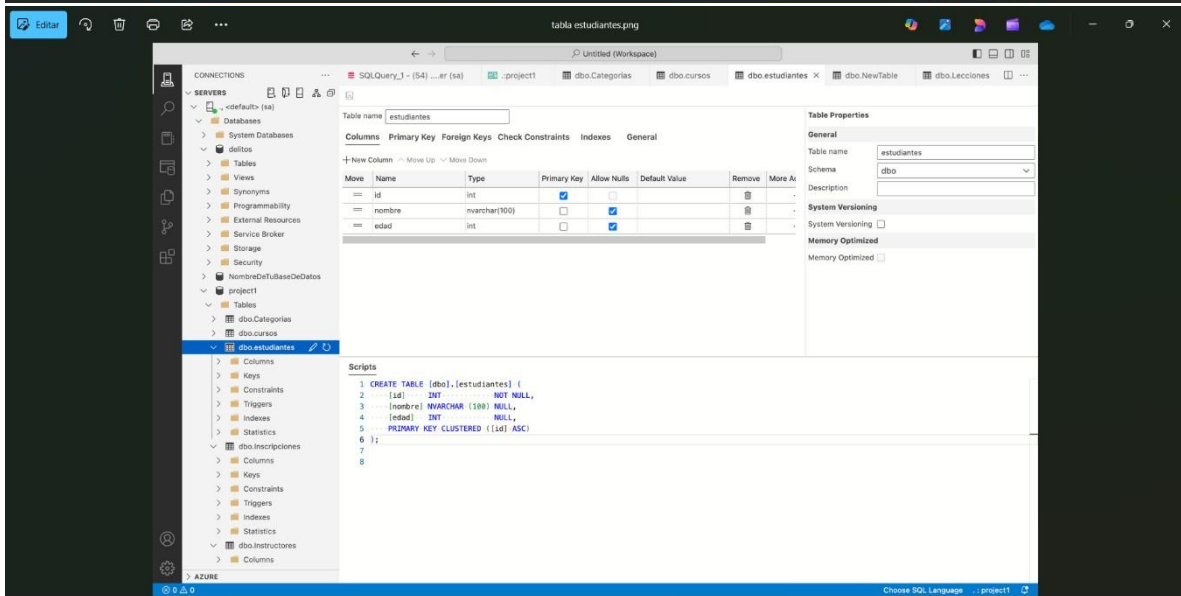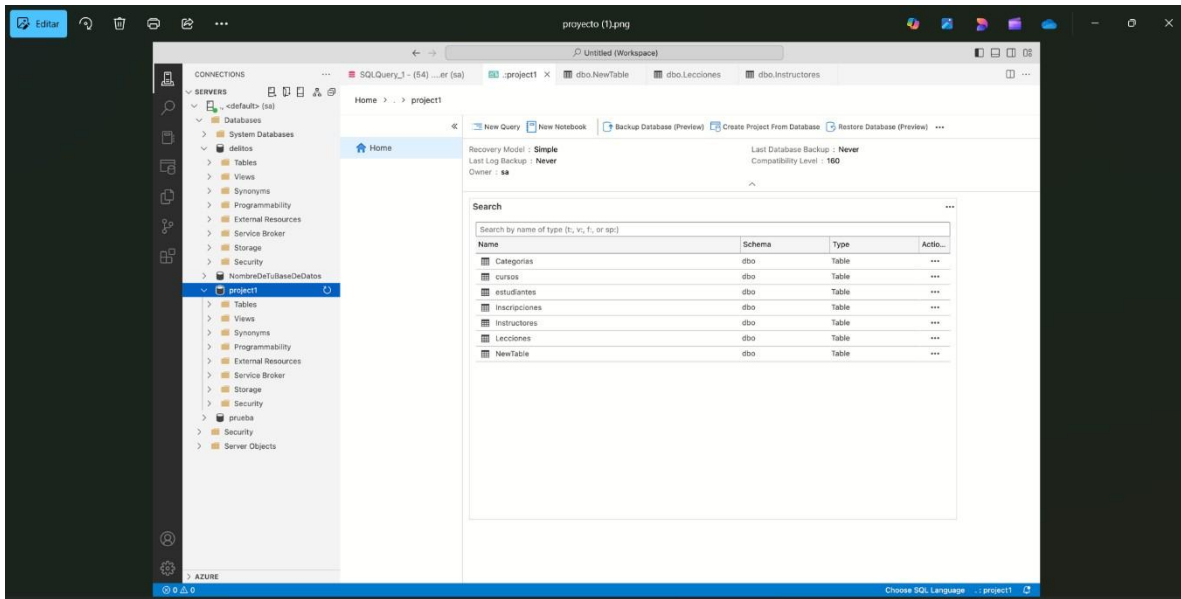

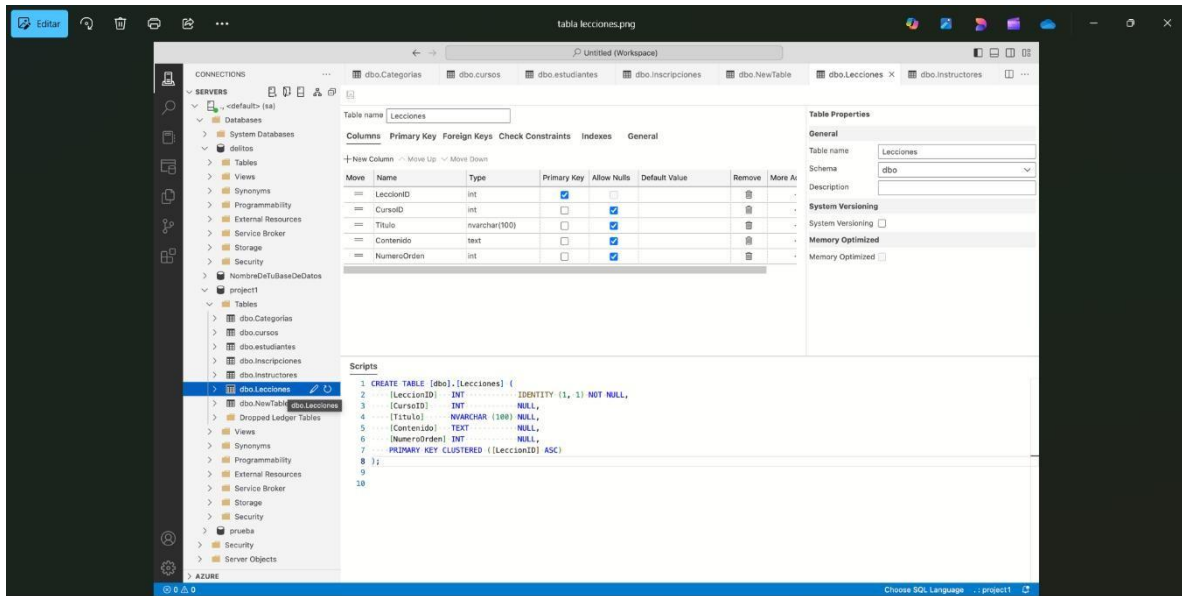

## BASE DE DATOS EN MONGODB

MongoDB Compass - azure/BAR\_sfm

Connections Edit View Help

Compass

My Queries

CONNECTIONS (1)

Search connections

azure

BAR\_sfm

Sort by Collection Name

View

Open MongoDB shell Create collection Refresh

|                       |                        |               |                              |            |                            |
|-----------------------|------------------------|---------------|------------------------------|------------|----------------------------|
| <b>actividad sena</b> | Storage size: 430 kB   | Documents: 0  | Avg. document size: 0 B      | Indexes: 1 | Total index size: 430 kB   |
| <b>clientes</b>       | Storage size: 20.48 kB | Documents: 2  | Avg. document size: 142.00 B | Indexes: 1 | Total index size: 24.58 kB |
| <b>empleados</b>      | Storage size: 20.48 kB | Documents: 4  | Avg. document size: 159.00 B | Indexes: 1 | Total index size: 24.58 kB |
| <b>horarios</b>       | Storage size: 20.48 kB | Documents: 3  | Avg. document size: 110.00 B | Indexes: 1 | Total index size: 24.58 kB |
| <b>mesa</b>           | Storage size: 20.48 kB | Documents: 4  | Avg. document size: 98.00 B  | Indexes: 1 | Total index size: 24.58 kB |
| <b>productos</b>      | Storage size: 20.48 kB | Documents: 14 | Avg. document size: 137.00 B | Indexes: 1 | Total index size: 24.58 kB |

MongoDB Compass - azure/BAR\_sfm.cientes

Connections Edit View Collection Help

Compass

My Queries

CONNECTIONS (0)

Search connections

- azure
  - BAR\_sfm
    - actividad seno
    - clientes**
    - empleados
    - horarios
    - meso
    - productos
    - proveedor
    - ventas
  - admin
  - config
  - local

azure > BAR\_sfm > clientes

Documents 2 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

EXPLAIN RESET FIND OPTIONS

ADD DATA EXPORT DATA UPDATE DELETE

25 1-2 of 2

```
{ "_id": "ObjectID('68652329a964e8cf68759d')", "id": "1", "nombre": "Juanito", "telefono": "31245212345", "email": "Juanito@gmail.com", "fecha_registro": "2025-06-27" }
```

```
{ "_id": "ObjectID('68652329a964e8cf68759e')", "id": "2", "nombre": "Mariona Correa", "telefono": "3628379602", "email": "mariona_cor@gmail.com", "fecha_registro": "2025-06-28" }
```

Compass is ready to update to 1.46.0! [RESTART](#)

MongoDB Compass - azure/BAR\_sfm.empleados

Connections Edit View Collection Help

Compass

My Queries

CONNECTIONS (0)

Search connections

- azure
  - BAR\_sfm
    - actividad seno
    - clientes
    - empleados**
    - horarios
    - meso
    - productos
    - proveedor
    - ventas
  - admin
  - config
  - local

azure > BAR\_sfm > empleados

Documents 4 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

EXPLAIN RESET FIND OPTIONS

ADD DATA EXPORT DATA UPDATE DELETE

26 1-4 of 4

```
{ "_id": "ObjectID('686522bda0964e8cf687593')", "id": "1", "nombre": "Maykal", "puesto": "gerente", "telefono": "3134569882", "email": "MaykalSerrad@gmail.com", "fecha_ingreso": "2025-06-02" }
```

```
{ "_id": "ObjectID('686522bda0964e8cf687594')", "id": "2", "nombre": "Santiago", "puesto": "CantiNero", "telefono": "3145698988", "email": "SantiagoSerrad@gmail.com", "fecha_ingreso": "2025-06-04" }
```

```
{ "_id": "ObjectID('686522bda0964e8cf687595')", "id": "3", "nombre": "Felipe", "puesto": "mensero", "telefono": "3145673454", "email": "Felipamnd@gmail.com", "fecha_ingreso": "2025-06-03" }
```

```
{ "_id": "ObjectID('686522bda0964e8cf687596')", "id": "4", "nombre": "Samuel", "puesto": "mensero", "telefono": "3214352054", "email": "samuelreg@gmail.com", "fecha_ingreso": "2025-06-03" }
```

MongoDB Compass - azure/BAR\_sfm.horarios

Connections Edit View Collection Help

Compass

My Queries

CONNECTIONS (0)

Search connections

- azure
  - BAR\_sfm
    - actividad seno
    - clientes
    - empleados
    - horarios
    - meso
    - productos
    - proveedor
    - ventas
  - admin
  - config
  - local

azure > BAR\_sfm > horarios

Documents 3 Aggregations Schema Indexes 1 Validation

Type a query: ( field: 'value' ) or [Generate query](#)

EXPLAIN RESET FIND Options

ADD DATA EXPORT DATA UPDATE DELETE

25 1-3 of 3

|                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>{   "_id": ObjectId("6865226a8964e8cf0874fe"),   "id": "1",   "dia_semana": "viernes",   "hora_apertura": "07:00:00",   "hora_cierre": "18:00:00" }</pre> |
| <pre>{   "_id": ObjectId("6865226a8964e8cf0874ff"),   "id": "2",   "dia_semana": "sabado",   "hora_apertura": "09:00:00",   "hora_cierre": "18:00:00" }</pre>  |
| <pre>{   "_id": ObjectId("6865226a8964e8cf0874ff"),   "id": "3",   "dia_semana": "domingo",   "hora_apertura": "09:00:00",   "hora_cierre": "18:00:00" }</pre> |

MongoDB Compass - azure/BAR\_sfm.meso

Connections Edit View Collection Help

Compass

My Queries

CONNECTIONS (0)

Search connections

- azure
  - BAR\_sfm
    - actividad seno
    - clientes
    - empleados
    - horarios
    - meso
    - productos
    - proveedor
    - ventas
  - admin
  - config
  - local

azure > BAR\_sfm > meso

Documents 4 Aggregations Schema Indexes 1 Validation

Type a query: ( field: 'value' ) or [Generate query](#)

EXPLAIN RESET FIND Options


ADD DATA EXPORT DATA UPDATE DELETE

25 1-4 of 4

|                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>{   "_id": ObjectId("686522e9a964e8cf0874ff"),   "id": "1",   "numero": "1",   "capacidad": "4",   "ubicacion": "al frente de la cantina " }</pre> |
| <pre>{   "_id": ObjectId("686522e9a964e8cf0874ff"),   "id": "2",   "numero": "2",   "capacidad": "4",   "ubicacion": "al frente del baño" }</pre>       |
| <pre>{   "_id": ObjectId("686522e9a964e8cf0874ff"),   "id": "3",   "numero": "3",   "capacidad": "4",   "ubicacion": "en la entrada " }</pre>           |
| <pre>{   "_id": ObjectId("686522e9a964e8cf0874ff"),   "id": "4",   "numero": "4",   "capacidad": "4",   "ubicacion": "en el centro del bar" }</pre>     |





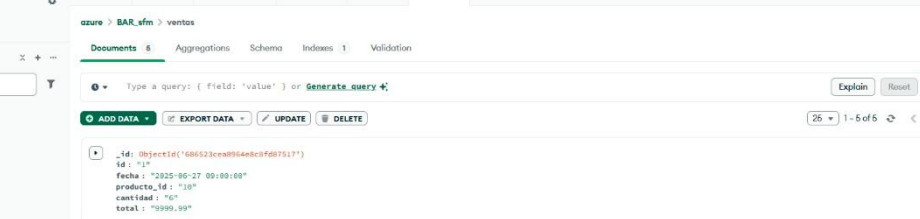

The screenshot shows the MongoDB Compass interface. On the left, there's a sidebar with a file explorer showing the database structure: 'azure' > 'BAR\_sfm' > 'ventas'. The main area displays a collection of documents in the 'ventas' database. The documents are shown in a JSON format, with fields like '\_id', 'fecha', 'producto\_id', 'cantidad', and 'total'. The interface includes a top navigation bar with 'MongoDB Compass - azure/BAR\_sfm.ventas', a sidebar with 'Connections', 'My Queries', and 'Collections', and a main document viewer area. The documents are displayed in a table-like view, with each document's JSON structure visible. The first document has an '\_id' of '606523cea0964e8cf6075117' and a 'total' of '9999.99'. The second document has an '\_id' of '606523cea0964e8cf6075118' and a 'total' of '9999.99'. The third document has an '\_id' of '606523cea0964e8cf6075119' and a 'total' of '9999.99'. The fourth document has an '\_id' of '606523cea0964e8cf607511a' and a 'total' of '9999.99'. The fifth document has an '\_id' of '606523cea0964e8cf607511b' and a 'total' of '9999.99'.