BENCHVAULT QUICKSTART

Back up lab notebooks. Read them calmly later.

Back up LabArchives GOV notebooks and read them offline

Full-size archives	Read-only viewer	Integrity warnings

Owner-only backup rule

At NIH and NICHD, full-size LabArchives notebook backup is owner-only. BenchVault helps make that permission boundary visible before someone mistakes a policy restriction for a software failure.

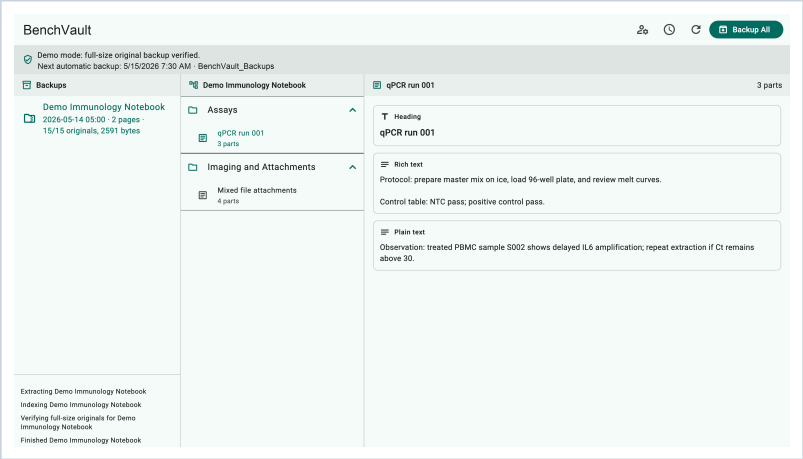

May 15, 2026 · macOS first · Windows and iPad path scaffolded

Local credentials, notebook IDs, source PDFs, and backups stay outside GitHub.

BenchVault is a desktop app for backing up LabArchives GOV electronic lab notebooks and reading those backups later in a read-only viewer. It is designed for lab records, experiment notes, protocols, tables, images, PDFs, sequence files, instrument output, and other bench-research attachments.

What BenchVault Does

- Backs up every notebook that your LabArchives account is allowed to back up.
- Uses a production read-only LabArchives allowlist for login, user-access lookup, and notebook backup download only.
- Runs a Backup Center preflight before backup starts.
- Keeps the original LabArchives archive file for preservation.
- Verifies full-size original attachment files after backup by byte size.
- Seals each backup with SHA-256 checksums and warns if files change later.
- Creates a readable Markdown copy and search index for each backup.
- Lets you search backed-up notebooks with local fuzzy matching, or with natural-language answers when you add an OpenAI API key.
- Lets you schedule routine backups while the app is open.
- Stores credentials and backups locally, not in GitHub.

Local handling note
BenchVault is for backup and offline viewing. The production app does not add, update, delete, upload, or restore content to the original LabArchives notebook.

Before You Start

You need:

- Your LabArchives GOV email address.
- Your LabArchives API access ID.
- Your LabArchives API access key.
- A local folder where routine backup copies should be saved.
- An OpenAI API key if you want natural-language notebook search.

At NIH and NICHD, lab notebook ownership is restricted to lab chiefs, also known as PIs. The LabArchives full-size notebook backup API is owner-only. If you can see a notebook but you are not the PI owner, BenchVault can list it but cannot download its full-size backup archive.

Owner-only backup rule
At NIH and NICHD, full-size LabArchives backup is owner-only. A visible notebook is not necessarily a notebook your account can download as a full preservation archive.

Choose a backup folder that is easy to protect and easy to find. A good pattern is to create a dedicated folder named `BenchVault_Backups` in a secure local or approved institutional storage location.

First Launch Setup

1. Open BenchVault.
2. Enter your LabArchives email address.
3. Enter your access ID and access key.
4. Choose the folder where routine backup copies should be stored.
5. Enter an OpenAI API key if you want natural-language notebook search.
6. Click `Connect`.
7. Complete the LabArchives authorization step in the browser.
8. Return to BenchVault after authorization is captured.

If browser authorization does not complete cleanly, paste the LabArchives auth code into the setup screen and click `Use Auth Code`.

Run a Manual Backup

1. Review the Backup Center preflight band.
2. Open `Details` if any item says `Blocked` or `Review`.
3. Resolve blocking checks before backup.
4. Click `Back Up Now`.
5. Keep the app open while the backup is running.
6. Watch the status messages in the backup log.
7. When backup finishes, select a backup from the left pane.
8. Browse pages in the notebook tree.
9. Select a page to read its backed-up contents.

The preflight checks local readiness before backup starts. It covers local credentials, notebook list, backup folder writability, available storage, archive extractor availability, the read-only LabArchives API guardrail, OpenAI search configuration, and schedule state. A blocking preflight check prevents backup from starting until it is resolved.

After each run, BenchVault writes a local run manifest with per-notebook outcomes, classified skip reasons, successful backup records, and the run log. The backup pane shows the latest run summary, persistent notebook status cards, and the local backup copies available for reading. Each notebook card combines the latest run outcome with prior local backups, so a skipped notebook can still show whether an older protected copy exists. Open `Details` in the latest-run banner to review every notebook outcome, suggested next action, and run-log line.

If a run has skipped notebooks that are likely fixable, such as network, storage, extraction, verification, or authorization problems, the latest-run banner shows a retry action. Owner-rights skips are not retried because only the notebook owner can download the full-size backup.

BenchVault may skip notebooks that are visible to you but not eligible for API backup with your current permissions. This does not mean the backup system failed. It means LabArchives did not grant backup rights for that notebook. At NIH/NICHD, ask the lab chief or PI owner to run the backup for that notebook.

Confirm Full-Size Originals

For each successful notebook backup, BenchVault verifies the original attachment payloads. A successful backup means:

- The LabArchives `.7z` archive was saved.
- Each reported attachment has an `original` file in the extracted backup.
- Each original file has the same byte size reported by LabArchives.
- A checksum manifest was written for later auditing.
- An integrity seal was written so the viewer can detect later byte changes.

The manifest is named `original_files_manifest.json`. It includes relative file paths, expected byte counts, actual byte counts, and SHA-256 checksums.

BenchVault also writes `integrity_manifest.json` for the whole backup run and records a local seal in the ignored credentials folder. The local seal ledger is chained, so removing or rewriting an earlier seal makes later seals fail local corroboration. When you open a backup later, the viewer re-checks protected files. If a file was changed, removed, or added, BenchVault shows a warning before you rely on that copy. This is tamper-evidence for local preservation; it is not a legal certification by itself.

The viewer treats backup metadata paths as untrusted. It rejects absolute paths, drive-letter paths, UNC-style paths, `..` traversal, and files that resolve outside the backup folder before previewing or restoring an attachment.

> **Integrity note**
> Tamper-evidence depends on protecting the backup folder after it is written. BenchVault can warn when sealed files change, but it does not replace formal records policy, chain-of-custody review, or institutional legal guidance.

Export An Audit Summary

When a backup is selected, the integrity banner includes an `Audit` action. BenchVault writes three local sidecars under the selected backup run's `audit/` folder:

- `backup_audit_summary.md`: human-readable backup and integrity summary.
- `backup_audit_summary.json`: machine-readable backup, integrity, and export metadata, including compact archive diagnostics such as source layout, page/part counts, attachment counts, thumbnail counts, and part-type counts.
- `integrity_files.csv`: protected file paths, byte counts, SHA-256 hashes, and backup-time modification timestamps.
- `external_hash_anchor.txt`: a compact manifest-hash record that can be placed in an institutional records system, WORM storage, or another append-only location.

The audit export is derived from the local backup and integrity manifest. It is useful for review packets and internal records conversations, but it is still tamper-evidence rather than legal certification by itself.

Supported Attachments

LabArchives can attach documents of any file type and format. BenchVault therefore preserves and restores every original payload it finds in a full-size backup, even when no inline preview is available.

The read-only viewer recognizes the same major LabArchives attachment families:

- Common browser images such as PNG, JPG, JPEG, GIF, WebP, and BMP.
- Text, tabular, structured, and sequence files such as TXT, CSV, TSV, Markdown, JSON, XML, FASTA, GenBank, EMBL, BED, VCF, GFF, and GTF.
- PDFs and Microsoft Office documents.
- Jupyter notebooks.
- SnapGene, Geneious, Sanger trace, and related molecular biology files.
- Chemical structure files such as CDX, CDXML, MOL, SDF, and SKC.
- Media files, archives, and other custom instrument exports.

BenchVault previews safe local formats inline, including common images, text-like files, sequence text, chemical text files, and a Jupyter notebook summary. Tool-specific formats such as Office files, PDFs, TIFF images, SnapGene files, binary chemical drawings, media, and custom instrument exports are still preserved, sealed, and restorable from the attachment card for inspection in the appropriate local application. HTML and SVG attachments are shown as source text; the viewer does not run embedded scripts.

Attachment cards show whether the original payload was indexed in the backup, whether the format is usually viewable in LabArchives, the reported byte size, and the relative path of the preserved original file. Use the restore button on the card to copy the original payload into a folder you choose.

Search Backed-Up Notebooks

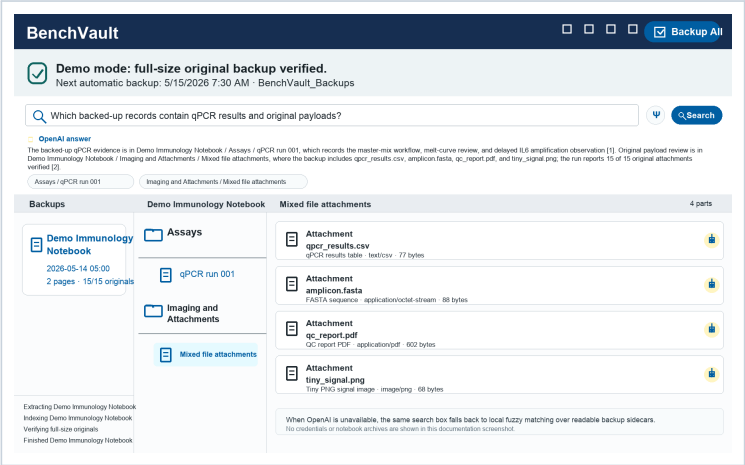

Figure. Natural-language notebook search.

Use the search field above the notebook viewer to ask about backed-up content. BenchVault always creates a local readable copy first, then searches that copy. Use the search controls to narrow results to page text, attachments, comments, exact phrases, or verified backups only.

Without an OpenAI API key, or if the OpenAI request fails, search uses local fuzzy matching and shows the best matching pages. With an OpenAI API key, BenchVault sends the best matching excerpts to OpenAI and returns a concise answer with page citations. On macOS app launches, the OpenAI key is stored in macOS Keychain when available; non-secret search settings remain in the ignored local setup folder.

> **Local handling note**
> Credentials, OpenAI keys, notebook IDs, access XML, source PDFs, and raw backup archives should remain local-only. Public GitHub files should contain only examples or placeholders.

On macOS, BenchVault uses Keychain for newly saved LabArchives access credentials and OpenAI API keys when available. Setup metadata, UID records, notebook indexes, schedules, and integrity ledgers remain local-only files.

Useful searches include:

- `Which pages mention zebrafish hypoxia imaging?`
- `Find attachment records for qPCR or RNA-seq runs.`
- `What did the PI reviewer ask us to repeat?`
- `Show pages about freezer transfer or chain of custody.`

Set Automatic Backups

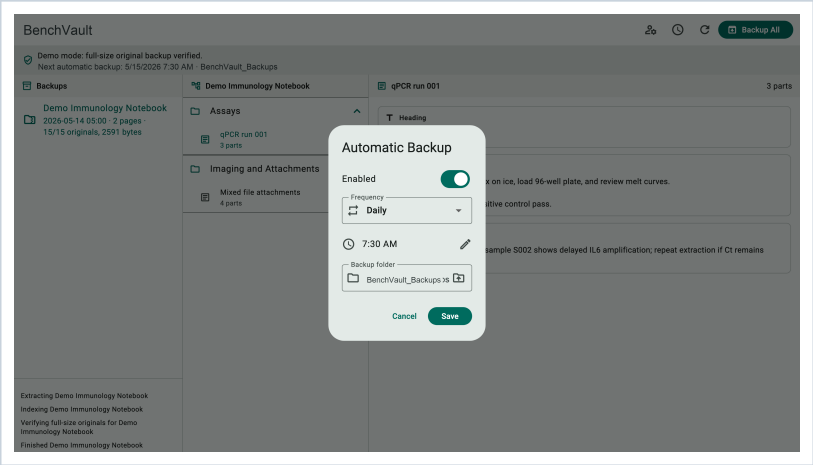

Figure. Automatic backup schedule.

1. Click the schedule button in the toolbar.
2. Turn `Enabled` on.
3. Choose `Daily` or `Weekly`.
4. Pick the time of day.
5. Confirm the backup folder.
6. Click `Save`.

Scheduled backups run while BenchVault is open. If the app is closed, a scheduled backup will not run until app-level background scheduling is added for your platform.

Known Limitations

BenchVault is meant for backup and offline viewing. It does not edit LabArchives, restore records back into LabArchives, back up external systems linked from notebook pages, or replace institutional records policy.

Current practical limits:

- Full-size backup is limited by LabArchives owner permissions.
- Automatic backups run only while the app is open.
- Integrity checks are tamper-evidence, not true immutability or legal certification.
- The viewer preserves more formats than it previews inline. Office files, PDFs, TIFF images, SnapGene files, media, archives, and proprietary instrument files may need to be restored and opened in another local application.
- Search does not read inside most binary attachments. OpenAI search sends only selected excerpts when an OpenAI key is configured; otherwise BenchVault uses local fuzzy search.
- Credentials and backups are local files protected by local machine controls; they are not stored in a built-in encrypted vault.
- macOS is the primary tested platform. Windows and iPad support are scaffolded but still need platform-specific validation.

The full limitations list is maintained in `docs/implementation_limitations.md`.

Backup Folder Structure

BenchVault organizes routine copies inside the folder you choose:

```
notebooks/
  notebook_name/
    year/
      month/
        day/
          run_timestamp/
            notebook.7z
            extracted/
            render_notebook.json
            readable/
              notebook.md
              search_chunks.jsonl
            original_files_manifest.json
            integrity_manifest.json
            backup_record.json
runs/
  year/
    month/
      day/
        run_timestamp.json
```

This structure keeps each notebook separated and keeps every backup run date-stamped. The paths saved in records and manifests are relative to the backup folder.

Read-Only Viewer

The viewer is for checking and reading backed-up records. It does not edit LabArchives and it does not write changes back to LabArchives.

Use the viewer to:

- Confirm a notebook was backed up.
- Check each notebook's `Notebook Status` card for latest run status, owner action, prior local copies, and original-attachment verification.
- Use the page breadcrumb and outline to orient yourself inside long notebooks.
- Review page titles and entries.
- Read text entries, rich text, and headings.
- Check attachment names, types, sizes, and preservation evidence chips.
- Click the restore button on an attachment card to copy the backed-up original file into a folder you choose.
- Open the backup folder when you need to inspect the preservation archive.
- Watch the integrity banner at the top of the viewer before relying on a backup copy.
- Open the integrity details button to review the manifest path, local seal state, checked file count, checked byte count, manifest hash, and any changed, missing, or unexpected files.
- Click `Audit` in the integrity banner to export a local Markdown summary, machine-readable JSON, integrity-file CSV, and external hash anchor for the selected backup.

Good Lab Practice

- Run a manual backup after important notebook updates.
- Keep routine backup scheduling enabled on the computer used for records work.
- Periodically check that recent backups appear in the viewer.
- Keep the backup folder in a protected location.
- Do not email or commit credential files, user access XML, notebook IDs, or raw backup archives.
- Treat the `.7z` archive and `original_files_manifest.json` as preservation records.

Troubleshooting

`Setup needed`: Connect LabArchives credentials again from the setup screen.

`Skipped notebook`: Your account can see the notebook, but LabArchives did not grant API backup rights for it. At NIH/NICHD, full-size backup is owner-only, and the notebook owner should be the lab chief or PI.

`Original attachment verification failed`: BenchVault did not find every full-size original attachment or the byte sizes did not match. Run backup again. If it still fails, keep the failed run for review and contact the project maintainer.

`No local backups yet`: Click `Back Up Now`, or check that the backup folder is available.

Quick Checklist

- Connect credentials.
- Choose backup folder.
- Click `Back Up Now`.
- Confirm the backup appears in the viewer.
- Check that original attachment verification passed.
- Enable routine backups.