.slideDown()

Categories: Effects (https://api.jquery.com/category/effects/) > Sliding (https://api.jquery.com/category/effects/sliding/)

.slideDown([duration] [, complete])

Returns: jQuery (http://api.jquery.com/Types/#jQuery)

Description: *Display the matched elements with a sliding motion.*

.slideDown([duration] [, complete]) **version added: 1.0 (/category/version/1.0/)**

duration (default: `400`)
Type: Number (http://api.jquery.com/Types/#Number) or String (http://api.jquery.com/Types/#String)
A string or number determining how long the animation will run.

complete
Type: Function (http://api.jquery.com/Types/#Function)()
A function to call once the animation is complete, called once per matched element.

- Ajax (https://api.jquery.com/category/ajax/)
  - Global Ajax Event Handlers (https://api.jquery.com/category/ajax/global-ajax-event-handlers/)
  - Helper Functions (https://api.jquery.com/category/ajax/helper-functions/)
  - Low-Level Interface (https://api.jquery.com/category/ajax/low-level-interface/)
  - Shorthand Methods (https://api.jquery.com/category/ajax/shorthand-methods/)
- Attributes (https://api.jquery.com/category/attributes/)
- Callbacks Object (https://api.jquery.com/category/callbacks-

.slideDown(options)

version added: 1.0 (/category/version/1.0/)

options

Type: PlainObject (http://api.jquery.com/Types/#PlainObject)
A map of additional options to pass to the method.

duration (default: `400`)
Type: Number (http://api.jquery.com/Types/#Number) or String (http://api.jquery.com/Types/#String)
A string or number determining how long the animation will run.

easing (default: `swing`)
Type: String (http://api.jquery.com/Types/#String)
A string indicating which easing function to use for the transition.

queue (default: `true`)
Type: Boolean (http://api.jquery.com/Types/#Boolean) or String (http://api.jquery.com/Types/#String)
A Boolean indicating whether to place the animation in the effects queue. If false, the animation will begin immediately. **As of jQuery 1.7**, the queue option can also accept a string, in which case the animation is added to the queue represented by that string. When a custom queue name is used the animation does not automatically start; you must call `.dequeue("queuename")` to start it.

specialEasing
Type: PlainObject (http://api.jquery.com/Types/#PlainObject)
An object containing one or more of the CSS properties defined by the properties argument and their corresponding easing functions. **(version added: 1.4 (/category/version/1.4/))**

step
Type: Function (http://api.jquery.com/Types/#Function)(Number (http://api.jquery.com/Types/#Number) now, Tween (http://api.jquery.com/Types/#Tween) tween)
A function to be called for each animated property of each animated element. This function provides an opportunity to modify the Tween object to change the value of the property before it is set.

progress
Type: Function (http://api.jquery.com/Types/#Function)(Promise (http://api.jquery.com/Types/#Promise) animation, Number (http://api.jquery.com/Types/#Number) progress, Number (http://api.jquery.com/Types/#Number) remainingMs)

- Deprecated 3.5 (https://api.jquery.com/category/deprecated/deprecated-3.5/)
- Deprecated 3.7 (https://api.jquery.com/category/deprecated/deprecated-3.7/)

- Dimensions (https://api.jquery.com/category/dimensions/)
- Effects (https://api.jquery.com/category/effects/)
  - Basics (https://api.jquery.com/category/effects/basics/)
  - Custom (https://api.jquery.com/category/effects/custom-effects/)
  - Fading (https://api.jquery.com/category/effects/fading/)
  - Sliding (https://api.jquery.com/category/effects/sliding/)

- Events (https://api.jquery.com/category/events/)
  - Browser Events (https://api.jquery.com/category/events/browser-events/)
  - Document Loading (https://api.jquery.com/category/events/document-loading/)
  - Event Handler Attachment (https://api.jquery.com/category/events/event-handler-attachment/)
  - Event Object (https://api.jquery.com/category/events/event-object/)
  - Form Events (https://api.jquery.com/category/events/form-events/)

A function to be called after each step of the animation, only once per animated element regardless of the number of animated properties. **(version added: 1.8 (/category/version/1.8/))**

complete
Type: Function (http://api.jquery.com/Types/#Function)()
A function that is called once the animation on an element is complete.

start
Type: Function (http://api.jquery.com/Types/#Function)(Promise (http://api.jquery.com/Types/#Promise) animation)
A function to call when the animation on an element begins. **(version added: 1.8 (/category/version/1.8/))**

done
Type: Function (http://api.jquery.com/Types/#Function)(Promise (http://api.jquery.com/Types/#Promise) animation, Boolean (http://api.jquery.com/Types/#Boolean) jumpedToEnd)
A function to be called when the animation on an element completes (its Promise object is resolved). **(version added: 1.8 (/category/version/1.8/))**

fail
Type: Function (http://api.jquery.com/Types/#Function)(Promise (http://api.jquery.com/Types/#Promise) animation, Boolean (http://api.jquery.com/Types/#Boolean) jumpedToEnd)
A function to be called when the animation on an element fails to complete (its Promise object is rejected). **(version added: 1.8 (/category/version/1.8/))**

always
Type: Function (http://api.jquery.com/Types/#Function)(Promise (http://api.jquery.com/Types/#Promise) animation, Boolean (http://api.jquery.com/Types/#Boolean) jumpedToEnd)
A function to be called when the animation on an element completes or stops without completing (its Promise object is either resolved or rejected). **(version added: 1.8 (/category/version/1.8/))**

.slideDown([duration] [, easing] [, complete]) version added: 1.4.3 (/category/version/1.4.3/)

duration (default: `400`)
Type: Number (http://api.jquery.com/Types/#Number) or String

- Keyboard Events (https://api.jquery.com/category/events/keyboard-events/)
- Mouse Events (https://api.jquery.com/category/events/mouse-events/)

- Forms (https://api.jquery.com/category/forms/)
- Internals (https://api.jquery.com/category/internals/)
- Manipulation (https://api.jquery.com/category/manipulation/)
  - Class Attribute (https://api.jquery.com/category/manipulation/class-attribute/)
  - Copying (https://api.jquery.com/category/manipulation/copying/)
  - DOM Insertion, Around (https://api.jquery.com/category/manipulation/dom-insertion-around/)
  - DOM Insertion, Inside (https://api.jquery.com/category/manipulation/dom-insertion-inside/)
  - DOM Insertion, Outside (https://api.jquery.com/category/manipulation/dom-insertion-outside/)
  - DOM Removal (https://api.jquery.com/category/manipulation/dom-removal/)
  - DOM Replacement (https://api.jquery.com/category/manipulation/dom-replacement/)
  - General Attributes (https://api.jquery.com/category/manipulation/general-attributes/)
  - Style Properties

(http://api.jquery.com/Types/#String)
A string or number determining how long the animation will run.

easing (default: `swing`)
Type: String (http://api.jquery.com/Types/#String)
A string indicating which easing function to use for the transition.

complete
Type: Function (http://api.jquery.com/Types/#Function)()
A function to call once the animation is complete, called once per matched element.

The `slideDown()` method animates the height of the matched elements. This causes lower parts of the page to slide down, making way for the revealed items.

Durations are given in milliseconds; higher values indicate slower animations, not faster ones. The strings `'fast'` and `'slow'` can be supplied to indicate durations of `200` and `600` milliseconds, respectively. If any other string is supplied, or if the `duration` parameter is omitted, the default duration of `400` milliseconds is used.

We can animate any element, such as a simple image:

```
<div id="clickme">
  Click here
</div>
<img id="book" src="book.png" alt="" width="100" h
```

With the element initially hidden, we can show it slowly:

```
$( "#clickme" ).on( "click", function() {
  $( "#book" ).slideDown( "slow", function() {
    // Animation complete.
  });
});
```

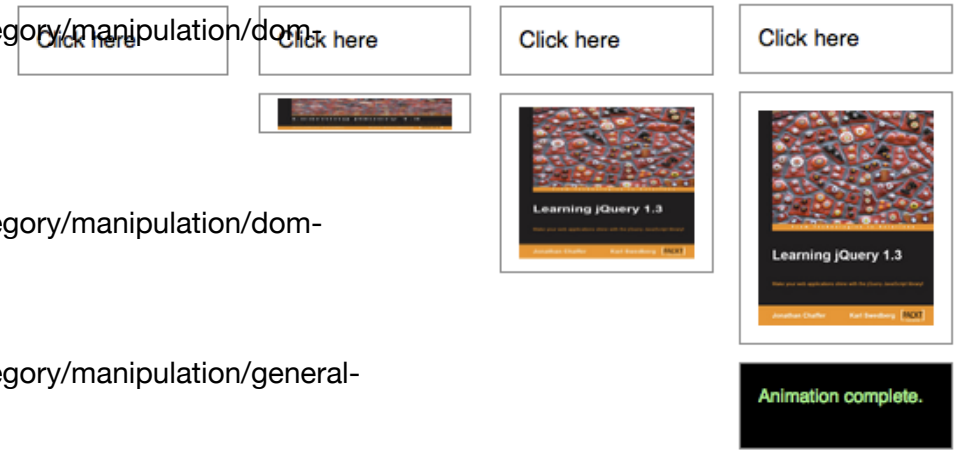

(https://api.jquery.com/category/manipulation/style-properties/)

- Miscellaneous (https://api.jquery.com/category/miscellaneous/)
  - Collection Manipulation (https://api.jquery.com/category/miscellaneous/collection-manipulation/)
  - Data Storage (https://api.jquery.com/category/miscellaneous/data-storage/)
  - DOM Element Methods (https://api.jquery.com/category/miscellaneous/dom-element-methods/)
  - Setup Methods (https://api.jquery.com/category/miscellaneous/setup-methods/)
- Offset (https://api.jquery.com/category/offset/)
- Properties (https://api.jquery.com/category/properties/)
  - Properties of jQuery Object Instances (https://api.jquery.com/category/properties/jquery-object-instance-properties/)
  - Properties of the Global jQuery Object (https://api.jquery.com/category/properties/global-jquery-object-properties/)
- Removed (https://api.jquery.com/category/removed/)
- Selectors (https://api.jquery.com/category/selectors/)
  - Attribute

Figure 1 - Illustration of the `slideDown()` effect

Easing

As of jQuery 1.4.3, an optional string naming an easing function may be used. Easing functions specify the speed at which the animation progresses at different points within the animation. The only easing implementations in the jQuery library are the default, called `swing`, and one that progresses at a constant pace, called `linear`. More easing functions are available with the use of plug-ins, most notably the jQuery UI suite (https://jqueryui.com).

Callback Function

If supplied, the callback is fired once the animation is complete. This can be useful for stringing different animations together in sequence. The callback is not sent any arguments, but `this` is set to the DOM element being animated. If multiple elements are animated, it is important to note that the callback is executed once per matched element, not once for the animation as a whole.

As of jQuery 1.6, the `.promise() (/promise/)` method can be used in conjunction with the `deferred.done() (/deferred.done/)` method to execute a single callback for the animation as a whole when *all* matching elements have completed their animations (See the example for .promise() (/promise/#example-1)).

Additional Notes:

- All jQuery effects, including `.slideDown()`, can be turned off globally by setting `jQuery.fx.off = true`, which effectively sets the duration to 0. For more information, see jQuery.fx.off (/jquery.fx.off/).
- If `.slideDown()` is called on an unordered list (`<ul>`) and its `<li>` elements have position (relative, absolute, or fixed), the effect may not work properly in IE6 through at least IE9 unless the `<ul>` has "layout." To remedy the problem, add the `position: relative;` and `zoom: 1;` CSS declarations to the `ul`.

Examples:

Example 1

Animates all divs to slide down and show themselves over 600 milliseconds.

(https://api.jquery.com/category/selectors/attribute-selectors/)

- Basic (https://api.jquery.com/category/selectors/basic-css-selectors/)
- Basic Filter (https://api.jquery.com/category/selectors/basic-filter-selectors/)
- Child Filter (https://api.jquery.com/category/selectors/child-filter-selectors/)
- Content Filter (https://api.jquery.com/category/selectors/content-filter-selector/)
- Form (https://api.jquery.com/category/selectors/form-selectors/)
- Hierarchy (https://api.jquery.com/category/selectors/hierarchy-selectors/)
- jQuery Extensions (https://api.jquery.com/category/selectors/jquery-selector-extensions/)
- Visibility Filter (https://api.jquery.com/category/selectors/visibility-filter-selectors/)

- Traversing (https://api.jquery.com/category/traversing/)
  - Filtering (https://api.jquery.com/category/traversing/filtering/)
  - Miscellaneous Traversing (https://api.jquery.com/category/traversing/miscellaneous-traversal/)
  - Tree Traversal (https://api.jquery.com/category/traversing/tree-traversal/)

- Utilities

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <title>slideDown demo</title>
  <style>
  div {
    background: #de9a44;
    margin: 3px;
    width: 80px;
    height: 40px;
    display: none;
    float: left;
  }
  </style>
  <script src="https://code.jquery.com/jquery-4.0
</head>
<body>

Click me!
<div></div>
<div></div>
<div></div>

<script>
$( document.body ).on( "click", function () {
  if ( $( "div" ).first().is( ":hidden" ) ) {
    $( "div" ).slideDown( "slow" );
  } else {
    $( "div" ).hide();
  }
} );
</script>

</body>
</html>
```

Demo:

Click me!

Example 2

(https://api.jquery.com/category/utilities/)

- Version (https://api.jquery.com/category/version/)
  - Version 1.0 (https://api.jquery.com/category/version/1.0/)
  - Version 1.0.4 (https://api.jquery.com/category/version/1.0.4/)
  - Version 1.1 (https://api.jquery.com/category/version/1.1/)
  - Version 1.1.2 (https://api.jquery.com/category/version/1.1.2/)
  - Version 1.1.3 (https://api.jquery.com/category/version/1.1.3/)
  - Version 1.1.4 (https://api.jquery.com/category/version/1.1.4/)
  - Version 1.2 (https://api.jquery.com/category/version/1.2/)
  - Version 1.2.3 (https://api.jquery.com/category/version/1.2.3/)
  - Version 1.2.6 (https://api.jquery.com/category/version/1.2.6/)
  - Version 1.3 (https://api.jquery.com/category/version/1.3/)
  - Version 1.4 (https://api.jquery.com/category/version/1.4/)
  - Version 1.4.1 (https://api.jquery.com/category/version/1.4.1/)
  - Version 1.4.2 (https://api.jquery.com/category/version/1.4.2/)
  - Version 1.4.3 (https://api.jquery.com/category/version/1.4.3/)
  - Version 1.4.4 (https://api.jquery.com/category/version/1.4.4/)
  - Version 1.5 (https://api.jquery.com/category/version/1.5/)
  - Version 1.5.1 (https://api.jquery.com/category/version/1.5.1/)
  - Version 1.6

Animates all inputs to slide down, completing the animation within 1000 milliseconds. Once the animation is done, the input look is changed especially if it is the middle input which gets the focus.

```html
<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <title>slideDown demo</title>
  <style>
  div {
    background: #cfd;
    margin: 3px;
    width: 50px;
    text-align: center;
    float: left;
    cursor: pointer;
    border: 2px outset black;
    font-weight: bolder;
  }
  input {
    display: none;
    width: 120px;
    float: left;
    margin: 10px;
  }
  </style>
  <script src="https://code.jquery.com/jquery-4.(
</head>
<body>

<div>Push!</div>
<input type="text">
<input type="text" class="middle">
<input type="text">
<script>
$( "div" ).on( "click", function() {
  $( this ).css( {
    borderStyle: "inset",
    cursor: "wait"
  } );
  $( "input" ).slideDown( 1000, function() {
    $( this )
      .css( "border", "2px red inset" )
      .filter( ".middle" )
        .css( "background", "yellow" )
        .trigger( "focus" );
    $( "div" ).css( "visibility", "hidden" );
  } );
} );

</script>

</body>
</html>
```

Demo:

(https://api.jquery.com/category/version/1.6/)

- Version 1.7 (https://api.jquery.com/category/version/1.7/)
- Version 1.8 (https://api.jquery.com/category/version/1.8/)
- Version 1.9 (https://api.jquery.com/category/version/1.9/)
- Version 1.11 & 2.1 (https://api.jquery.com/category/version/1.11-and-2.1/)
- Version 1.12 & 2.2 (https://api.jquery.com/category/version/1.12-and-2.2/)
- Version 3.0 (https://api.jquery.com/category/version/3.0/)
- Version 3.1 (https://api.jquery.com/category/version/3.1/)
- Version 3.2 (https://api.jquery.com/category/version/3.2/)
- Version 3.3 (https://api.jquery.com/category/version/3.3/)
- Version 3.4 (https://api.jquery.com/category/version/3.4/)
- Version 3.5 (https://api.jquery.com/category/version/3.5/)
- Version 3.6 (https://api.jquery.com/category/version/3.6/)
- Version 3.7 (https://api.jquery.com/category/version/3.7/)
- Version 4.0 (https://api.jquery.com/category/version/4.0/)

Push!

BOOKS

Learning jQuery Fourth Edition
Karl Swedberg and Jonathan Chaffer
(https://www.packtpub.com/en-us/product/learning-jquery-fourth-edition-9781782163152)

jQuery in Action
Bear Bibeault, Yehuda Katz, and Aurelio De Rosa
(https://www.manning.com/books/jquery-in-action-third-edition)

jQuery Succinctly
Cody Lindley
(https://www.syncfusion.com/ebooks/jquery)

Copyright 2026 OpenJS Foundation (https://openjsf.org/) and jQuery contributors. All rights reserved. See jQuery License (https://jquery.com/license/) for more information. The OpenJS Foundation (https://openjsf.org/) has registered trademarks and uses trademarks. For a list of trademarks of the OpenJS Foundation (https://openjsf.org/), please see our Trademark Policy (https://trademark-policy.openjsf.org/) and Trademark List (https://trademark-list.openjsf.org/). Trademarks and logos not indicated on the list of OpenJS Foundation trademarks (https://trademark-list.openjsf.org/) are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. OpenJS Foundation Terms of Use (https://terms-of-use.openjsf.org/), Privacy (https://privacy-policy.openjsf.org/), Code of Conduct (https://code-of-conduct.openjsf.org/), and Cookie (https://www.linuxfoundation.org/cookies) Policies also apply.