

```

library(knitr)
library(diagram)
read_demo("flowchart", package = "diagram", labels = "demo-flowchart")

## Flowchart examples
par(ask = TRUE)

## MODELLING DIAGRAM
mar <- par(mar = c(1, 1, 1, 1))
openplotmat(main = "from Soetaert and herman, book in prep",
  cex.main = 1)
elpos <- coordinates(c(1, 1, 1, 1, 1, 1, 1, 1), mx = -0.1)
segmentarrow(elpos[7, ], elpos[2, ], arr.pos = 0.15, dd = 0.3,
  arr.side = 3, endhead = TRUE)
segmentarrow(elpos[7, ], elpos[3, ], arr.pos = 0.15, dd = 0.3,
  arr.side = 3, endhead = TRUE)
segmentarrow(elpos[7, ], elpos[4, ], arr.pos = 0.15, dd = 0.3,
  arr.side = 3, endhead = TRUE)

pin <- par("pin") # size of plotting region, inches
xx <- 0.2
yy <- xx * pin[1]/pin[2] * 0.15 # used to make circles round

sx <- rep(xx, 8)
sx[7] <- 0.05

sy <- rep(yy, 8)
sy[6] <- yy * 1.5
sy[7] <- sx[7] * pin[1]/pin[2]

for (i in c(1:7)) straightarrow(to = elpos[i + 1, ], from = elpos[i,
  ], lwd = 2, arr.pos = 0.6, endhead = TRUE)
lab <- c("Problem", "Conceptual model", "Mathematical model",
  "Parameterisation", "Mathematical solution", "", "OK?", "Prediction, Analysis")

for (i in c(1:5, 8)) textround(elpos[i, ], sx[i], sy[i], lab = lab[i])

textround(elpos[6, ], xx, yy * 1.5, lab = c("Calibration,sensitivity",
  "Verification,validation"))
textdiamond(elpos[7, ], sx[7], sy[7], lab = lab[7])

textplain(c(0.7, elpos[2, 2]), yy * 2, lab = c("main components",
  "relationships"), font = 3, adj = c(0, 0.5))
textplain(c(0.7, elpos[3, 2]), yy, "general theory", adj = c(0,


```

```

0.5), font = 3)
textplain(c(0.7, elpos[4, 2]), yy * 2, lab = c("literature",
"measurements"), font = 3, adj = c(0, 0.5))
textplain(c(0.7, elpos[6, 2]), yy * 2, lab = c("field data",
"lab measurements"), font = 3, adj = c(0, 0.5))

```

from Soetaert and herman, book in prep

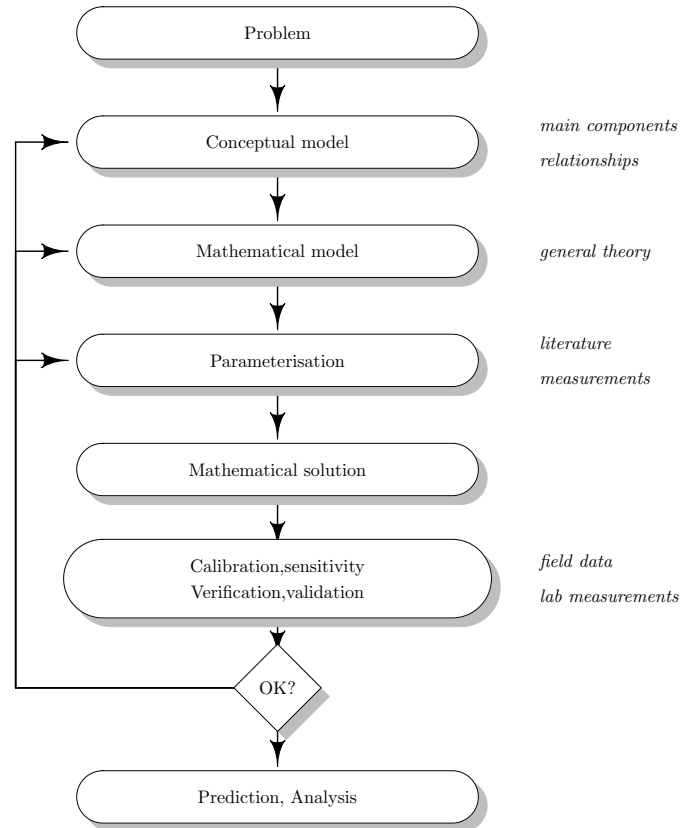

DIAGRAM

```

par(mar = c(1, 1, 1, 1))
openplotmat()
elpos <- coordinates(c(1, 1, 2, 4))
fromto <- matrix(ncol = 2, byrow = TRUE, data = c(1, 2, 2, 3,
2, 4, 4, 7, 4, 8))
nr <- nrow(fromto)
arrpos <- matrix(ncol = 2, nrow = nr)
for (i in 1:nr) arrpos[i, ] <- straightarrow(to = elpos[fromto[i,


```

```

    2], ], from = elpos[fromto[i, 1], ], lwd = 2, arr.pos = 0.6,
    arr.length = 0.5)
textellipse(elpos[1, ], 0.1, lab = "start", box.col = "green",
  shadow.col = "darkgreen", shadow.size = 0.005, cex = 1.5)
textrect(elpos[2, ], 0.15, 0.05, lab = "found term?", box.col = "blue",
  shadow.col = "darkblue", shadow.size = 0.005, cex = 1.5)
textrect(elpos[4, ], 0.15, 0.05, lab = "related?", box.col = "blue",
  shadow.col = "darkblue", shadow.size = 0.005, cex = 1.5)
textellipse(elpos[3, ], 0.1, 0.1, lab = c("other", "term"), box.col = "orange",
  shadow.col = "red", shadow.size = 0.005, cex = 1.5)
textellipse(elpos[3, ], 0.1, 0.1, lab = c("other", "term"), box.col = "orange",
  shadow.col = "red", shadow.size = 0.005, cex = 1.5)
textellipse(elpos[7, ], 0.1, 0.1, lab = c("make", "a link"),
  box.col = "orange", shadow.col = "red", shadow.size = 0.005,
  cex = 1.5)
textellipse(elpos[8, ], 0.1, 0.1, lab = c("new", "article"),
  box.col = "orange", shadow.col = "red", shadow.size = 0.005,
  cex = 1.5)

dd <- c(0, 0.025)
text(arrpos[2, 1] + 0.05, arrpos[2, 2], "yes")
text(arrpos[3, 1] - 0.05, arrpos[3, 2], "no")
text(arrpos[4, 1] + 0.05, arrpos[4, 2] + 0.05, "yes")
text(arrpos[5, 1] - 0.05, arrpos[5, 2] + 0.05, "no")

```

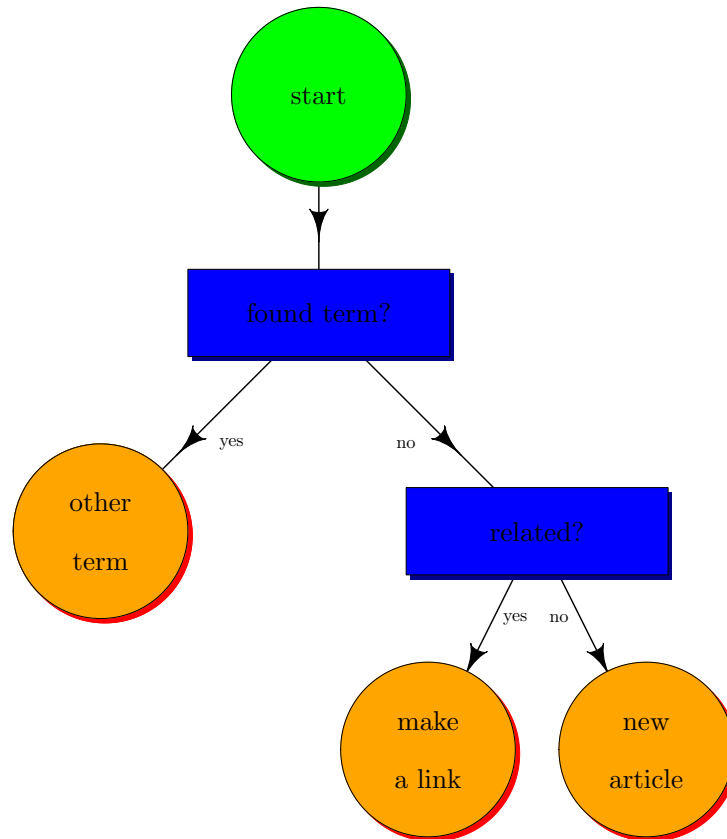

```
#####
par(mfrow = c(2, 2))
par(mar = c(0, 0, 0, 0))
openplotmat()
elpos <- coordinates(c(2, 3))
treearrow(from = elpos[1:2, ], to = elpos[3:5, ], arr.side = 2,
  path = "H")
for (i in 1:5) textrect(elpos[i, ], 0.15, 0.05, lab = i, cex = 1.5)

openplotmat()
elpos <- coordinates(c(3, 2), hor = FALSE)
treearrow(from = elpos[1:3, ], to = elpos[4:5, ], arr.side = 2,
  arr.pos = 0.2, path = "V")
for (i in 1:5) textrect(elpos[i, ], 0.15, 0.05, lab = i, cex = 1.5)

openplotmat()
```


```

elpos <- coordinates(c(1, 4))
treearrow(from = elpos[1, ], to = elpos[2:5, ], arr.side = 2,
  arr.pos = 0.7, path = "H")
for (i in 1:5) textrect(elpos[i, ], 0.05, 0.05, lab = i, cex = 1.5)

openplotmat()
elpos <- coordinates(c(2, 1, 2, 3))
elpos[1, 1] <- 0.3
elpos[2, 1] <- 0.7
treearrow(from = elpos[1:3, ], to = elpos[4:8, ], arr.side = 2,
  path = "H")
for (i in 1:8) bentarrow(from = elpos[i, ], to = elpos[i, ] +
  c(0.1, -0.05), arr.pos = 1, arr.type = "circle", arr.col = "white",
  arr.length = 0.2)
for (i in 1:8) textrect(elpos[i, ], 0.05, 0.05, lab = i, cex = 1.5)
mtext(side = 3, outer = TRUE, line = -2, "treearrow", cex = 1.5)

```

treearrow

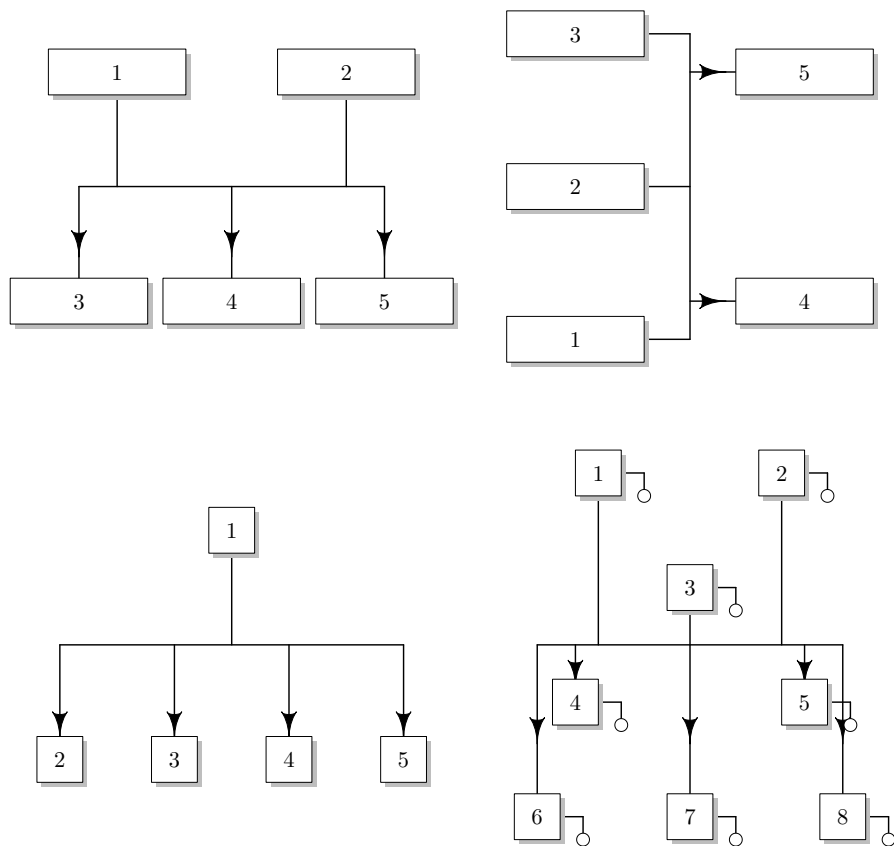


```

par(mfrow = c(1, 1))

par(mar = c(0, 0, 0, 0))
openplotmat()
elpos <- coordinates(c(1, 1, 2, 1))
straightarrow(to = elpos[2, ], from = elpos[1, ])
treearrow(from = elpos[2, ], to = elpos[3:4, ], arr.side = 2,
  path = "H")
treearrow(from = elpos[3:4, ], to = elpos[5, ], arr.side = 2,
  path = "H")
segmentarrow(from = elpos[5, ], to = elpos[2, ], dd = 0.4)
curvedarrow(from = elpos[5, ], to = elpos[2, ], curve = 0.8)
col <- femmecol(5)
texthexa(mid = elpos[1, ], radx = 0.1, angle = 20, shadow.size = 0.01,
  rady = 0.05, lab = 1, box.col = col[1])
textrect(mid = elpos[2, ], radx = 0.1, shadow.size = 0.01, rady = 0.05,
  lab = 2, box.col = col[2])
textround(mid = elpos[3, ], radx = 0.05, shadow.size = 0.01,
  rady = 0.05, lab = 3, box.col = col[3])
textellipse(mid = elpos[4, ], radx = 0.05, shadow.size = 0.01,
  rady = 0.05, lab = 4, box.col = col[4])
textellipse(mid = elpos[5, ], radx = 0.05, shadow.size = 0.01,
  rady = 0.08, angle = 45, lab = 5, box.col = col[5])

```

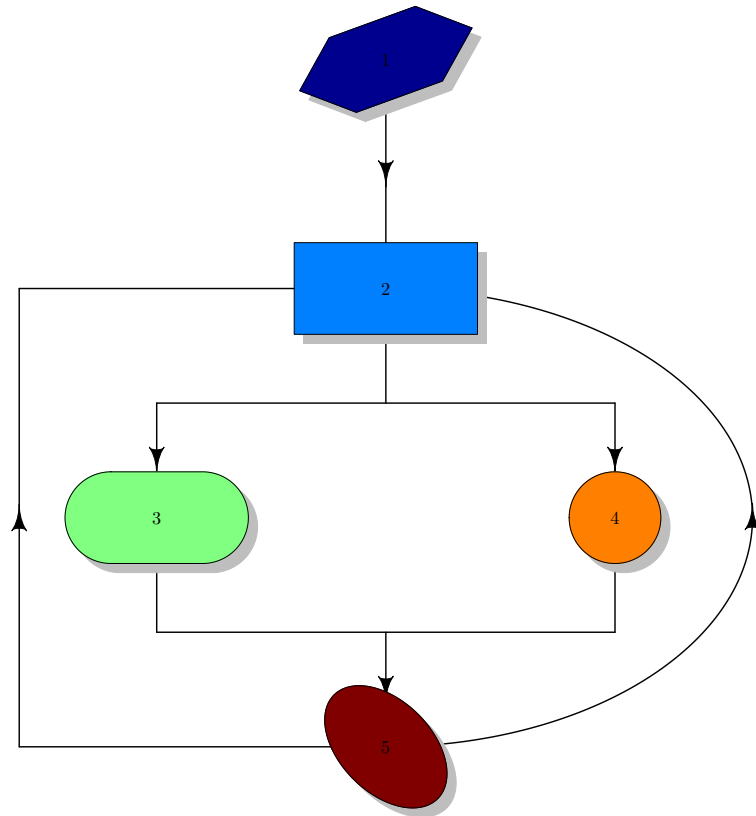

```

par(mar = c(1, 1, 1, 1))
openplotmat(main = "Arrowtypes")
elpos <- coordinates(c(1, 2, 1), mx = 0.1, my = -0.1)
curvedarrow(from = elpos[1, ], to = elpos[2, ], curve = -0.5,
  lty = 2, lcol = 2)
straightarrow(from = elpos[1, ], to = elpos[2, ], lty = 3, lcol = 3)
segmentarrow(from = elpos[1, ], to = elpos[2, ], lty = 1, lcol = 1)
treearrow(from = elpos[2:3, ], to = elpos[4, ], lty = 4, lcol = 4)
bentarrow(from = elpos[3, ], to = elpos[3, ] - c(0.1, 0.1), arr.pos = 1,
  lty = 5, lcol = 5)
bentarrow(from = elpos[1, ], to = elpos[3, ], lty = 5, lcol = 5)
selfarrow(pos = elpos[3, ], path = "R", lty = 6, curve = 0.075,
  lcol = 6)
splitarrow(from = elpos[1, ], to = elpos[2:3, ], lty = 1, lwd = 1,
  dd = 0.7, arr.side = 1:2, lcol = 7)

```


```

for (i in 1:4) textrect(elpos[i, ], 0.05, 0.05, lab = i, cex = 1.5)

legend("topright", lty = 1:7, legend = c("segmentarrow", "curvedarrow",
"straightarrow", "treearrow", "bentarrow", "selfarrow", "splitarrow"),
lwd = c(rep(2, 6), 1), col = 1:7)

```

Arrowtypes

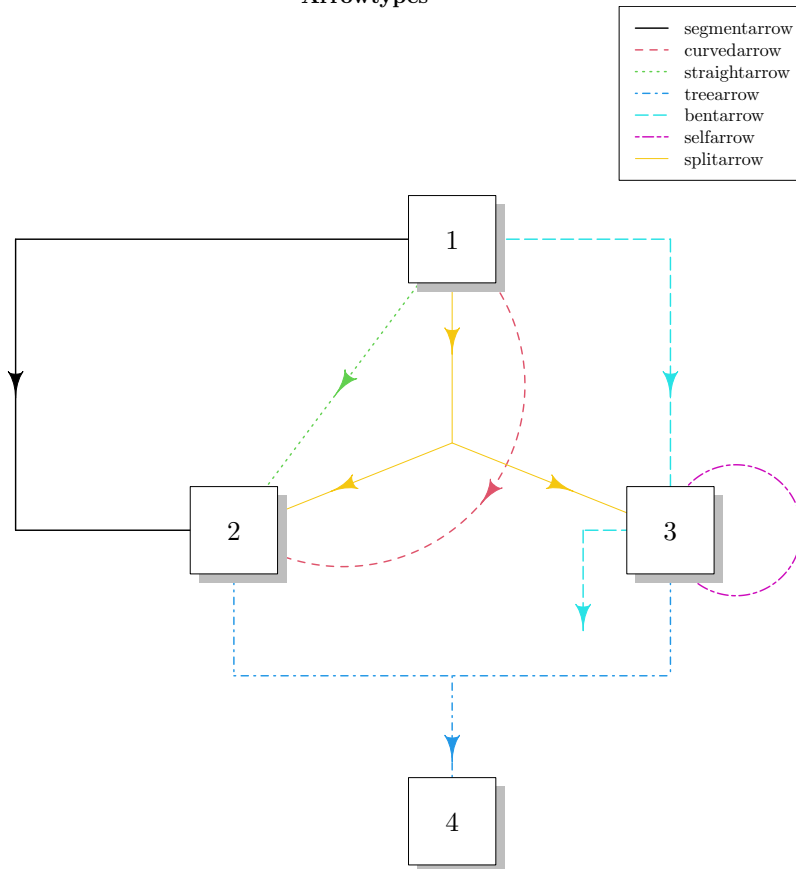

```

openplotmat(main = "textbox shapes")
rx <- 0.1
ry <- 0.05
pos <- coordinates(c(1, 1, 1, 1, 1, 1, 1), mx = -0.2)
textdiamond(mid = pos[1, ], radx = rx, rady = ry, lab = LETTERS[1],
cex = 2, shadow.col = "lightblue")
textellipse(mid = pos[2, ], radx = rx, rady = ry, lab = LETTERS[2],
cex = 2, shadow.col = "blue")
texthexa(mid = pos[3, ], radx = rx, rady = ry, lab = LETTERS[3],
cex = 2, shadow.col = "darkblue")


```

```

textmulti(mid = pos[4, ], nr = 7, radx = rx, rady = ry, lab = LETTERS[4],
          cex = 2, shadow.col = "red")
textrect(mid = pos[5, ], radx = rx, rady = ry, lab = LETTERS[5],
          cex = 2, shadow.col = "darkred")
textround(mid = pos[6, ], radx = rx, rady = ry, lab = LETTERS[6],
           cex = 2, shadow.col = "black")
textempty(mid = pos[7, ], lab = LETTERS[7], cex = 2, box.col = "yellow")
pos[, 1] <- pos[, 1] + 0.5
text(pos[, 1], pos[, 2], c("textdiamond", "textellipse", "texthexa",
                           "textmulti", "textrect", "textround", "textempty"))

```

textbox shapes

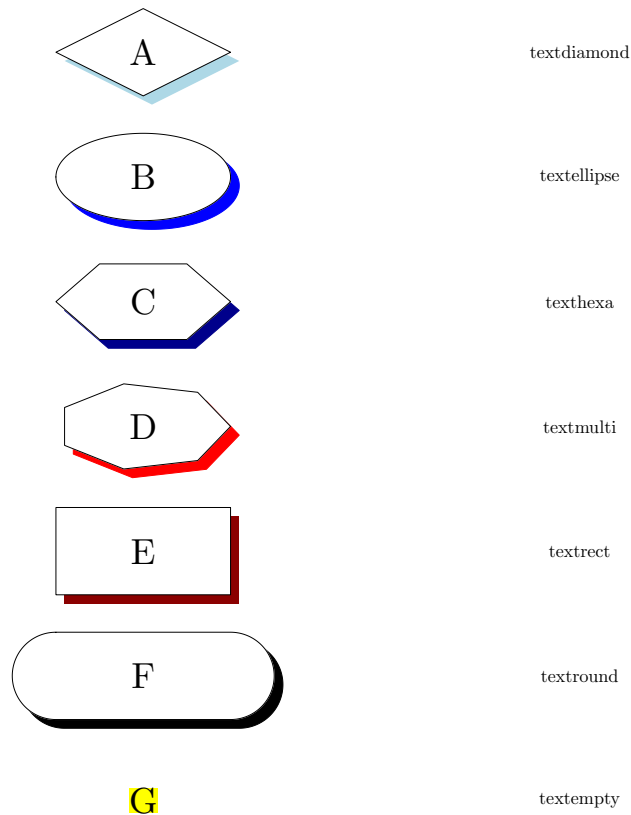

```

mf <- par(mfrow = c(2, 2))
example(bentarrow)



##
## bntrrw> openplotmat(main = "bentarrow")

```

```
##
## bntrrw> pos <- cbind( A <- seq(0.1, 0.9, by = 0.2), rev(A))
##
## bntrrw> text(pos, LETTERS[1:5], cex = 2)
##
## bntrrw> for (i in 1:4)
## bntrrw+   bentarrow(from = pos[i,] + c(0.05, 0), to = pos[i+1,] + c(0, 0.05),
## bntrrw+   arr.pos = 1, arr.adj = 1)
##
## bntrrw> for (i in 1:2)
## bntrrw+   bentarrow(from = pos[i,] + c(0.05, 0), to = pos[i+1, ] + c(0, 0.05),
## bntrrw+   arr.pos = 0.5, path = "V", lcol = "lightblue",
## bntrrw+   arr.type = "triangle")
##
## bntrrw> bentarrow(from = pos[3, ] + c(0.05, 0), to = pos[4, ] + c(0, 0.05),
## bntrrw+   arr.pos = 0.7, arr.side = 1, path = "V", lcol = "darkblue")
##
## bntrrw> bentarrow(from = pos[4, ] + c(0.05, 0), to = pos[5, ] + c(0, 0.05),
## bntrrw+   arr.pos = 0.7, arr.side = 1:2, path = "V", lcol = "blue")

example(coordinates)

##
## crdnts> openplotmat(main = "coordinates")
##
## crdnts> text(coordinates(N = 6), lab = LETTERS[1:6], cex = 2)
##
## crdnts> text(coordinates(N = 8, relsize = 0.5), lab = letters[1:8], cex = 2)
##
## crdnts> openplotmat(main = "coordinates")
##
## crdnts> text(coordinates(pos = c(2, 4, 2)), lab = letters[1:8], cex = 2)
##
## crdnts> plot(0, type = "n", xlim = c(0, 5), ylim = c(2, 8), main = "coordinates")
```

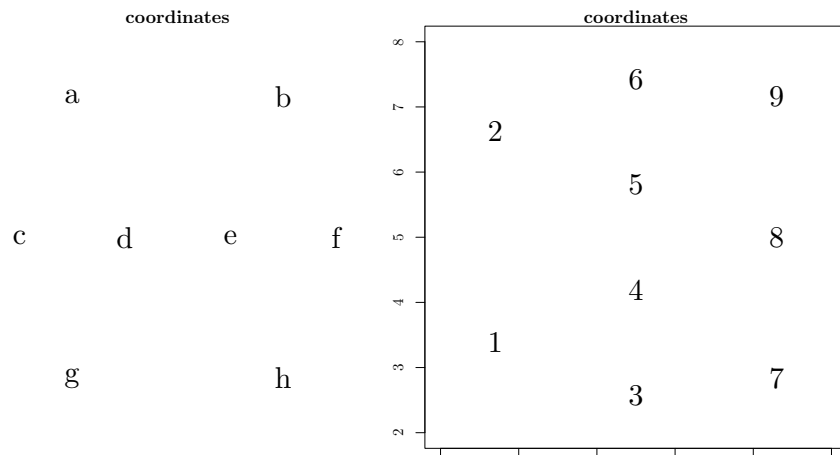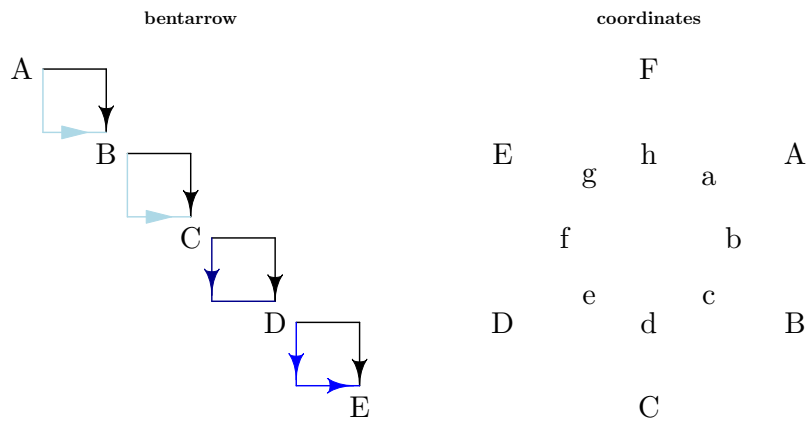

```
##
## crdnts> text(coordinates(pos = c(2, 4, 3), hor = FALSE), lab = 1:9, cex = 2)

par(mfrow = c(2, 2))
example(curvedarrow)

##
## crvdr> openplotmat(main = "curvedarrow")
##
## crvdr> pos <- coordinates(pos = 4, my = 0.2)
##
## crvdr> text(pos, LETTERS[1:4], cex = 2)
##
## crvdr> for (i in 1:3)
## crvdr+   curvedarrow(from = pos[1, ] + c(0,-0.05), to = pos[i+1, ] + c(0,-0.05),
## crvdr+   curve = 0.5, arr.pos = 1)
```

```
##
## crvdr> for (i in 1:3)
## crvdr+   curvedarrow(from = pos[1, ] + c(0, 0.05), to = pos[i+1, ] + c(0, 0.05),
## crvdr+   curve = -0.25, arr.adj = 1, arr.pos = 0.5,
## crvdr+   arr.type = "triangle", arr.col = "blue")

example(segmentarrow)

##
## sgmnt> openplotmat(main="segmentarrow")
##
## sgmnt> pos <- cbind(A <- seq(0.2, 0.8, by = 0.2), rev(A))
##
## sgmnt> text(pos, LETTERS[1:4], cex = 2)
##
## sgmnt> segmentarrow(from = pos[1, ] + c(0, 0.05), to = pos[2, ] + c(0, 0.05),
## sgmnt+   arr.pos = 1, arr.adj = 1, dd = 0.1,
## sgmnt+   path = "UHD", lcol = "darkred")
##
## sgmnt> segmentarrow(from = pos[2, ] + c(-0.05, 0), to = pos[3, ] + c(-0.05, 0.01),
## sgmnt+   arr.pos = 1, arr.adj = 1, dd = 0.1,
## sgmnt+   lcol = "black", arr.type = "triangle")
##
## sgmnt> segmentarrow(from = pos[2, ] + c(0.05, 0), to = pos[3, ] + c(0.05, 0.01),
## sgmnt+   arr.pos = 0.5, dd = 0.3, path = "RVL", arr.side = 1,
## sgmnt+   lcol = "lightblue", arr.type = "simple")
##
## sgmnt> segmentarrow(from = pos[3, ] + c(0.05, 0), to = pos[4, ] + c(-0.05, 0.01),
## sgmnt+   arr.pos = 0.5, dd = 0.05, path = "RVL", lcol = "darkblue",
## sgmnt+   arr.type = "ellipse")
##
## sgmnt> segmentarrow(from = pos[3, ] + c(0, -0.05), to = pos[4, ] + c(0, 0.05),
## sgmnt+   arr.pos = 0.5, arr.side = 3, dd = 0.05, path = "DHU",
## sgmnt+   lcol = "darkgreen")
##
## sgmnt> segmentarrow(from = pos[3, ] + c(-0.05, -0.05), to = pos[4, ] + c(0, -0.05),
## sgmnt+   arr.pos = 0.5, arr.side = 1:3, dd = 0.3, path = "DHU",
## sgmnt+   lcol = "green")

example(selfarrow)

##
## slfrr> openplotmat(main = "selfarrow")
##
## slfrr> pos <- coordinates(3, mx = 0.05)
##
```





```

## slfrrw> text(pos, LETTERS[1:3], cex = 2)
##
## slfrrw> for (i in 1:3)
## slfrrw+   selfarrow(pos = pos[i, ], path = "R", arr.pos = 0.2,
## slfrrw+     curve = c(0.05, 0.1), lcol = "darkred")
##
## slfrrw> for (i in 1:3)
## slfrrw+   selfarrow(pos = pos[i, ], path = "L", arr.pos = 0.7,
## slfrrw+     lcol = "darkblue", curve = c(0.05, 0.05))
##
## slfrrw> for (i in 1:3)
## slfrrw+   selfarrow(pos = pos[i, ], path = "L", arr.pos = 0.5,
## slfrrw+     lcol = "darkgreen", code = i, arr.type = "triangle")

example(straightarrow)

##
## strght> openplotmat(main = "straightarrow")

```

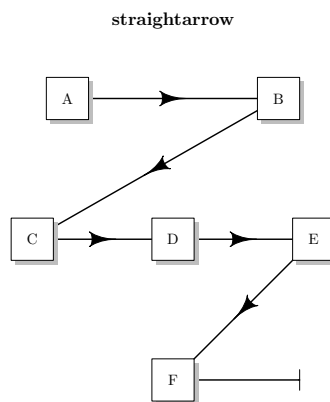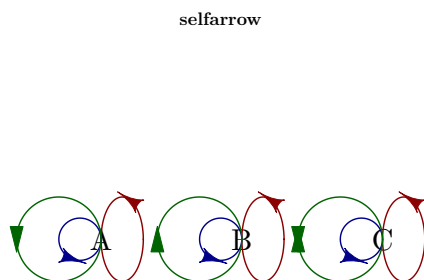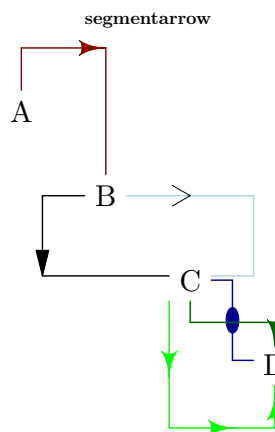

```
##
## strght> pos <- coordinates(c(2, 3, 1))
##
## strght> for (i in 1:5)
## strght+   straightarrow(from = pos[i, ], to = pos[i+1, ], arr.pos = 0.5)
##
## strght> straightarrow(from = pos[6, ], to = pos[6, ] + c(0.3, 0.),
## strght+   arr.type = "T", arr.pos = 1, arr.lwd = 3)
##
## strght> for (i in 1:6)
## strght+   textrect(pos[i, ], lab = LETTERS[i], radx = 0.05)

par(mfrow = c(2, 2))
example(treearrow)




##
```

```

## trerrw> openplotmat(main = "treearrow")
##
## trerrw> pos <- coordinates(c(3, 2, 4, 1))
##
## trerrw> treearrow(from = pos[1:5, ], to = pos[6:10, ])
##
## trerrw> for (i in 1:10)
## trerrw+   textrect(pos[i, ], lab = i, cex = 2, radx = 0.05)
##
## trerrw> openplotmat(main = "treearrow")
##
## trerrw> pos <- coordinates(c(2, 4), hor = FALSE)
##
## trerrw> treearrow(from = pos[1:2, ], to = pos[3:6, ],
## trerrw+   arr.side = 1:2, path = "V")
##
## trerrw> for (i in 1:6)
## trerrw+   textrect(pos[i, ], lab = i, cex = 2, radx = 0.05)
##
## trerrw> openplotmat(main = "treearrow")
##
## trerrw> pos <- coordinates(c(3, 5, 7, 7, 5, 3))
##
## trerrw> treearrow(from = pos[1:15, ], to = pos[15:30, ], arr.side = 0)
##
## trerrw> for (i in 1:30)
## trerrw+   textrect(pos[i, ], lab = i, cex = 1.2, radx = 0.025)

par(mfrow = c(2, 2))

```

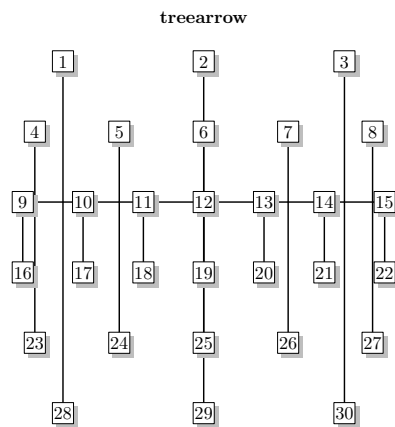
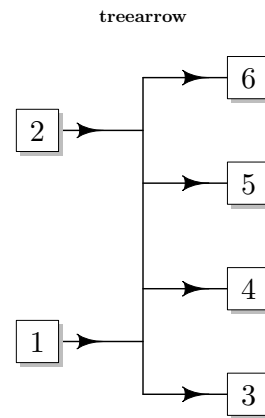
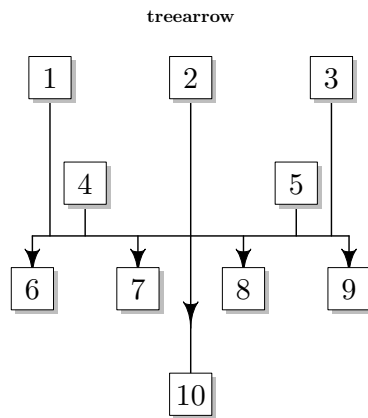


```
example(splitarrow)

##
## spltrr> openplotmat(main = "splitarrow")
##
## spltrr> pos <- coordinates(c(1, 2, 2, 4, 1))
##
## spltrr> splitarrow(from = pos[1, ], to = pos[2:10, ],
## spltrr+       arr.side = 1, centre = c(0.5, 0.625))
##
## spltrr> for (i in 1:10)
## spltrr+   textrect(pos[i, ], lab = i, cex = 2, radx = 0.05)
##
## spltrr> openplotmat(main = "splitarrow")
##
## spltrr> pos <- coordinates(c(1, 3))
```

```
##
## spltrr> splitarrow(from = pos[1,], to = pos[2:4, ], arr.side = 1)
##
## spltrr> splitarrow(from = pos[1,], to = pos[2:4, ], arr.side = 2)
##
## spltrr> for (i in 1:4)
## spltrr+   textrect(pos[i, ], lab = i, cex = 2, radx = 0.05)
##
## spltrr> openplotmat(main = "splitarrow")
##
## spltrr> pos <- coordinates(N = 6)
##
## spltrr> pos <- rbind(c(0.5, 0.5), pos)
##
## spltrr> splitarrow(from = pos[1, ], to = pos[2:7, ], arr.side = 2)
##
## spltrr> for (i in 1:7)
## spltrr+   textrect(pos[i, ], lab = i, cex = 2, radx = 0.05)

par(mfrow = c(2, 2))
```

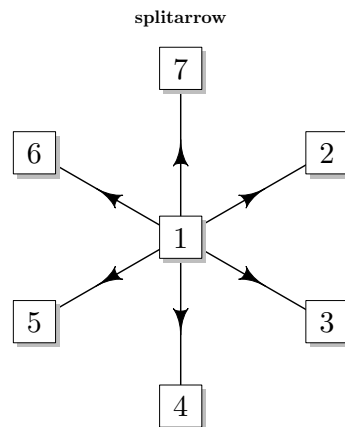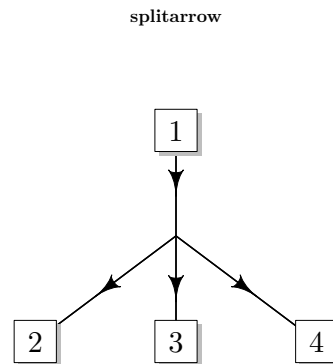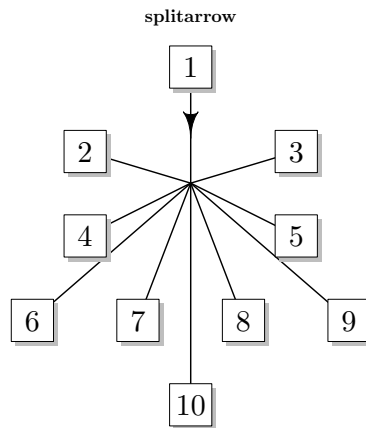

```

example(textdiamond)

##
## txtltp> openplotmat(xlim = c(-0.1, 1.1), main = "textdiamond")
##
## txtltp> for (i in 1:10)
## txtltp+   textdiamond(mid = runif(2), col = i, radx = 0.1, rady = 0.05,
## txtltp+   lab = LETTERS[i], cex = 2, angle = runif(1)*360)

example(textellipse)

##
## txtltp> openplotmat(xlim = c(-0.1, 1.1), main = "textellipse")
##
## txtltp> for (i in 1:10)
## txtltp+   textellipse(mid = runif(2), col = i, box.col = grey(0.95),

```

```

## txtllp+          radx = 0.1, rady = 0.05, lab = LETTERS[i],
## txtllp+          cex = 2, angle = runif(1)*360)


example(textempty)

##
## txtmpt> openplotmat(xlim = c(-0.1, 1.1), col = "lightgrey", main = "textempty")
##
## txtmpt> for (i in 1:10)
## txtmpt+   textempty(mid = runif(2), box.col = i, lab = LETTERS[i], cex = 2)
##
## txtmpt> textempty(mid = c(0.5, 0.5), adj = c(0, 0),
## txtmpt+   lab = "textempty", box.col = "white")

example(texthexa)

##
## texthx>   openplotmat(xlim = c(-0.1, 1.1), main = "texthexa")

```

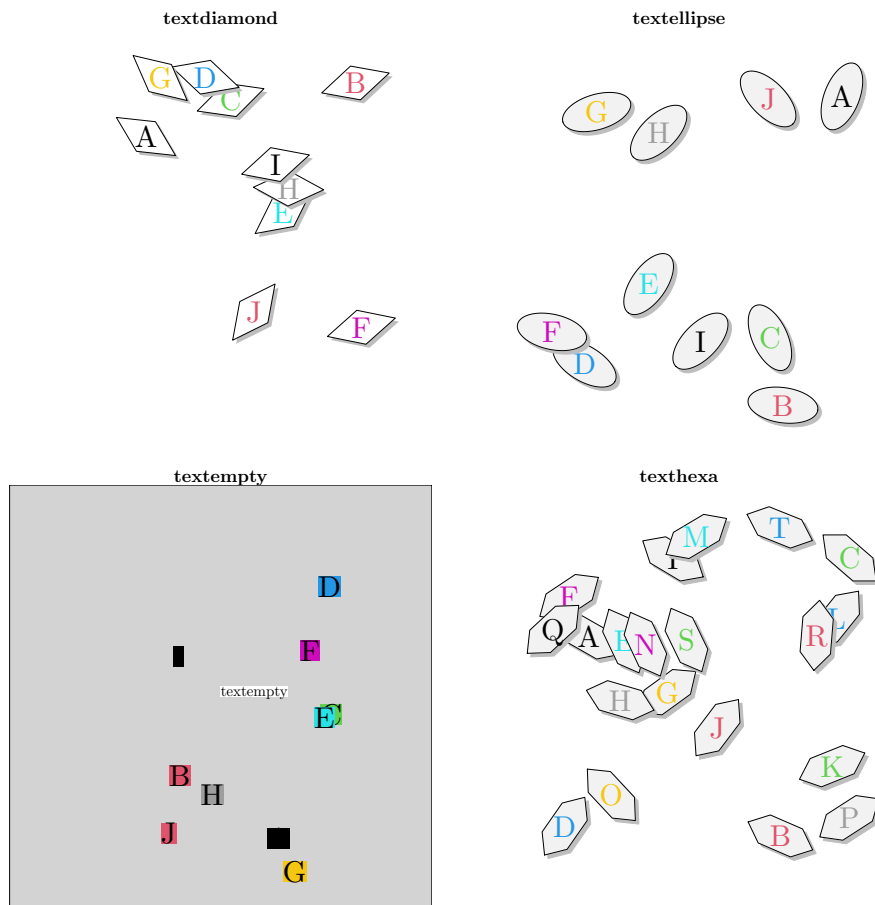

```
##
## textx>   for (i in 1:20)
## textx+   texthexa(mid = runif(2), angle = runif(1)*360, col = i,
## textx+             box.col = grey(0.95), radx = 0.1, rady = 0.05,
## textx+             lab = LETTERS[i], cex = 2)

example(textmulti)

##
## txtm1t>   openplotmat(xlim = c(-0.1, 1.1), main = "textmulti")
##
## txtm1t>   for (i in 1:10)
## txtm1t+   textmulti(mid = runif(2), col = i, radx = 0.1, rady = 0.1,
## txtm1t+             lab = LETTERS[i], cex = 2, nr = trunc(i/1.5)+3)


example(textplain)
```

```
##
## txtpln> openplotmat(main = "textplain")
##
## txtpln> textplain(mid = c(0.5, 0.5),
## txtpln+           lab = c("this text is", "centered", "4 strings", "on 4 lines"))
##
## txtpln> textplain(mid = c(0.5, 0.2), adj = c(0, 0.5), font = 2, height = 0.05,
## txtpln+           lab = c("this text is", "left aligned"))
##
## txtpln> textplain(mid = c(0.5, 0.8), adj = c(1, 0.5), font = 3, height = 0.05,
## txtpln+           lab = c("this text is", "right aligned"))

example(textrect)

##
## txtrect> openplotmat(xlim = c(-0.1, 1.1), main = "textrect")
##
## txtrect> for (i in 1:10)
## txtrect+   textrect(mid = runif(2), col = i, radx = 0.1, rady = 0.1,
## txtrect+     lab = LETTERS[i], cex = 2)
##
## txtrect> openplotmat(xlim = c(-0.1, 1.1), main = "textparallel")
```

textmulti

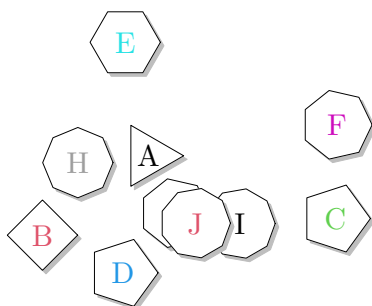


textplain

*this text is
right aligned*


this text is
centered
4 strings
on 4 lines

this text is
left aligned

textrect



textparallel

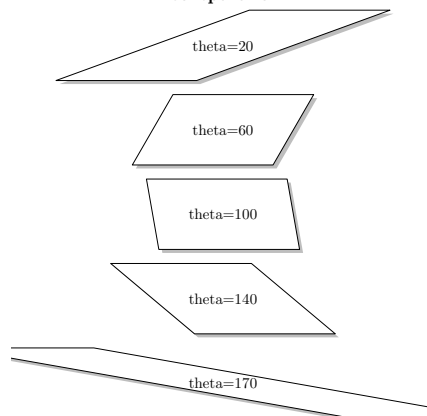

```
##
## txtrect>   elpos <-coordinates (c(1, 1, 1, 1, 1))
##
## txtrect>   textparallel(mid = elpos[1,], col = 1, radx = 0.2, rady = 0.1,
## txtrect+   lab = "theta=20", theta = 20)
##
## txtrect>   textparallel(mid = elpos[2,], col = 1, radx = 0.2, rady = 0.1,
## txtrect+   lab = "theta=60", theta = 60)
##
## txtrect>   textparallel(mid = elpos[3,], col = 1, radx = 0.2, rady = 0.1,
## txtrect+   lab = "theta=100", theta = 100)
##
## txtrect>   textparallel(mid = elpos[4,], col = 1, radx = 0.2, rady = 0.1,
## txtrect+   lab = "theta=140", theta = 140)
##
## txtrect>   textparallel(mid = elpos[5,], col = 1, radx = 0.2, rady = 0.1,
```

```
## txttrct+          lab = "theta=170", theta = 170)

example(textround)

##
## txttrnd>   openplotmat(xlim = c(-0.1, 1.1), main = "textround")
##
## txttrnd>   for (i in 1:10)
## txttrnd+     textround(mid = runif(2), col = i,
## txttrnd+         radx = 0.03, rady = 0.075,
## txttrnd+         lab = LETTERS[i], cex = 2)

par(mfrow = mf)
```

