

Graphics Options in knitr

Yihui Xie

September 22, 2026

These options are vectorized for multiple plots per chunk: `fig.cap`, `fig.scap`, `fig.alt`, `fig.env`, `fig.pos`, `fig.subcap`, `fig.note`, `out.width`, `out.height`, `out.extra`, `fig.link`. When the plot hook is called, the *i*-th elements of these options will be applied to the *i*-th plot.

Figure captions. Look at Figure 1 and 2.

```
par(bg = rgb(runif(1), runif(1), runif(1)))  
plot(1:10)
```

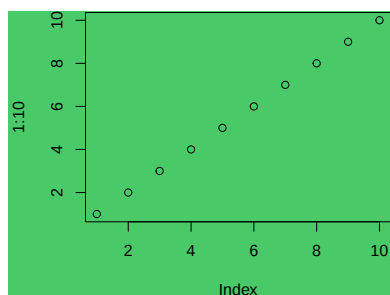


Figure 1: One plot.

```
plot(rnorm(10), pch = 19)
```


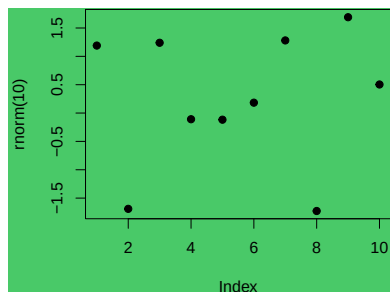



Figure 2: Another plot.

Different out.width and out.height.

```
par(bg = rgb(runif(1), runif(1), runif(1)))  
plot(1:10)
```




```
plot(rnorm(10), pch = 19)
```

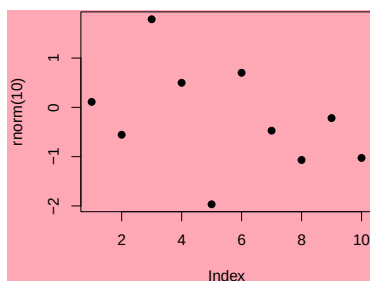


Different out.extra (rotate by different degrees).

```
par(bg = rgb(runif(1), runif(1), runif(1)))  
plot(1:10)
```

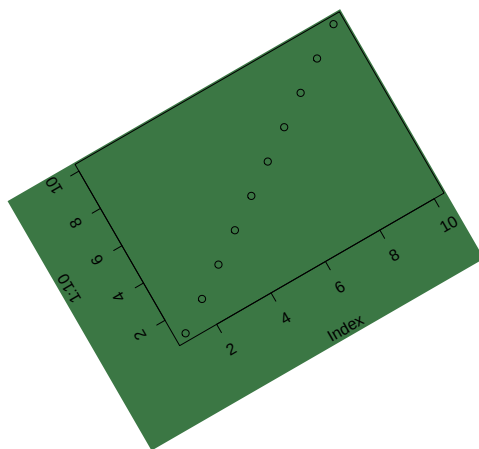


```
plot(rnorm(10), pch = 19)
```

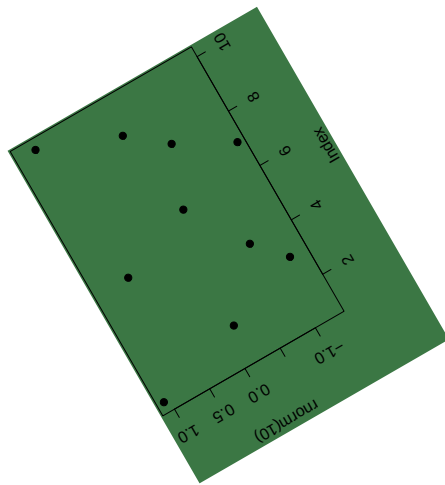


Short options will be recycled: `out.width` below is of length 1 but there are two plots.

```
par(bg = rgb(runif(1), runif(1), runif(1)))
plot(1:10)
```



```
plot(rnorm(10), pch = 19)
```



Use subfigures for each plot. Look at Figure 3a and 3b. By default, knitr uses the **subfig** package, but it has a few shortcomings, so some people prefer the **subcaption** package. In that case, we can simply redefine the `\subfloat` command; see the preamble of this document for an example. We are actually using the **subcaption** package in this document.

```
par(bg = rgb(runif(1), runif(1), runif(1)))
plot(1:10)
plot(rnorm(10), pch = 19)
```

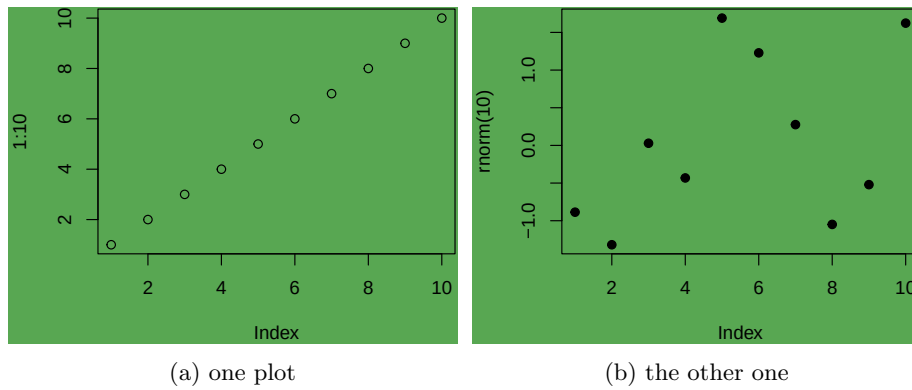


Figure 3: two plots

The second figure uses `sidewaysfigure` (i.e. Figure 5).

```
par(bg = rgb(runif(1), runif(1), runif(1)))
plot(1:10)
```

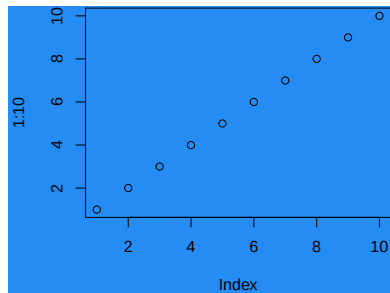


Figure 4: ordinary figure

```
plot(rnorm(10), pch = 19)
```

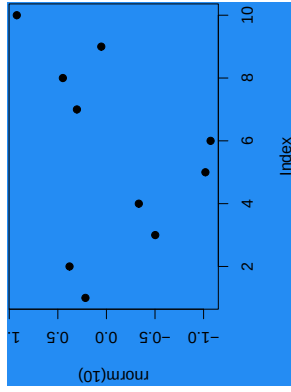


Figure 5: sideways figure