Introduction to Jenkins


In this lab, we will use Eclipse IDE to set up Selenium WebDriver project, and additionally we add m2eclipse plugin to eclipse to help the build process and to create POM.xml file.

Configure Eclipse with Maven


We now need to create Maven project.

Step 1: In IntelliJ, select File | New | New Project

Step 2: Select Maven on left side of window then click on Next button

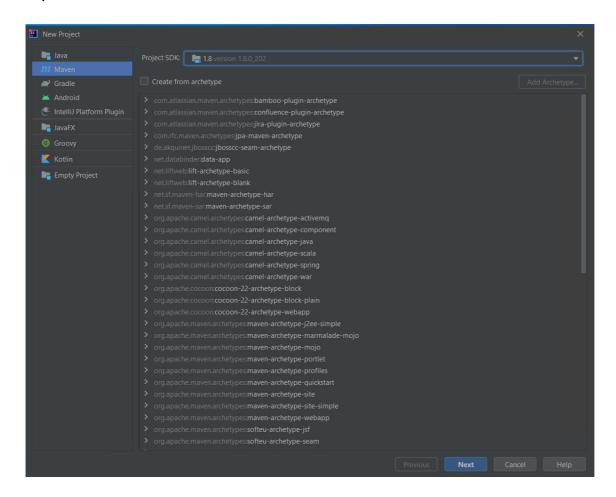

- Step 3: Enter TestWebdriver in the Name field
- **Step 4:** Click on the arrow next to Artifact Coordinates
- Step 5: Change the Group Id and Artifact Id to TestWebdriver as well
- Step 6: Click Finish

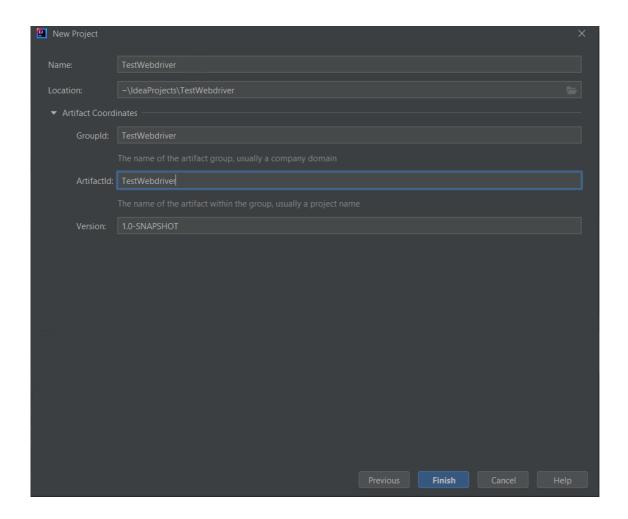

Step 7: When asked if you want to open this project in a new window or this window, select This Window

Step 8: Add the Selenium, Maven, TestNG, Junit dependencies to pom.xml in the replacing
pom.xml content with following:


```
<groupId>junit
          <artifactId>junit</artifactId>
          <version>4.13.2
          <scope>test</scope>
       </dependency>
       <dependency>
          <groupId>org.seleniumhq.selenium
          <artifactId>selenium-java</artifactId>
          <version>3.141.5
       </dependency>
       <dependency>
          <groupId>org.testng</groupId>
          <artifactId>testng</artifactId>
          <version>6.10</version>
          <scope>test</scope>
       </dependency>
       <dependency>
          <groupId>org.seleniumhq.selenium
          <artifactId>htmlunit-driver</artifactId>
          <version>2.33.3
       </dependency>
   </dependencies>
</project>
```

Step 9: Right-click on pom.xml and select Maven | Reload project

Step 10: Create a new class under src/main/java:

```
- Put it in package `testing`
- Give the class the name `NewFile`
```


Step 11: Open the new file, and right-click on the class name. Select Generate... and then select Test...

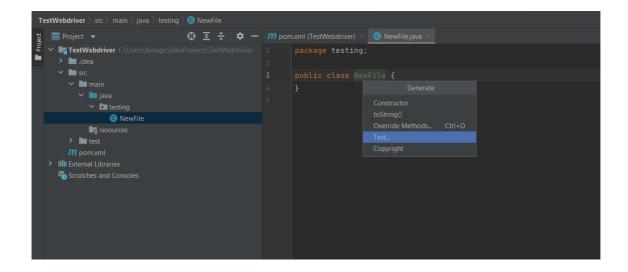

Step 12: In Create Test pop-up window, change the Testing library to TestNG

Step 13: Define the class name to be **NewTest** and select to generate setUp and tearDown

Step 14: Click OK

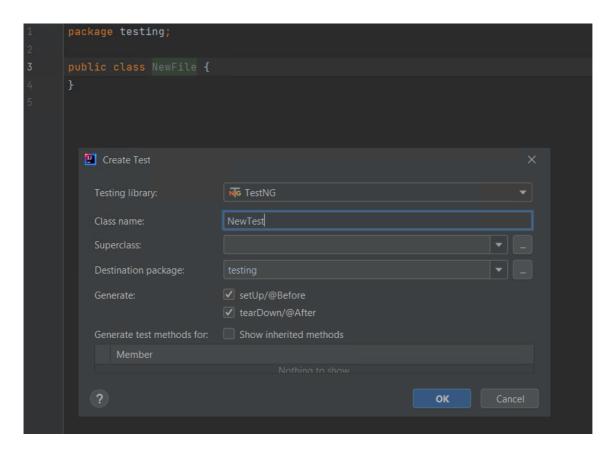

 $\textbf{Step 15:} \ \mathsf{Add the below code to the } \ \textbf{NewTest} \ \mathsf{class:}$

```
package testing;
```

```
import org.openqa.selenium.htmlunit.HtmlUnitDriver;
import org.testng.annotations.AfterMethod;
import org.testng.annotations.BeforeMethod;
import org.openga.selenium.WebDriver;
import org.openqa.selenium.firefox.FirefoxDriver;
import org.testng.annotations.Test;
import static org.testng.Assert.*;
public class NewTest {
   private WebDriver driver;
   @Test
   public void testEasy() {
       driver.get("https://www.facebook.com/");
       String title = driver.getTitle();
       assertTrue(title.contains("Facebook"));
   @BeforeMethod
   public void setUp() {
        // Uncomment following lines to use firefox instead of HtmlUnitDriver
        // System.setProperty("webdriver.gecko.driver",
"C:\\Selenium\\drivers\\firefox\\geckodriver.exe");
        // driver = new FirefoxDriver();
       driver = new HtmlUnitDriver();
   @AfterMethod
   public void tearDown() {
       driver.quit();
```

Step 16: Create testng.xml file.

Step 17: Right-click on project name and go to Modify Run Configuration... | All Tests (the second one)

This will launch the website and finished the build successfully.

Step 18: Additionally, to pom.xml we need to add

1. maven-compiler-plugin

- 2. maven-surefire-plugin
- 3. testng.xml


The maven-surefire-plugin is used to configure and execute the tests. To configure the testing.xml for TestNG test and generate to test reports this plugin is used.


The maven-compiler-plugin is used in compiling the code and using the particular JDK version for compilation. Add all the dependencies to the pom.xml in the <plugin> node. Replace complete pom.xml with following:

```
<?xml version="1.0" encoding="UTF-8"?>
project xmlns="http://maven.apache.org/POM/4.0.0"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/xsd/maven-4.0.0.xsd">
   <modelVersion>4.0.0</modelVersion>
   <groupId>TestWebdriver</groupId>
    <artifactId>TestWebdriver</artifactId>
   <version>1.0-SNAPSHOT</version>
    cproperties>
       <maven.compiler.source>8</maven.compiler.source>
       <maven.compiler.target>8</maven.compiler.target>
   </properties>
   <dependencies>
       <dependency>
           <groupId>junit
           <artifactId>junit</artifactId>
           <version>4.13.2
           <scope>test</scope>
       </dependency>
        <dependency>
           <groupId>org.seleniumhq.selenium</groupId>
           <artifactId>selenium-java</artifactId>
           <version>3.141.5
       </dependency>
        <dependency>
           <groupId>org.testng</groupId>
           <artifactId>testng</artifactId>
           <version>6.10</version>
           <scope>test</scope>
        </dependency>
        <dependency>
           <groupId>org.seleniumhq.selenium
           <artifactId>htmlunit-driver</artifactId>
           <version>2.33.3
        </dependency>
   </dependencies>
   <build>
       <plugins>
          <plugin>
```

```
<groupId>org.apache.maven.plugins</groupId>
               <artifactId>maven-compiler-plugin</artifactId>
              <version>3.7.0
              <!-- <configuration>
                  <source>1.8</source>
                  <target>1.8</target>
              </configuration> -->
           </plugin>
           <plugin>
              <groupId>org.apache.maven.plugins
               <artifactId>maven-surefire-plugin</artifactId>
              <version>3.0.0-M1
              <inherited>true</inherited>
              <configuration>
                  <suiteXmlFiles>
                      <suiteXmlFile>testng.xml</suiteXmlFile>
                  </suiteXmlFiles>
               </configuration>
           </plugin>
       </plugins>
   </build>
</project>
```

Step 19: Update Maven, then run the tests

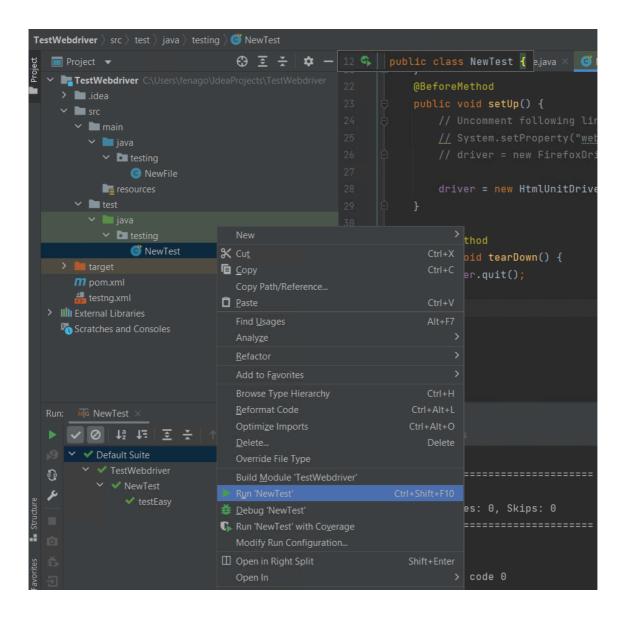

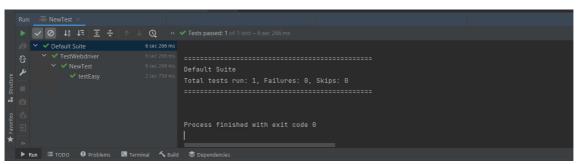

This will launch the website and finished the build successfully.

Installation steps for Jenkins and configure it to Run Maven with TestNg

Step 1: Go to the URL https://www.jenkins.io/ and download the package for your OS and click Download button.

Download Jenkins 2.222.4 for: Docker FreeBSD Gentoo macOS macOS

Red Hat/Fedora/CentOS

Ubuntu/Debian


OpenBSD 🕸

openSUSE

Windows

Generic Java package (.war)

Step 2: Unzip the Jenkins folder and run the exe file as shown in the below image:

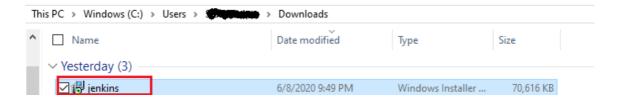


Step 3: In Jenkins 2.233 Setup window click on Next button.





Service Logon Credentials






		_
	enkins 2.303.2 installs and runs as an independent Windows service. To operate in this nanner, you must supply the user account credentials for Jenkins 2.303.2 to run successfully.	
L	ogon Type:	
(Run service as LocalSystem (not recommended)	
(Run service as local or domain user:	
	Account: Password:	
	Test Credentials	
	Back Next Cancel	




Port Selection

Choose a port for the service.




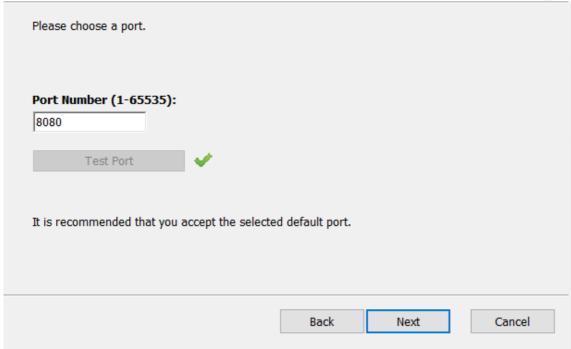


Step 4: Click on Install button.

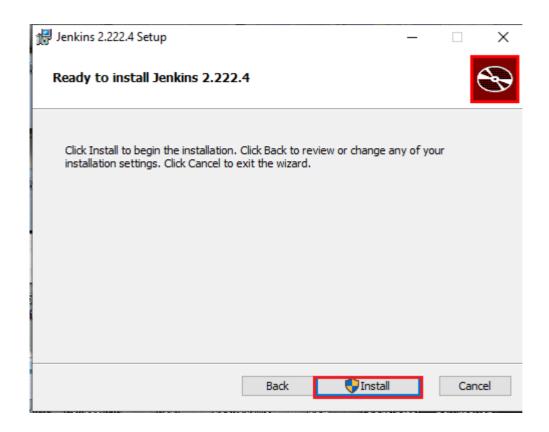


Step 5: Once installation is complete, it automatically navigate to the Jenkins Dashboard (http://localhost:8080) in the browser window.

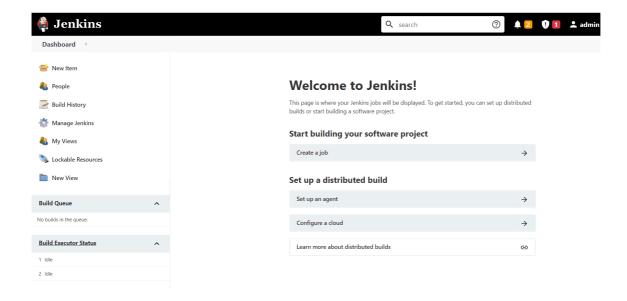

Step 6: Click on the **New Item** to create a job.




Step 7: Enter an Item Name and click OK button

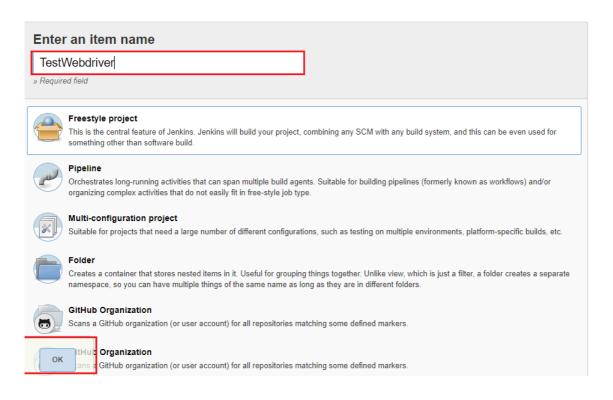

Step 8: A new job with name "TestWebdriver" is created in Jenkins Dashboard.



Step 9: Go to Manage Jenkins and select Global Tool Configuration as shown in the below image.

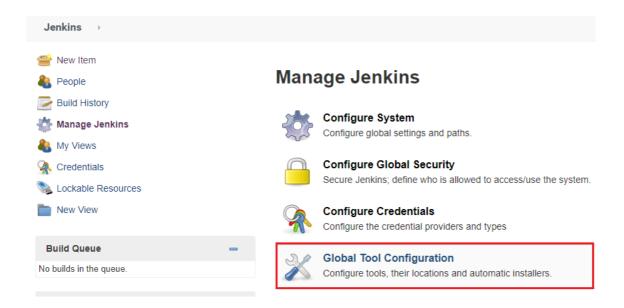


Click on JDK installations and configure JDK as in the following image:

Enter JDK Name: java 1.8.0



Step 10: Go to the **Build** section of created job.

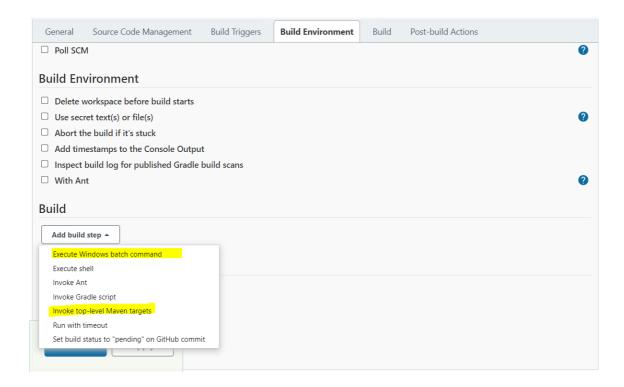


First, set variables using windows batch commands:


```
setx /M MAVEN_HOME "C:\Users\fenago\Downloads\apache-maven-3.8.3"
setx /M PATH "%MAVEN_HOME%\bin;%PATH%"
```

Note: Update the above MAVEN_HOME variable incase you have downloaded different version.


Then, add the pom.xml file's path in the **POM** option.

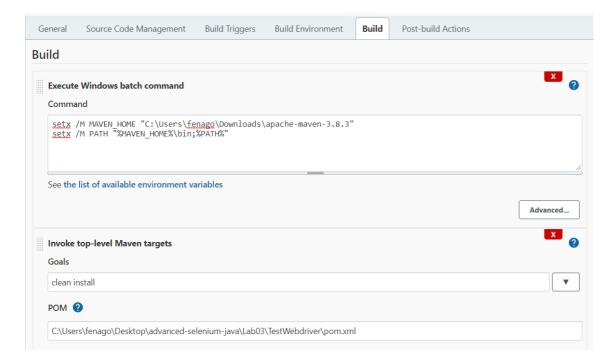

Step 11: Click on the Apply button.



Step 12: On the TestWebdriver project page, click on the Build Now link.




Maven will build the project. It will have TestNG execute the test cases.

Step 13: Once the build process is completed, in Jenkins Dashboard click on the **TestWebdriver** project.



Step 14: The TestWebdriver project page displays the build history as shown in the below image:

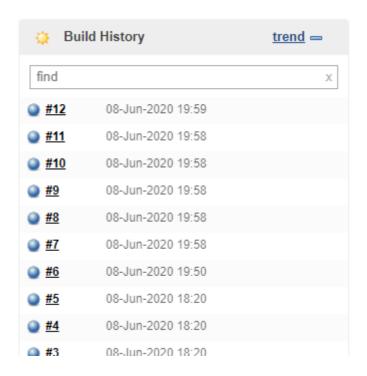

Step 15: Select specific build, and you will see the current status by clicking on "console output".

```
Running TestSuite
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 2.748 sec
Results:
Tests run: 1, Failures: 0, Errors: 0, Skipped: 0

[JENKINS] Recording test results
log4j:NARN No appenders could be found for logger (org.apache.commons.beanutils.converters.BooleanConverter).
log4j:NARN Please initialize the log4j system properly.
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger

[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - BUILD SUCCESS
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Total time: 01:26 min
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apache.maven.cli.event.ExecutionEventLogger - Finished at: 2015-03-29721:28:51+03:00
[pool-1-thread-1 for channel] INFO org.apa
```

Scheduling Jenkins for automatic execution.

Scheduling builds (Selenium Tests) is one of the important features of Jenkins where it automatically triggers the build, based on defined criteria. Jenkins provides multiple ways to trigger the build process under the Build Trigger configuration.

For example: Enter 0 23 * * * in the Schedule textbox as shown in the following screenshot. This will trigger the build process every day at 11 p.m.

Build Triggers		
Build whenever	r a SNAPSHOT dependency is built	
 Build after other 	er projects are built	
Build periodical	lly	
Schedule	0 23 * * *	