

## Lab 2. Configuration and Deployment



In the previous lab, you have installed Apache Tomcat 8 on Linux/Unix operating systems. Now, it's time to discuss the different configuration and deployment strategy tools used by different IT industries.

In this lab, we will discuss the following topics:

- Configuration of Tomcat
- Configuration of the virtual directory
- Deployment of an application on Tomcat 8

### Configuration files and their usage

Apache Tomcat 8 comes with a default setup, which can be directly used for a QA environment. We can customize Tomcat based on the environment specification; components such as Services, Servers, Engine, Connectors, Realm, and Valve can be configured. The Tomcat configuration files are available in the `conf` folder. Let's discuss the configuration properties and their usage.

Tomcat 8, by default, comes with seven configuration files (usually in XML format), and these files are very useful in order to customize Tomcat, based on the environment needs. We shall install in the production or development environment.

The following screenshot shows the directory structure of the configuration directory for Tomcat 8:

```
root@localhost conf]# ls -l
total 136
-rwxr-xr-x 3 root root 4096 May 16 21:03 catalina
-rw-r--r-- 1 root root 11888 Apr 1 18:15 catalina.policy
-rw-r--r-- 1 root root 5089 Apr 1 18:15 catalina.properties
-rw-r--r-- 1 root root 1428 Apr 1 18:15 context.xml
-rw-r--r-- 1 root root 3213 Apr 1 18:15 logging.properties
-rw-r--r-- 1 root root 6645 Apr 1 18:15 server.xml
-rw-r--r-- 1 root root 1566 Apr 1 18:15 tomcat-users.xml
-rw-r--r-- 1 root root 53273 Apr 1 18:15 web.xml
```

It's very important from an administrator's point of view, to know about the configuration files and their usage in the Tomcat environment. Let's discuss the configuration properties one-by-one, as follows:

- `catalina.policy`: This file describes the security policy permissions for Tomcat 8. It enforces the security policy permissions by JVM on the web application.

#### Note

When `catalina` is executed with the `-security` option, the security policy mentioned in the `catalina` file is used and the web application security policy also gets executed.

- `catalina.properties`: This file contains the shared definition of the server, shared loader, and JARs, which need to be scanned at the time of the server startup.
- `server.xml`: This is one of the important configuration files of Tomcat. It holds critical information, such as the IP address, port, virtual host, context path, and so on.
- `tomcat-users.xml`: This file is used for authentication, authorization, and role-based definitions. It is used to implement a database of users/passwords/roles for authentication and container-managed security. To add/remove users or assign/unassign roles to existing users, edit this file.

- `logging.properties`: As the name suggests, it defines the logging properties of the Tomcat instances (such as startup logs).
- `web.xml`: This defines the default values for all web applications loaded into this instance of Tomcat, at the time of startup of the Tomcat instance. If a web application has its own deployment descriptor, its content will always override the configuration settings specified in this default descriptor.
- `context.xml`: The contents of this file will load with every application. Configuration of parameters such as session persistence, Comet connection tracking, and so on, are done here.

## Note

Any changes made in the `server.xml` file will be in effect after restarting the Tomcat instance.

## Note

Application level resources are not defined in the `web.xml` of the configuration folder. It would be better to define these in the application `web.xml`.

## Configuration files and their usage

Apache Tomcat 8 comes with a default setup, which can be directly used for a QA environment. We can customize Tomcat based on the environment specification; components such as Services, Servers, Engine, Connectors, Realm, and Valve can be configured. The Tomcat configuration files are available in the `conf` folder. Let's discuss the configuration properties and their usage.

Tomcat 8, by default, comes with seven configuration files (usually in XML format), and these files are very useful in order to customize Tomcat, based on the environment needs. We shall install in the production or development environment.

The following screenshot shows the directory structure of the configuration directory for Tomcat 8:

```
root@localhost conf]# ls -l
total 136
-rwxr-xr-x 3 root root 4096 May 16 21:03 catalina
-rw-r--r-- 1 root root 11888 Apr 1 18:15 catalina.policy
-rw-r--r-- 1 root root 5089 Apr 1 18:15 catalina.properties
-rw-r--r-- 1 root root 1428 Apr 1 18:15 context.xml
-rw-r--r-- 1 root root 3213 Apr 1 18:15 logging.properties
-rw-r--r-- 1 root root 6645 Apr 1 18:15 server.xml
-rw-r--r-- 1 root root 1566 Apr 1 18:15 tomcat-users.xml
-rw-r--r-- 1 root root 53273 Apr 1 18:15 web.xml
```

It's very important from an administrator's point of view, to know about the configuration files and their usage in the Tomcat environment. Let's discuss the configuration properties one-by-one, as follows:

- `catalina.policy`: This file describes the security policy permissions for Tomcat 8. It enforces the security policy permissions by JVM on the web application.

## Note

When `catalina` is executed with the `-security` option, the security policy mentioned in the `catalina` file is used and the web application security policy also gets executed.

- `catalina.properties`: This file contains the shared definition of the server, shared loader, and JARs, which need to be scanned at the time of the server startup.

- `server.xml`: This is one of the important configuration files of Tomcat. It holds critical information, such as the IP address, port, virtual host, context path, and so on.
- `tomcat-users.xml`: This file is used for authentication, authorization, and role-based definitions. It is used to implement a database of users/passwords/roles for authentication and container-managed security. To add/remove users or assign/unassign roles to existing users, edit this file.
- `logging.properties`: As the name suggests, it defines the logging properties of the Tomcat instances (such as startup logs).
- `web.xml`: This defines the default values for all web applications loaded into this instance of Tomcat, at the time of startup of the Tomcat instance. If a web application has its own deployment descriptor, its content will always override the configuration settings specified in this default descriptor.
- `context.xml`: The contents of this file will load with every application. Configuration of parameters such as session persistence, Comet connection tracking, and so on, are done here.

### Note

Any changes made in the `server.xml` file will be in effect after restarting the Tomcat instance.

### Note

Application level resources are not defined in the `web.xml` of the configuration folder. It would be better to define these in the application `web.xml`.

## Configuration of Tomcat 8


Until now, we have discussed the various configuration files of Tomcat 7. Now, the interesting part starts while implementing these in practical, or on live systems.

Before we learn the details of the Tomcat server configuration, let's quickly understand how the web application works from the following steps:

1. Whenever you hit the URL (for example, [www.abc.com](http://www.abc.com)), the browser will contact the DNS server.
2. The DNS server will contact the ISP for the required information.
3. Once the web server accepts the request from the client browser, it will redirect it to the database server.
4. In turn, the database server will retrieve the query and respond it back to the web server.
5. The web server then forwards the same response to the client browser, and finally, the client browser will display the content to the user.

That's how the web browser gets the content generated by the web server. The following figure explains the web application functionality and different components, which play a vital role for the application to work:

---

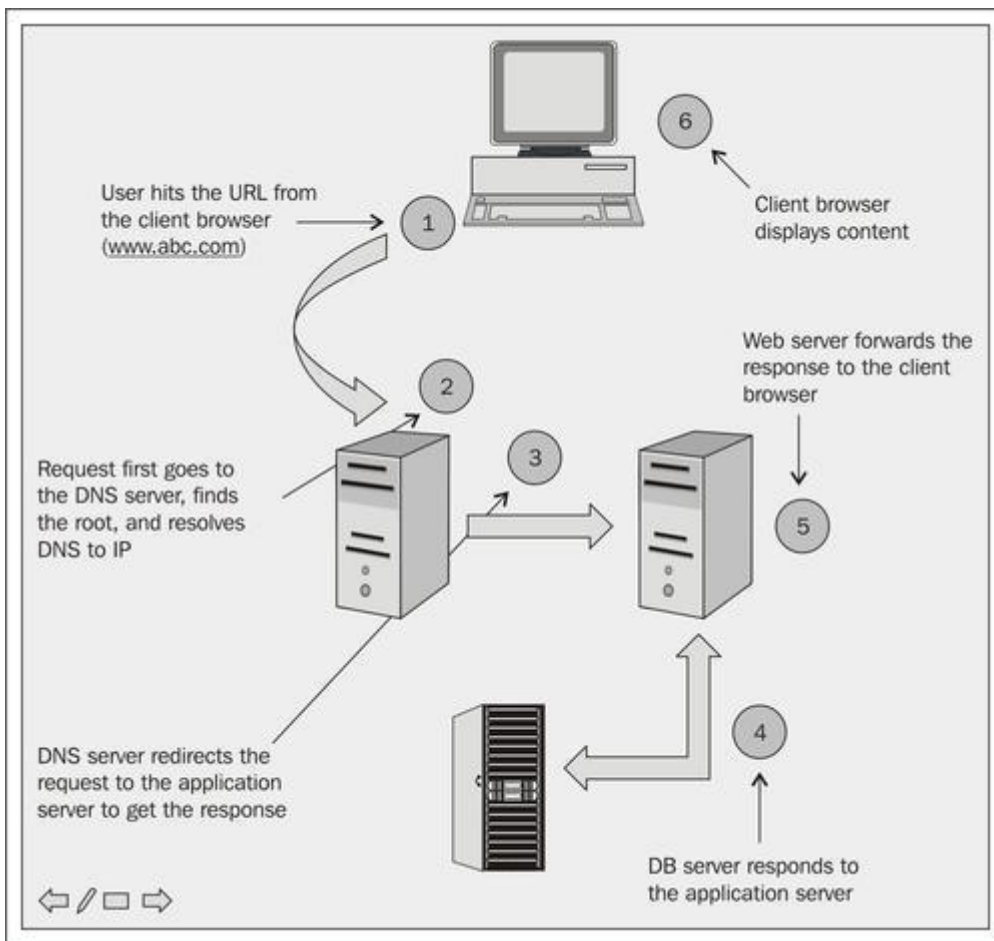

## DataSource configuration


For any web application, the database plays a very vital role as it's the backbone for an enterprise application. For an application to perform well, the correct datasource configuration is necessary at the application layer.

Before moving further, let's quickly discuss how the web application gets the response from the database server.

1. Whenever you hit the URL (for example, [www.abc.com](http://www.abc.com)), the request goes to the web server.
2. Once the web server accepts the request from the client browser, it will analyze the request based on the query. If it requires the database (DB) response, then it redirects the request to the database server.
3. Based on the query, the database server will retrieve the content and respond to the web server. The web server then forwards the response from the database server to the client browser.

This process flow is also explained in the following figure:

---

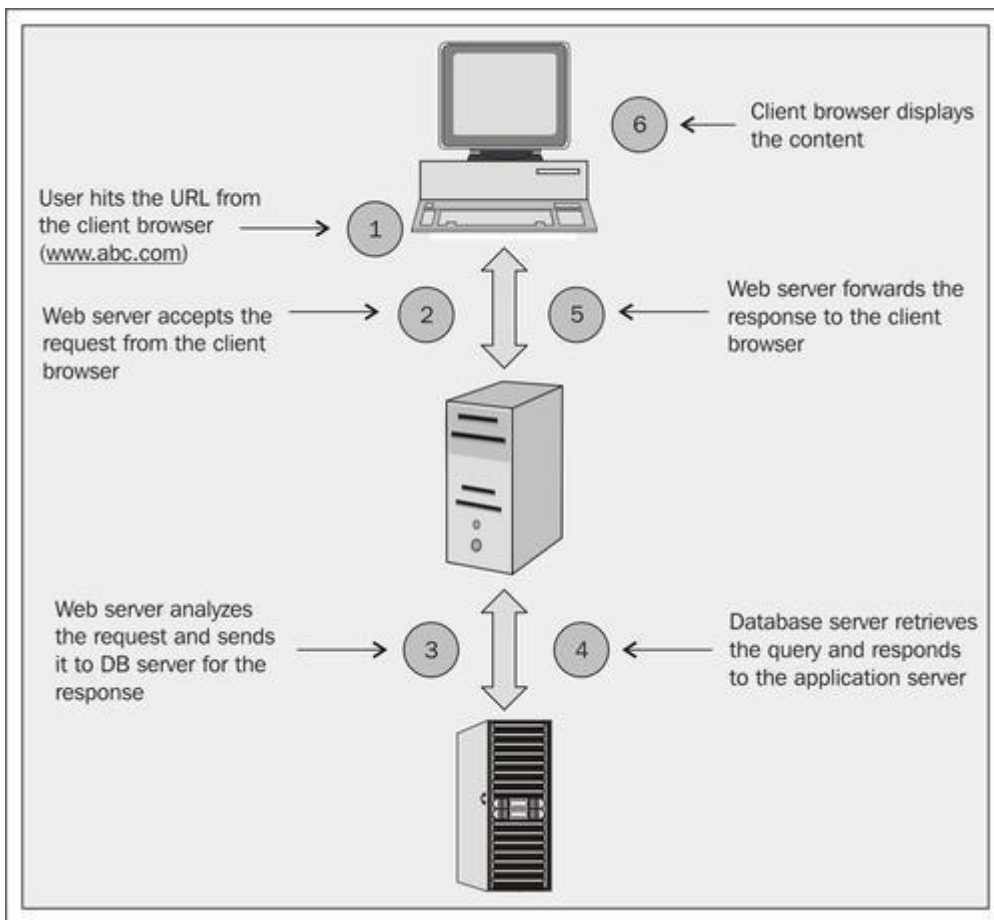

After all the previous discussions, we now understand how the database request flows in the web application. Now, it's time to do the real-time configuration of the datasource of Tomcat 8. Some of the terminologies used in the database connectivity are explained in the following content.

### JDBC

**Java Database Connectivity (JDBC)** is a Java-based data access technology is an API through which the client accesses the server database. It is oriented towards a relational database and provides a way to query and update the database.

### JNDI

**Java Naming and Directory Interface (JNDI)** services are an API for the Java platform, which provides naming and directory functionalities to applications written using the Java programming language.

### DataSource

It is a Java object used to access relational databases through the JDBC API. It works well when integrated with the JNDI and after a datasource object is registered with a JNDI naming service. Objects can be accessed by the application itself and connect to the database.

The following are the parameters required for any database server to connect Tomcat 8 with the database and are also the prerequisites for datasource configuration:

- IP address

- Port number
- JNDI name
- Database user ID/password


## Note

Database servers in production

The applications which are hosted on the Internet, their web servers are always configured in the **Demilitarized Zone (DMZ)**. For more information on the DMZ zone, please refer to [http://en.wikipedia.org/wiki/DMZ\\_\(computing\)](http://en.wikipedia.org/wiki/DMZ_(computing)). Database servers are placed in an internal network. In this situation, the firewall port needs to be open between the web servers and the database server for communication.

**Database Connection Pool (DBCP)** configuration is located in the `TOMCAT_HOME` or `CATALINA_HOME/lib/tomcat-dbcp.jar`. This specific JAR is responsible for connection pooling. The following screenshot shows the location of `tomcat-dbcp.jar`. The following are the built-in properties of the Tomcat 8 server for accomplishing a connection with the database:

- Database Connection pool
- Common DBCP properties

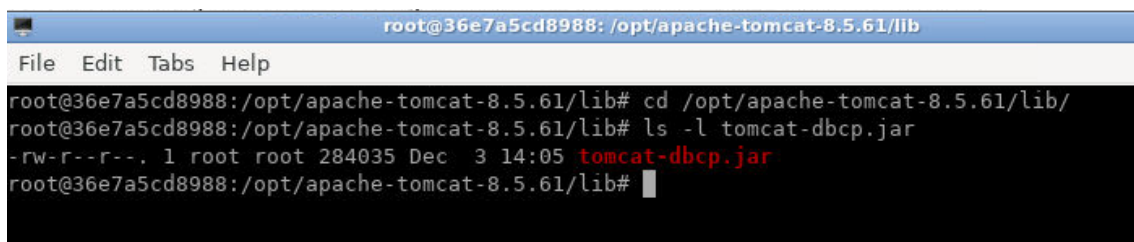

```

root@36e7a5cd8988: /opt/apache-tomcat-8.5.61/lib
File Edit Tabs Help

root@36e7a5cd8988:/opt/apache-tomcat-8.5.61/lib# cd /opt/apache-tomcat-8.5.61/lib/
root@36e7a5cd8988:/opt/apache-tomcat-8.5.61/lib# ls -l tomcat-dbcp.jar
-rw-r--r--. 1 root root 284035 Dec  3 14:05 tomcat-dbcp.jar
root@36e7a5cd8988:/opt/apache-tomcat-8.5.61/lib#

```

- Configuration of the database server details in `server.xml`
- The database specific JAR or JDBC driver needs to be placed in the `lib` directory
- The JNDI should be defined in the application `web.xml` file
- Application code should have proper JNDI configuration defined

There are many databases available in the market and every DB has its own advantage and disadvantage. We will discuss the most common databases used in the enterprise application and how to configure a datasource for these databases.

DataSource configuration consists of four major steps, irrespective of the database used.

## DataSource for Oracle

The Oracle database holds a major share in the IT market because of its features. Following are the steps which you need to perform on the datasource configuration of Tomcat.

1. By default, the definition of datasource values are defined in the global section of `server.xml`. The following screenshot shows the datasource details in `server.xml`:

```

<!-- Global JNDI resources Documentation at /docs/jndi-resources-howto.html-->
<GlobalNamingResources>
<!-- Editable user database that can also be used by UserDatabaseRealm to
authenticate users-->
<Resource name="jdbc/tomcat8" auth="Container"
type="javax.sql.DataSource" driverClassName="oracle.jdbc.OracleDriver"
url="jdbc:oracle:thin:@127.0.0.1:1521:test"

```

```
description="test database for tomcat 8"
username="admin" password="admin" maxActive="20" maxIdle="10"
maxWait="-1"/>
</GlobalNamingResources>
```

---

```
<Resource name="jdbc/tomcat7" auth="Container"
    type="javax.sql.DataSource" driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@127.0.0.1:1521:mysid"
    description="User database that can be updated and saved"
    username="admin" password="admin" maxActive="20" maxIdle="10"
    maxWait="-1"/>
```

2. Oracle JDBC driver classes should be placed in the CATALINA\_HOME/lib/ folder of the Tomcat instance. For Oracle, either class 12.jar or ojdbc14.jar is used.
3. It's always mandatory to define the Document Type Definition (DTD) for the resource in the application web.xml. There is always a question that comes to the mind of the administrator, why can't we define the application specific DTD in the server web.xml? The answer to that question is very tricky. When the application is deployed, it will reference the application web.xml for the resource, but not for the server web.xml. The server web.xml should be used only for the server properties changes, such as the session parameter and so on, which references to the web/application server specific.

```
<resource-ref>
<description>Oracle Datasource for tomcat </description>
<res-ref-name>jdbc/tomcat8 </res-ref-name>
<res-type>javax.sql.DataSource</res-type>
<res-auth>Container</res-auth>
</resource-ref>
```

4. After the previous step, the developer has to reference the JNDI in their code file and connect it to the database.

### **DataSource for MySQL**

MySQL is one of the biggest open source databases currently supported by Oracle. It follows the same process as Oracle, but a few parameters vary.

1. MySQL configuration

Ensure that you follow these instructions as variations can cause problems.

Create a new test user, a new database and a single test table. Your MySQL user must have a password assigned. The driver will fail if you try to connect with an empty password.

Make sure that mysql server is running and login as root:

```
service mysql status

service mysql start
```

Log in to the MySQL prompt and run the following command to grant the permissions: `mysql`

```
...
mysql> CREATE USER 'tomcatuser'@'localhost' IDENTIFIED BY 'tomcat8';
mysql> GRANT ALL PRIVILEGES ON *.* TO 'tomcatuser'@'localhost' WITH GRANT OPTION;
```

```
mysql> create database tomcat8;
mysql> use tomcat8;
mysql> create table testdata ( id int not null auto_increment primary key,foo
varchar(25), bar int);
mysql> insert into testdata values(null, 'hello', 12345);
```

```

```
mysql> CREATE USER 'tomcatuser'@'localhost' IDENTIFIED BY 'tomcat8';
Query OK, 0 rows affected (0.03 sec)

mysql> GRANT ALL PRIVILEGES ON *.* TO 'tomcatuser'@'localhost' WITH GRANT OPTION;
Query OK, 0 rows affected (0.04 sec)

mysql> create database tomcat8;
Query OK, 1 row affected (0.03 sec)


mysql> use tomcat 8;
ERROR 1049 (42000): Unknown database 'tomcat'
mysql> use tomcat8;
Database changed
mysql> create table testdata ( id int not null auto_increment primary key,foo varchar(25), bar int);
Query OK, 0 rows affected (0.28 sec)

mysql> insert into testdata values(null, 'hello', 12345);
Query OK, 1 row affected (0.03 sec)

mysql>
```

## Lab Solution

Complete solution for this lab is available at `~/Desktop/apache-tomcat/02_Code/DBTest` . Run `cp -r ~/Desktop/apache-tomcat/02_Code/DBTest /opt/apache-tomcat-8.5.61/webapps` to copy solution and start tomcat. Application URL: <http://localhost:8080/DBTest/test.jsp>

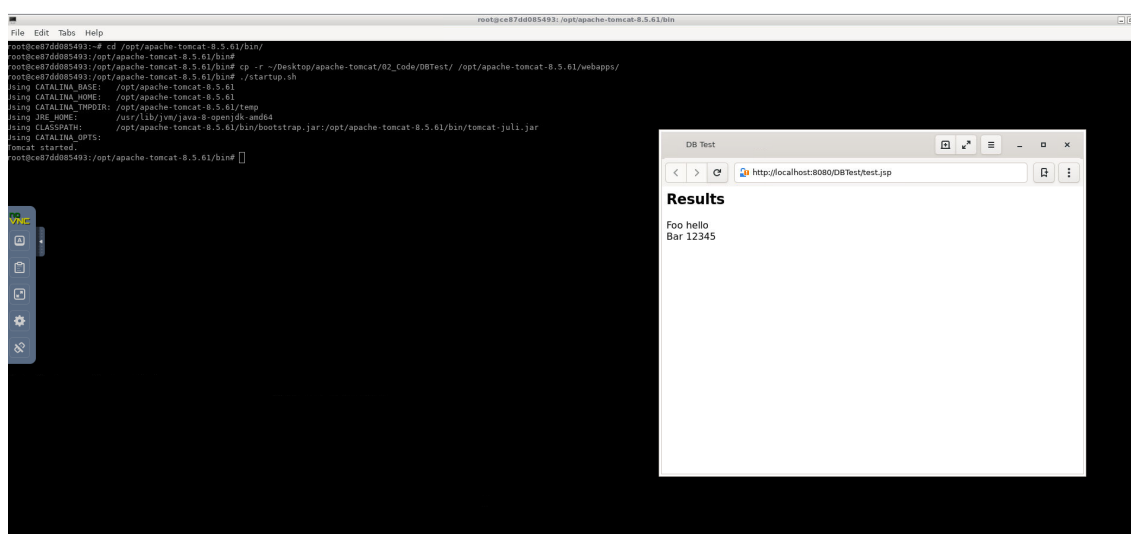

## 2. Context configuration

Configure the JNDI DataSource in Tomcat by adding a declaration for your resource to your Context.

For example:

```
<Context>

<Resource name="jdbc/TestDB" auth="Container" type="javax.sql.DataSource"
maxTotal="100" maxIdle="30" maxWaitMillis="10000"
```



```

        username="javauser" password="javadude"
driverClassName="com.mysql.jdbc.Driver"
        url="jdbc:mysql://localhost:3306/javatest"/>

</Context>

```

### 3. web.xml configuration

Now create a WEB-INF/web.xml for this test application.

```

<web-app xmlns="http://java.sun.com/xml/ns/j2ee"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
http://java.sun.com/xml/ns/j2ee/web-app_2_4.xsd"
  version="2.4">
  <description>MySQL Test App</description>
  <resource-ref>
    <description>DB Connection</description>
    <res-ref-name>jdbc/TestDB</res-ref-name>
    <res-type>javax.sql.DataSource</res-type>
    <res-auth>Container</res-auth>
  </resource-ref>
</web-app>

```

### 4. Test code

Now create a simple test.jsp page for use later.

```

<%@ taglib uri="http://java.sun.com/jsp/jstl/sql" prefix="sql" %>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>

<sql:query var="rs" dataSource="jdbc/TestDB">
select id, foo, bar from testdata
</sql:query>

<html>
  <head>
    <title>DB Test</title>
  </head>
  <body>

    <h2>Results</h2>

    <c:forEach var="row" items="${rs.rows}">
      Foo ${row.foo}<br/>
      Bar ${row.bar}<br/>
    </c:forEach>

  </body>
</html>


```

Finally deploy your web app into \$CATALINA\_BASE/webapps into a sub-directory called DBTest.

Once deployed, point a browser at <http://localhost:8080/DBTest/test.jsp> to view the results of your hard work.

Insert new row and open `http://localhost:8080/DBTest/test.jsp` again to verify that data is available in the web application.

```
mysql> insert into testdata values(null, 'fenago', 123);
```

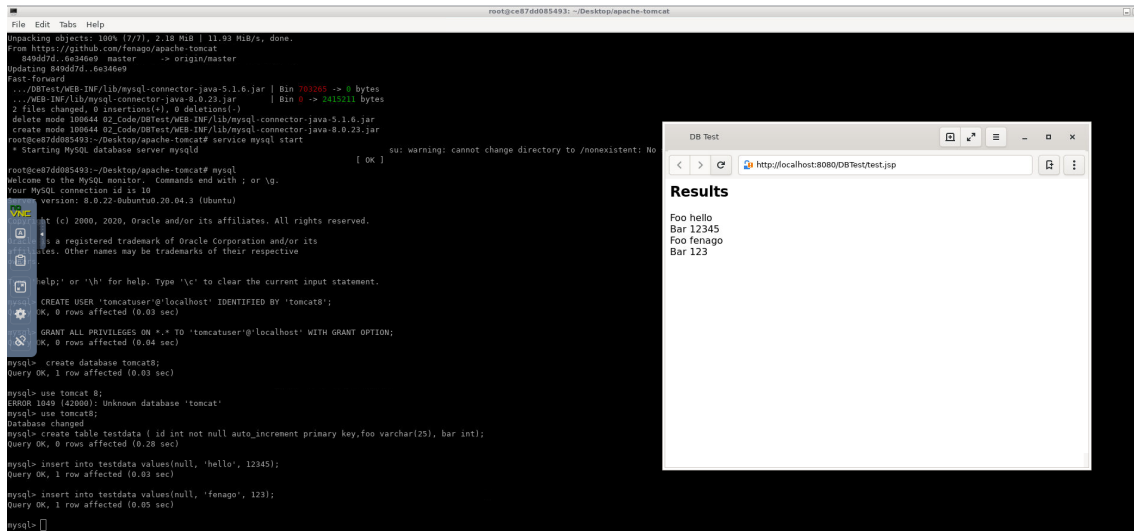

## Note

If you create the MySQL user without password, then the JDBC driver will fail to connect and you will have an authentication error in `catalina.out`.

## DataSource for PostgreSQL

PostgreSQL is an open source and relational database. It is one of the oldest databases (15 years old). It can be installed on multiple OSes, such as Windows, Unix, MAC, and so on.

It has a four step configuration rule similar to Oracle as follows:

1. The following code provides the definition of datasource in `server.xml`. By default, these values are defined in the global section.

```
<Resource name="jdbc/tomcat8" auth="Container" type="javax.sql.DataSource"
driverClassName="org.postgresql.Driver"
url="jdbc:postgresql://127.0.0.1:5432/tomcat8" username="tomcat8"
password="tomcat" maxActive="20" maxIdle="10" maxWait="-1"/>
```

2. The PostgreSQL JDBC driver is deployed in the `CATALINA_HOME/lib/postgresql-9.0-801.jdbc3.jar` folder of Tomcat.

## Note

Based on the version, the JDBC driver should be downloaded. For more reference on the driver version, refer to <http://jdbc.postgresql.org/download.html>.

3. For the web.xml configuration of the application, use the following lines of code. This should be placed in the WEB-INF/web.xml for the application-specific content.

```
<resource-ref>
<description>postgreSQL Tomcat datasource </description>
<res-ref-name>jdbc/tomcat8 </res-ref-name>
<res-type>javax.sql.DataSource</res-type>
<res-auth>Container</res-auth>
</resource-ref>
```

At the end of these steps, the developer will reference the JNDI in his/her code file and connect to the database.

## Comparison of the datasource for common databases

Until now, we have seen how the datasource is configured on different databases. Let's quickly compare and find out what are the different syntaxes for each database:

- **Oracle:** The following mentioned code describes the datasource parameter for the Oracle database:

```
<Resource name="jdbc/tomcat8" auth="Container" type="javax.sql.DataSource"
driverClassName="oracle.jdbc.OracleDriver"
url="jdbc:oracle:thin:@127.0.0.1:1521:test" description="test database for
tomcat 8" username="admin" password="admin" maxActive="20" maxIdle="10"
maxWait="-1"/>
```

- **MySQL:** The following mentioned code describes the datasource parameter for the MySQL database:

```
<Resource name="jdbc/tomcat8" auth="Container" type="javax.sql.DataSource"
driverClassName="org.postgresql.Driver"
url="jdbc:postgresql://127.0.0.1:5432/tomcat8" username="tomcat8"
password="tomcat" maxActive="20" maxIdle="10" maxWait="-1"/>
```

- **PostgreSQL:** The following mentioned code describes the datasource parameter for the PostgreSQL database:

```
...
<Resource name="jdbc/tomcat8" auth="Container" type="javax.sql.DataSource"
driverClassName="org.postgresql.Driver" url="jdbc:postgresql://127.0.0.1:5432/tomcat8"
username="tomcat8" password="tomcat" maxActive="20" maxIdle="10" maxWait="-1"/>
...
```

Database	oracle	Mysql	Postgresql
classes	oracle.jdbc.OracleDriver	com.mysql.jdbc.Driver	org.postgresql.Driver
Port	1521	3306	5432
JDBC driver	ojdbc14.jar	MySQL 3.23.47	postgresql-9.0-801.jdbc3.jar

In the previous figure, we have defined each `driverClassName` , port, and JDBC driver for each database and tabulated to conclude that if you know the details for connectivity with the database, you can configure any new database very easily.

### Note

Every vendor has a predefined set of libraries through which you can connect to its database. If you need to connect to any other database, which is not mentioned here, then you can visit the vendor websites for support information.

## Tomcat Manager configuration

The Tomcat Manager is a very powerful tool for Tomcat administration. In production server issues, it's not possible to be in the data center at all times. Sometimes, we have to connect to Tomcat remotely to resolve the issues and that is when the Tomcat Manager is very useful for handling a critical issue. It comes with the following features:


- Deployment of a new application remotely
- Idle session clearing
- Undeployment of an application without restarting the container
- Analysis of memory leaks
- JVM status
- Server status

## Enabling the Tomcat Manager

By default, the Tomcat Manager is disabled in Tomcat 8. To enable the Tomcat Manager, you have to do the configuration in the default file, that is, `tomcat-users.xml` in the `conf` folder of Tomcat 8.

In this file, user roles and their authentication are configured. Let's quickly discuss the configuration parameters for enabling the Tomcat Manager.

Before enabling the Tomcat Manager, an authentication window will pop-up while browsing the Tomcat page, as shown in the following screenshot:

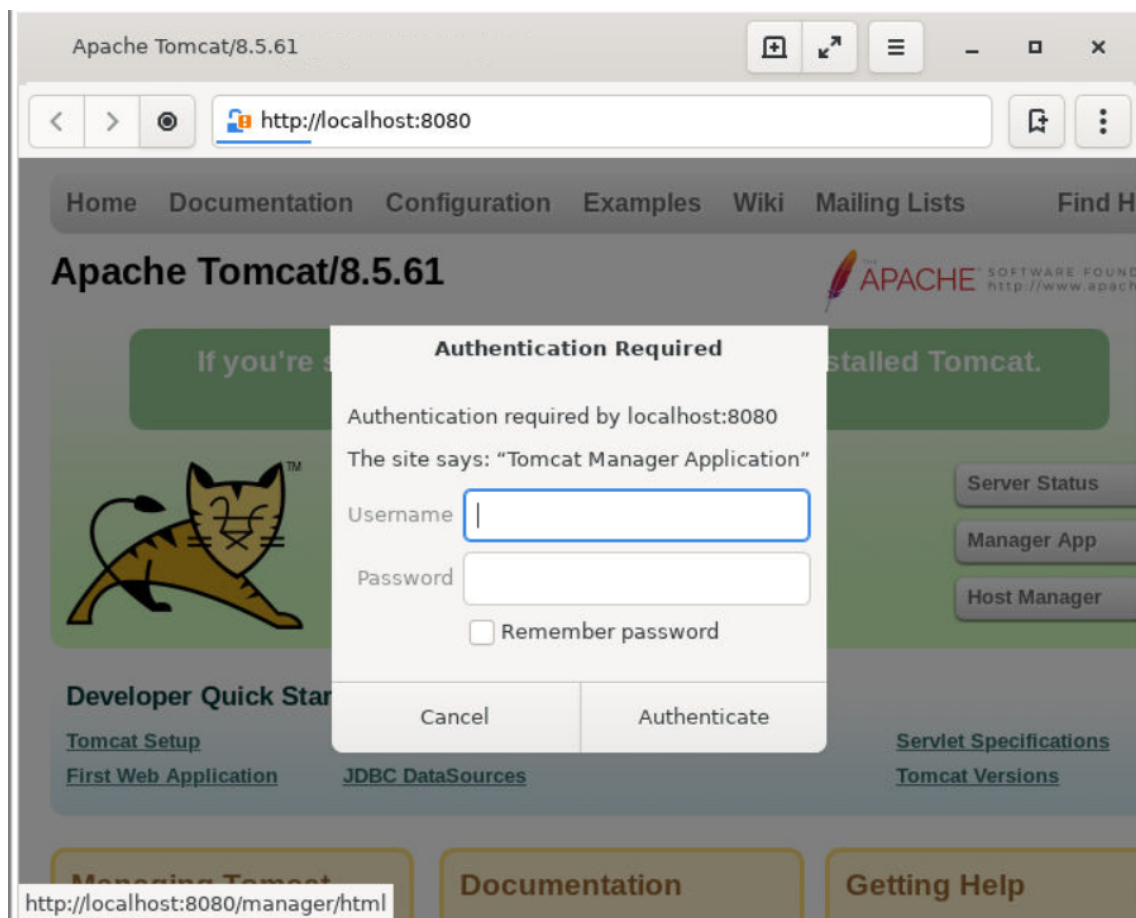


The following screenshot shows the `tomcat-users.xml` section before enabling the user properties:

Open `/opt/apache-tomcat-8.5.61/conf` in vscode and add following lines in `tomcat-users.xml`. Add these line before `</tomcat-users>`

```
-----tomcat-users.xml-----  
  
<role rolename="manager-gui"/>  
<role rolename="manager-script"/>  
<role rolename="manager-status"/>  
<role rolename="manager-jmx"/>  
<user username="tomcat" password="password"  
  roles="manager-gui, manager-jmx, manager-script, manager-status"/>
```

By default, Tomcat 8 comes with two users, `tomcat` and `role1`. If you want to add more users based on your system requirement, you can add here and define the role. Once you enable the Tomcat user configurations, this configuration will be in effect after the Tomcat recycle.

You can browse the Tomcat Manager using the URL `http://localhost:8080/` and click on **Manager App**, as shown in the the following screenshot:

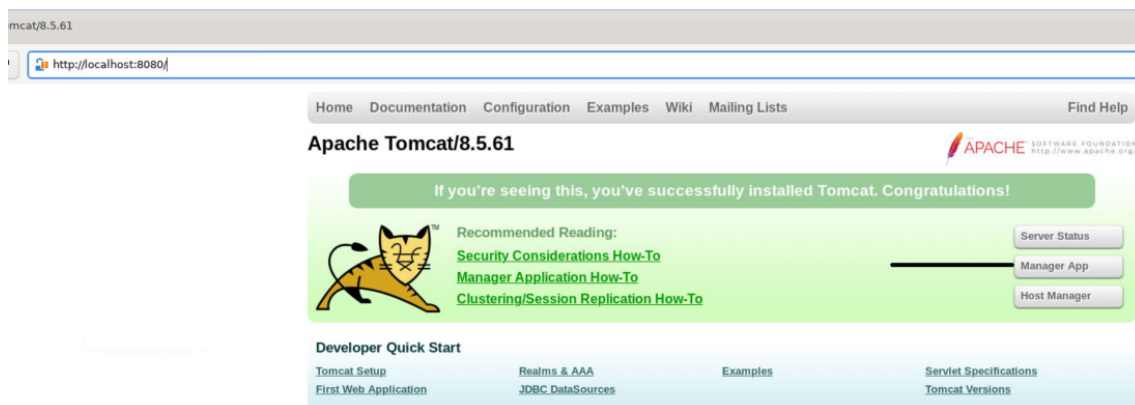

Once the authentication page is displayed, provide the user ID/password (user = `admin`, password = `admin`) as it's already defined in `tomcat-users.xml`. Click on **OK**. The pop-up will redirect it to the Tomcat Manager console, as shown in the following screenshot:

The screenshot shows the Tomcat Web Application Manager interface. At the top, there's a message bar with "OK". Below it, a navigation bar includes "Applications", "HTML Manager Help", "Manager Help", and "Server Status". The main content area displays a table of applications:

Applications	Version	Display Name	Running	Sessions	Commands
None specified	None specified	Welcome to Tomcat	true	0	Start Stop Reload Undeploy Expire sessions with idle ≥ 30 minutes
None specified	None specified	Tomcat Documentation	true	0	Start Stop Reload Undeploy Expire sessions with idle ≥ 30 minutes
None specified	None specified	Servlet and JSP Examples	true	0	Start Stop Reload Undeploy Expire sessions with idle ≥ 30 minutes
None specified	None specified	Tomcat Host Manager Application	true	0	Start Stop Reload Undeploy Expire sessions with idle ≥ 30 minutes
None specified	None specified	Tomcat Manager Application	true	1	Start Stop Reload Undeploy Expire sessions with idle ≥ 30 minutes

Below the table is a "Deploy" section with the heading "Deploy directory or WAR file located on server". It contains two input fields: "Context Path (required):" and "XML Configuration file path:".

Through this console, we can deploy the new application or modify the current application's state to stop, undeploy, start, reload, clear sessions, and so on. Also, we can check the current status of the server by clicking on the **Server Status**, as shown in the following screenshot:

This screenshot shows the same Tomcat Web Application Manager interface. The "Server Status" link in the navigation bar is circled in red, indicating it is the next step to be taken.

The following screenshot shows the **Server Status**:



The server status will define the following details:

- JVM status
- Max memory
- Total memory
- Free memory
- Connection of AJP port 8009
- Connection state
- Data sent
- Data received
- Client
- Virtual host
- Connection on HTTP port 8080
- Connection state
- Data sent
- Data received
- Client
- Virtual host
- Server information
- Tomcat version
- OS version
- JVM version
- System architecture

## Context path

The context path is a key element of a web application. It's also used for a virtual host. Virtual hosting can be defined as a method through which you can host multiple domain names on the same web server or a single IP.

The context path is also used to define the URL mapping for the `.war` files.

Many people ask why we need the context path. Instead, can we deploy the application on one root directory? The answer is, by defining the context path, we minimize the load on the server. When the server gets the request with the URL, it will check the `server.xml` or context path for the defined URL. If it's found, then the URL will be

served from here, otherwise the server has to search all the deployed WAR files. Hence, the context path reduces the CPU cycle.

The second important advantage is, it gives us freedom to customize the application based on our requirement, such as logging, appBase, DB connection, and so on.

Let's consider a scenario for a large enterprise where a single application needs to be deployed on 100 Tomcat servers. Now it's impossible to deploy the application on every server, and so, in that case Common NAS share is used for the application deployment.


### Enabling the context path

The context path in Tomcat can be enabled in two ways:

- GUI using the Tomcat Web Application Manager
- Command-line configuration in `server.xml`


### GUI using the Tomcat Web Application Manager

For enabling the context path in the Tomcat Manager, you have to first log in to the Tomcat Manager app using the URL `http://localhost:8080`. Then click on **Manager App**, as shown in the following screenshot:

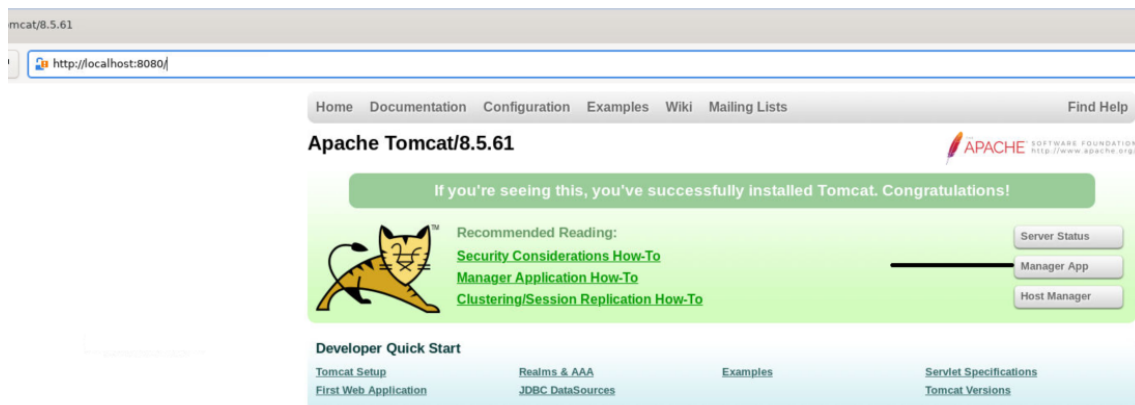


It then displays the **Tomcat Web Application Manager** console and its features, as shown in the following screenshot:



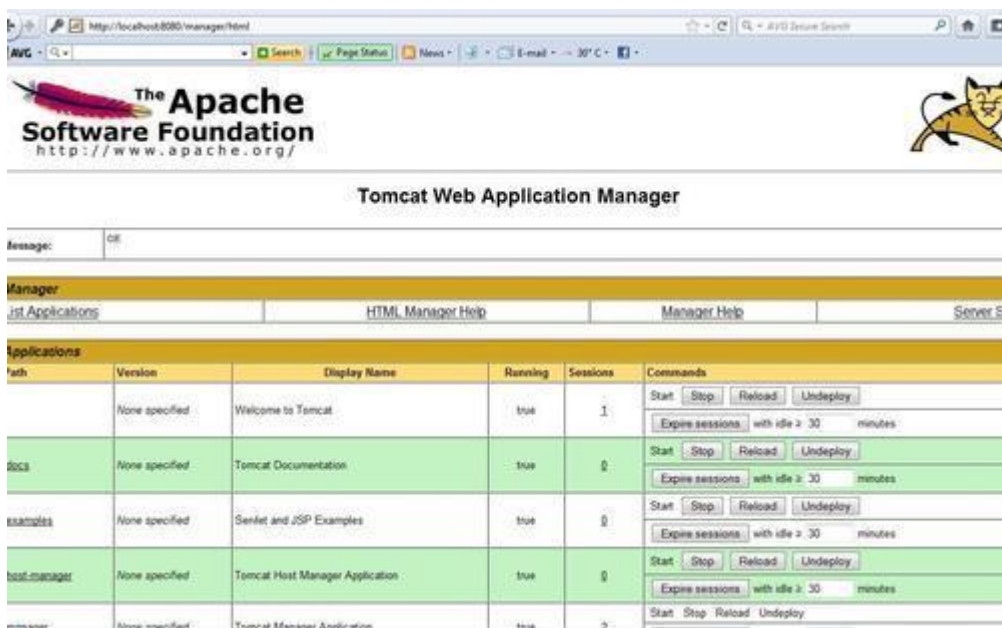

You can create the context path using the **Deploy** tab. Click on **Browse** and select the required WAR file. Then click on **Deploy**. It will take 10 to 15 seconds to deploy the application and you will see a page similar to the following screenshot:

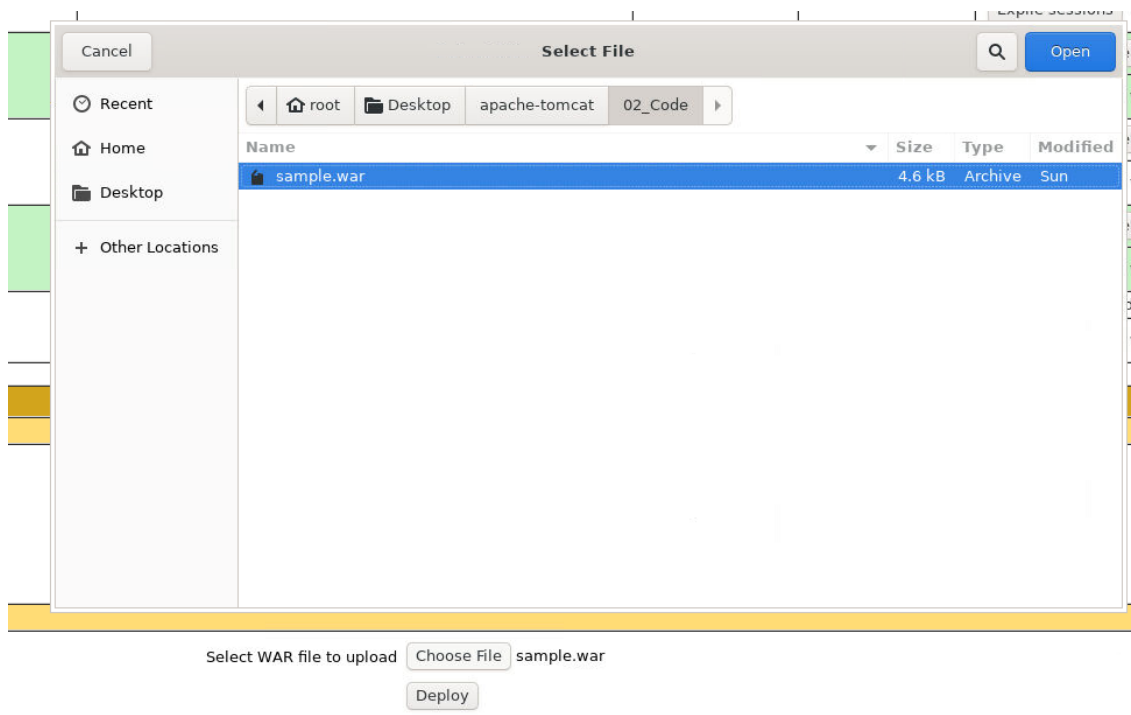

The following screenshot shows the application deployment status and administrative controls such as **Stop**, **Reload**, and **Undeploy**:

/sample	None specified	Hello, World Application	true	0	<input type="button" value="Start"/> <input type="button" value="Stop"/> <input type="button" value="Reload"/> <input type="button" value="Undeploy"/> <input type="button" value="Expire sessions"/> with idle > 30 minutes
---------	----------------	--------------------------	------	---	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Once the application is deployed successfully, you can browse the application using the URL `http://localhost:8080/sample`, as shown in the following screenshot:



### Command-line configuration in server.xml

Another way of adding the context path in Tomcat 8 is by editing `server.xml`. But, you need to have a good understanding of XML. Let's quickly discuss the changes that need to be done on the Tomcat server.

```
<Context path="/sample" docBase="/opt/" reloadable="true" swallowOutput="true">
<WatchedResource>WEB-INF/web.xml</WatchedResource>
<Logger className="org.apache.catalina.logger.FileLogger" prefix="www-sample-com-log."
suffix=".txt" timestamp="true"/>
</Context>
```

```
<Context path="/sample" docBase="/opt/" reloadable="true"
swallowOutput="true">
<WatchedResource>WEB-INF/web.xml</WatchedResource>
<Logger className="org.apache.catalina.logger.FileLogger"
prefix="www-example-com-log." suffix=".txt"
timestamp="true"/>
</Context>
```

Now, it's time to discuss the parameters defined in the context path. The previous screenshot shows the details for the context path.

- `path="/sample"`: It defines the path URL for the server request, for example, `http://localhost:8080/sample`.
- `docBase="/opt/"`: It defines the document root for the context path. In simple language, this parameter defines the place from where the deployment `.war` file gets picked up.
- `reloadable="true"`: If this parameter is `true`, then every change done on the WAR file will be in effect automatically without a Tomcat recycle.
- `swallowOutput="true"`: If this parameter is set to `true`, then the output for `System.out` and `System.err` will be redirected to the application log.

### Note

It's always recommended to take the backup of the existing configuration file before performing changes in Tomcat.

## Deployment in Tomcat 8

Deployment is basically defined as the installation of the WAR files in the web application. In other words, we can define the unpacking of the WAR file in the Tomcat `webapps` directory.

### Structure of the WebArchive

You develop your web application within a specified directory structure so that it can be archived and deployed on Tomcat 8. All servlets, classes, static files, and other resources belonging to a web application are organized under a directory hierarchy. The root of this hierarchy defines the **document root** of your web application. All files under this root directory can be served to the client, except for files under the special directory `WEB-INF`, located under the root directory. The name of your web application is used to resolve requests for components of the application.

### Note

Always place private files (files which are not required to serve to the client) in the `WEB-INF` directory, under the `root` directory. All files under `WEB-INF` are private, and are not served to the client.

- `WebApplicationName/`: In this directory (or a subdirectory), all the static files, such as HTML and JSP files are placed. This directory is the document root of your web application.
- `/WEB-INF/web.xml`: It contains the deployment descriptor for the web application. Resources specific to the application are placed here.
- `/WEB-INF/classes`: This contains all the server-side classes or your application-specific third-party classes.
- `/WEB-INF/lib`: This directory contains JAR files used for the JSP completion.
- `web.xml`: It contains the details of all your dynamic files (servlets and JSP) and also other configuration-related information such as session time out and defining the datasource (access to DB).

```
<servlet>
<servlet-name>classB</servlet-name>
<servlet-class>class.classB</servlet-class>
</servlet>
```

In the previous snippet, we are mapping the name to the servlet class (when Tomcat 8 starts, it will create an object of the class and map it to the name we have provided in the ``servlet-name`` field).

```
...
classB =new class.classB ()
<servlet-mapping>
<servlet-name> classB </servlet-name>
...
```

### Archive Files

In most production environments, you receive a deployment unit as an archive file from the developer. An archive file is a single file that contains all of an application or module's classes, static files, directories, and deployment descriptor files. Archive files are typically created by using the JAR utility or Ant JAR tool.

Deployment units that are packaged using the JAR utility have a specific file extension depending on the type, as explained in the following points:

- EJBs are packaged as `.jar` files
- Web applications are packaged as `.war` files
- Resource adapters are packaged as `.rar` files
- Enterprise applications are packaged as `.ear` files, and can contain any combination of EJBs, web applications, and resource adapters
- Web services can be packaged either as `.ear` files or as `.war` files

### Exploded archive directories

An exploded archive directory contains the same files and directories as a JAR archive. However, the files and directories reside directly in your filesystem and are not packaged into a single archive file with the JAR utility.

A deployment unit should be deployed as an exploded archive directory, rather than a single archive file, in the following circumstances:

- You want to perform partial updates to a deployed application without redeploying the entire application.
- You want to use the Tomcat Manager to dynamically edit and persist selected deployment descriptor values for the deployment.

### Note

It's not possible to edit deployment descriptor values in the console for deployments from the archive files or `.war` files.

- You are deploying a web application that contains static files that you will periodically update. In this case, it is easier to deploy the application as an exploded directory, because you can update and refresh the static files without re-creating the archive.

### Deployment operations

The deployment tools provide support for performing these common deployment operations:

- **Deploy:** It makes deployment source files available to target servers and loading classes into class loaders so that applications are available to clients.
- **Redeploy:** It updates a deployment unit or part of a deployment unit (for example, a WAR, a module within a WAR, or a static file in a Web Application) that is currently deployed and available to clients. When redeploying an entire application, all of the application's modules must redeploy successfully or the entire application is stopped.

### Note

An application becomes unavailable to clients during redeployment. The Tomcat 8 server doesn't guarantee the operation of the application and deployment task if there is an access from the client at this time. For this reason, redeployment is not recommended for use in a production environment.

- **Stop:** This unloads an application's classes and makes an application unavailable to clients. Stopping still leaves the deployment files and deployment name available to the target servers for subsequent redeployment or starting.
- **Start:** It reloads an application's classes into class loaders and makes the application available to clients. Starting requires that the deployment files be available on the target servers as a result of an earlier deployment.

- **Undeploy:** This stops a deployment unit and then removes its deployment files and the deployment name from the target servers.

### **Note**

An application becomes unavailable to clients during undeployment. The Tomcat 8 server doesn't guarantee the operation of the application and deployment task if there is an access from the client at this time.


## **Types of deployment**

The deployment staging mode determines how deployment files are made available to the target servers that must deploy an application or standalone module. The Tomcat 8 server provides three different options for staging files listed as follows:


- Stage mode
- Nostage mode
- External\_stage mode

### **Ways of application deployment in Tomcat 8**

Deployment of applications can be done in many ways in Tomcat 8. There are five different ways which are widely known and accepted in the various industries displayed in the following figure:

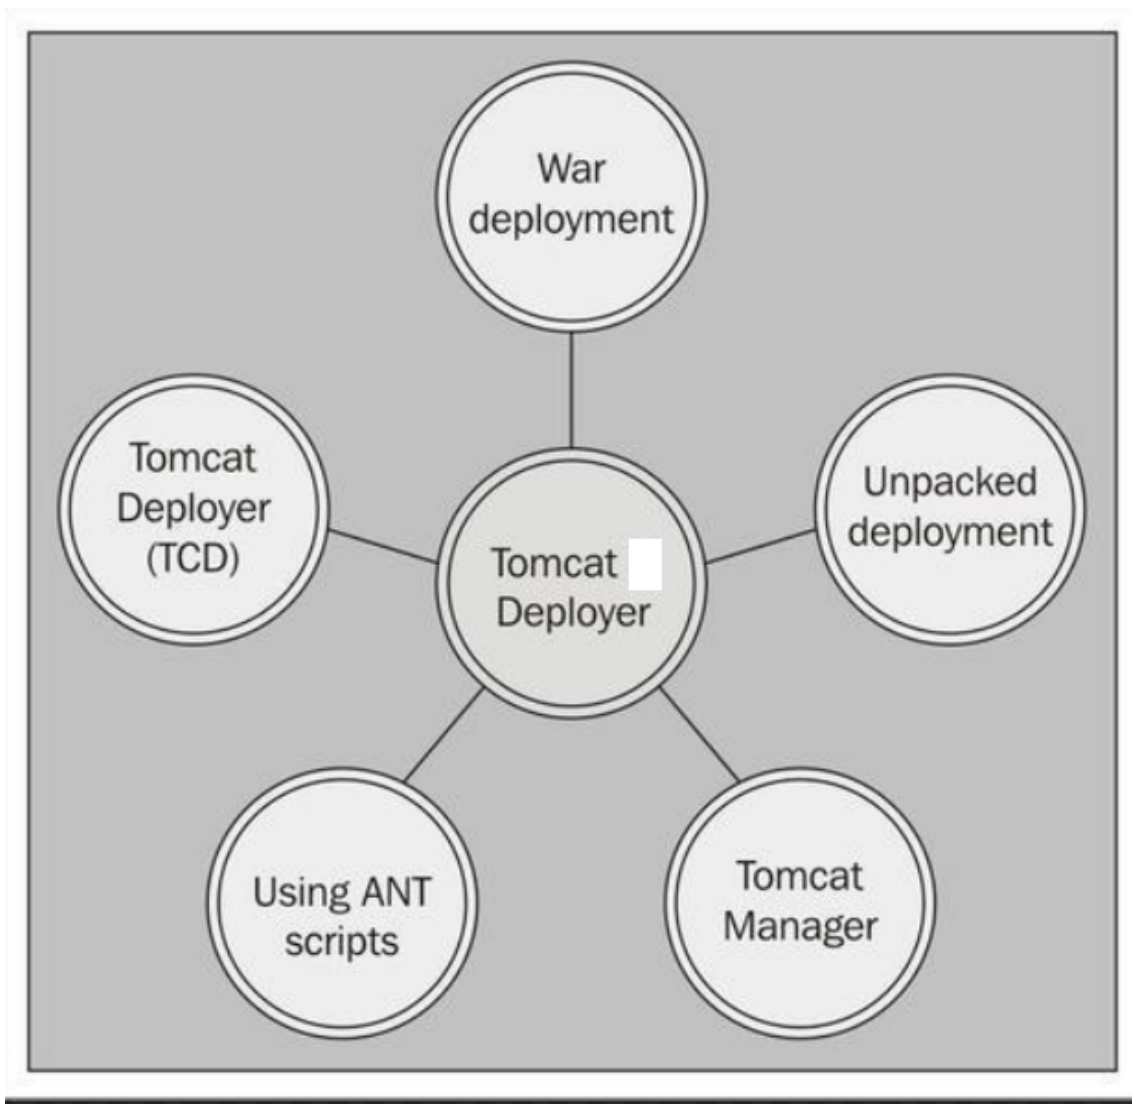

- **War deployment:** You can deploy the WAR file in the `CATALINA_BASE` directory of Tomcat and restart Tomcat to view the application. This approach is widely used in the production environment.
- **Unpacked deployment:** In this deployment method, the WAR file is extracted on the `CATALINA_BASE` directory for the instance. This method is commonly used in the development server.
- **Tomcat Manager:** It's a very good tool which is widely used in the production environment, mainly in remote infrastructure deployment. You can log in to the Tomcat browser from your system and deploy. Then click on the new web application deployment, as shown in the next screenshot:

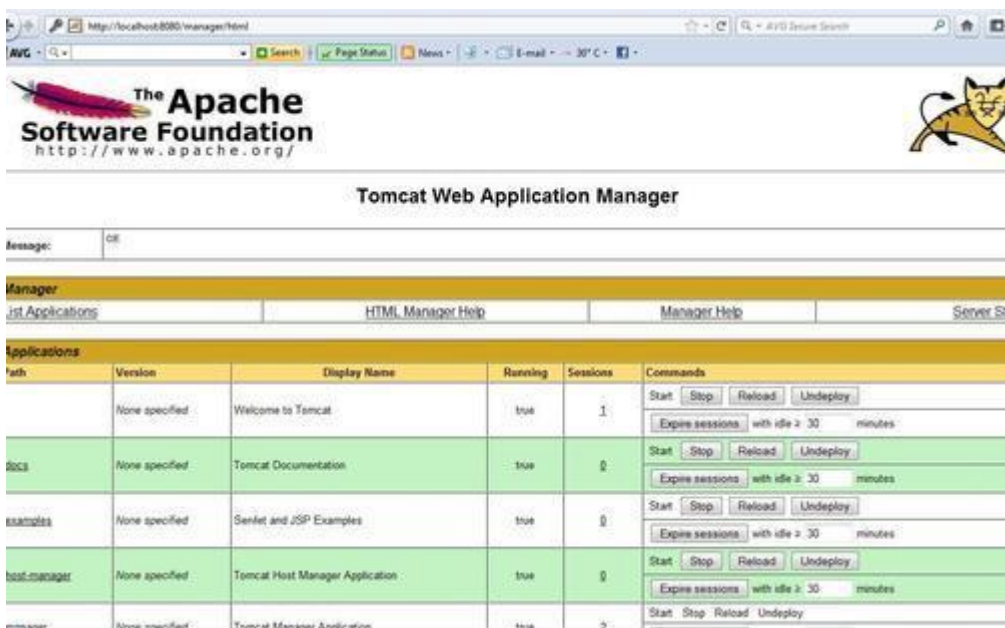

- You can create the context path using the **Deploy** tab. Click on **Browse** and select the required WAR

file. Then click on **\*\*Deploy\*\***. It will take 10 to 15 seconds to deploy the application and you will see a page similar to the following screenshot:



- The following screenshot shows the application deployment status

and administrative control such as **\*\*Stop, Reload\*\***, and **\*\*Undeploy:\*\***

sample	None specified	Hello, World Application	true	0	Start Stop Reload Undeploy Expire sessions with idle > 30 minutes
--------	----------------	--------------------------	------	---	----------------------------------------------------------------------

- Once the application is deployed successfully, as shown in the

following screenshot, you can browse the application using the URL, `http://localhost:8080/sample:`



- **Using ANT scripts:** You can also deploy the application using the ANT scripts. These scripts contain the information of the source/destination and target file. For doing this deployment, the Tomcat instance should be running.
- **TCD (Tomcat Deployer):** It is a tool which is used for application deployment. ANT should be installed for the TCD to be working and the Tomcat instance should be running. There is no need to install the TCD on the Tomcat instance.

## Common issues in deployment, configuration, and their troubleshooting

There are multiple issues which may arise after the deployment and configuration on Tomcat. Let's discuss the different issues:

### Scenario 1:

**Issue:** Users complain that after the deployment, they can still view the old code.

#### Troubleshooting steps:

- Check if the latest file is present on the doc base.
- Check the `catalina.out` in the `logs` directory of Tomcat 8 and whether the WAR filename is deployed or not.
- If both are checked and the issue still persists, then stop the Tomcat service and clear the content of the `temp` directory under the `work/Catalina/localhost` using the following command:

```
cd /opt/apache-tomcat-8.5.61/temp/ rm -rf ../temp/*
cd /opt/apache-tomcat-8.5.61/work/Catalina/localhost/ rm -rf ../localhost/*
```

- Restart the Tomcat service and ask the user to test the application.

### Scenario 2:

**Issue:** Users complaining that they can view the current deployed code on one node and the other node still displays the previous version of the code.

#### Troubleshooting steps:

- Check if the latest file is present on the doc base.
- Check the `catalina.out` in the `logs` directory of Tomcat 8 and whether the WAR filename is deployed or not.

If both are checked and the issue still persists, then stop the Tomcat service on node2. Replicate the code from node1 and clear the content of the `temp` directory under the `work/Catalina/localhost` using the following command:



```
cd /opt/apache-tomcat-8.5.61/temp/ rm -rf ../temp/*
cd /opt/apache-tomcat-8.5.61/work/Catalina/localhost/ rm -rf ../localhost/*
```

- Restart the Tomcat service and ask the user to test the application. Also, check the database status on node1 and node2, if they are in replication.
- Connect the database from both the nodes.

### Scenario 3:

**Issue:** The Tomcat instance is not coming up after the changes made to `server.xml`.

#### Troubleshooting steps:

- Go to the Tomcat `bin` directory.
- Then, run the `configtest.sh`. It will give you the following output:

```
[root@localhost ~]# cd /opt/apache-tomcat-8.5.61/bin/
[root@localhost bin]# ./configtest.sh
Using CATALINA_BASE: /opt/apache-tomcat-8.5.61
Using CATALINA_HOME: /opt/apache-tomcat-8.5.61
Using CATALINA_TMPDIR: /opt/apache-tomcat-8.5.61/temp
Using JRE_HOME: /usr/lib/jvm/java-8-openjdk-amd64
Using CLASSPATH: /opt/apache-tomcat-8.5.61/bin/bootstrap.jar:/opt/apache-tomcat-8.5.61/bin/tomcat-juli.jar
Error:-
org.apache.catalina.startup.Bootstrap.main(Bootstrap.java:435)
Caused by: java.net.BindException: Address already in use
at java.net.PlainSocketImpl.socketBind(Native Method)
at java.net.PlainSocketImpl.bind(PlainSocketImpl.java:383)
at java.net.ServerSocket.bind(ServerSocket.java:328)
at java.net.ServerSocket.<init>(ServerSocket.java:194)
at java.net.ServerSocket.<init>(ServerSocket.java:150)
```

- It means that Tomcat is already running. Then, stop the web server and clear the `temp` directory.
- Restart the services again.

#### Summary

---

In this lab, we have discussed the configuration of Tomcat including data source configuration for the different databases (Oracle, MySQL, and PostgreSQL) and the context path creation using a sample application, various ways to perform deployment including deployment using the Tomcat Manager for the sample application. We also discussed troubleshooting of common issues.

In the next lab, we will discuss performance tuning for Tomcat 8 in terms of the JVM and OS level.