



# ORACLE BI 12c Installation

## Installation Guide


Open **C:\Oracle\Middleware\Oracle\_Home\bi\bin** folder in Windows explorer:

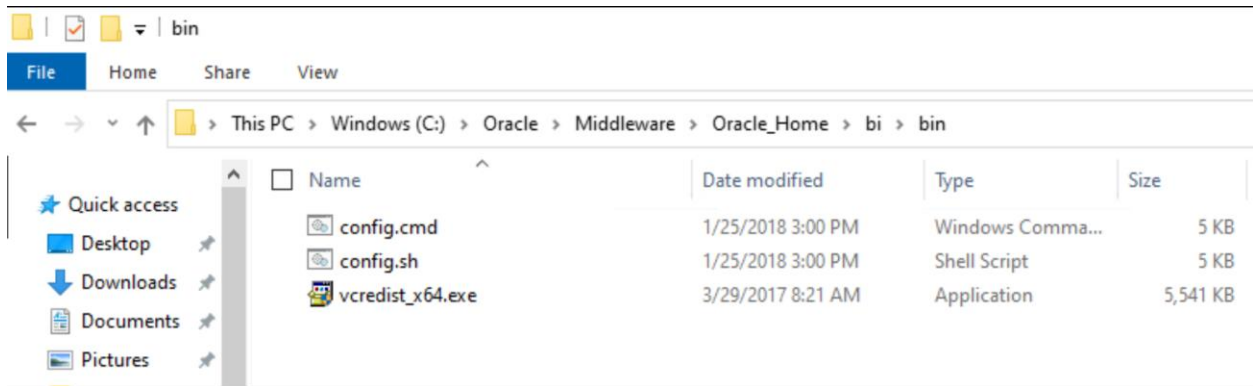


Open cmd As **ADMINISTRATOR** in current directory and run following command: **config.cmd**

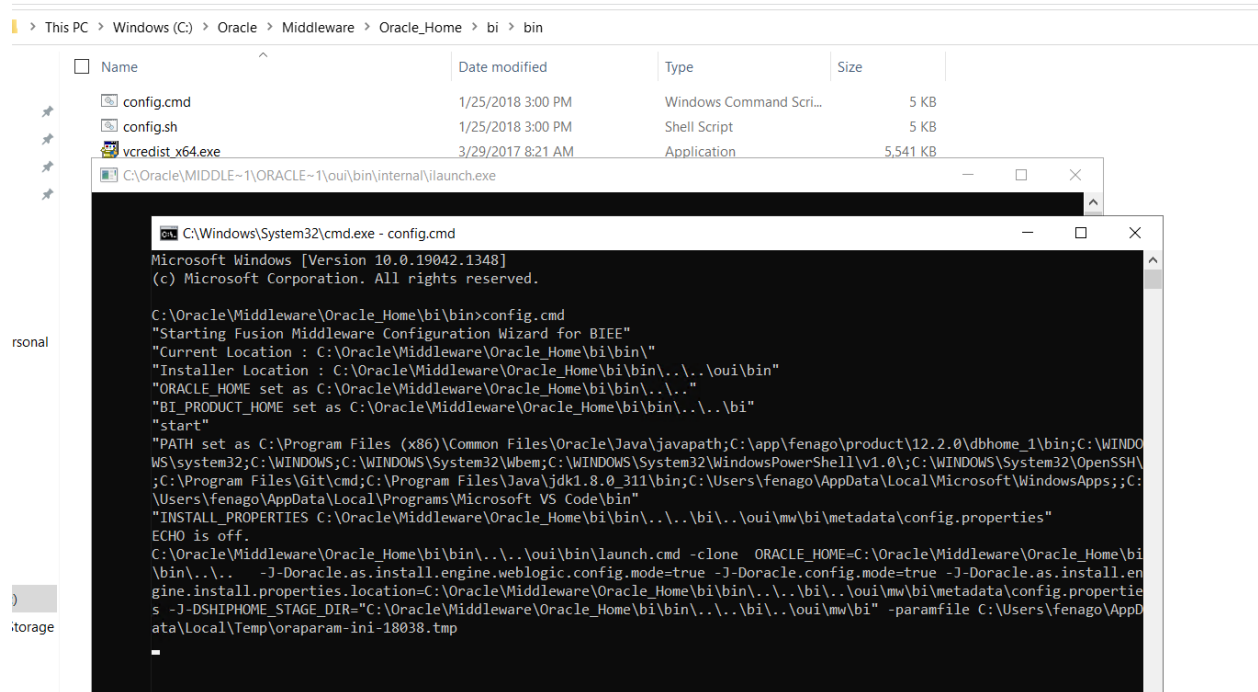


Click **Yes**

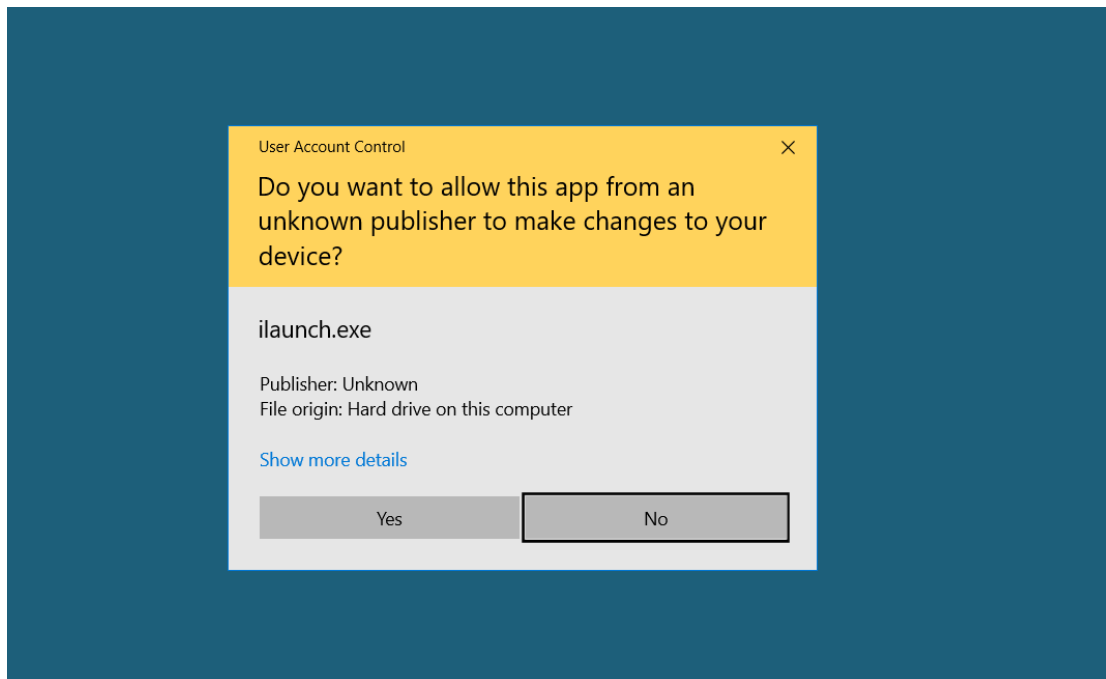


Click **Next:**

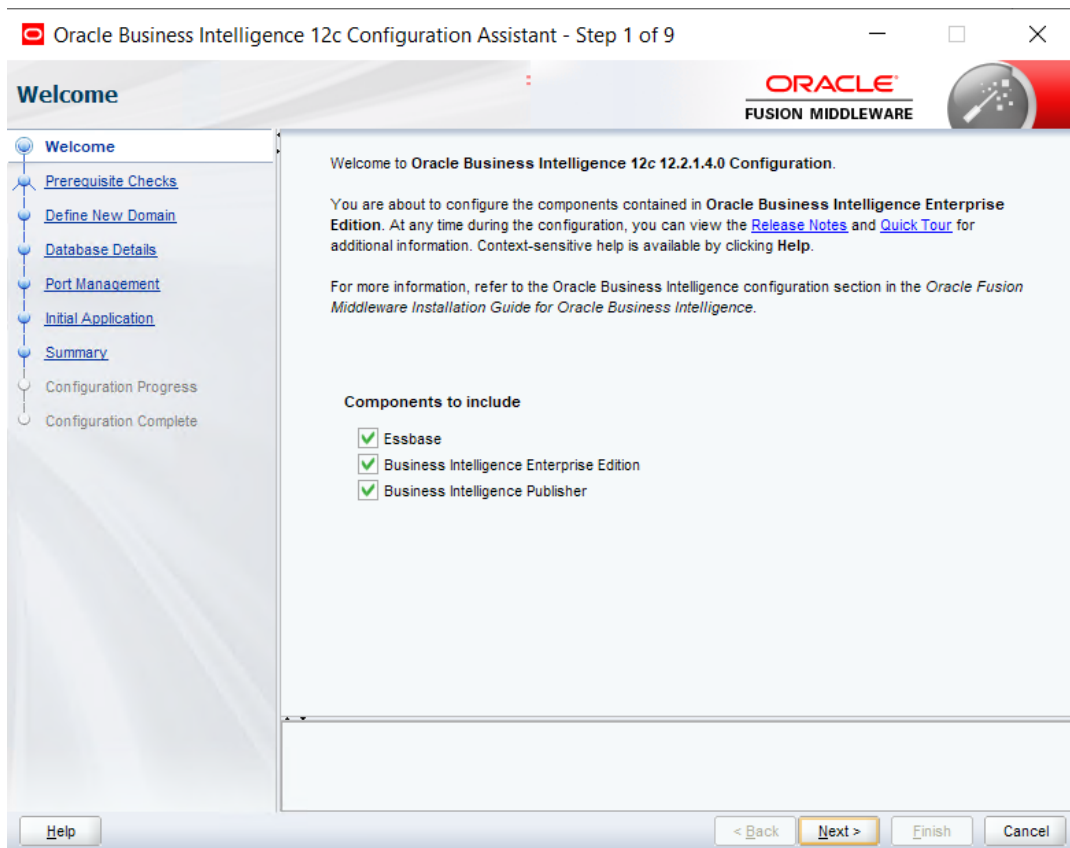

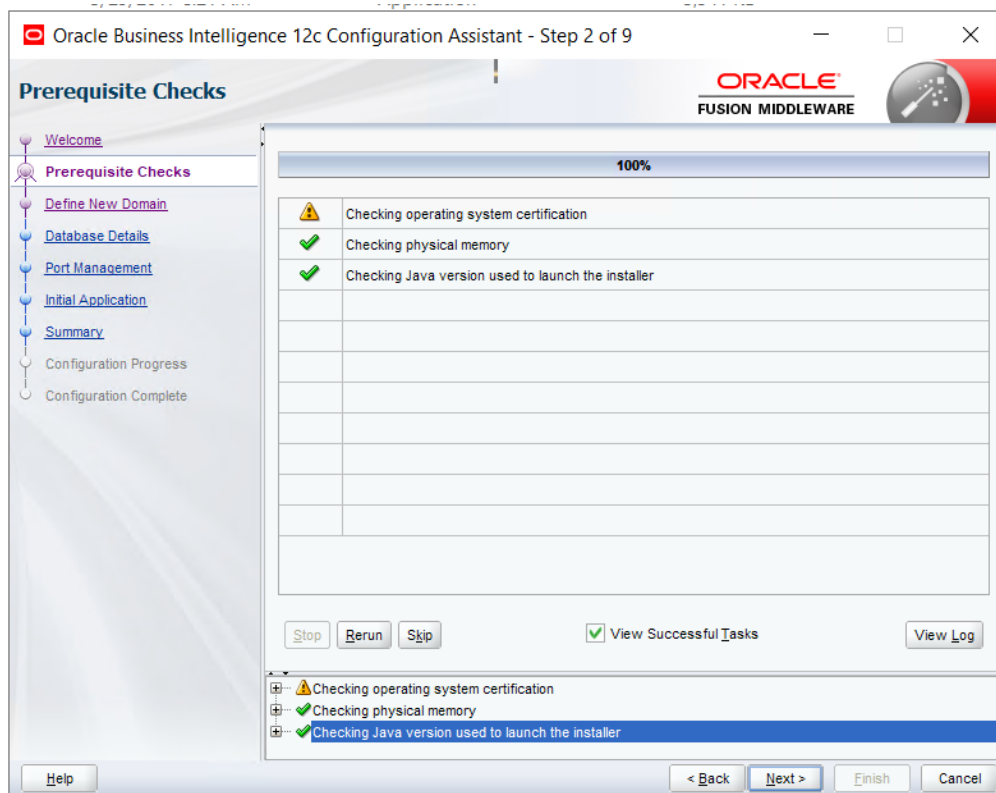

Enter password: **weblogic1**

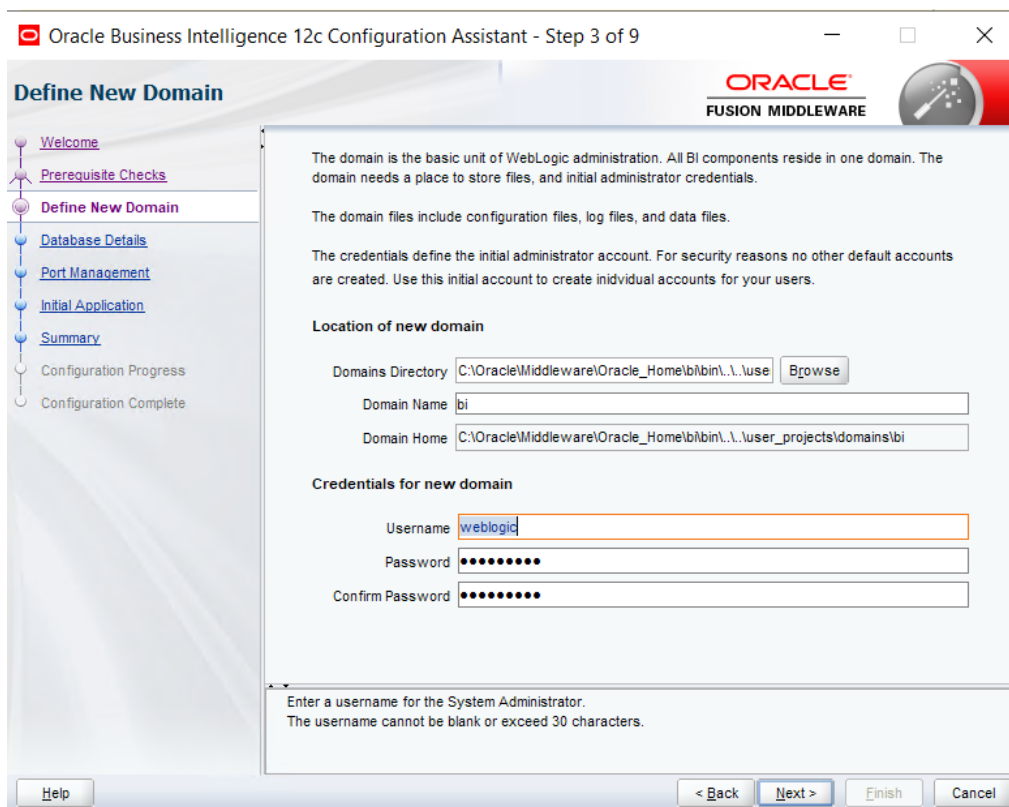

**Enter following input on Database details screen:**

Schema Prefix: **bischema**

Schema password: **fenago**

Confirm Schema password: **fenago**

Database type: **Oracle Database**

Username: **sys**

password: **fenago**

Simple connection string: **localhost:1521:fenago**

Oracle Business Intelligence 12c Configuration Assistant - Step 4 of 9

### Database Schema

Database schemas are required for storage of internal housekeeping information. These schemas are distinct from any data sources which you plan to analyse in BI.

The simplest option is to create new database schemas here. Alternatively you can use existing schemas you created earlier using the Repository Creation utility (RCU). Using RCU in advance gives you additional options, such as choosing tablespaces. RCU is available in directory C:\Oracle\Middleware\Oracle\_Home\bin\..\oracle\_common\bin.

☒ Create new schemas

Schema prefix:

Schema password:

Confirm schema password:

Database type:

Username:

Password:

Simple connect string:

☐ Use existing schemas

Enter the connect string in the format hostname:port:service\_name for the Oracle database. Use only for non-RAC databases. Use the separate Oracle RAC option for all RAC databases, included those accessed using an Oracle Single Client Access Name (SCAN) address

Help < Back Next > Finish Cancel

Click **Next**

Oracle Business Intelligence 12c Configuration Assistant - Step 5 of 9

### Port Range

Choose the port range for BI and WLS processes to use.

**Port Range**

Port Range Starting Port

Port Range End Port

The very first port that will be used when allocating port numbers

[Help](#) [< Back](#) [Next >](#) [Finish](#) [Cancel](#)

Oracle Business Intelligence 12c Configuration Assistant - Step 6 of 9

### Initial Application

Choose the application that will be installed into your initial service instance. This can be the default sample application, an application archive exported from another BI installation or you can choose to start with a clean slate.

☒ Oracle sample application (SampleAppLite)


☐ Your own existing BI Application from export bundle (.jar file)


☐ Clean Slate (no predefined application)

Choose the application to be installed into your initial service instance.


[Help](#) [< Back](#) [Next >](#) [Finish](#) [Cancel](#)

Click **Save Response** button:

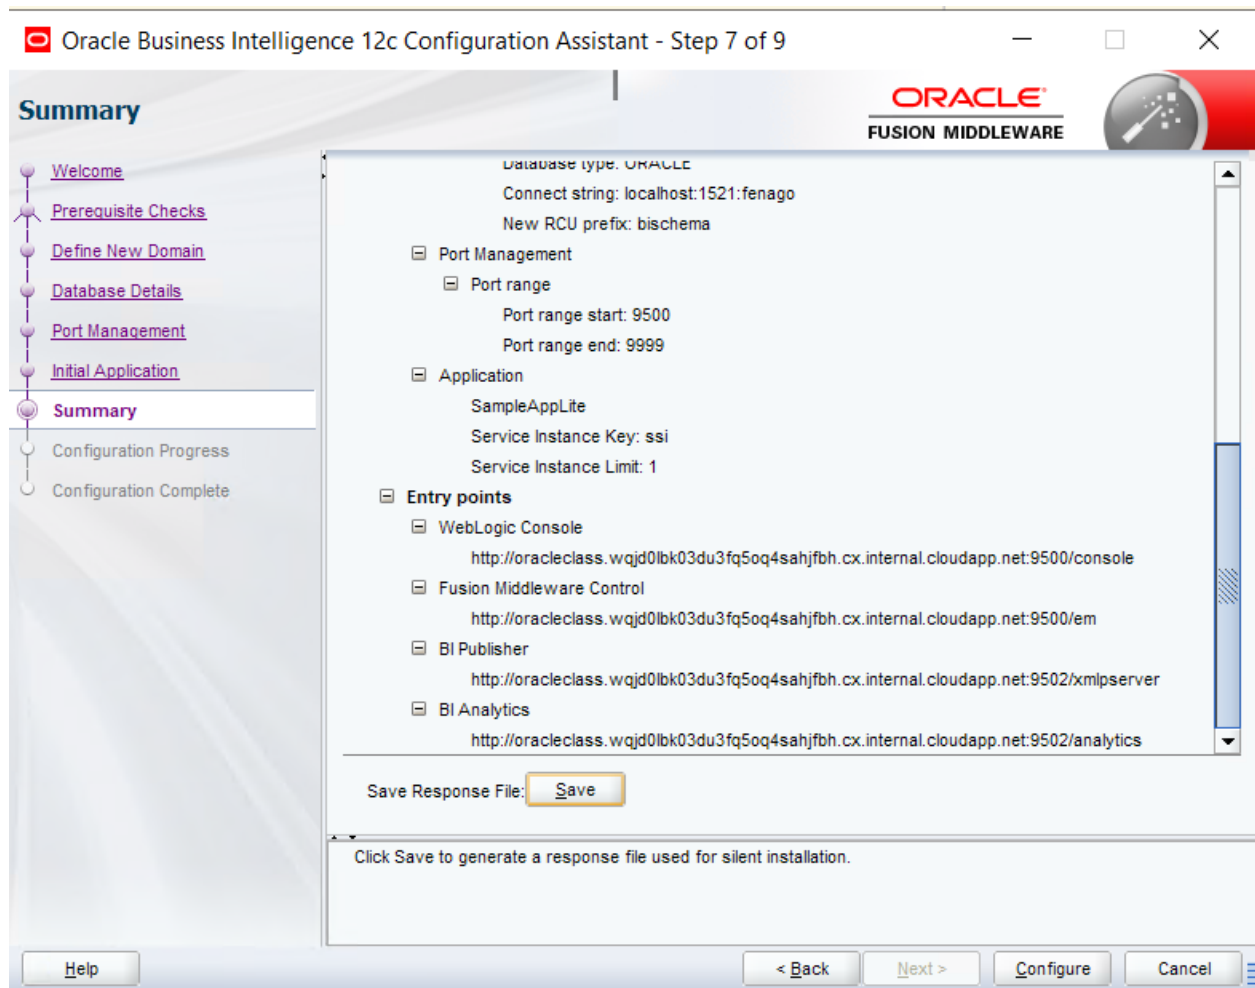

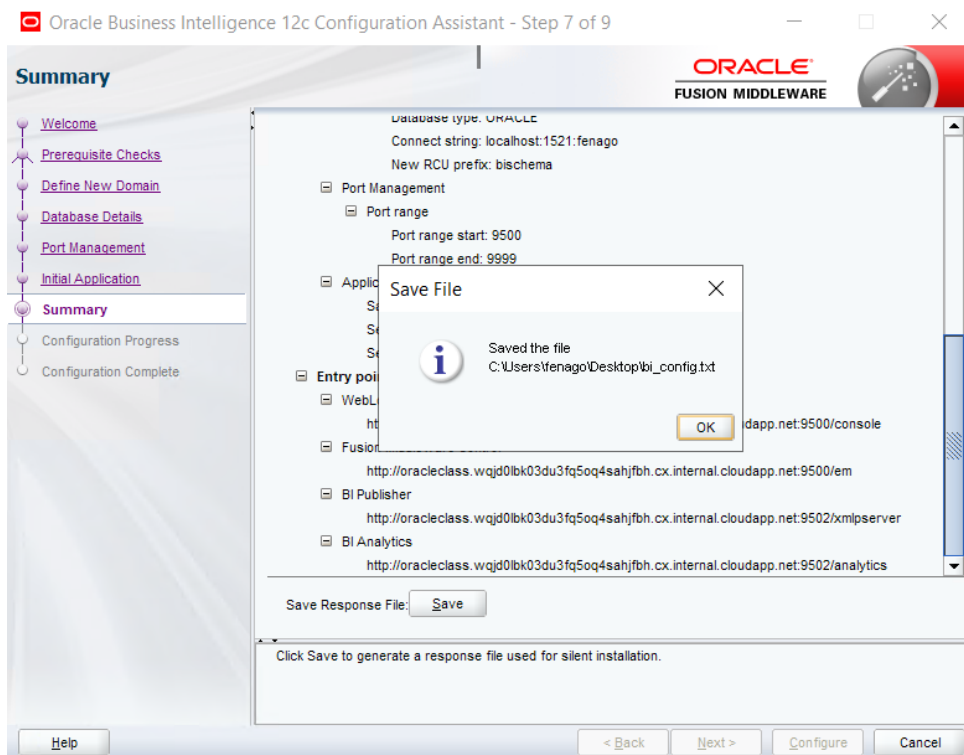


Click **Configure** button:

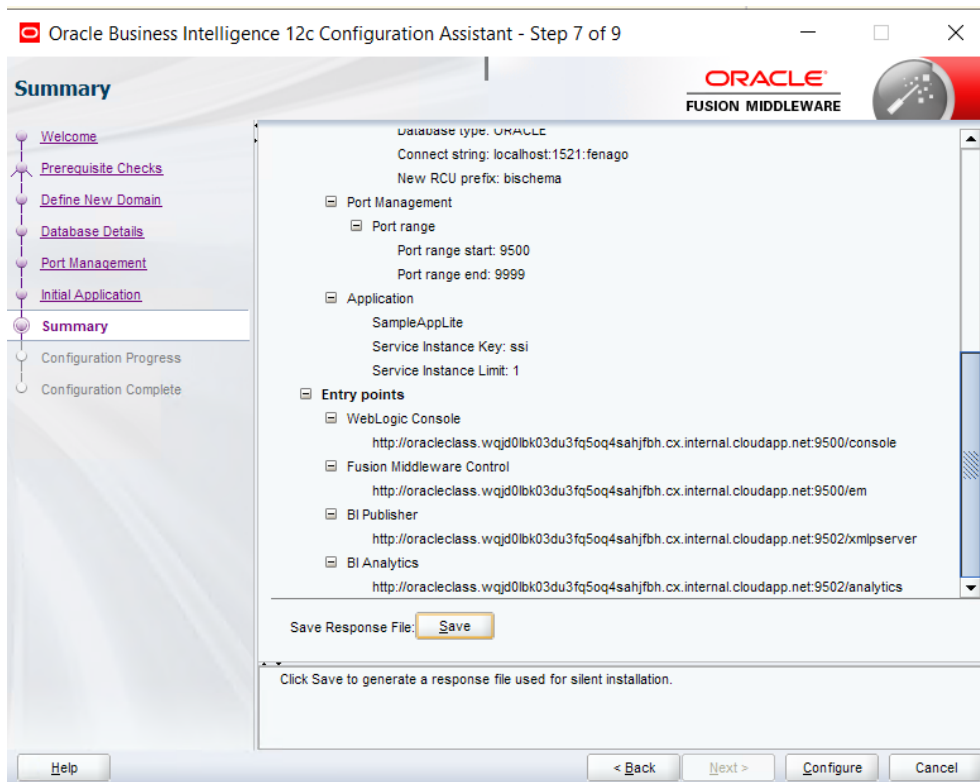



It will take around 30-45 minutes to complete setup

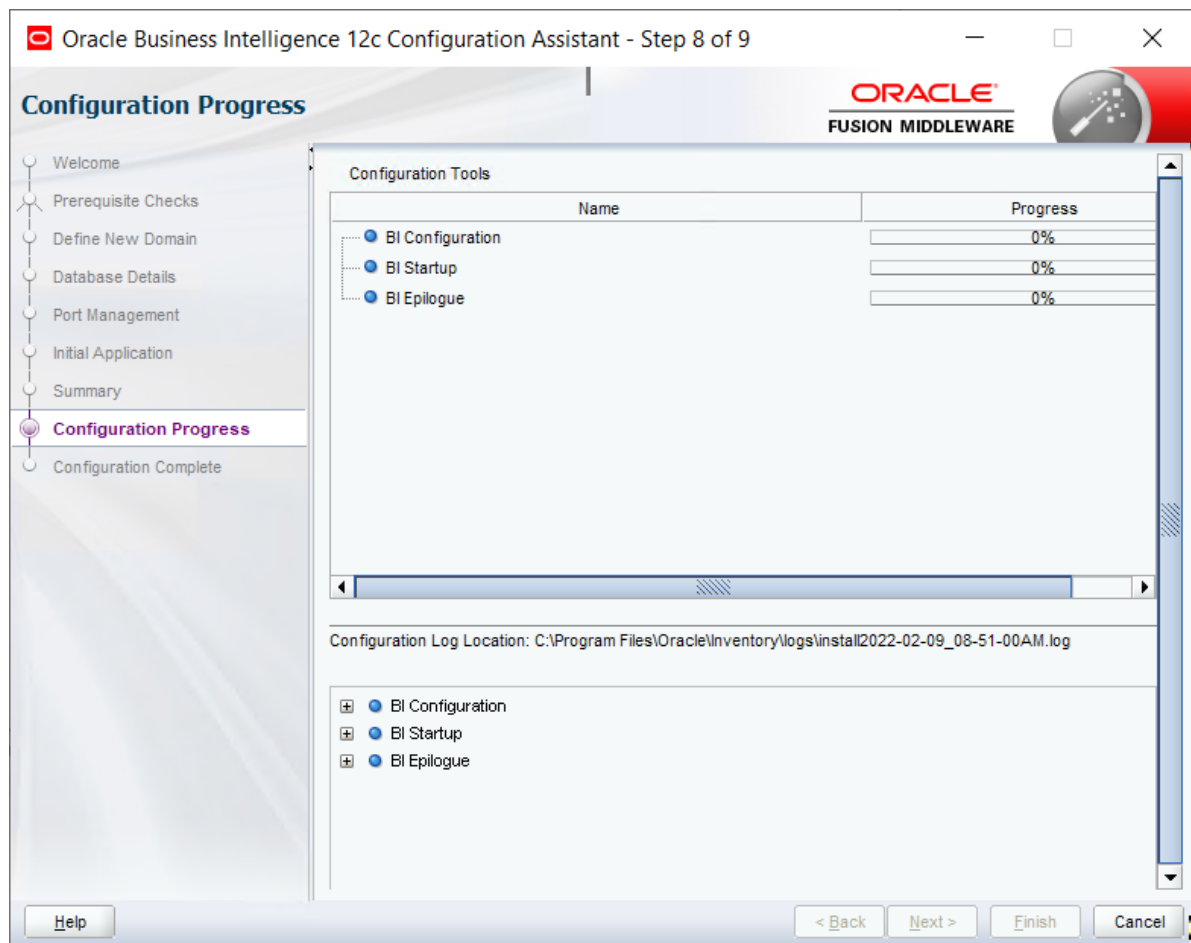

Note: If you get an error in BI Startup step, it can be ignored.

After installation Click **Next** and then select “Save this file”

