

# ORACLE BI 12c Installation

## Installation Guide

Open terminal and run following commands:


```
sqlplus "/ AS SYSDBA"
```

```
alter pluggable database orclpdb open;
```


```
alter pluggable database orclpdb save state;
```

```
exit;
```


Open **C:\Oracle\Middleware\Oracle\_Home\bi\bin** folder in Windows explorer:

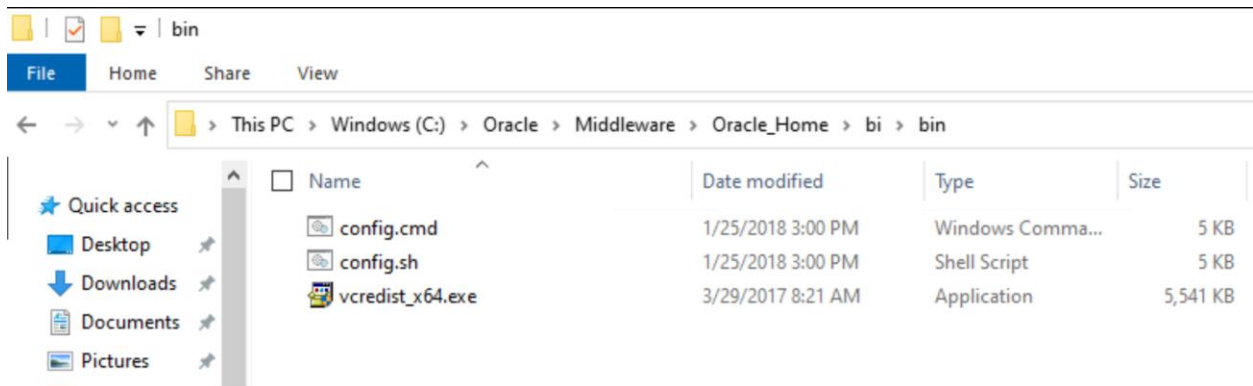



Open cmd As **ADMINISTRATOR** in current directory and run following command: **config.cmd**

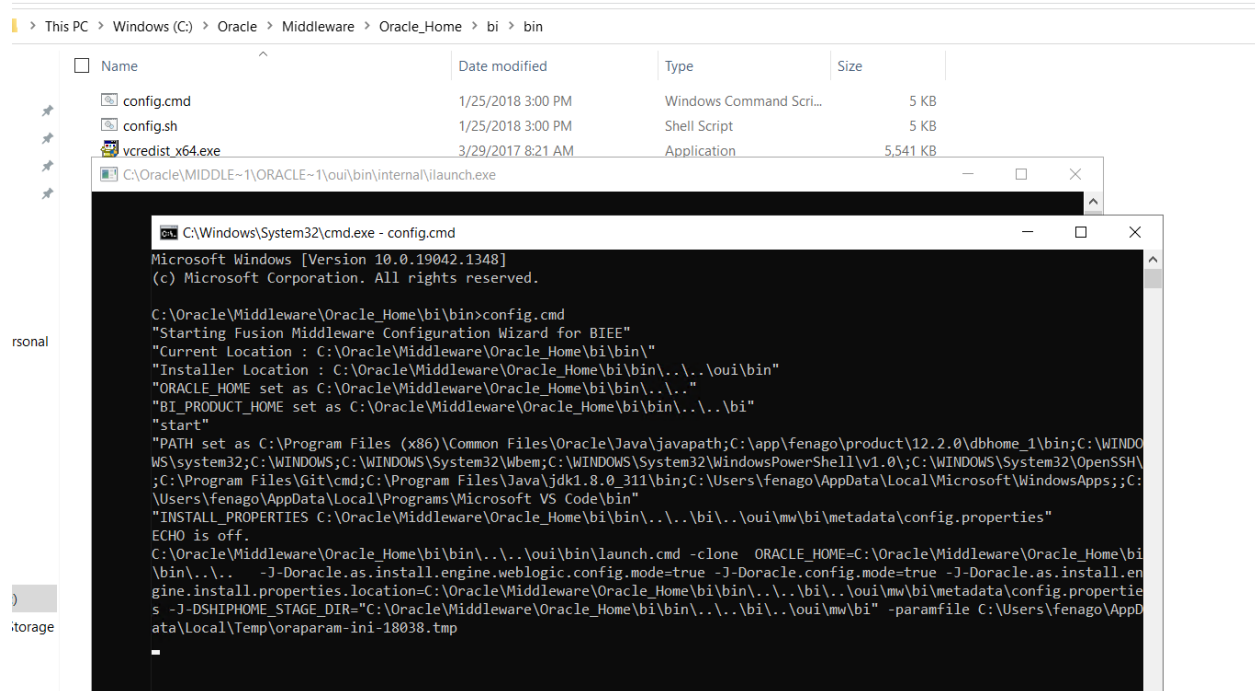

Click **Yes**

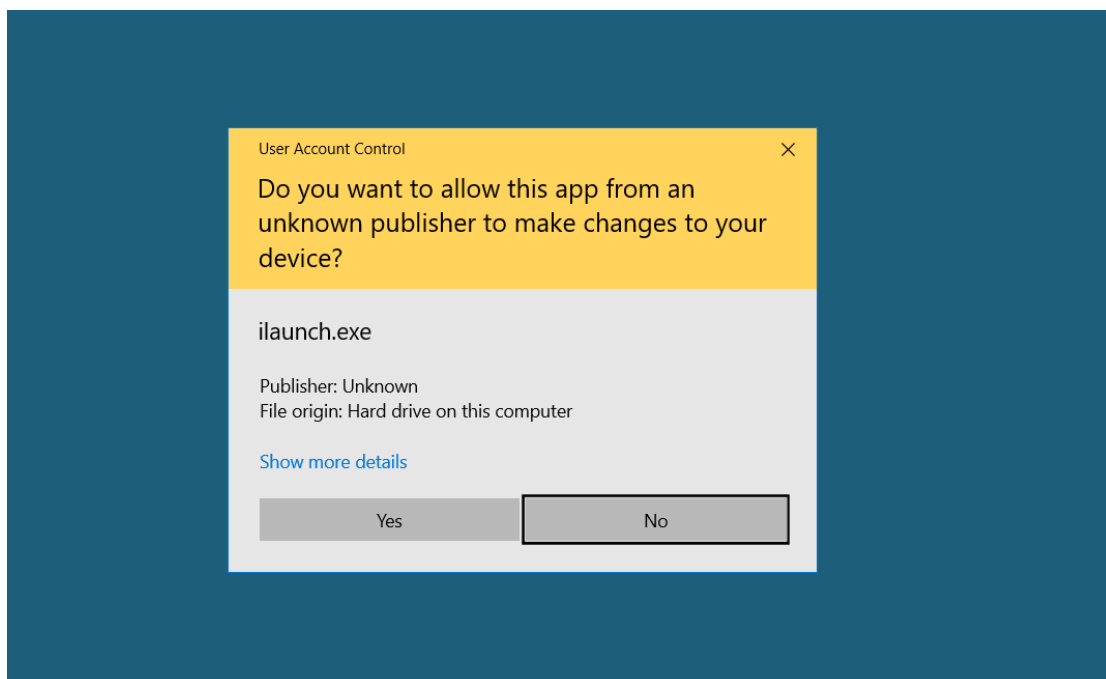

**Important:** Uncheck first two checkboxes and Click **Next**:

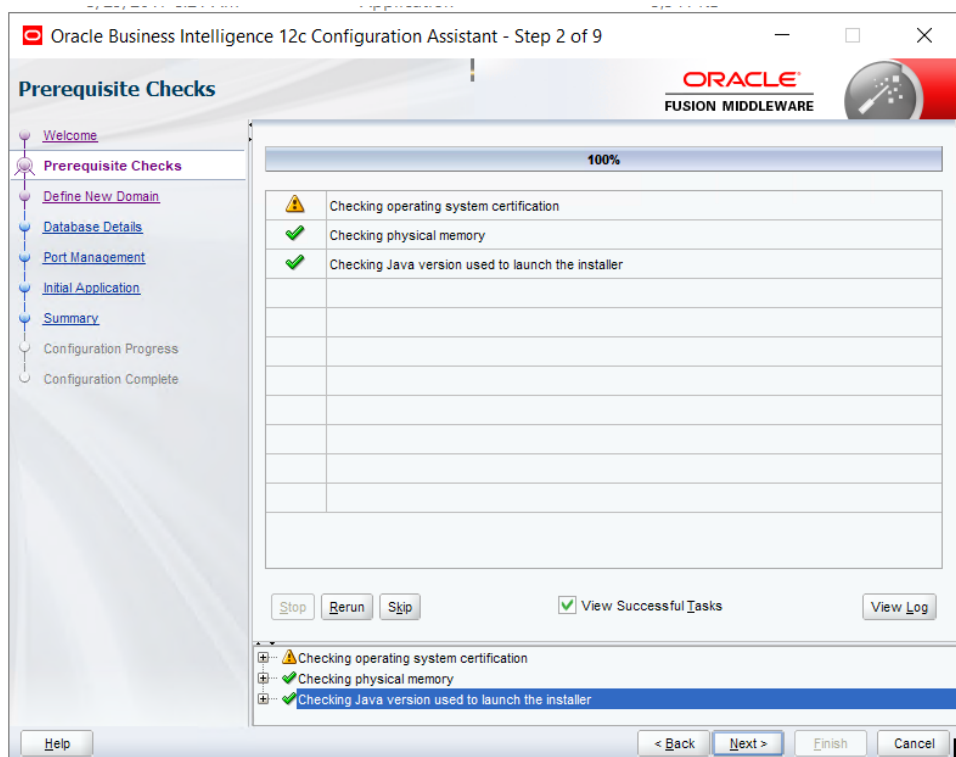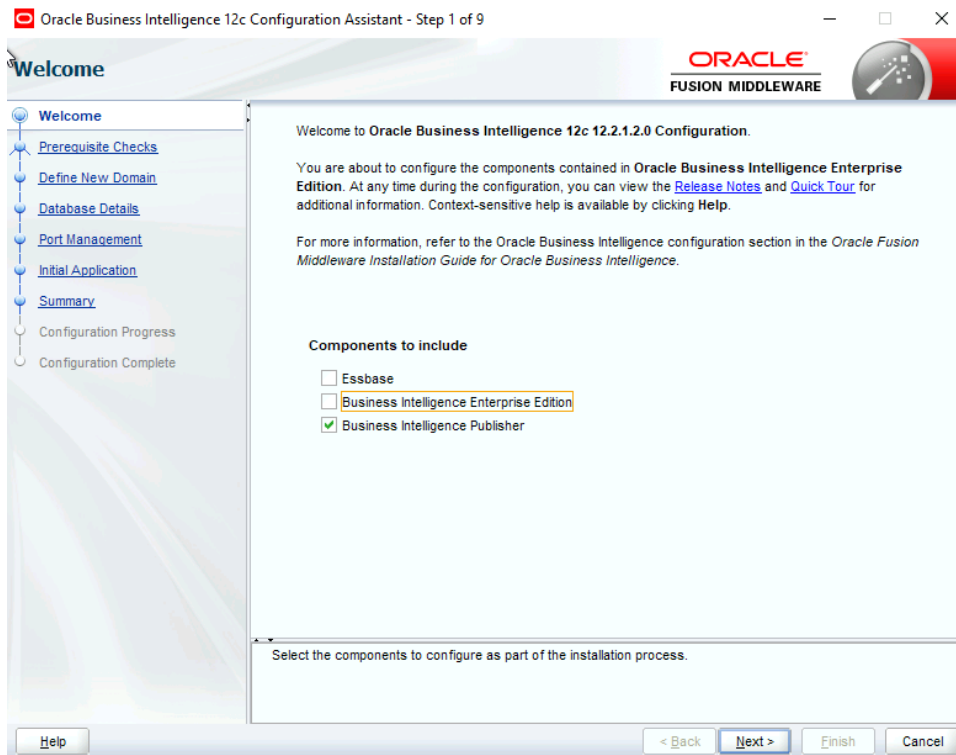

Enter Username: **weblogic**

Enter Password: **weblogic1**

Oracle Business Intelligence 12c Configuration Assistant - Step 3 of 9

## Define New Domain

The domain is the basic unit of WebLogic administration. All BI components reside in one domain. The domain needs a place to store files, and initial administrator credentials.

The domain files include configuration files, log files, and data files.

The credentials define the initial administrator account. For security reasons no other default accounts are created. Use this initial account to create individual accounts for your users.

**Location of new domain**

Domains Directory:

Domain Name:

Domain Home:

**Credentials for new domain**

Username:

Password:

Confirm Password:


Enter a username for the System Administrator.  
The username cannot be blank or exceed 30 characters.

Enter following input on Database details screen:


Simple string connect: hostname:port:servicename i.e. **localhost:1521:orclpdb**

Prefix: **DEV**

Password: **fenago**

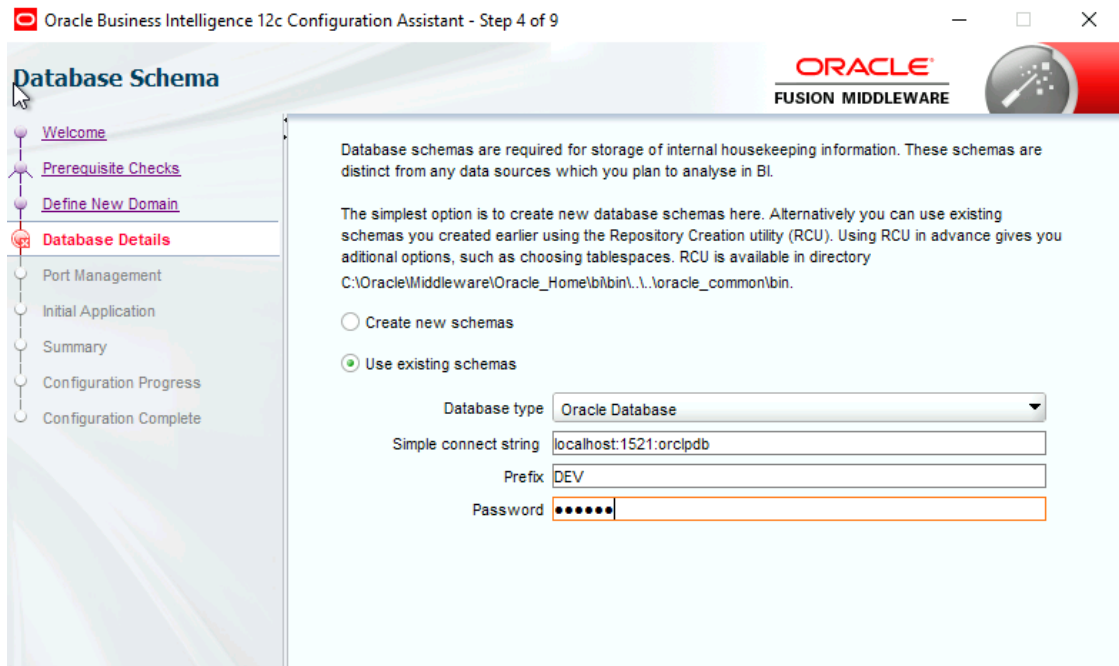



Click **Next**

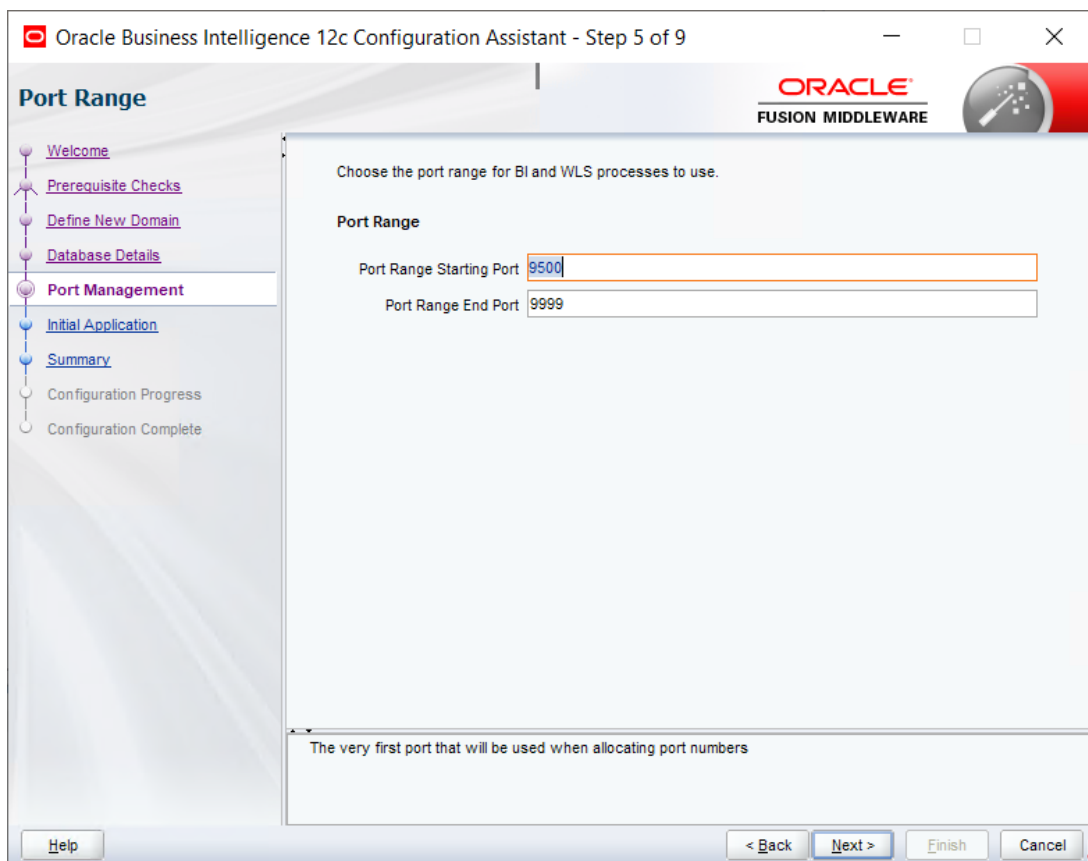




Click **Save Response** button:

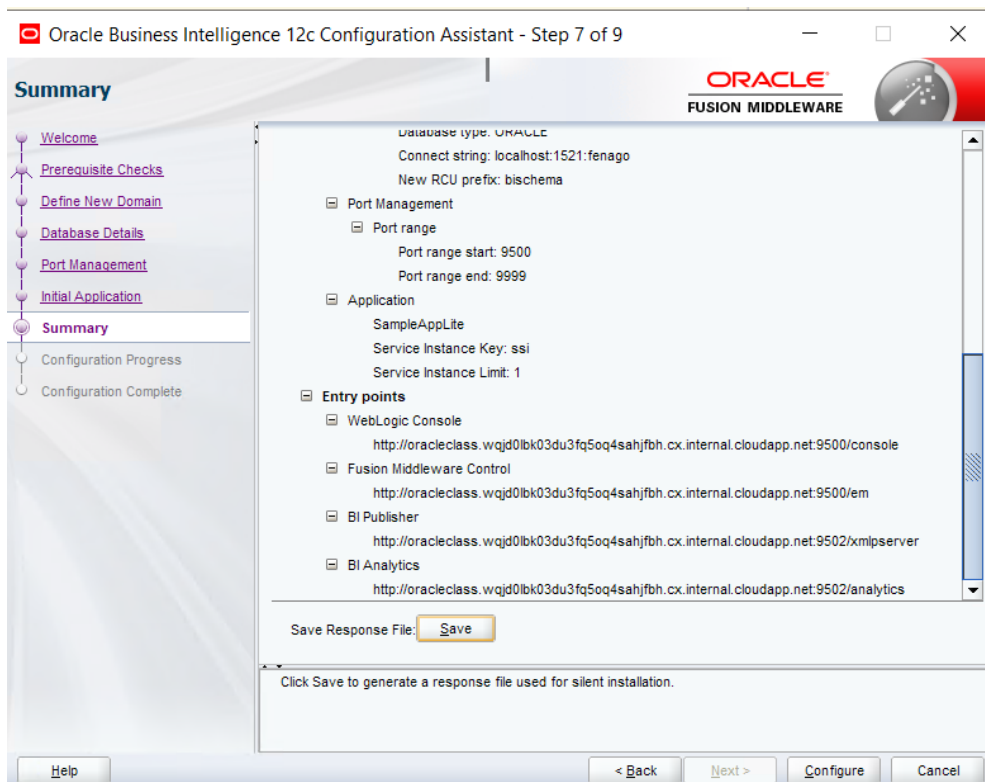


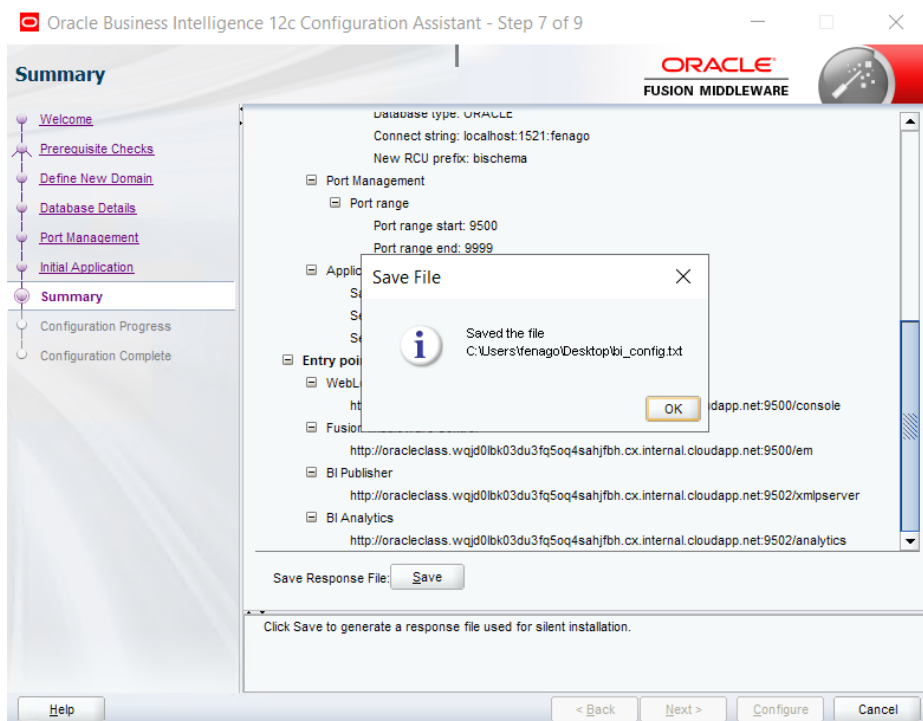


Click **Configure** button:


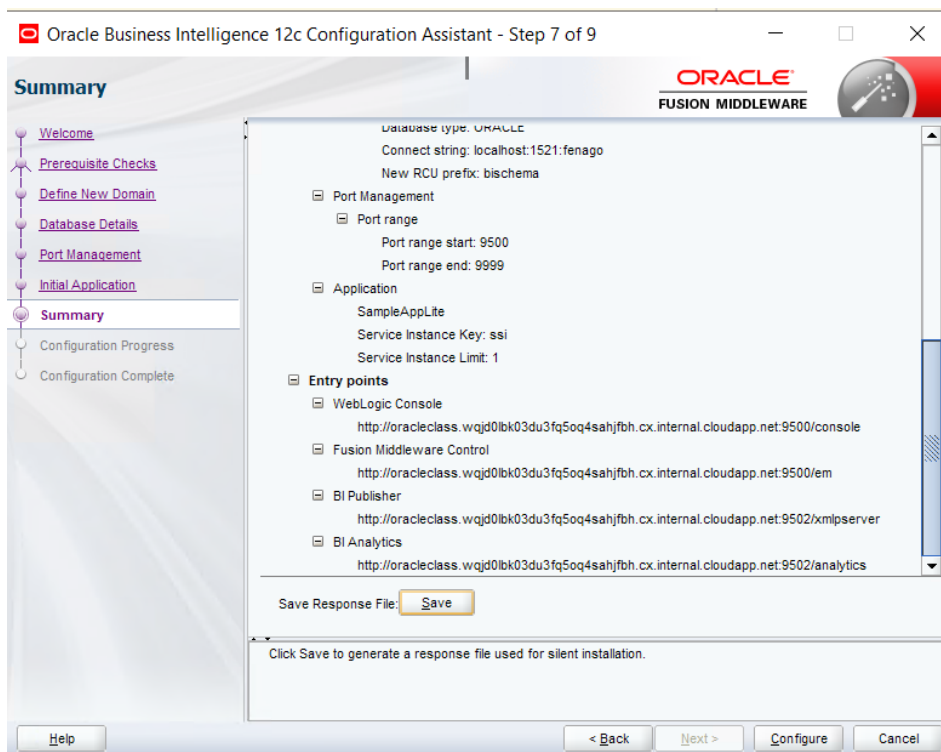


It will take around 20-35 minutes to complete setup



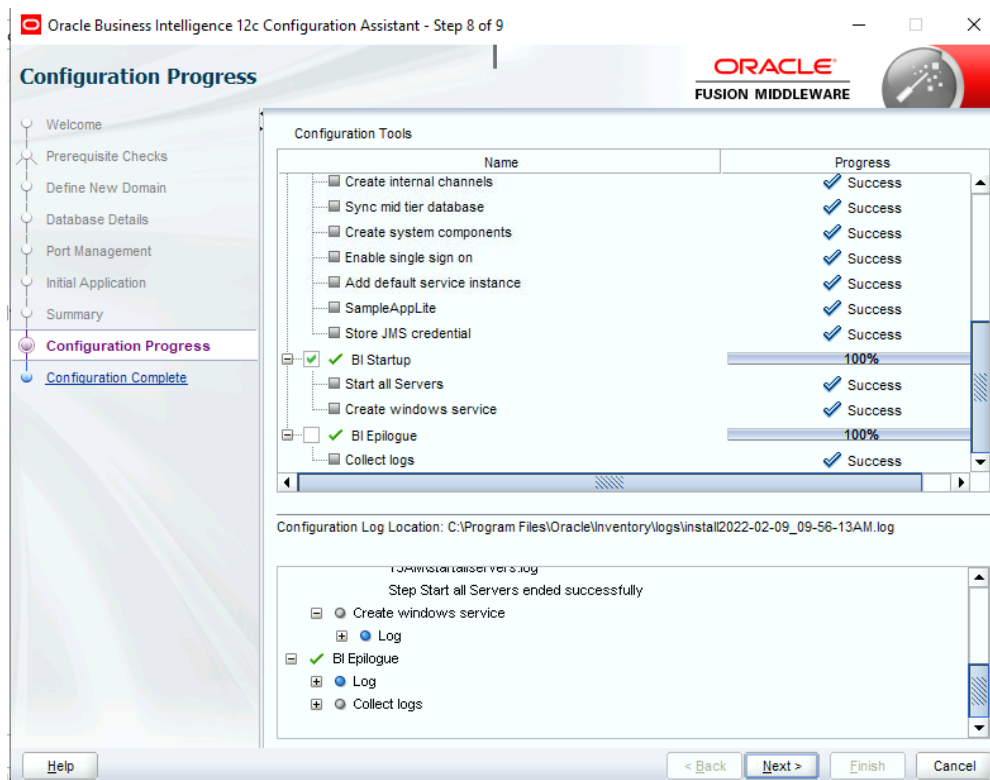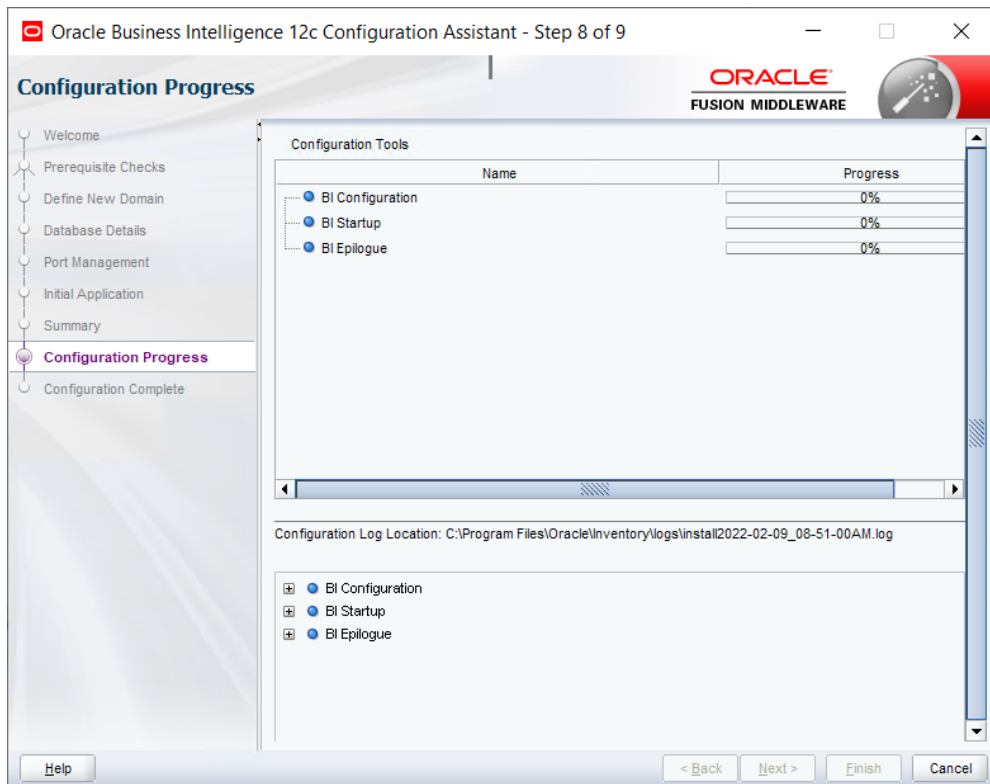

After installation Click **Next** and then select “Save this file”

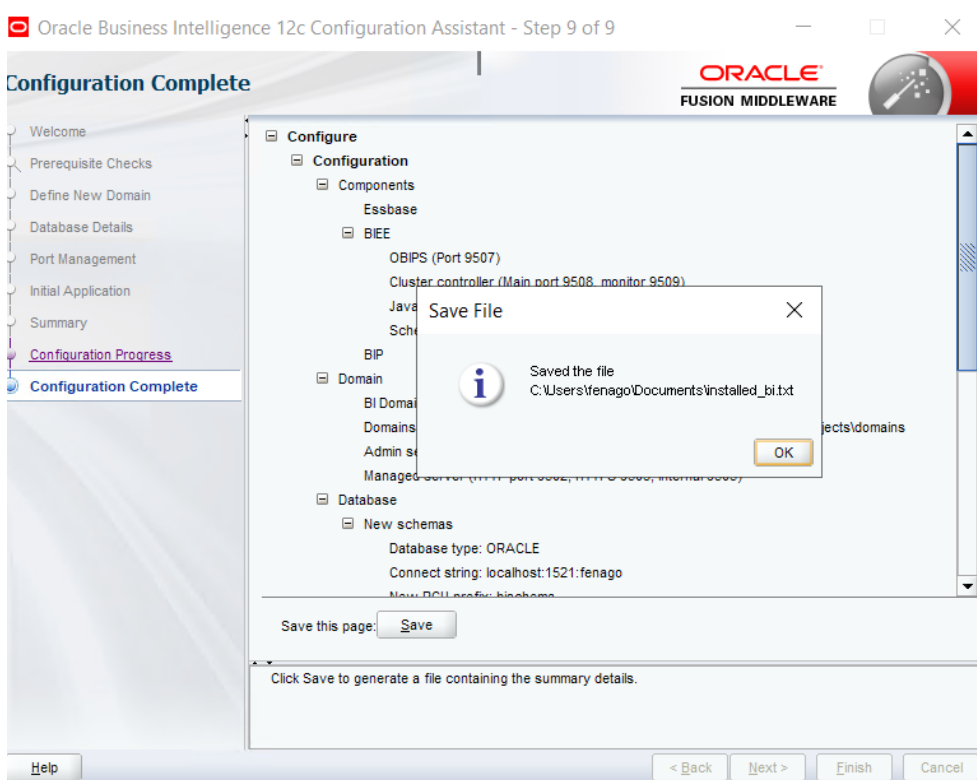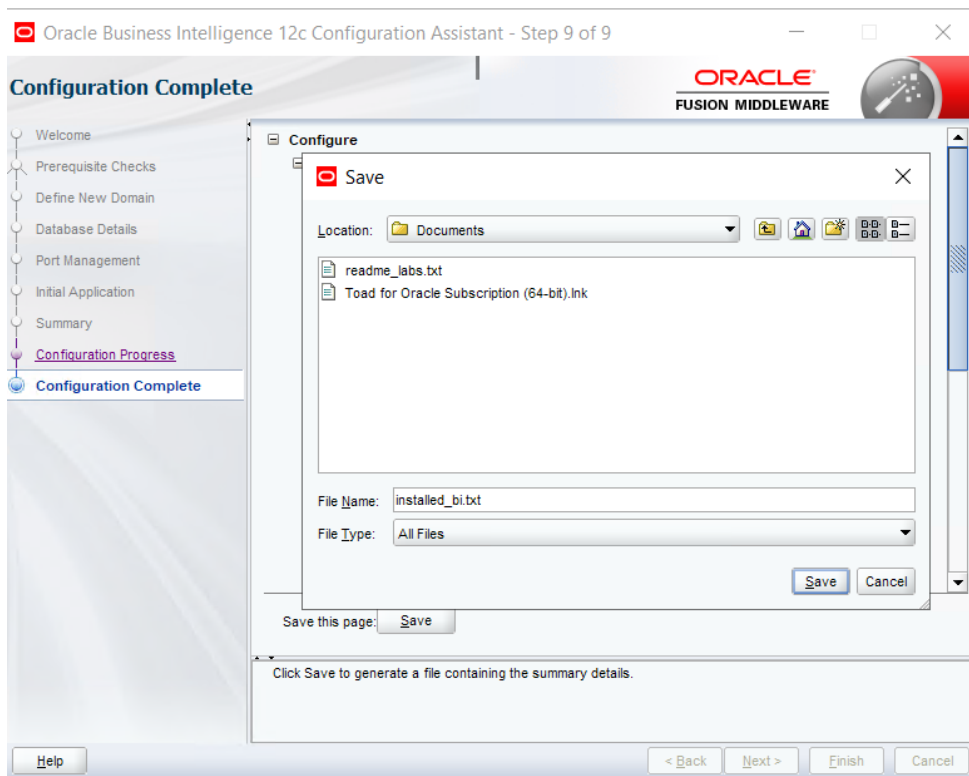


Open above saved file and enter **BI Publisher** endpoint url in browser and login with following credentials:

Username: **weblogic**

Password: **weblogic1**

```
C:\Users\fenago\Documents\installed_bi - Notepad++
File Edit Search View Encoding Language Settings Tools Macro Run Plugins Window ?
1
2 Configure
3 Components
4   Eesbase
5   DIEZ
6   OBIPS (Port 9507)
7   Cluster controller (Main port 9508, monitor 9509)
8   Java host (Port 9510)
9   Scheduler (Main port 9511, monitor 9512, script 9513)
10  BIIP
11  Domain
12    BI Domain Name: bi
13    Domains Directory: C:\Oracle\Middleware\Oracle_Home\bin\...\user_projects\domains
14    Admin server (HTTP port 9500, HTTPS 9501, internal 9504)
15    Managed server (HTTP port 9502, HTTPS 9503, internal 9505)
16  Database
17    New schemas
18      Database type: ORACLE
19      Connect string: localhost:1521:fenago
20      New RCU prefix: bischema
21  Port Management
22    Port range
23      Port range start: 9500
24      Port range end: 9999
25  Application
26    SampleAppLite
27    Service Instance Key: ssl
28    Service Instance Limit: 1
29  Entry points
30    WebLogic Console
31      http://oracleclass.wqld01bk03du3fg5oq4sah1fhh.cx.internal.cloudapp.net:9500/console
32    Fusion Middleware Control
33      http://oracleclass.wqld01bk03du3fg5oq4sah1fhh.cx.internal.cloudapp.net:9500/em
34    BI Publisher
35      http://oracleclass.wqld01bk03du3fg5oq4sah1fhh.cx.internal.cloudapp.net:9502/xmlpserver
36    BI Analytics
37      http://oracleclass.wqld01bk03du3fg5oq4sah1fhh.cx.internal.cloudapp.net:9502/analysis
38
```

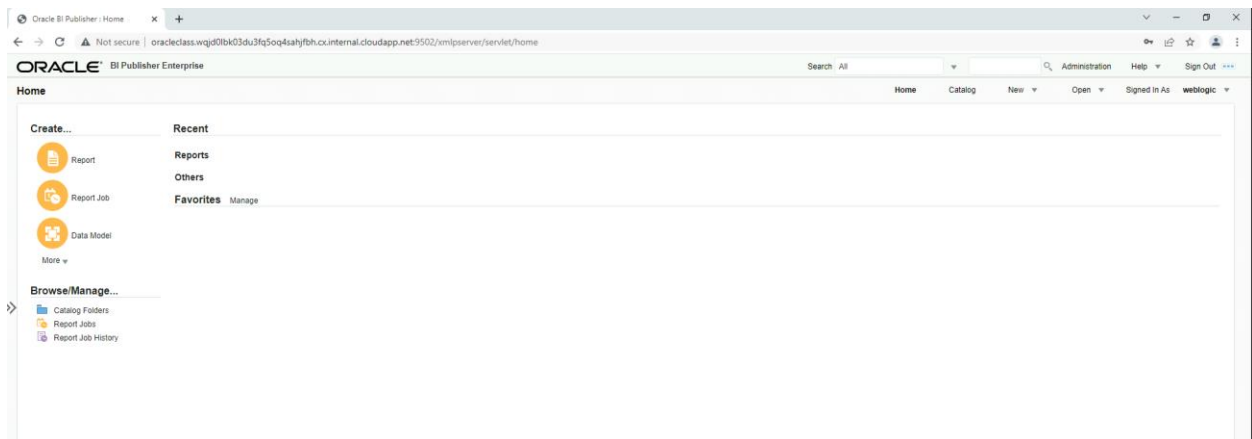

Setup completed!