

Oracle 12c RAC

Lab Module 9

Module 9 Lab: Oracle EM

EM Configuration

Unlike the DB Control, it runs from inside the database using the XML DB infrastructure, so there are no additional parts to install or executables to start.

To get up and running, you just need to check the HTTPS port is set for the XML DB.

```
SQL> SELECT DBMS_XDB_CONFIG.gethttpport FROM dual;
```

```
GETHTTPPORT
```

```
-----
```

```
0
```

```
SQL> SELECT DBMS_XDB_CONFIG.gethttpsport FROM dual;
```

```
GETHTTPSPORT
```

```
-----
```

```
5500
```

```
SQL> EXEC DBMS_XDB_CONFIG.sethttpsport(5500);
```

```
PL/SQL procedure successfully completed.
```

```
SQL>
```

Once that is done, EM Database Express is accessible using the following type of URL.

```
https://<hostname>:<port>/em/
```


Example:

```
https://localhost:5500/em/
```


```
https://ol7-122-rac1.localdomain:5500/em/
```

Enter your database login details and click the "Login" button.

1) Open Enterprise Express and connect as system

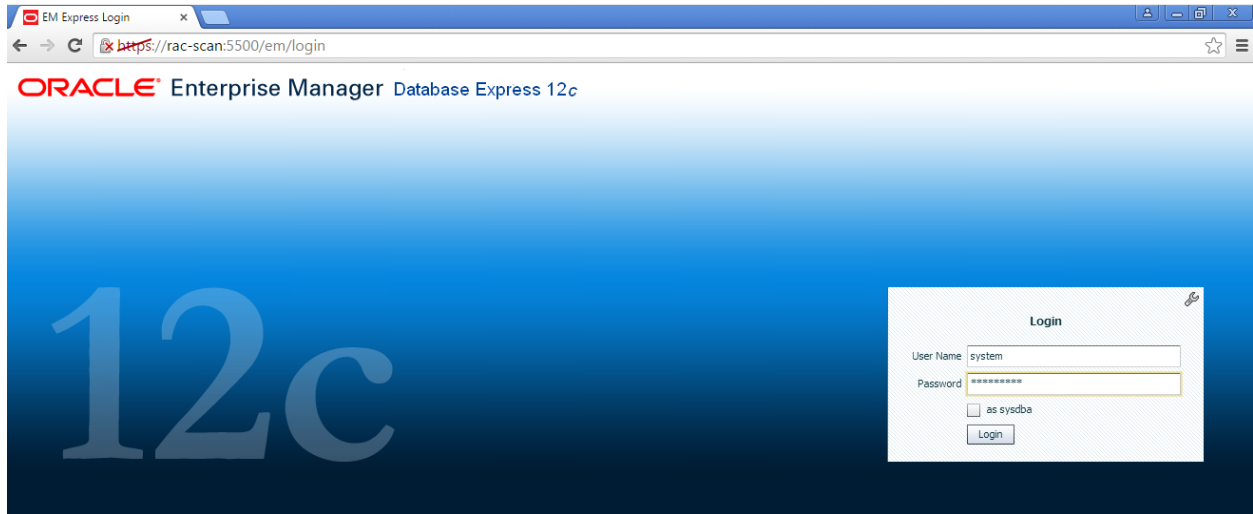

2) Navigate to the Performance Hub Menu

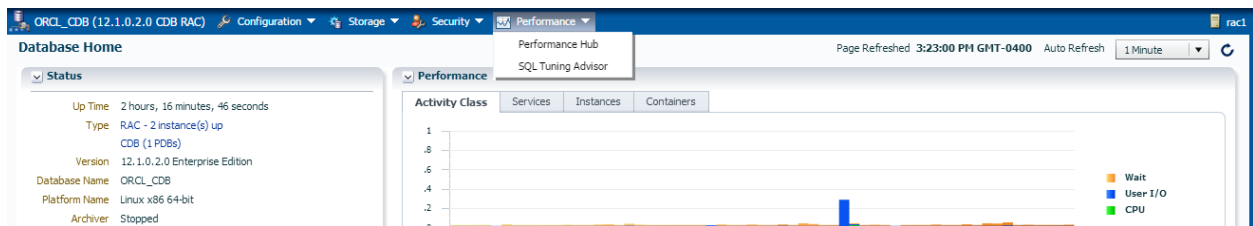

3) Review the Performance Hub and identify an issues

