


Zookeeper cluster 共三个节点:

Summary	
<a href="#">ZooKeeper Server</a>	✔ Started
<a href="#">ZooKeeper Server</a>	✔ Started
<a href="#">ZooKeeper Server</a>	✔ Started
<a href="#">ZooKeeper Clients</a>	3 ZooKeeper Clients Installed

Zookeeper 原数据目录配置: /hadoop/zookeeper, 具体内容如下:

```
[root@cmhhost6 zookeeper]# ll
myid
version-2
[root@cmhhost6 version-2]# ll
acceptedEpoch
currentEpoch
log.100000001
log.200000001
```

zk 中的 znode 如下:

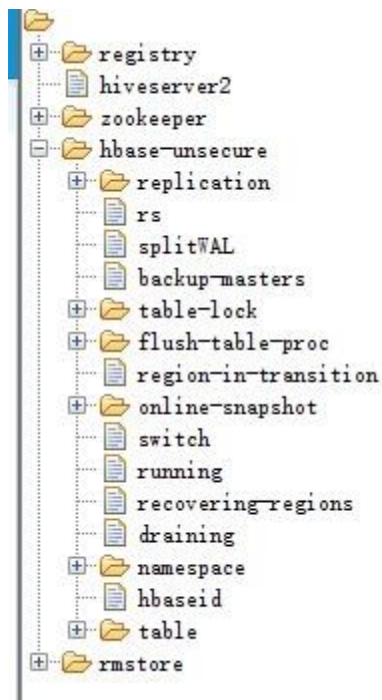

换数据目录步骤如下：

1) 新建数据目录：

```
mkdir zookeeper1
chown zookeeper:hadoop zookeeper1
chmod 755 zookeeper1
```

2) 停止 zk 服务：

3) 将原目录数据复制到新目录

```
#cp -r zookeeper/* zookeeper1/
#ll zookeeper1
myid
version-2
```

4) 修改 zookeeper 数据目录配置

ZooKeeper Server hosts	cmhhost4.novalocal and 2 others
ZooKeeper directory	/hadoop/zookeeper1

5) 查看 znode，如下：

