

SUPABASE FULL RUNS

S3, R2, Railway, Backblaze, Neon and Supabase, measured from 4 places


Time to first byte lower is better

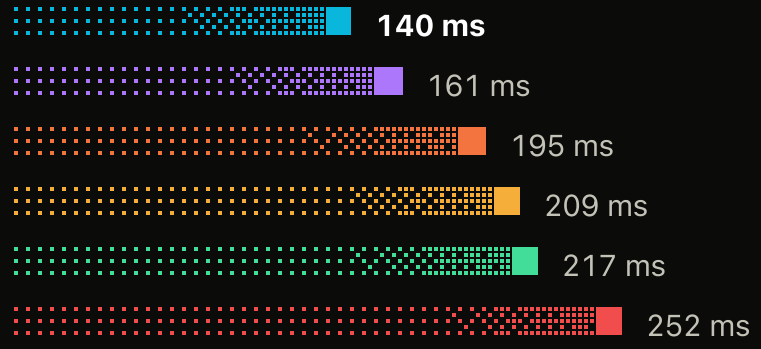


Download 100 MB higher is better

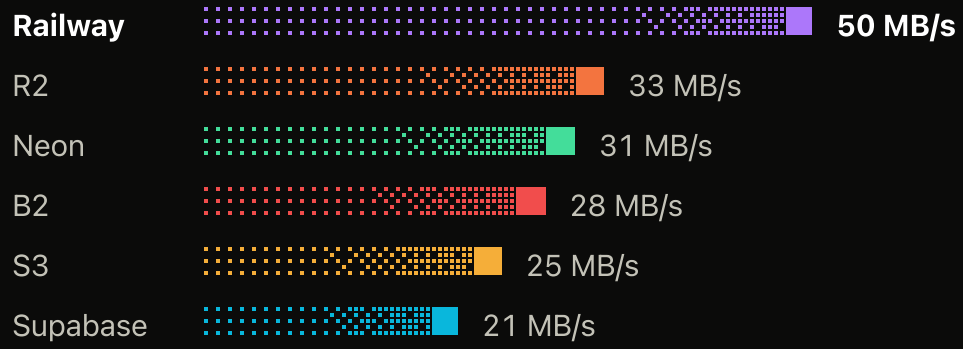

Failed uploads no retries

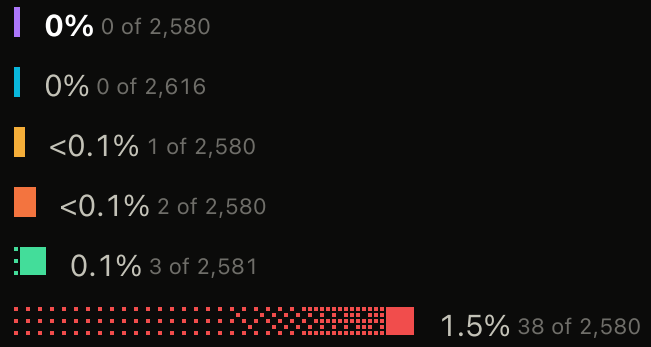

Monthly cost 10 TB stored, 50 TB served

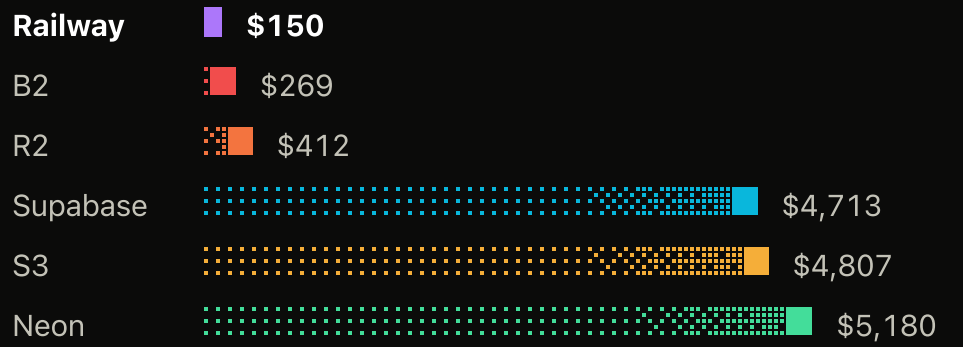

storagebench

Speed: median of 4 locations · Supabase: three full passes, 16 Oct 2026 · others: published runs, 9 and 15 Oct

SUPABASE FULL RUNS

What the numbers say

- **Fastest on 6 of 11 tests across the four locations**: time to first byte, download 1 MB, upload 1 MB, upload 100 MB, browser upload and first request. Time to first byte is 140 ms against 161 ms for the next provider, Railway.
- **Its weakest result is download 100 MB:** 21 MB/s, sixth of six; Railway leads with 50 MB/s.
- **Next to the bucket, Supabase is slower.** From Ashburn its 1 KB time to first byte is 58 ms, fifth of six; Railway and B2 answer in 8 ms and 11 ms. Across all 11 tests from Ashburn it is never first and ranks third at best.
- **Farther from the bucket, it leads.** Fastest first byte from Amsterdam and Lille, and the fastest 1 MB download from San Francisco, Amsterdam and Lille. Supabase ran from different client networks than the others (card 9), so part of that gap may come from the client rather than the service.
- **No failed uploads in 2,616 attempts.** Railway also had none; B2 failed 1.5%.
- **Cost follows egress.** $4,713 a month for the media-heavy workload, between R2 ($412) and S3 ($4,807). Serving 50 TB at $0.09/GB is most of it.


SUPABASE FULL RUNS

Time to first byte, location by location

A 1 KB file through a presigned GET, the path a browser takes. Lower is better. Every bucket is in US East, including Supabase's (us-east-1), so distance to Virginia sets the floor.


From Ashburn

others from Railway · Supabase from Fly iad

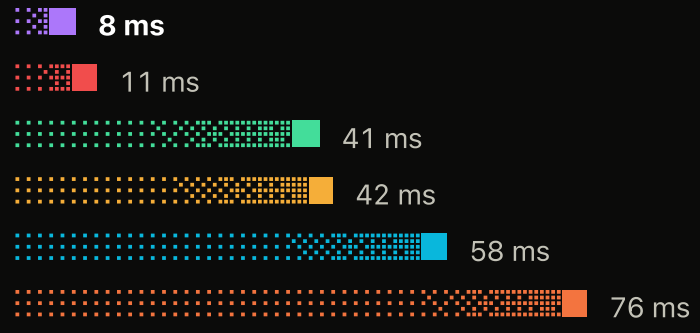


From San Francisco

others from Freestyle VM · Supabase from Fly sjc

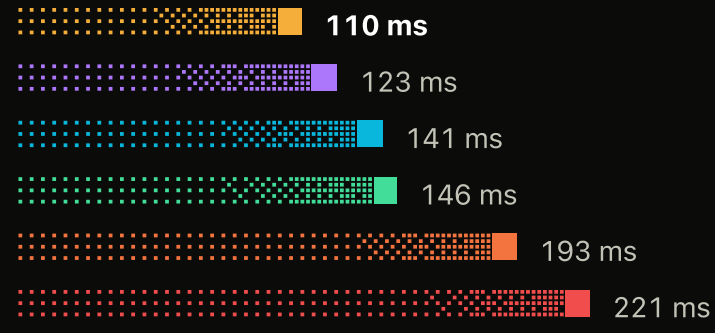


From Amsterdam

others from Railway · Supabase from Fly ams

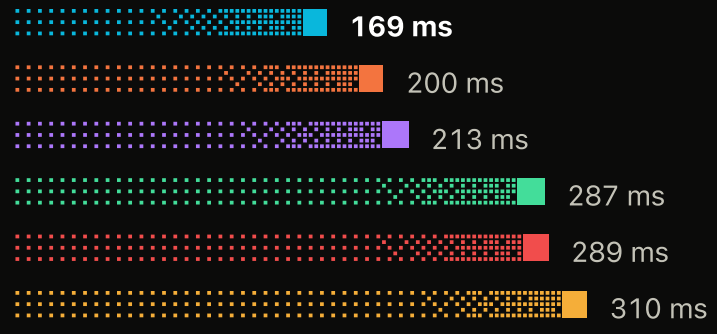

From Lille

others from OVH sandbox · Supabase from Fly cdg, Paris

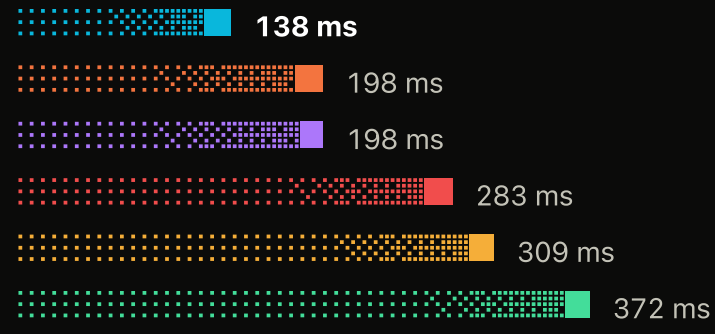

storagebench


Samples per location: Supabase 180 · others 155–180

SUPABASE FULL RUNS


100 MB files

Uploads use multipart with 5 MiB parts, 4 in flight; downloads go through a presigned GET. Megabytes per second at the median, higher is better.


Download 100 MB median of 4 locations

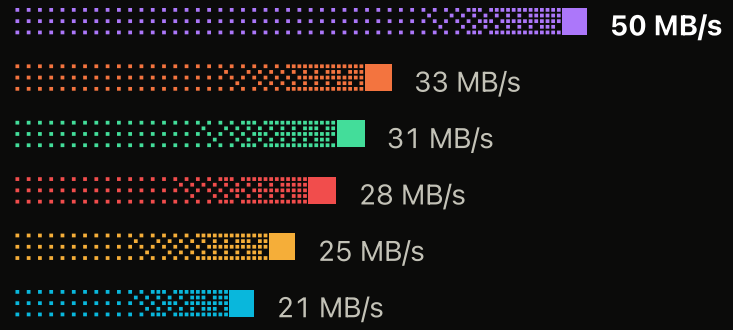


Upload 100 MB median of 4 locations

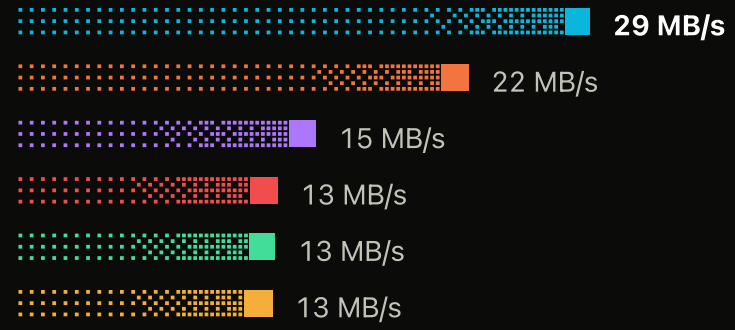

Download 100 MB from Ashburn next to the buckets

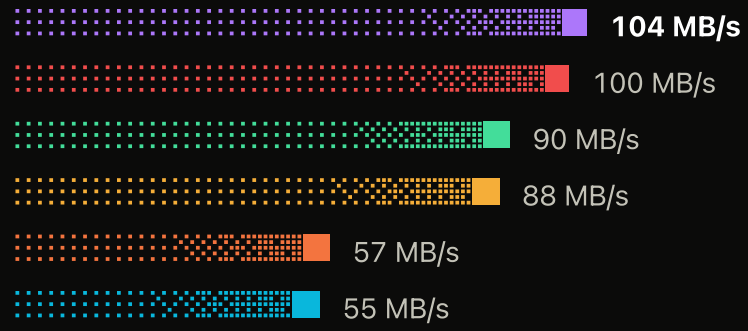

Upload 100 MB from Ashburn next to the buckets

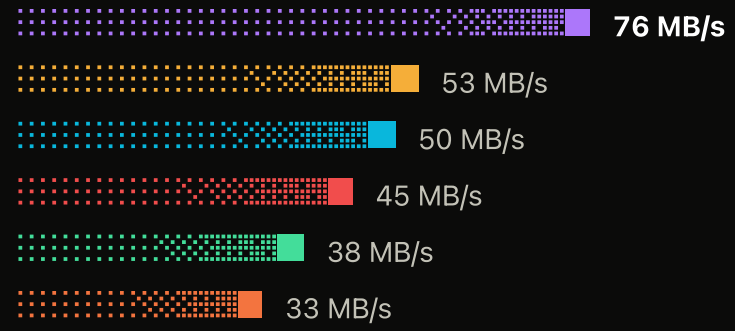


Samples per location: Supabase 24 · others 22–24


SUPABASE FULL RUNS

Uploads, cold starts and seeking


Upload 1 MB lower is better

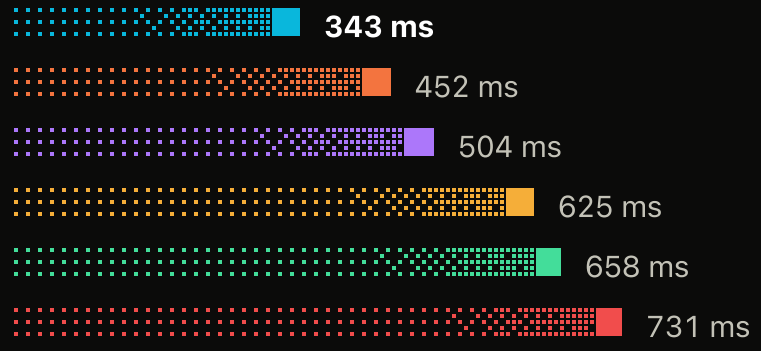


16 uploads in parallel lower is better

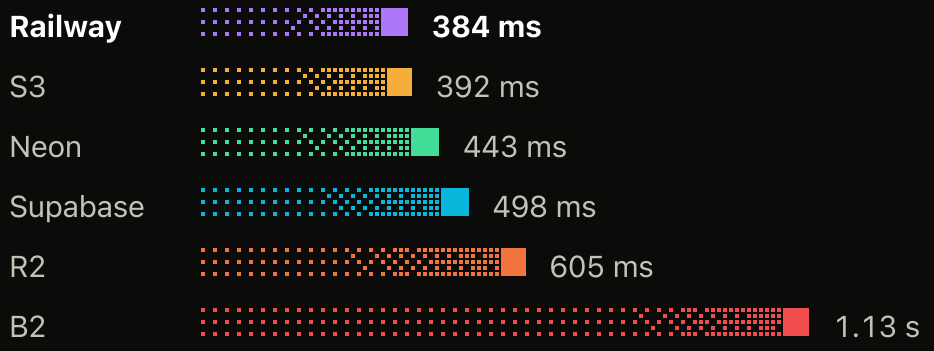

First request lower is better

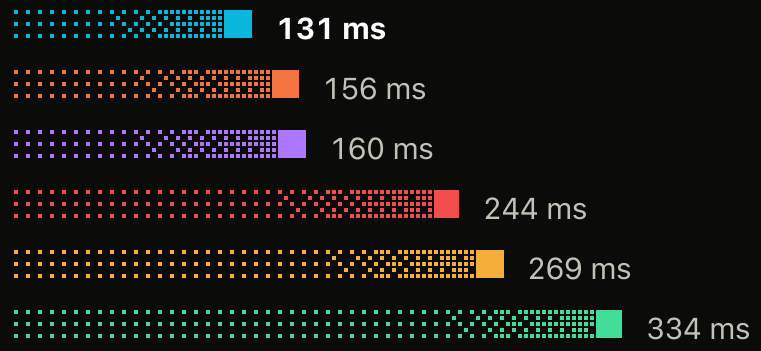

Seek in a video lower is better

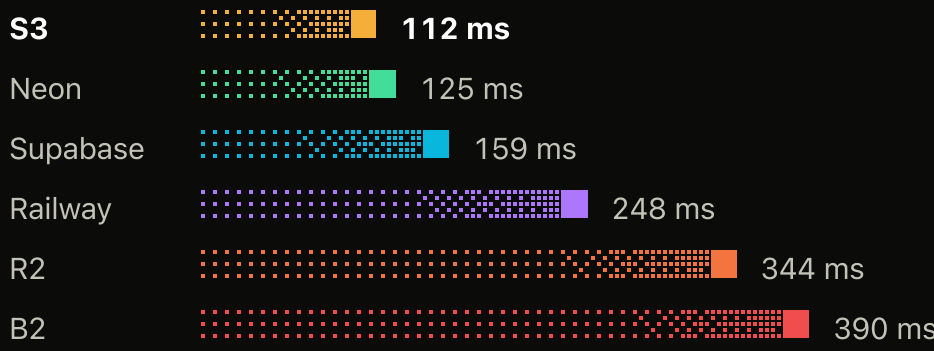

storagebench

Median of 4 locations · Supabase samples per location: upload 90, parallel 30, first request 60, seek 60

SUPABASE FULL RUNS

Every test, median of the four locations


Test	S3	R2	Railway	B2	Neon	Supabase	Supabase rank
Time to first byte 1 KB, presigned GET	209 ms	195 ms	161 ms	252 ms	217 ms	**140 ms**	first
Download 1 MB presigned GET	689 ms	264 ms	356 ms	714 ms	839 ms	**161 ms**	first
Download 100 MB presigned GET, MB/s	25 MB/s	33 MB/s	**50 MB/s**	28 MB/s	31 MB/s	21 MB/s	sixth
Upload 1 MB put()	625 ms	452 ms	504 ms	731 ms	658 ms	**343 ms**	first
Upload 100 MB multipart put(), MB/s	13 MB/s	22 MB/s	15 MB/s	13 MB/s	13 MB/s	**29 MB/s**	first
16 uploads in parallel 100 KB each	392 ms	605 ms	**384 ms**	1.13 s	443 ms	498 ms	fourth
Browser upload 1 MB PUT to a signed URL	829 ms	493 ms	612 ms	741 ms	875 ms	**365 ms**	first
First request fresh client, new TLS	269 ms	156 ms	160 ms	244 ms	334 ms	**131 ms**	first
Seek in a video 256 KB range of 10 MB	**112 ms**	344 ms	248 ms	390 ms	125 ms	159 ms	third
Copy 10 MB server-side	**219 ms**	1.34 s	522 ms	643 ms	304 ms	355 ms	third
List 1,000 objects every page	154 ms	740 ms	134 ms	298 ms	**120 ms**	163 ms	fourth

Bold: best in the row · each provider's median per location, then the median of the four

LIST PRICES


Monthly cost for three workloads

Side project

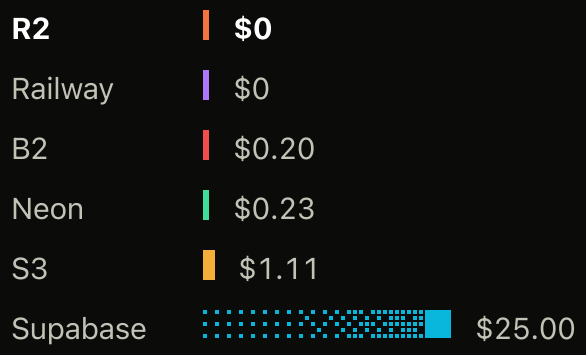


Side project
10 GB stored, 50 GB served, 100k uploads, 1M reads

SaaS with user uploads

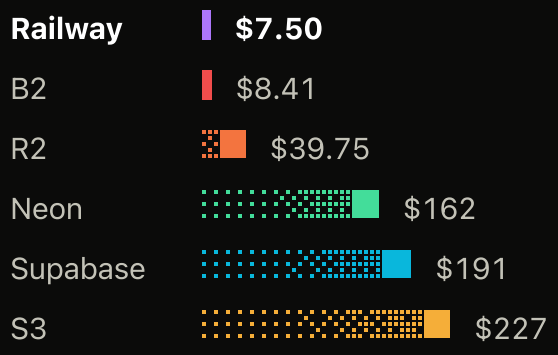

SaaS with user uploads
500 GB stored, 2 TB served, 5M uploads, 50M reads

Media-heavy app

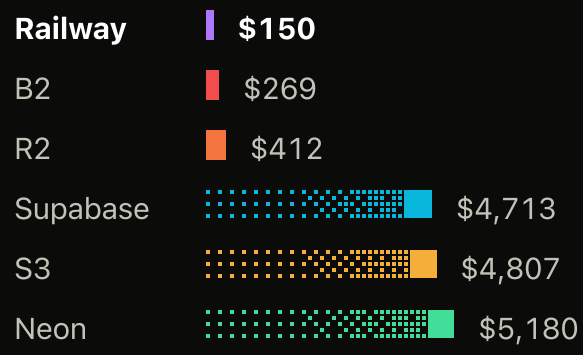

Media-heavy app
10 TB stored, 50 TB served, 20M uploads, 500M reads

Supabase: $25/month Pro plan (its $10 compute credit covers the Micro instance), 100 GB stored then $0.0213/GB-month, 250 GB uncached egress then $0.09/GB, no per-request charges listed. Egress is priced at the uncached rate; egress served from the Smart CDN cache is $0.03/GB. The Pro plan fee also covers the project's Postgres database, Auth and other services. Other providers: list prices from the published storage-bench cost model, checked 2026-10-09.

METHOD

What is like for like, and what is not

Same for every provider

- **Bucket region.** Supabase in AWS us-east-1, Virginia, like Neon; Railway and B2 are in Virginia, S3 in Ohio, R2 on an Eastern North America hint.
- **Harness.** The storage-bench code, files-sdk 3.0.0, the AWS SDK S3 client, Node 24, identical operations and object sizes.
- **No retries.** One attempt per request; failures are counted.
- **Locations.** Every number on these cards uses the same four: Ashburn, San Francisco, Amsterdam, Lille. Seattle and the Florida home line are left out for everyone.
- **Summary method.** Median per location, then the median of the four, as in the original summary.
- **Sample size.** Three full passes per location for every provider: 18–180 samples per number for the others, 18–180 for Supabase.

Different

- **Client machines and networks.** Supabase ran from Fly.io in or near each city; the others ran from Railway, a Freestyle VM and an OVH sandbox (next card).
- **When.** Supabase on 16 Oct 2026; the others on 9 and 15 Oct.
- **Not interleaved.** The original run took the five providers in a random order every round, so a slow minute hit everyone. Supabase ran on its own.

Credentials for the other five providers would allow a rerun of all six together from the same machines

METHOD

Where the clients and buckets are

Location	Original client	Network	Our client (Supabase)	Network (ipinfo)
Ashburn	Railway server (us-east4)	AS400940 Railway	Fly iad, Ashburn	AS60068 Datacamp Limited
San Francisco	Freestyle VM	AS36320 Freestyle Cloud	Fly sjc, Santa Clara (60 km)	AS396356 Latitude.sh
Amsterdam	Railway server (europe-west4)	AS400940 Railway	Fly ams, Amsterdam	AS60068 Datacamp Limited
Lille	boat sandbox on OVH	AS16276 OVH	Fly cdg, Paris (205 km)	AS30081 CacheFly
Seattle	Tenki VM	Wowrack, then Luxor	none: Fly has no Seattle region	excluded for all
Florida	Home server	AS7018 AT&T	none: a home line can't be reproduced	excluded for all

Provider	S3	R2	Railway	B2	Neon	Supabase
Bucket	us-east-2, Ohio	ENAM hint	iad, Virginia	us-east-005	aws us-east-1	aws us-east-1

Supabase reached through its S3 endpoint (<project>.storage.supabase.co/storage/v1/s3), path-style