

INITIAL RESULTS · SUPABASE SMOKE RUN

S3, R2, Railway, Backblaze, Neon and Supabase, measured from 4 places


Time to first byte lower is better

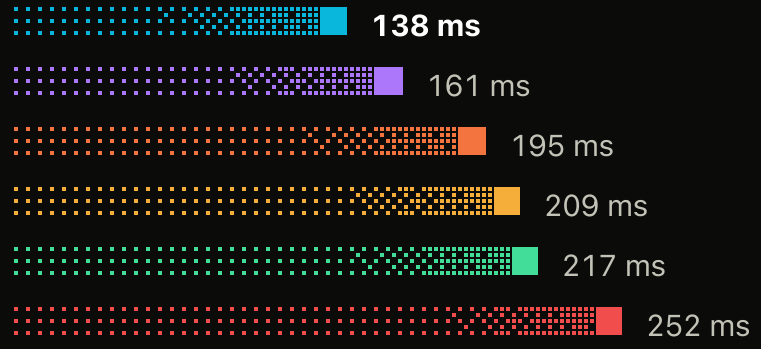


Download 1 MB lower is better

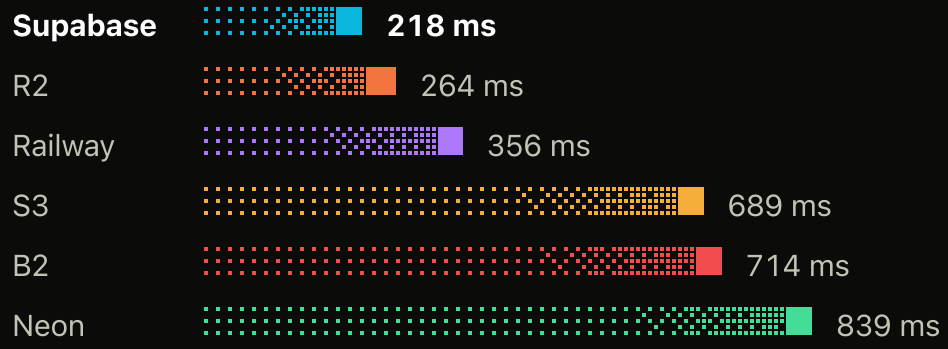

Failed uploads no retries

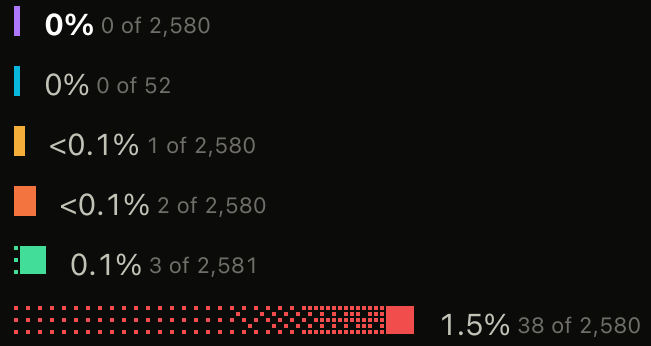

Monthly cost 10 TB stored, 50 TB served

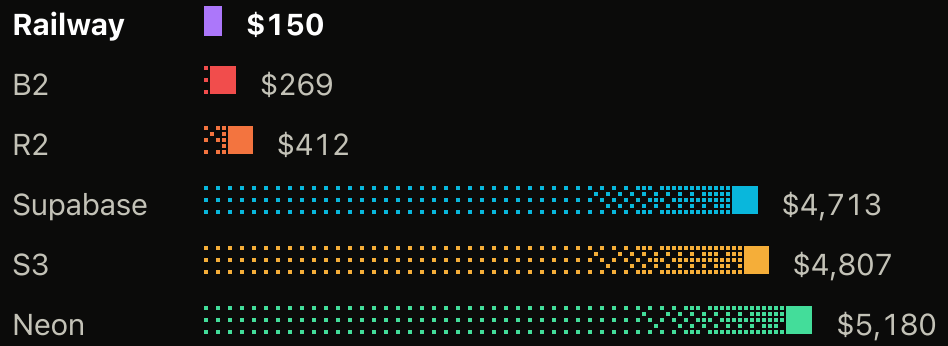

storagebench

Speed: median of 4 locations · Supabase: smoke run, 1–3 samples per number, 16 Oct 2026 · others: published runs, 9 and 15 Oct

INITIAL RESULTS · SUPABASE SMOKE RUN

What the initial numbers say

- **Next to the bucket, Supabase is slower.** From Ashburn its 1 KB time to first byte is 78 ms, sixth of six; Railway and B2 answer in 8 ms and 11 ms.
- **Farther from the bucket, it leads.** Fastest first byte from Amsterdam and Lille, and the fastest 1 MB download from San Francisco, Amsterdam and Lille. Supabase ran from different client networks than the others (card 7), so part of that gap may come from the client rather than the service.
- **Parallel uploads are its weakest test:** 670 ms for 16 uploads at once, fifth of six.
- **No failed uploads in 52 attempts.** Too few attempts to compare with the others' failure rates, which come from thousands.
- **Cost follows egress.** $4,713 a month for the media-heavy workload, between R2 ($412) and S3 ($4,807). Serving 50 TB at $0.09/GB is most of it.

Smoke run: 1 to 3 samples per Supabase number. Three full passes per location are running and will replace these numbers.


INITIAL RESULTS · SUPABASE SMOKE RUN

Time to first byte, location by location

A 1 KB file through a presigned GET, the path a browser takes. Lower is better. Every bucket is in US East, including Supabase's (us-east-1), so distance to Virginia sets the floor.


From Ashburn

others from Railway · Supabase from Fly iad

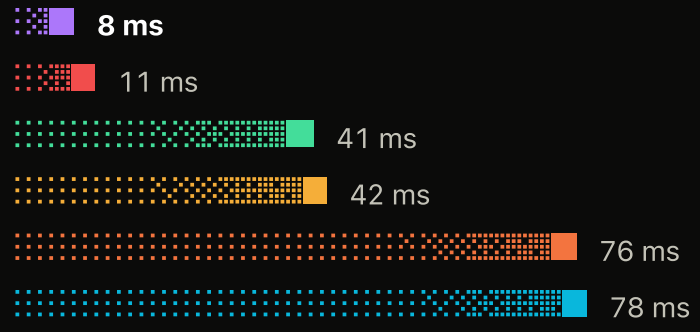


From San Francisco

others from Freestyle VM · Supabase from Fly sjc

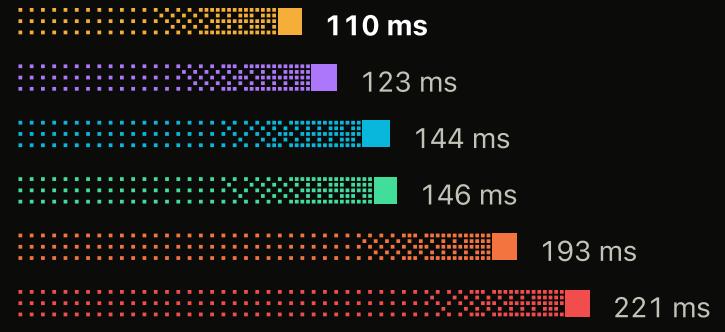


From Amsterdam

others from Railway · Supabase from Fly ams

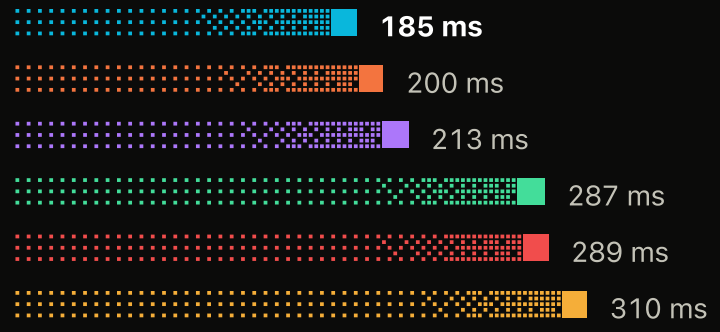

From Lille

others from OVH sandbox · Supabase from Fly cdg, Paris

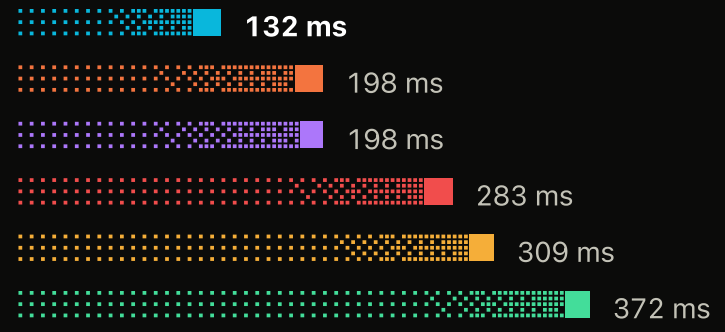


storagebench

Samples per location: Supabase 3 · others 155–180


INITIAL RESULTS · SUPABASE SMOKE RUN

Uploads, cold starts and seeking


Upload 1 MB lower is better

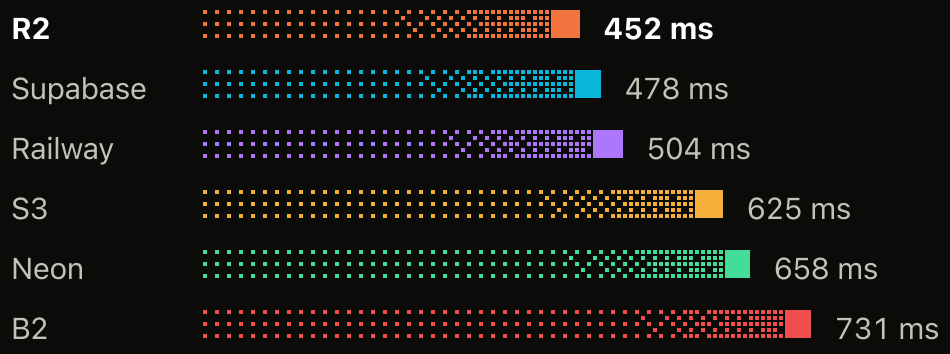


16 uploads in parallel lower is better

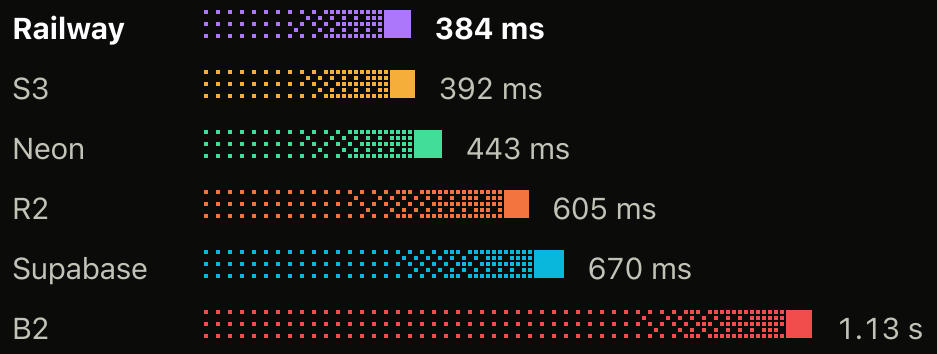

First request lower is better

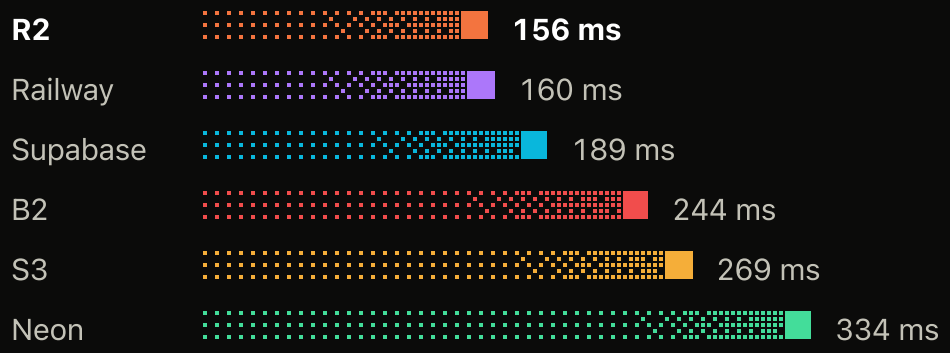

Seek in a video lower is better

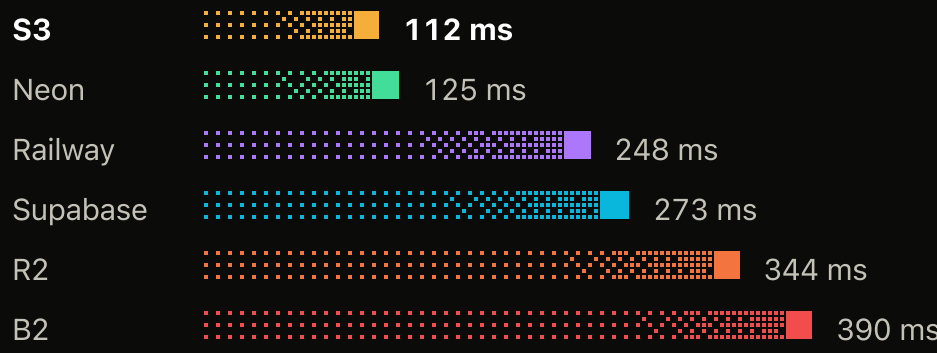


storagebench

Median of 4 locations · Supabase samples per location: upload 2, parallel 1, first request 2, seek 2

LIST PRICES


Monthly cost for three workloads

Side project

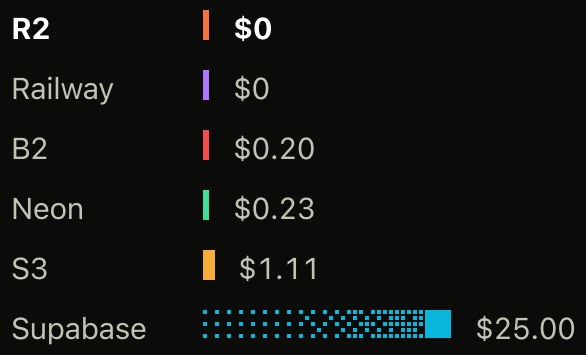


Side project
10 GB stored, 50 GB served, 100k uploads, 1M reads

SaaS with user uploads

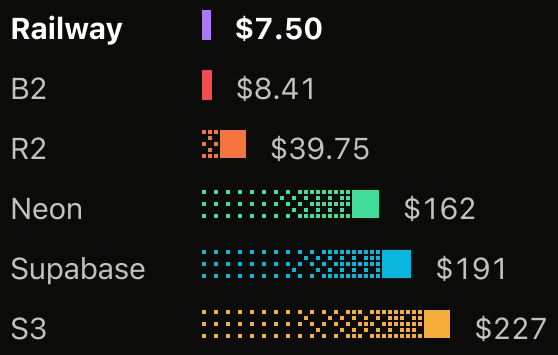

SaaS with user uploads
500 GB stored, 2 TB served, 5M uploads, 50M reads

Media-heavy app

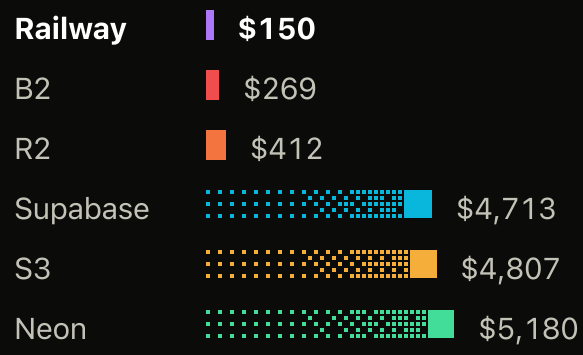

Media-heavy app
10 TB stored, 50 TB served, 20M uploads, 500M reads

Supabase: $25/month Pro plan (its $10 compute credit covers the Micro instance), 100 GB stored then $0.0213/GB-month, 250 GB uncached egress then $0.09/GB, no per-request charges listed. Egress is priced at the uncached rate; egress served from the Smart CDN cache is $0.03/GB. The Pro plan fee also covers the project's Postgres database, Auth and other services. Other providers: list prices from the published storage-bench cost model, checked 2026-10-09.

METHOD

What is like for like, and what is not

Same for every provider

- **Bucket region.** Supabase in AWS us-east-1, Virginia, like Neon; Railway and B2 are in Virginia, S3 in Ohio, R2 on an Eastern North America hint.
- **Harness.** The storage-bench code, files-sdk 3.0.0, the AWS SDK S3 client, Node 24, identical operations and object sizes.
- **No retries.** One attempt per request; failures are counted.
- **Locations.** Every number on these cards uses the same four: Ashburn, San Francisco, Amsterdam, Lille. Seattle and the Florida home line are left out for everyone.
- **Summary method.** Median per location, then the median of the four, as in the original summary.

Different

- **Client machines and networks.** Supabase ran from Fly.io in or near each city; the others ran from Railway, a Freestyle VM and an OVH sandbox (next card).
- **When.** Supabase on 16 Oct 2026; the others on 9 and 15 Oct.
- **Not interleaved.** The original run took the five providers in a random order every round, so a slow minute hit everyone. Supabase ran on its own.
- **Sample size.** This is a smoke run: 1 to 3 samples per Supabase number, no 100 MB tests. The other numbers come from three full passes (18–180 samples). Supabase's three full passes are running now.

Credentials for the other five providers would allow a rerun of all six together from the same machines

METHOD

Where the clients and buckets are

Location	Original client	Network	Our client (Supabase)	Network (ipinfo)
Ashburn	Railway server (us-east4)	AS400940 Railway	Fly iad, Ashburn	AS60068 Datacamp Limited
San Francisco	Freestyle VM	AS36320 Freestyle Cloud	Fly sjc, Santa Clara (60 km)	AS396356 Latitude.sh
Amsterdam	Railway server (europe-west4)	AS400940 Railway	Fly ams, Amsterdam	AS60068 Datacamp Limited
Lille	boat sandbox on OVH	AS16276 OVH	Fly cdg, Paris (205 km)	AS30081 CacheFly
Seattle	Tenki VM	Wowrack, then Luxor	none: Fly has no Seattle region	excluded for all
Florida	Home server	AS7018 AT&T	none: a home line can't be reproduced	excluded for all

Provider	S3	R2	Railway	B2	Neon	Supabase
Bucket	us-east-2, Ohio	ENAM hint	iad, Virginia	us-east-005	aws us-east-1	aws us-east-1

Supabase reached through its S3 endpoint (<project>.storage.supabase.co/storage/v1/s3), path-style