

# Description of Work

Szilvási, Krisztián                      Fenyvesi, Róbert  
krisztian.szilvasi.3@gmail.com      fenyvesr@gmail.com

November 23, 2019

SEVENTH FRAMEWORK PROGRAMME

ICTs

INFORMATION AND COMMUNICATION TECHNOLOGIES

**Grant agreement for: Large-scale integrating project**

<b>Annex I. - “Description of Work”</b>
---

Project acronym: ACROSS

Project full title: Automatic Code Verification by Formal Analysis

Grant agreement no.: FP7-199502

Date of preparation of Annex I (latest version): 2019.11.23

Date of approval of Annex I by Commission:

## Contents

1	The project summary	2
2		4

# 1 The project summary

Product Development is driven by stakeholder requirements. The larger the developed system, the harder it is to analyze and verify it. Software Projects are no exceptions. This project aims to show how the verification of huge software projects can be performed automatically against the given requirements. The project spreads across multiple areas of main stream research.

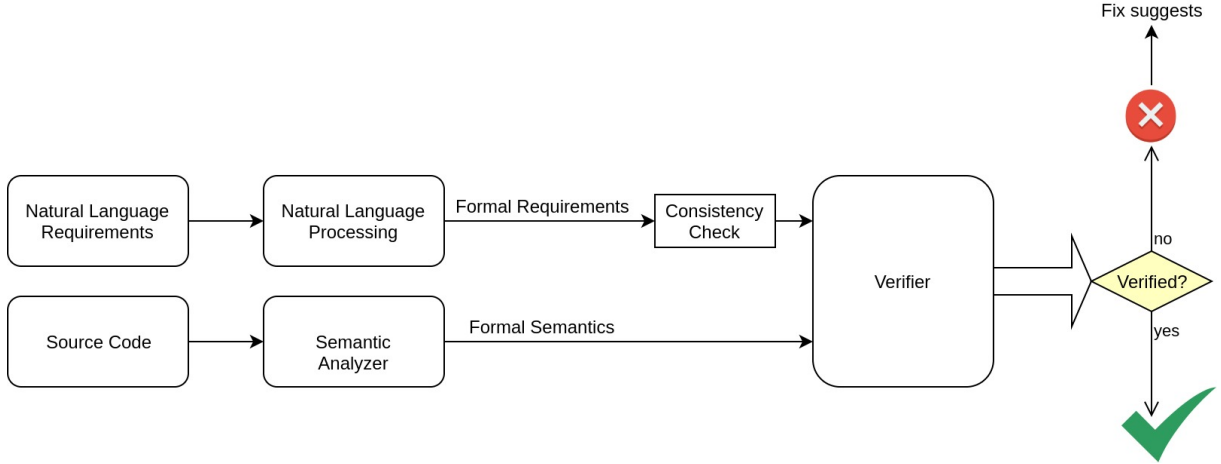


Figure 1: Project Architecture

Natural Language Processing (NLP) is used for formalizing the Software Requirements Specification (SRS). Since, natural language is widely understood by stakeholders, it is used as a common way for representing requirements. Representing requirements in natural language suffers from potential problems like ambiguity, inconsistency and incompleteness. A systematic literature review in the last two decades from 1995 till 2016 shows that collecting ambiguous requirements is one of the highest critical challenges in software engineering [2]. Since the advent of software engineering, researchers used formal and semi-formal methods to overcome this problem. However, even when formal and semi-formal languages are used, there is no escape from natural language as the initial requirements are written in natural language [6]. The consequences of ambiguous requirements will lead to excessive efforts, high cost and failure in some software projects. For example, software developers might decide a subjective interpretation of requirements based on their point of view. Ferrari et al. (2014) argued that this subjective interpretation leads to designing software in a different way from what was intended in the requirements [5]. For several decades, SRS processing and analysis has been the focus of research in software engineering discipline. Since natural language is ambiguous, a computer cannot provide full support to analyze SRS in an automatic fashion. Consequently, the analysis of SRS is conducted manually which consumes time, effort and cost. Most importantly, the manual analysis of requirements results in inefficiency and imprecise results [10]. The problem will be more obvious and critical when software projects involve thousands of requirements and hundreds of SRS documents. Conducting verification of thousands of requirements via humans will become extremely expensive [4]. Generally, the primary source of problems in requirement engineering is reliance on humans extensively [1]. This discussion leads to the importance of finding an automatic way for processing SRS. NLP was used as a possible solution to resolve ambiguity and to provide valuable information to the intended software developers. Ryan (1993) argued that: "It is highly questionable that the resulting system from NLP would be of great use in requirements engineering" [9]. Nazir et al. (2017) conducted a systematic literature review on NLP applications for software requirement engineering, he concluded that: "Manual operations are still required on initial plain text of software requirements before applying the desired NLP techniques" [7].

On the other hand the formal semantics of the source code is needed. A formal semantics should serve as a solid foundation for any programming language development, so it must be correct and complete (to be trusted and useful), executable (to yield a reference implementation), and appropriate for program reasoning and verification.

The five most popular programming languages according to GitHub in 2019 is JavaScript, Python, Java, PHP and C#. Several efforts to give JavaScript a formal semantics have been made, most notably by Politz et al. [8] and Bodin et al. [3]. But Unfortunately, these address fragments of the language and are not fully validated with a formal JavaScript semantics. Having to define two or more different semantics for a real-life language, together with proofs of equivalence, is a huge burden in itself, not to mention that these all need to be maintained as the language evolves. Due to the functional nature of their interpreters, these semantics cannot handle the nondeterminism of JavaScript well. Finally, their interpreters are not suited for symbolic execution, and thus for developing program reasoning tools.

## References

- [1] Usman Ahmed. A review on knowledge management in requirements engineering. pages 1–5, 02 2018.
- [2] Souhaib Besrour, Lukman Rahim, and P. Dominic. A quantitative study to identify critical requirement engineering challenges in the context of small and medium software enterprise. pages 606–610, 08 2016.
- [3] Martin Bodin, Arthur Chargueraud, Daniele Filaretti, Philippa Gardner, Sergio Maffeis, Daiva Naudziuniene, Alan Schmitt, and Gareth Smith. A trusted mechanised javascript specification. volume 49, pages 87–100, 01 2014.
- [4] Gauthier Fanmuy, Anabel Fraga, and Juan Llorens. Requirements verification in the industry. pages 145–160, 01 2011.
- [5] Alessio Ferrari, Giuseppe Lipari, Stefania Gnesi, and Giorgio Spagnolo. Pragmatic ambiguity detection in natural language requirements. 08 2014.
- [6] Erik Kamsties. *Engineering and Managing Software Requirements*, pages 245–266. 01 2005.
- [7] Farhana Nazir, Wasi Haider, Muhammad Anwar, and Muazzam Khattak. The applications of natural language processing (nlp) for software requirement engineering - a systematic literature review. pages 485–493, 03 2017.
- [8] Joe Gibbs Politz, Spiridon Aristides Eliopoulos, Arjun Guha, and Shriram Krishnamurthi. Adsafety: Type-based verification of javascript sandboxing. *CoRR*, abs/1506.07813, 2015.
- [9] K. Ryan. The role of natural language in requirements engineering. In *[1993] Proceedings of the IEEE International Symposium on Requirements Engineering*, pages 240–242, Jan 1993.
- [10] Yinglin Wang. Automatic semantic analysis of software requirements through machine learning and ontology approach. *Journal of Shanghai Jiaotong University (Science)*, 21:692–701, 12 2016.

## **Acronyms**

**NLP** Natural Language Processing. 1

**SRS** Software Requirements Specification. 1

**2**