

# PDF Output

*Yao-Jen Kuo*

*January 6, 2016*

## This is header 1

This is an *italic*.

This is a **bold**.

## This is another header 1

### This is header 2

### This is header 3

## Lists

### Unordered List

- Item 1
- Item 2
- Item 2a
- Item 2b

### Ordered List


1. Item 1
  2. Item 2
- 
- Item 2a
  - Item 2b

## Plain Code Chunks

This text is displayed verbatim / preformatted

## R Code Chunks

```
plot(cars)
```

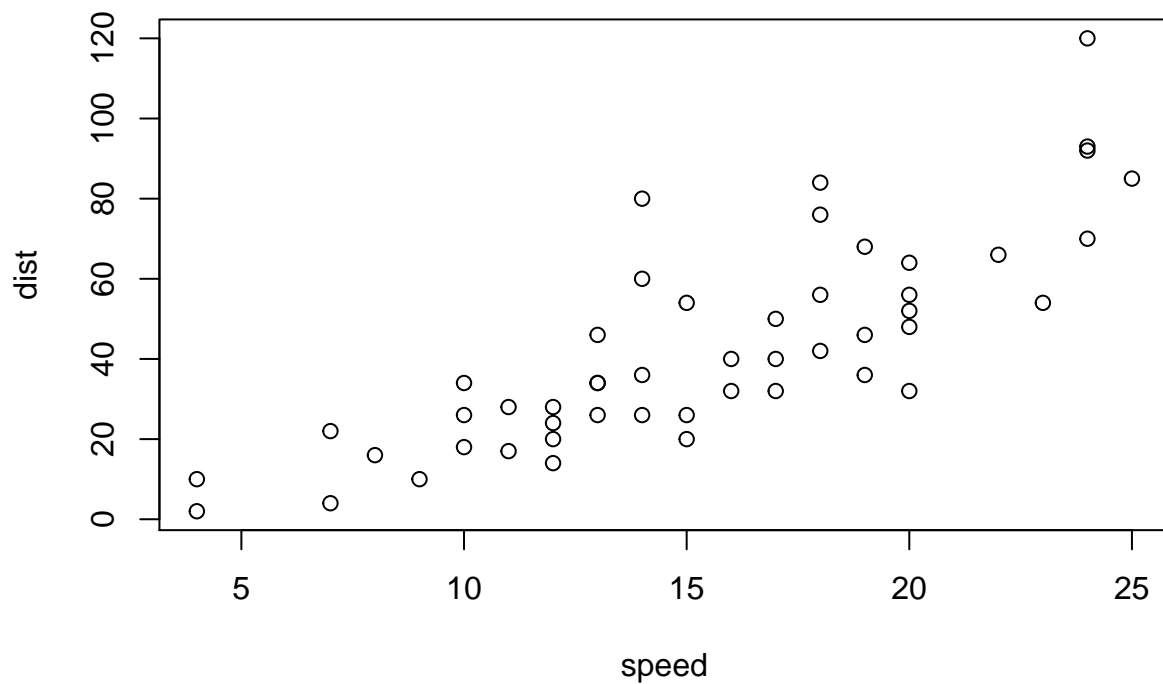

## Inline R Code and R Code Chunks Option

You may also specify `echo=FALSE` to prevent printing out `summary(cars)` command but still get the summary result.

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```


Other options for R code chunks:

- `echo`: (TRUE; logical)
- `results`: ('markup'; character)
- `markup`
- `asis`
- `hold`
- `hide`
- `warning`: (TRUE; logical)
- `error`: (TRUE; logical)
- `message`: (TRUE; logical)

## Links

[Click here to link to NTUCSIE Train](#)

## Images

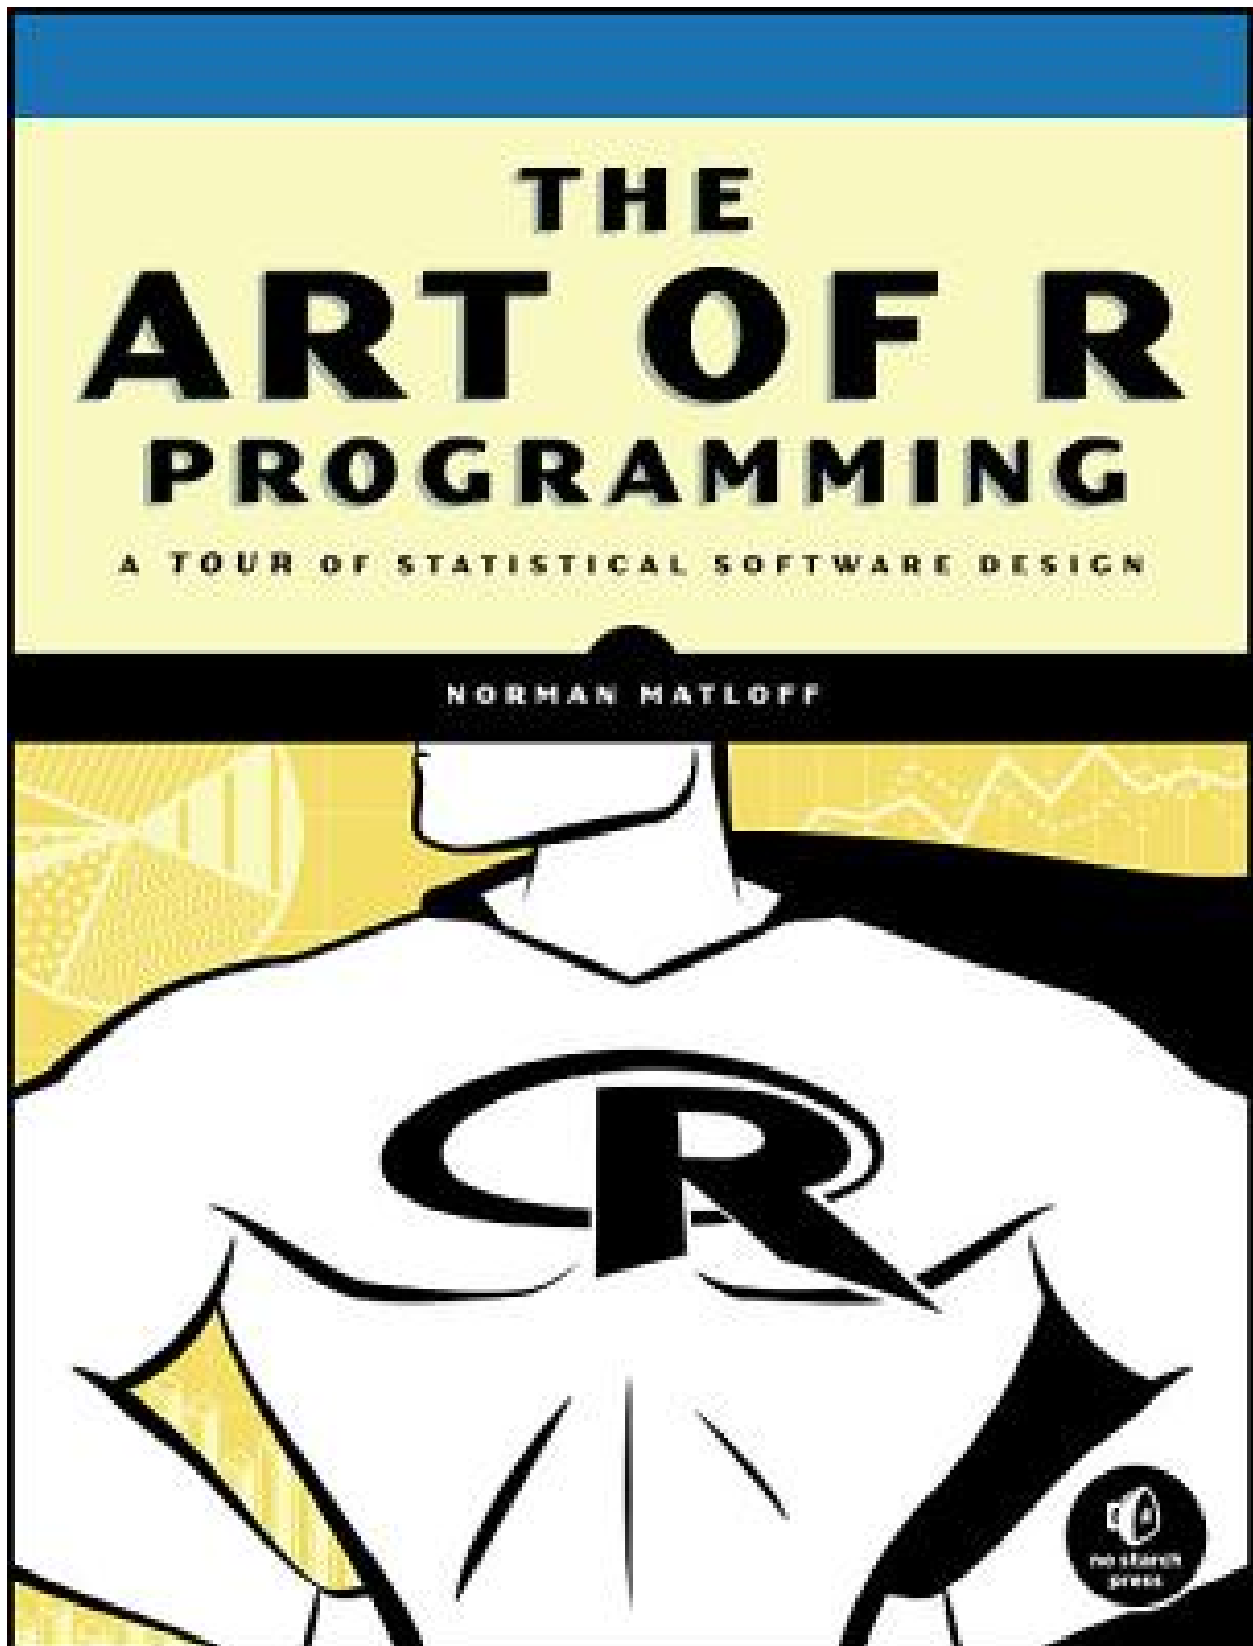

## Blockquotes

Darth Vader > I am your father.

## Math Equations

### Inline equation

The sum of squared deviations from the mean,  $\sum (x - \bar{x})^2$ , is divided by the degrees of freedom,  $n - 1$

### Display equation

As an example, the formula for sample variance:

$$\sigma^2 = \frac{\sum_{i=1}^n (x_i - \bar{x})^2}{n - 1}$$

## Horizontal Rule / Page Break

---

## Tables

First Header	Second Header				
Reference	Style	Links	and	Images	