

fernando@fernando-MacBookPro: ~/Desktop/lab5

GNU nano 8.1

myfind.sh *

#!/bin/bash

read p

read comanda

fisiere=`ls | grep \$p`

for x in \$fisiere

do

\$comanda \$x

done

done

[Read 9 lines]

^G Help

^O Write Out

^F Where Is

^K Cut

^T Execute

^C Location

^X Exit


^R Read File

^_ Replace

^U Paste

^J Justify


^_ Go To Line

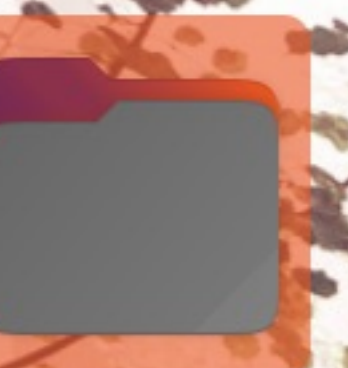

lab5



Home

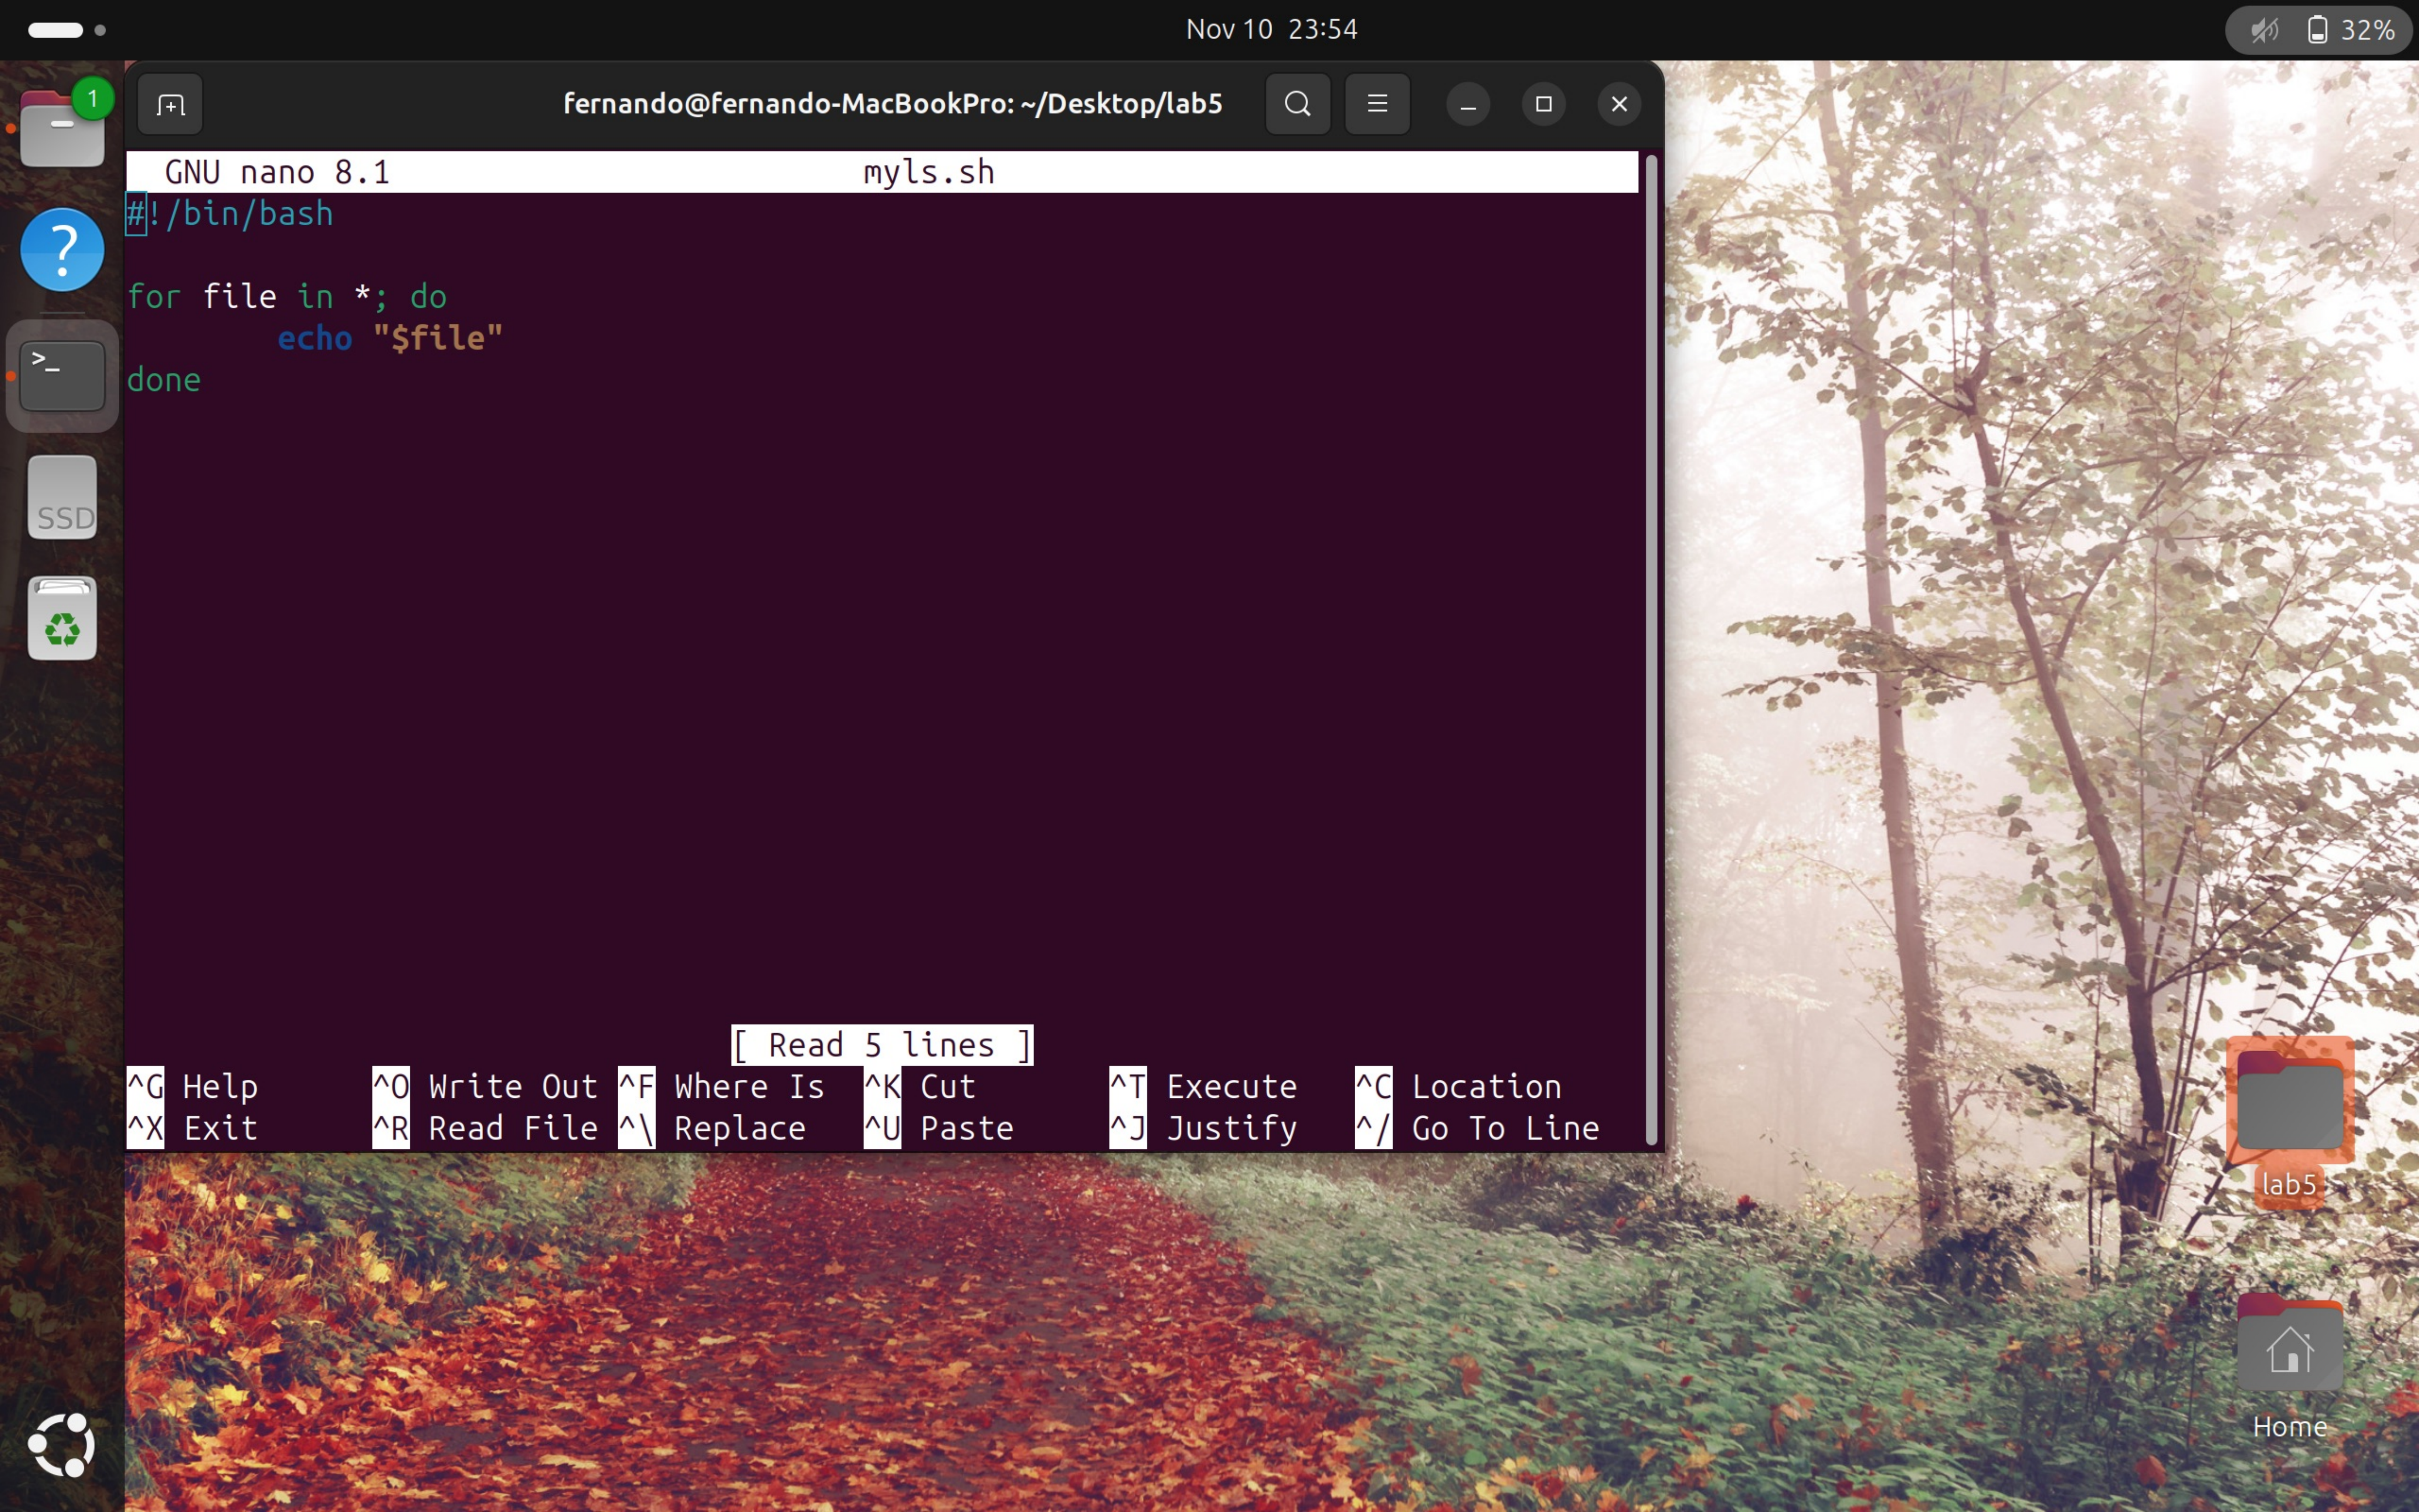


fernando@fernando-MacBookPro: ~/Desktop/lab5

```
GNU nano 8.1 myls.sh
#!/bin/bash
for file in *; do
    echo "$file"
done
```

[Read 5 lines]

^G Help	^O Write Out	^F Where Is	^K Cut	^T Execute	^C Location
^X Exit	^R Read File	^\\ Replace	^U Paste	^J Justify	^/_ Go To Line

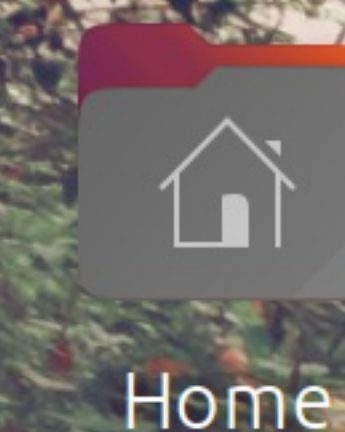

fernando@fernando-MacBookPro: ~/Desktop/lab5

GNU nano 8.1

mypid.sh

#!/bin/bash

ps auxw | while read user pid rest; do

if ["\$user"!="USER"]; then

echo "USER: \$user, PID: \$pid"

fi

done

[Read 7 lines]

^G Help

^O Write Out

^F Where Is

^K Cut

^T Execute

^C Location

^X Exit

^R Read File

^_ Replace

^U Paste

^J Justify

^_ Go To Line



lab5



Home