Centro Federal de Educação Tecnológica de Minas Gerais

Laboratório de Sistemas de Redes de Computadores

Nome: Helena Henriques Araújo
Turma: 3º ano informática

Configuração de e-mail (POP3, IMAP e SMTP)

Introdução:

1.1- Através deste relatório, será explicado a configuração de um servidor de e-mail, com o uso do postfix, dovecot e thunderbird.

Desenvolvimento:

T1- Primeiro, iniciamos com "sudo apt update" para atualizar;

T2- Depois, para instalar o postfix :"sudo apt install postfix", quando aparecer a tela: "internet site" e "cefet.br" como servidor;

T3- Verifica a instalação :“sudo systemctl status postfix”;

T4- Após a verificação, instalamos o dovecot: “sudo apt install dovecot-core dovecot-imapd dovecot-pop3d”;

T5- Verifica a instalação :“sudo systemctl status dovecot”;

T6-Criamos o usuário para teste:”sudo useradd usuario1”, definimos a senha em seguida com: ”sudo passwd usuario1”;

T7-Depois entramos no arquivo de configuração com o comando:"sudo nano /etc/dovecot/conf.d/10-auth.conf";

T8-Descomentamos a linha :"disable_plaintext_auth=no";

T9-Na máquina local, criamos o usuário de acordo com o usuário criado na máquina virtual: nome de usuário, endereço de e-mail com o "cefet.br" no final e a senha criada na máquina virtual;

T10-Na configuração manual:
SERVIDOR IMAP-
servidor= endereço ip da máquina
porta=143
segurança= nenhum
usuário= user da VM

SERVIDOR SMTP-
servidor= endereço ip da máquina
porta=25
segurança= nenhum
usuário= user da VM;

T11- Para testar, mandamos um e-mail para o próprio usuário e se chegar, deu certo;

Prints da configuração:

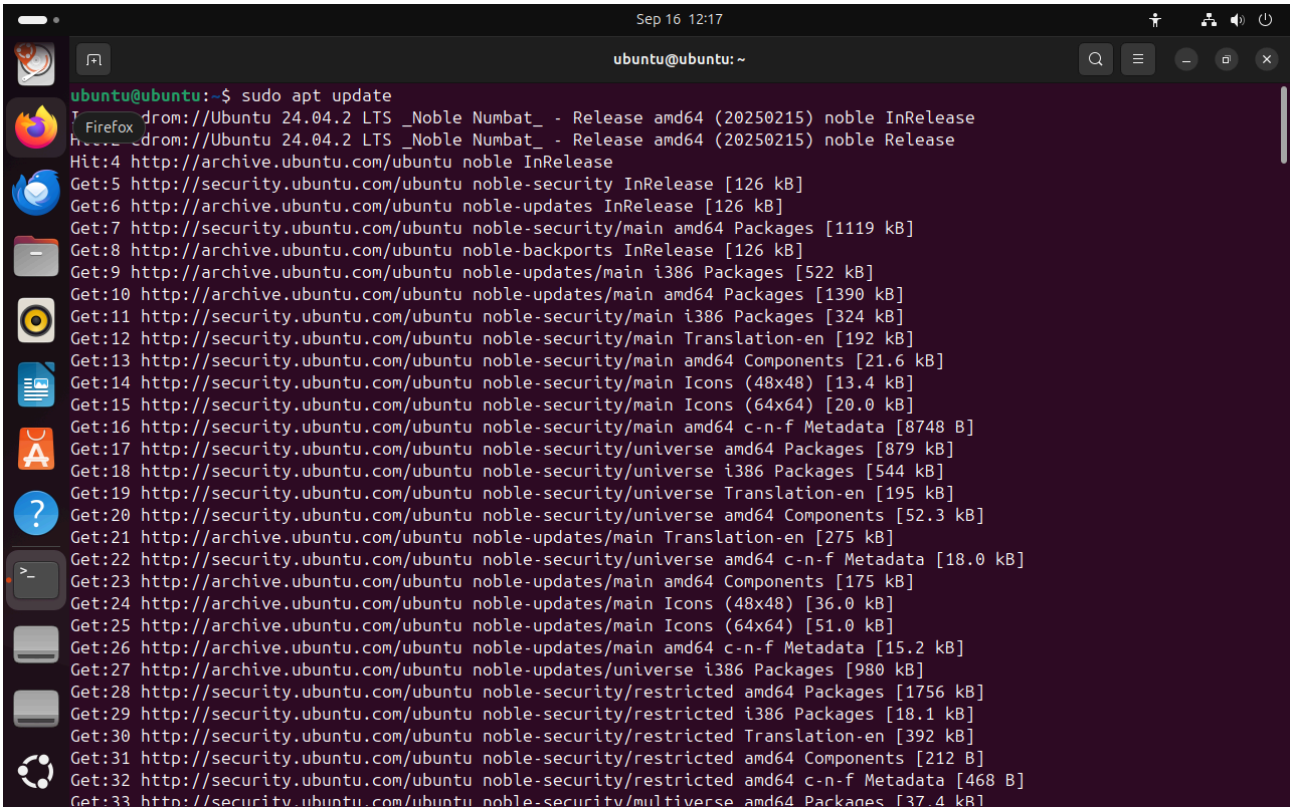

Sep 16 12:17

ubuntu@ubuntu: ~

```
ubuntu@ubuntu:~$ sudo apt install postfix
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libnsl2
Suggested packages:
  postfix-cdb postfix-doc postfix-ldap postfix-lmdb postfix-mta-sts-resolver
  postfix-mysql postfix-pcre postfix-pgsql postfix-sqlite procmail sasl2-bin
  | dovecot-common
The following NEW packages will be installed:
  libnsl2 postfix
0 upgraded, 2 newly installed, 0 to remove and 471 not upgraded.
Need to get 1296 kB of archives.
After this operation, 4321 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://archive.ubuntu.com/ubuntu noble/main amd64 libnsl2 amd64 1.3.0-3build3 [41.4 kB]
Get:2 http://archive.ubuntu.com/ubuntu noble/main amd64 postfix amd64 3.8.6-1build2 [1254 kB]
Fetched 1296 kB in 2s (606 kB/s)
Preconfiguring packages ...
Selecting previously unselected package libnsl2:amd64.
(Reading database ... 212032 files and directories currently installed.)
Preparing to unpack .../libnsl2_1.3.0-3build3_amd64.deb ...
Unpacking libnsl2:amd64 (1.3.0-3build3) ...
Selecting previously unselected package postfix.
Preparing to unpack .../postfix_3.8.6-1build2_amd64.deb ...
Unpacking postfix (3.8.6-1build2) ...
Setting up libnsl2:amd64 (1.3.0-3build3) ...
Setting up postfix (3.8.6-1build2) ...
info: Selecting GID from range 100 to 999 ...
info: Adding group `postfix' (GID 125) ...
info: Selecting UID from range 100 to 999 ...
```

Sep 16 12:18

ubuntu@ubuntu: ~

```
ubuntu@ubuntu:~$ systemctl status postfix
● postfix.service - Postfix Mail Transport Agent
     Loaded: loaded (/usr/lib/systemd/system/postfix.service; enabled; preset: >
     Active: active (exited) since Tue 2025-09-16 12:11:06 UTC; 45s ago
       Docs: man:postfix(1)
    Process: 6349 ExecStart=/bin/true (code=exited, status=0/SUCCESS)
   Main PID: 6349 (code=exited, status=0/SUCCESS)
        CPU: 773us

Sep 16 12:11:06 ubuntu systemd[1]: Starting postfix.service - Postfix Mail Tran>
Sep 16 12:11:06 ubuntu systemd[1]: Finished postfix.service - Postfix Mail Tran>
ubuntu@ubuntu:~$ sudo apt install dovecot-core dovecot-imapd dovecot-pop3d
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Suggested packages:
  dovecot-gssapi dovecot-ldap dovecot-lmtpd dovecot-managesieved dovecot-mysql
  dovecot-pgsql dovecot-sieve dovecot-solr dovecot-sqlite dovecot-submissiond
  ntp
The following NEW packages will be installed:
  dovecot-core dovecot-imapd dovecot-pop3d
0 upgraded, 3 newly installed, 0 to remove and 471 not upgraded.
Need to get 3582 kB of archives.
After this operation, 11.5 MB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 dovecot-core amd64 1:2.3.21+dfsg1-2ubuntu6 [3354 kB]
Get:2 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 dovecot-imapd amd64 1:2.3.21+dfsg1-2ubuntu6 [191 kB]
Get:3 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 dovecot-pop3d amd64 1:2.3.21+dfsg1-2ubuntu6 [37.3 kB]
Fetched 3582 kB in 2s (1943 kB/s)
Selecting previously unselected package dovecot-core.
(Reading database ... 212235 files and directories currently installed.)
Preparing to unpack .../dovecot-core_1%3a2.3.21+dfsg1-2ubuntu6_amd64.deb ...
Unpacking dovecot-core (1:2.3.21+dfsg1-2ubuntu6) ...
Selecting previously unselected package dovecot-imapd.
```

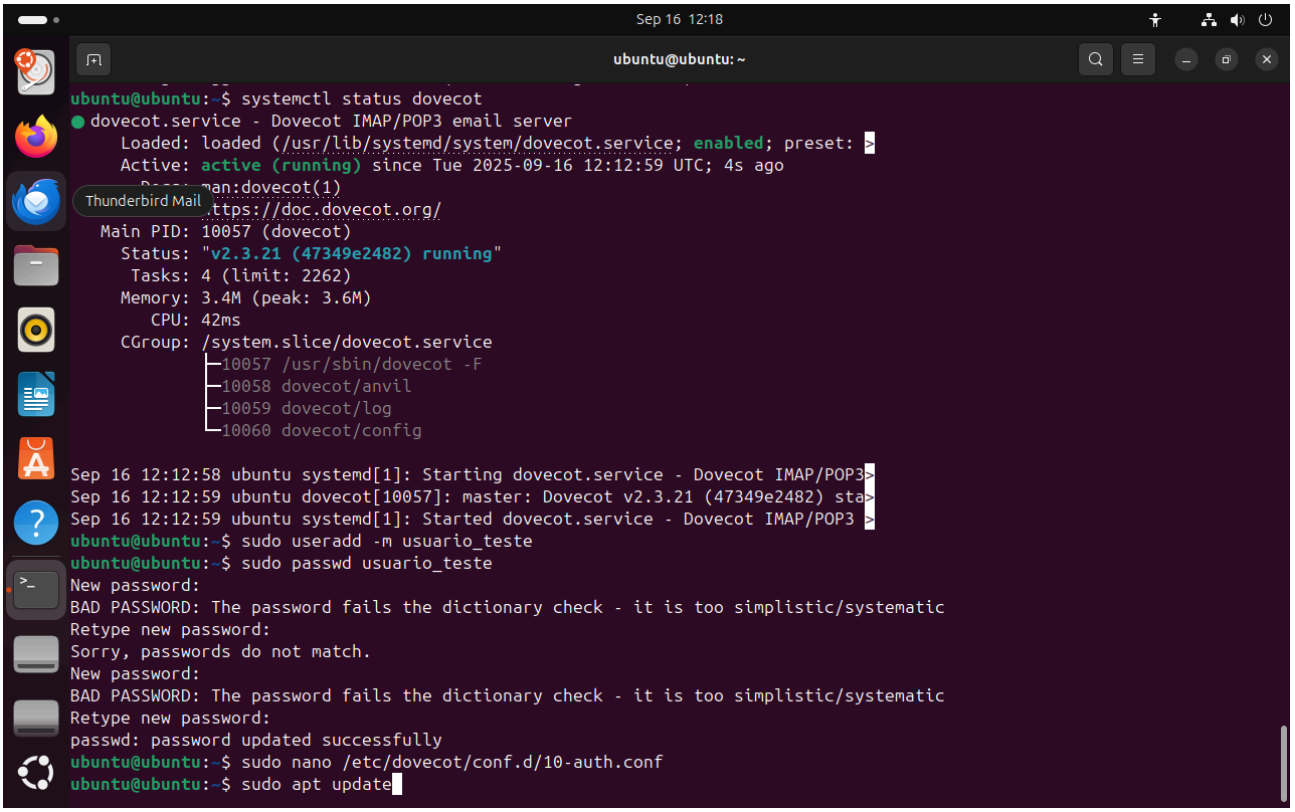
Sep 16 12:18
ubuntu@ubuntu: ~
Thunderbird Mail
ubuntu@ubuntu:~$ systemctl status dovecot
● dovecot.service - Dovecot IMAP/POP3 email server
Loaded: loaded (/usr/lib/systemd/system/dovecot.service; enabled; preset: >
Active: active (running) since Tue 2025-09-16 12:12:59 UTC; 4s ago
man:dovecot(1)
https://doc.dovecot.org/
Main PID: 10057 (dovecot)
Status: "v2.3.21 (47349e2482) running"
Tasks: 4 (limit: 2262)
Memory: 3.4M (peak: 3.6M)
CPU: 42ms
CGroup: /system.slice/dovecot.service
├─10057 /usr/sbin/dovecot -F
├─10058 dovecot/anvil
├─10059 dovecot/log
└─10060 dovecot/config
Sep 16 12:12:58 ubuntu systemd[1]: Starting dovecot.service - Dovecot IMAP/POP3>
Sep 16 12:12:59 ubuntu dovecot[10057]: master: Dovecot v2.3.21 (47349e2482) sta>
Sep 16 12:12:59 ubuntu systemd[1]: Started dovecot.service - Dovecot IMAP/POP3 >
ubuntu@ubuntu:~$ sudo useradd -m usuario_teste
ubuntu@ubuntu:~$ sudo passwd usuario_teste
New password:
BAD PASSWORD: The password fails the dictionary check - it is too simplistic/systematic
Retype new password:
Sorry, passwords do not match.
New password:
BAD PASSWORD: The password fails the dictionary check - it is too simplistic/systematic
Retype new password:
passwd: password updated successfully
ubuntu@ubuntu:~$ sudo nano /etc/dovecot/conf.d/10-auth.conf
ubuntu@ubuntu:~$ sudo apt update

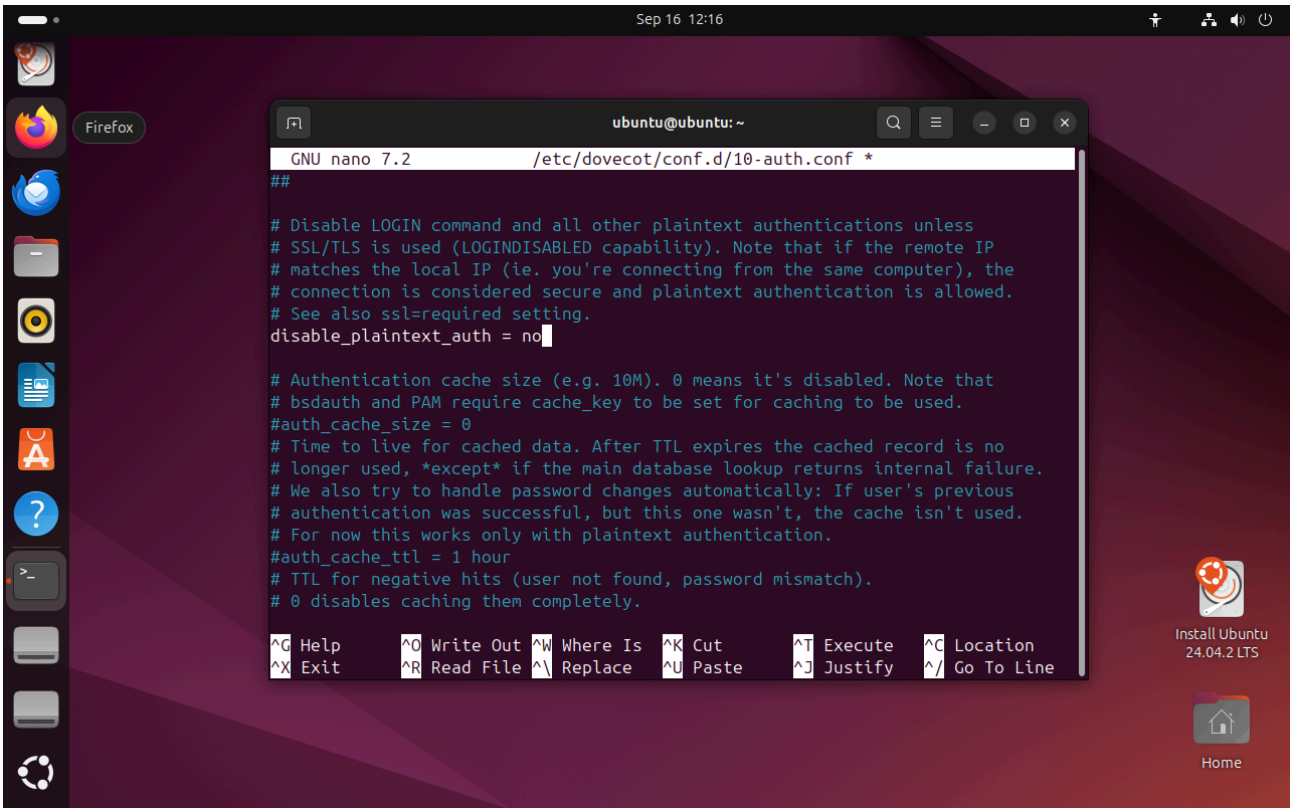
Sep 16 12:16
Firefox
ubuntu@ubuntu: ~
GNU nano 7.2 /etc/dovecot/conf.d/10-auth.conf *
##
# Disable LOGIN command and all other plaintext authentications unless
# SSL/TLS is used (LOGINDISABLED capability). Note that if the remote IP
# matches the local IP (ie. you're connecting from the same computer), the
# connection is considered secure and plaintext authentication is allowed.
# See also ssl=required setting.
disable_plaintext_auth = no
# Authentication cache size (e.g. 10M). 0 means it's disabled. Note that
# bsdauth and PAM require cache_key to be set for caching to be used.
#auth_cache_size = 0
Time to live for cached data. After TTL expires the cached record is no
longer used, *except* if the main database lookup returns internal failure.
We also try to handle password changes automatically: If user's previous
authentication was successful, but this one wasn't, the cache isn't used.
For now this works only with plaintext authentication.
#auth_cache_ttl = 1 hour
TTL for negative hits (user not found, password mismatch).
0 disables caching them completely.
^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line
Install Ubuntu 24.04.2 LTS
Home

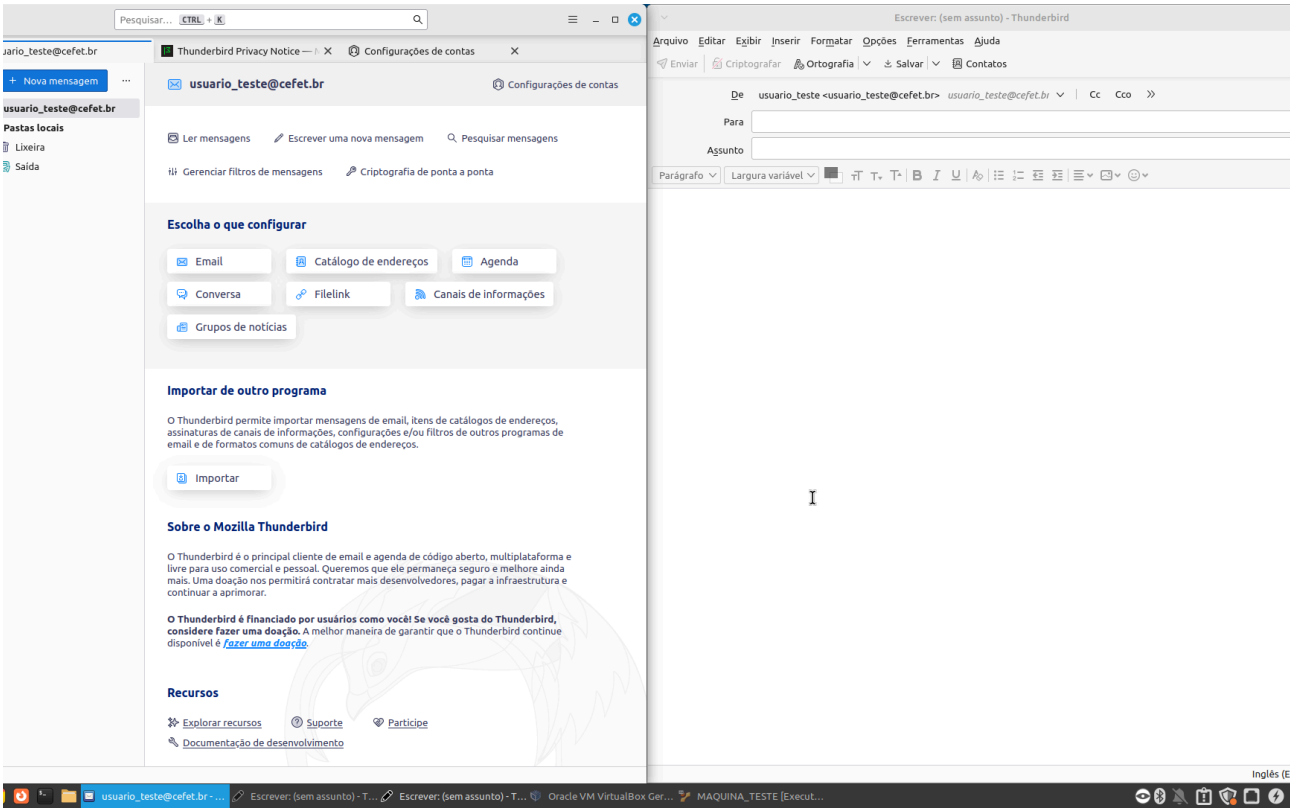
Pesquisar... CTRL + K
usuario_teste@cefet.br
Thunderbird Privacy Notice
Configurações de contas
Nova mensagem
usuario_teste@cefet.br
Pastas locais
Lixeira
Saída
usuario_teste@cefet.br
Configurações de contas
Ler mensagens
Escrever uma nova mensagem
Pesquisar mensagens
Gerenciar filtros de mensagens
Criptografia de ponta a ponta
Escolha o que configurar
Email
Catálogo de endereços
Agenda
Conversa
Filelink
Canais de informações
Grupos de notícias
Importar de outro programa
O Thunderbird permite importar mensagens de email, itens de catálogos de endereços, assinaturas de canais de informações, configurações e/ou filtros de outros programas de email e de formatos comuns de catálogos de endereços.
Importar
Sobre o Mozilla Thunderbird
O Thunderbird é o principal cliente de email e agenda de código aberto, multiplataforma e livre para uso comercial e pessoal. Queremos que ele permaneça seguro e melhore ainda mais. Uma doação nos permitirá contratar mais desenvolvedores, pagar a infraestrutura e continuar a aprimorar.
O Thunderbird é financiado por usuários como você! Se você gosta do Thunderbird, considere fazer uma doação. A melhor maneira de garantir que o Thunderbird continue disponível é fazer uma doação.
Recursos
Explorar recursos
Suporte
Participe
Documentação de desenvolvimento
Escrever: (sem assunto) - Thunderbird
Arquivo Editar Exibir Inserir Formatar Opções Ferramentas Ajuda
Enviar
Criptografar
Ortografia
Salvar
Contatos
De usuario_teste <usuario_teste@cefet.br>
Cc Cco
Para
Assunto
Parágrafo
Largura variável
Inglês (E
usuario_teste@cefet.br - ...
Escrever: (sem assunto) - T...
Escrever: (sem assunto) - T...
Oracle VM VirtualBox Ger...
MAQUINA_TESTE [Execut...

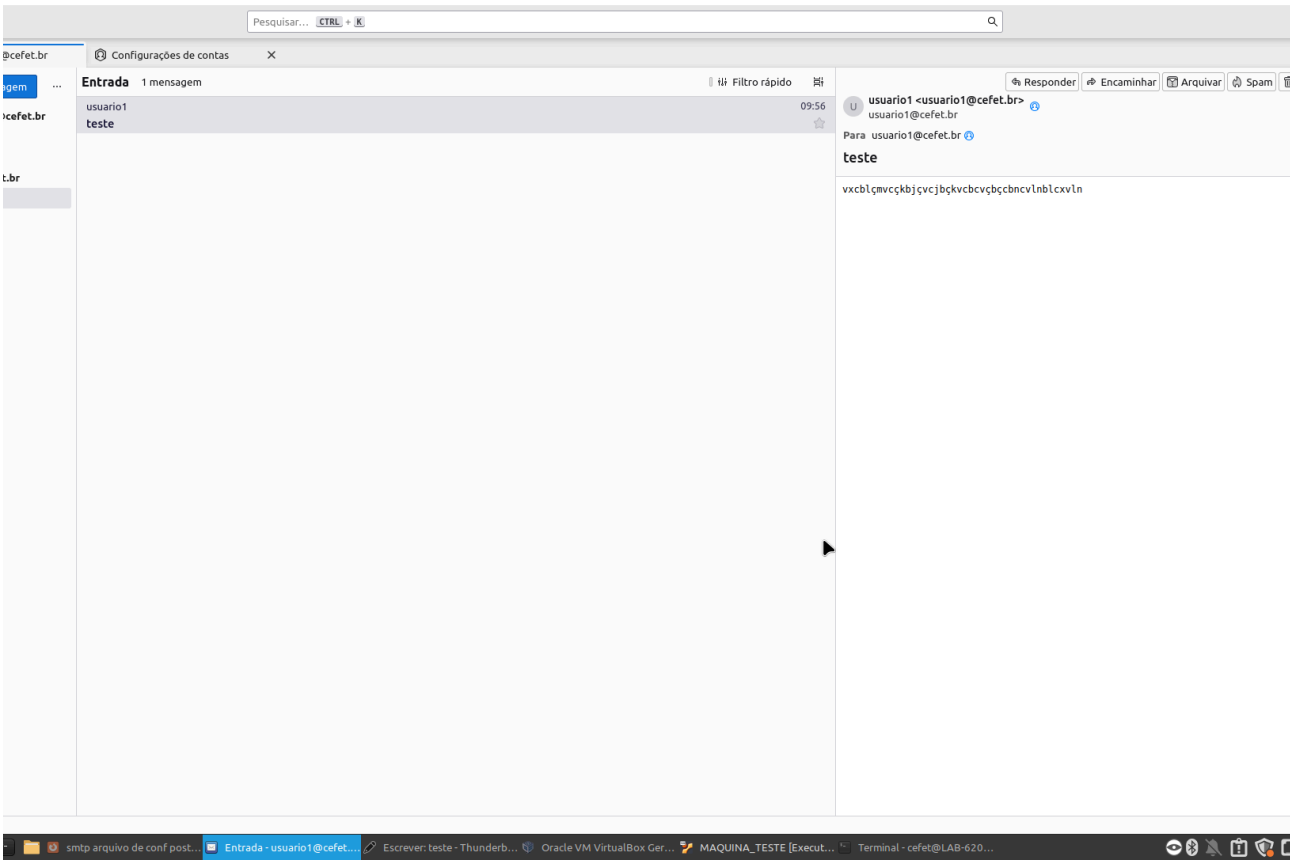
Pesquisar... CTRL + K
Configurações de contas
Entrada 1 mensagem
Filtro rápido
usuario1
09:56
teste
Responder
Encaminhar
Arquivar
Spam
usuario1 <usuario1@cefet.br>
usuario1@cefet.br
Para usuario1@cefet.br
teste
vxcblçmvcçkbjçvcjbçkvcbcvçbçcbncvlnblcxvln
smtp arquivo de conf post...
Entrada - usuario1@cefet....
Escrever: teste - Thunderb...
Oracle VM VirtualBox Ger...
MAQUINA_TESTE [Execut...
Terminal - cefet@LAB-620...