Fernando Contreras

Assignment 4.1 – MySQL Install

Date: April 18, 2026

1. Initial Database Connection

2. Create the Movies Database

The following SQL command was used to create the movies database:

```
CREATE DATABASE movies;
```

3. Show Databases

After creating the movies database, the SHOW DATABASES command was run to confirm it was created successfully:

```
SHOW DATABASES;
```

The screenshot below shows the output of the SHOW DATABASES command.

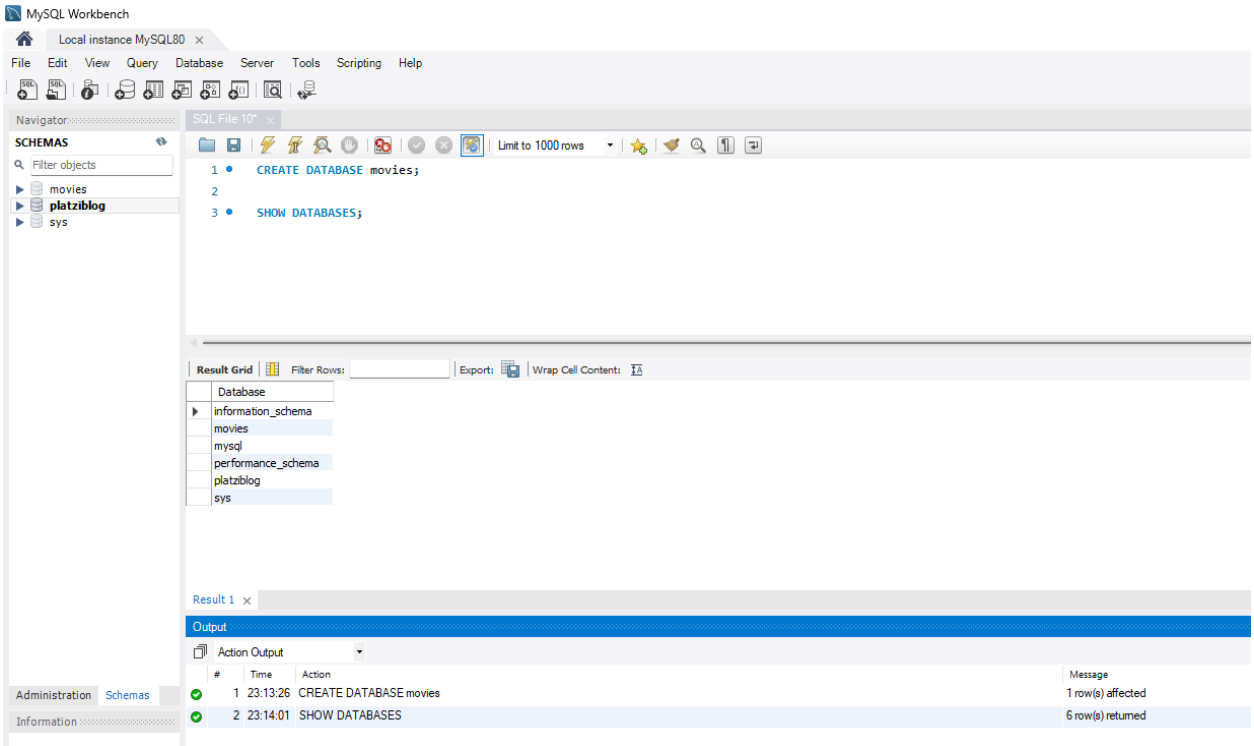

4. MySQL Functions

The following three MySQL functions were selected from W3Schools and tested in the movies database.

Function 1: NOW()

Description: The NOW() function returns the current date and time. This is useful when you want to timestamp when a record was created, track when a query was last run, or log activity in a database table.

Alias used: query_time

```
SELECT NOW() AS query_time;
```

Screenshot of output:

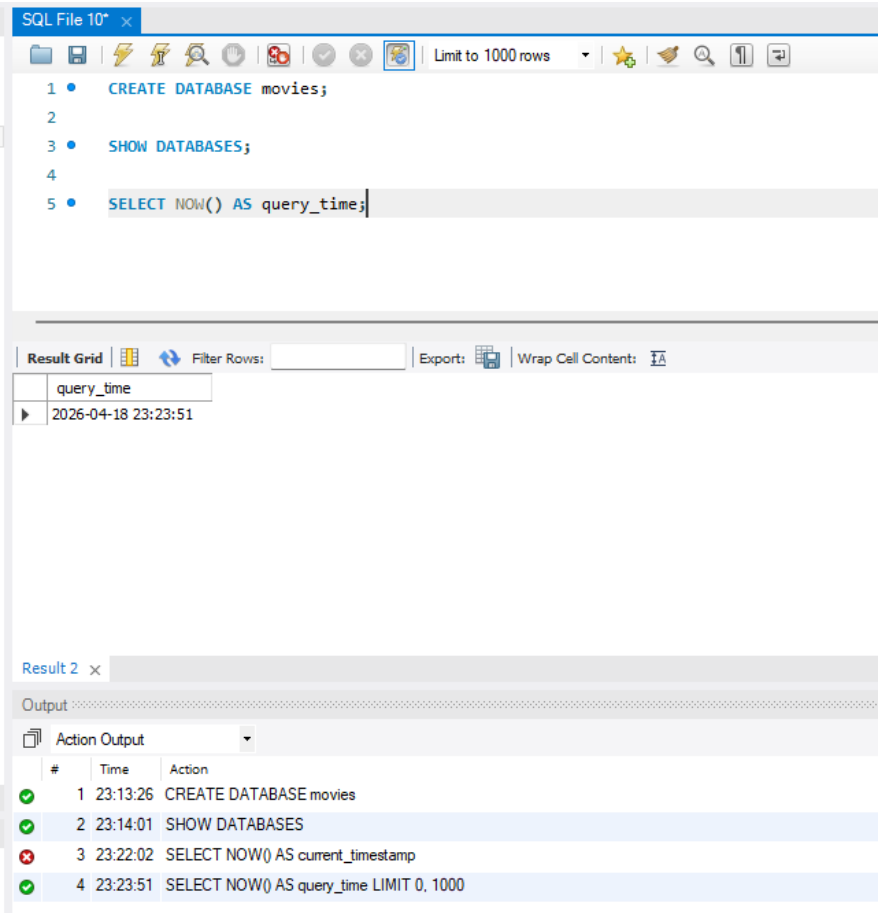

Function 2: UPPER()

Description: The UPPER() function converts a string to all uppercase letters. This is useful when you want to standardize the display of text data such as names or titles, regardless of how they were originally entered.

Alias used: uppercase_text

```
SELECT UPPER('hello world') AS uppercase_text;
```

Screenshot of output:

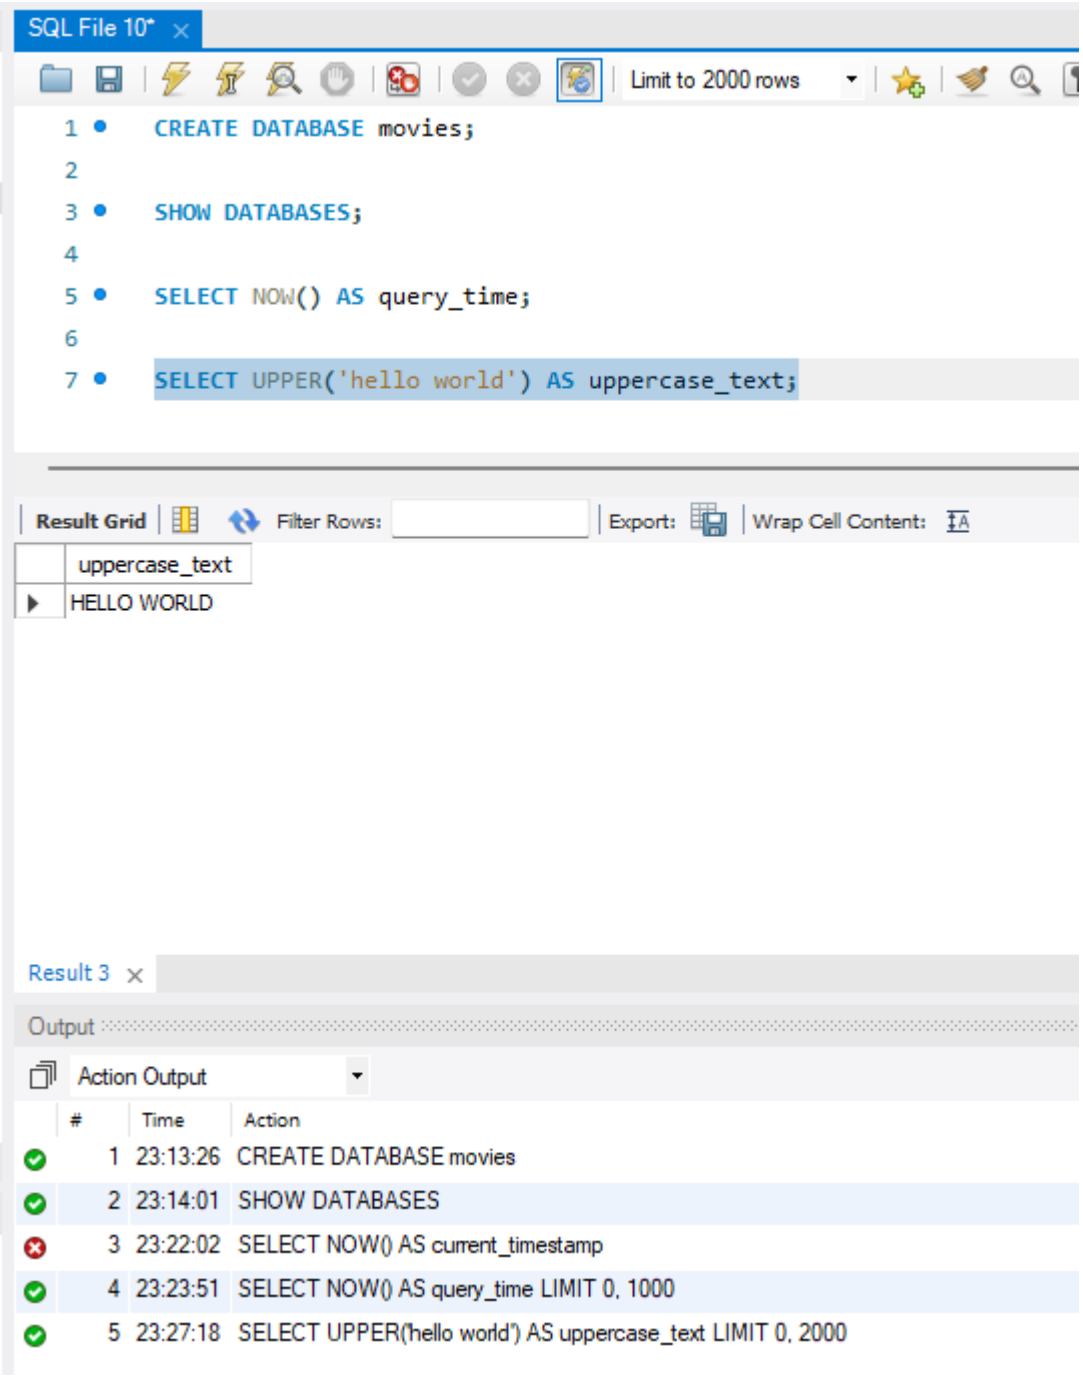

Function 3: ROUND()

Description: The ROUND() function rounds a numeric value to a specified number of decimal places. This is useful when working with prices, averages, or any calculated values that produce long decimals and need to be displayed cleanly.

Alias used: rounded_price

```
SELECT ROUND(4.5678, 2) AS rounded_price;
```
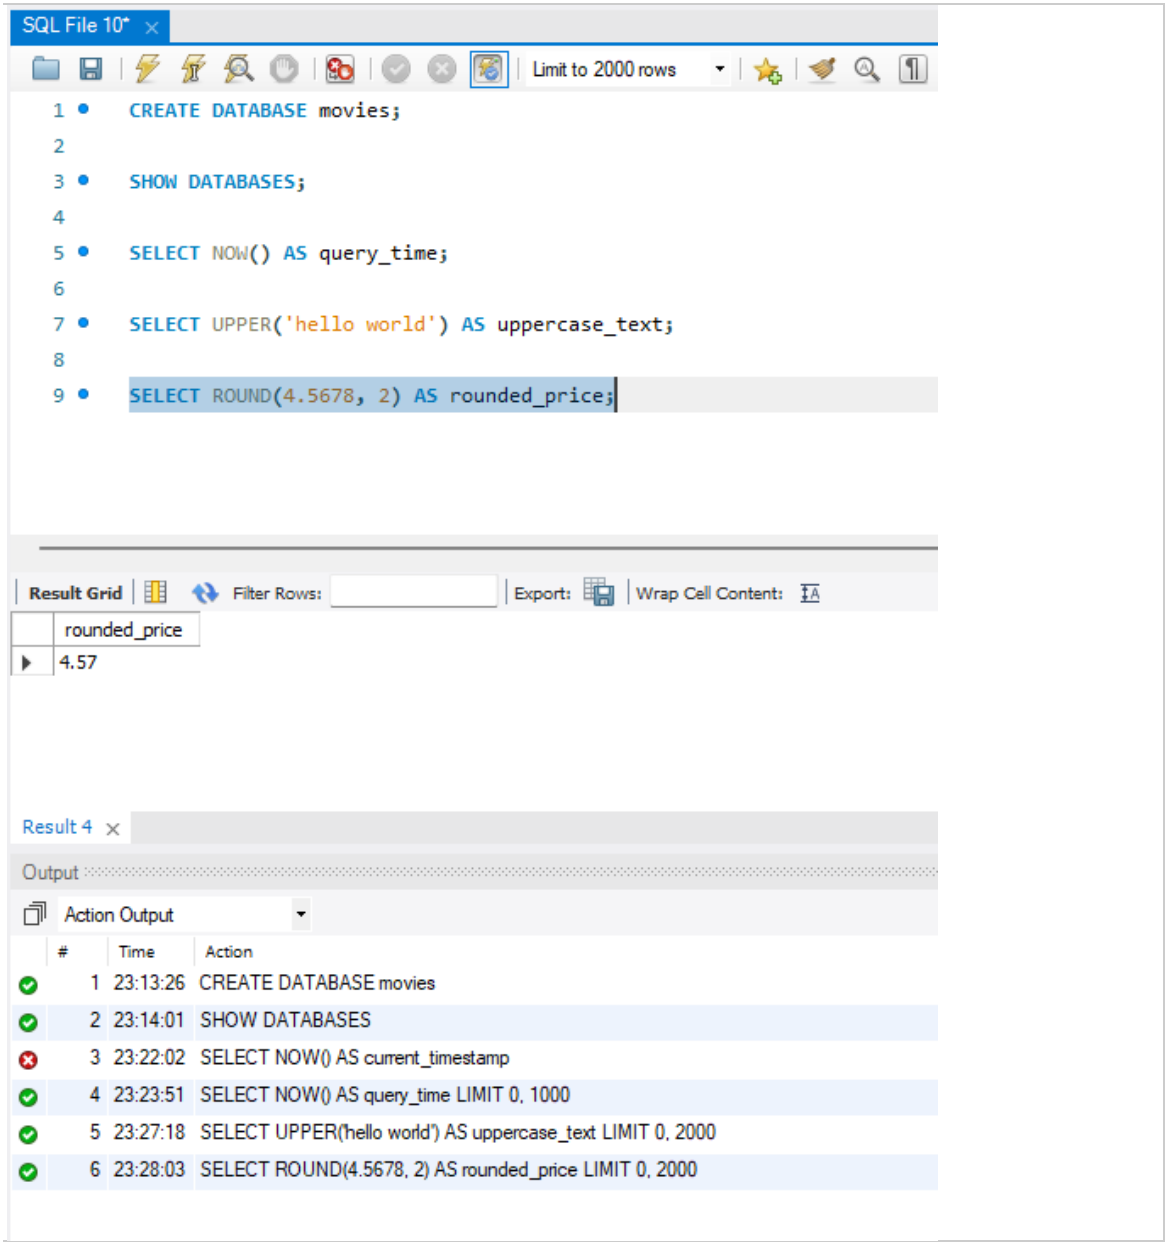
Screenshot of output: