



Activity 14.3 Solution File

1)

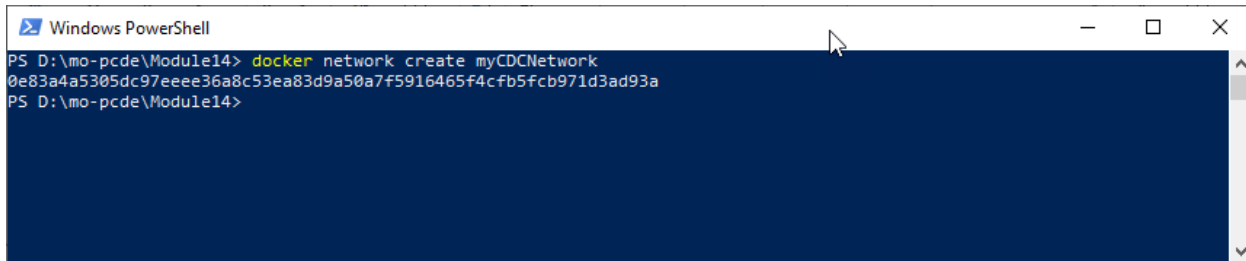


```
Windows PowerShell
PS D:\mo-pcde\Module14> docker network create myCDCNetwork
0e83a4a5305dc97eeee36a8c53ea83d9a50a7f5916465f4cfb5fcb971d3ad93a
PS D:\mo-pcde\Module14>
```

2)

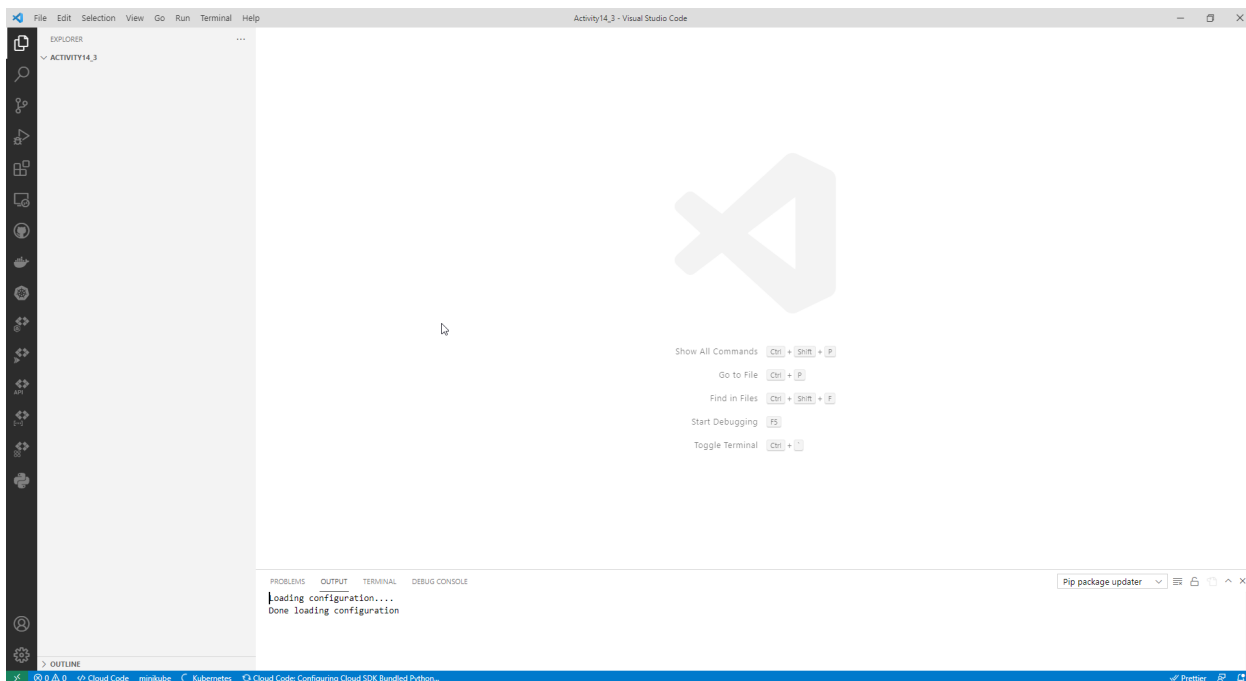


3)

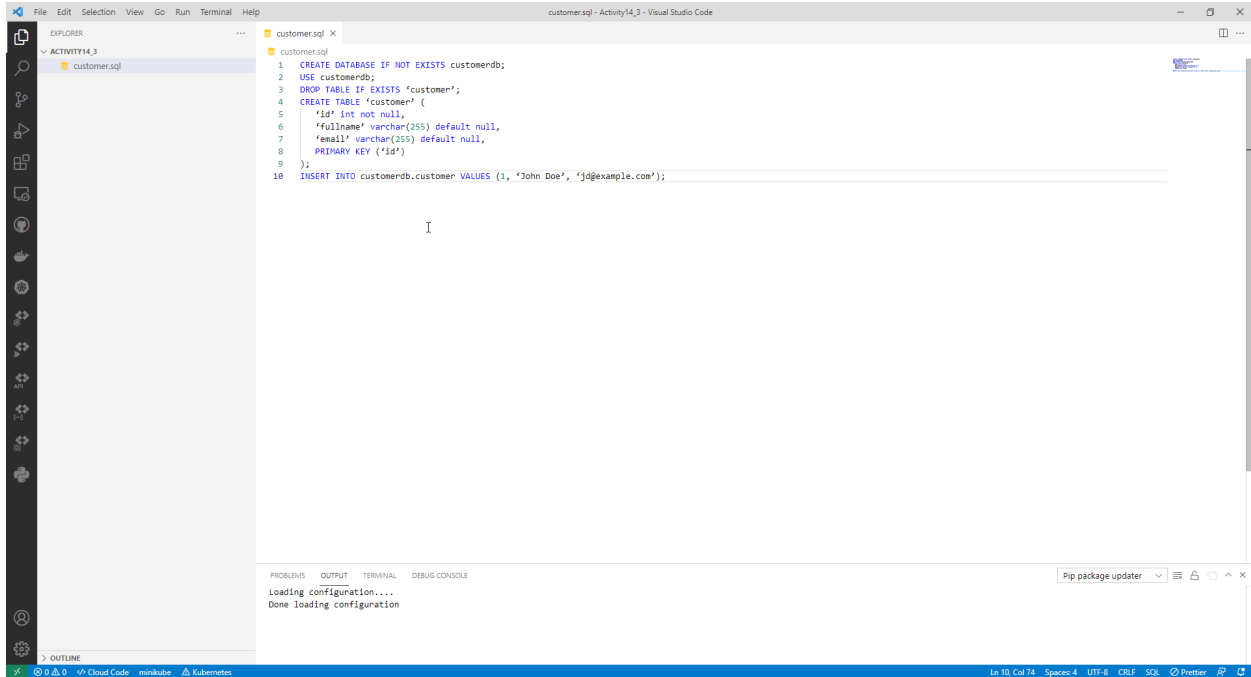


```
1 CREATE DATABASE IF NOT EXISTS customerdb;
2 USE customerdb;
3 DROP TABLE IF EXISTS 'customer';
4 CREATE TABLE 'customer' (
5   'id' int not null,
6   'fullname' varchar(255) default null,
7   'email' varchar(255) default null,
8   PRIMARY KEY ('id')
9 );
10 INSERT INTO customerdb.customer VALUES (1, 'John Doe', 'jd@example.com');
```

4)

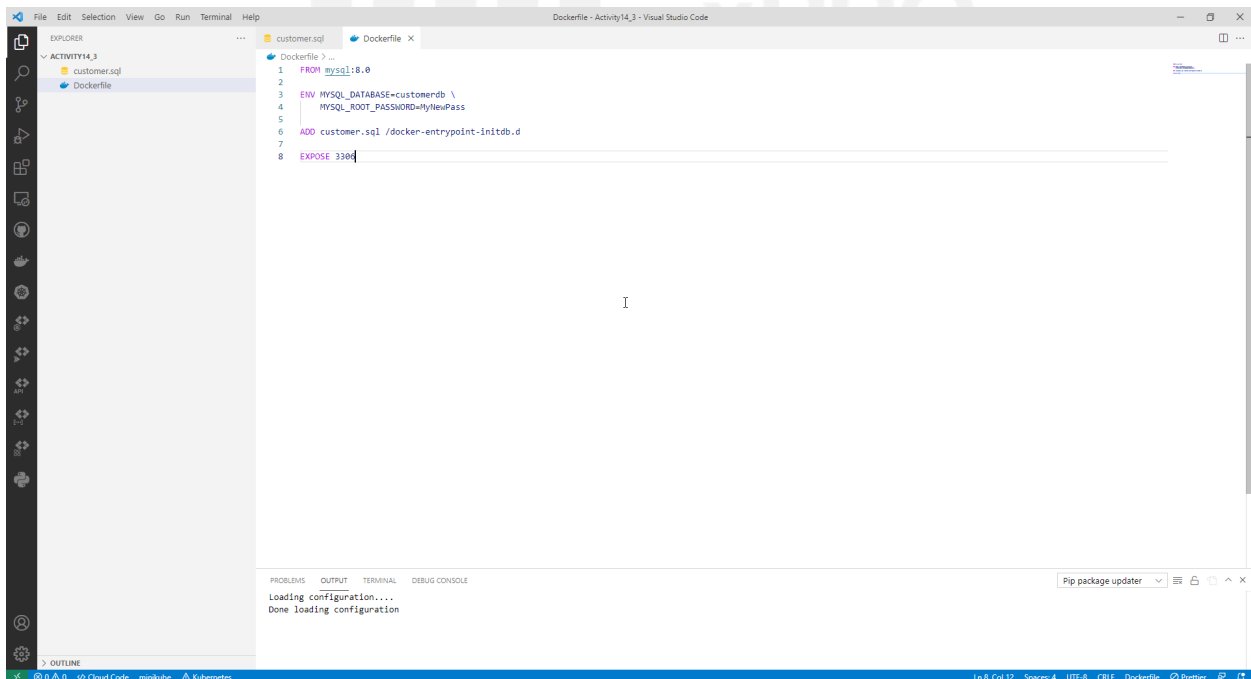


```
1 FROM mysql:8.0
2
3 ENV MYSQL_DATABASE=customerdb \
4     MYSQL_ROOT_PASSWORD=lyleuPass
5
6 ADD customer.sql /docker-entrypoint-initdb.d
7
8 EXPOSE 3306
```


5)

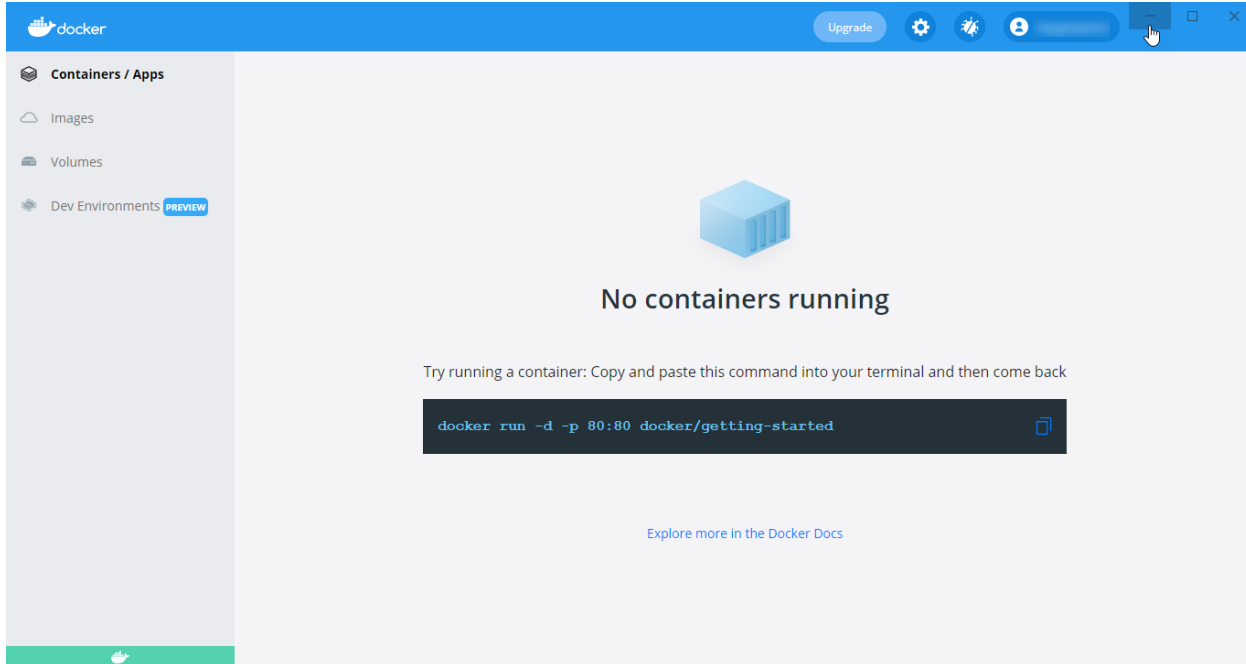

6)

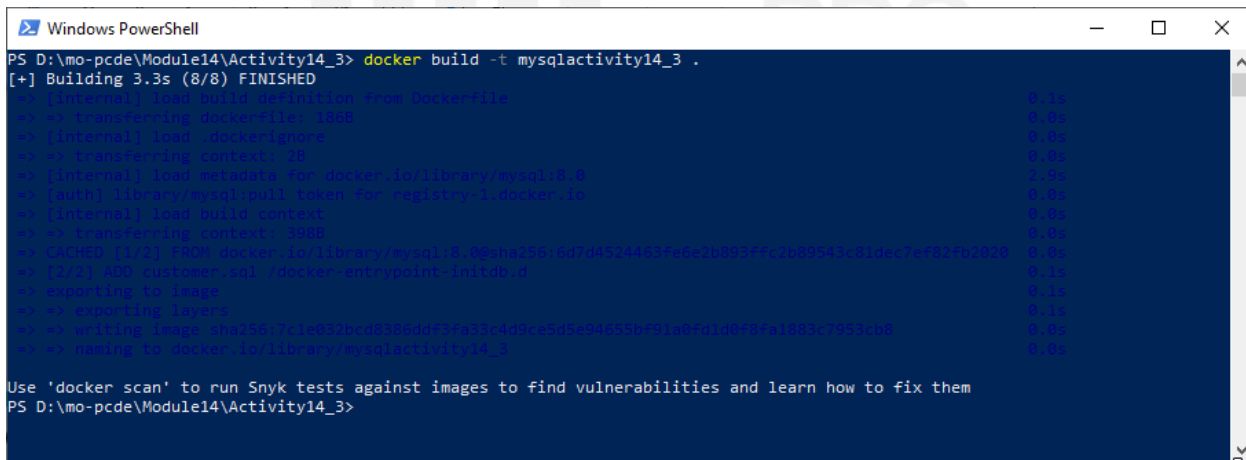

7)

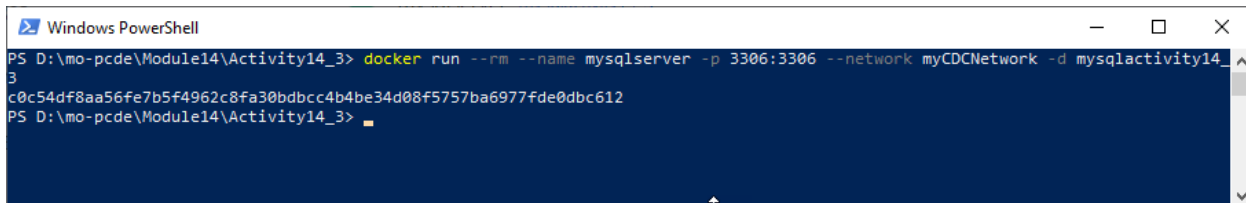

8)

