



iSAQB®  
Working Groups

# Glossary of Software Architecture Terminology

Edition 2022

# iSAQB® Glossary of Software Architecture Terminology

2022.1-EN-20230321



## Table of Contents

Introduction .....	1
Personal Comments .....	1
Terms Can Be Referenced .....	1
License .....	2
Acknowledgements .....	2
Contributing .....	2
Terms .....	3
A .....	3
B .....	6
C .....	7
D .....	9
E .....	11
F .....	12
H .....	12
I .....	12
L .....	15
M .....	15
N .....	16
O .....	16
P .....	17
Q .....	17
R .....	20
S .....	22
T .....	26
U .....	27
V .....	27
W .....	27
Translation Tables .....	29
English to German .....	29
German to English .....	35
References and Resources .....	41

## Introduction

This book contains a glossary of *software architecture terminology*.

It can aid in preparation for the iSAQB® e. V. examination *Certified Professional for Software Architecture - Foundation Level*®.

Please be aware: This glossary is **not** intended to be a primer or course book on software architecture, but just a collection of definitions and links to further information.

Furthermore, you find proposals for [translations](#) of the iSAQB® terminology, currently between English and German (and vice-versa).

Finally, this book contains numerous [references](#) to books and other resources, many of which we quoted in the definitions.



This book is work in progress.

Errors or omissions can also be reported in our issue tracker on [GitHub](#), where the authors maintain the original sources for this book.

## Personal Comments

Several of the terms contained in this book have been commented by one or several authors:



Comment (Markus Harrer)

Some terms might be especially important, or sometimes there are some subtle aspects involved. Comments like these give a personal opinion and do **not** necessarily reflect the iSAQB®.

## Terms Can Be Referenced

All terms in the glossary have unique URLs to the (free) online version of the book therefore they can be universally referenced, both from online- and print documentation.

Our URL scheme is quite simple:

- The base URL is <https://public.isaqb.org/glossary/glossary-en.html>
- We just add the prefix [#term-](#) in front of the term to be referenced, then the term itself, with hyphens ("-") instead of blanks.

For example our description of the term *software architecture* can be referenced (hyperlinked) with <https://public.isaqb.org/glossary/glossary-en.html#term-software-architecture>

Nearly all terms are hyperlinked with their full names, with very few examples that are referenced by their (common) abbreviations, like UML or DDD.

## License



This book is licensed under a [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/). The following is only a brief summary and no substitution for the real license.

The **CC BY 4.0** license means that you might:

- Share — copy and redistribute the material in any medium or format
- Adapt — remix, transform, and build upon the material for any purpose, even commercially.
- The licensor cannot revoke these freedoms as long as you follow the license terms.

You must:

- Give appropriate credit,
- Provide a link to the license (<https://creativecommons.org/licenses/by/4.0/>), and
- Indicate if (and which) changes were made with respect to the original.

## Acknowledgements

Several parts of this glossary have been contributed by the following volunteers and sponsors (apart from the numerous [authors](#).)

- The definitions of about 120 terms have been donated by Gernot Starke, originally compiled for one of his [books](#).
- A number of definitions in context of system improvement and evolution was contributed by the [aim42](#) open source project.

## Contributing



### Contributions are welcome

In case find errors, omissions or typos, or want to contribute additional content - please feel free to do this via one of the following ways:

1. Open an issue in our [GitHub repository](#)
2. Fork the repository and create a pull request.
3. Write an email to the authors,

Your input is highly appreciated by the authors.

Be aware that the authors of this version will also mirror your contributions back to the original repository.

## Terms

### A

#### **Abstraction (activity)**

Removing details to focus attention on aspects of greater importance.

#### **Abstraction (result)**

Representation of an element that focuses on the information relevant to a particular purpose, ignoring additional or other information.

#### **Adapter**

The adapter is a design pattern that allows the interface of an existing component to be used from another interface. It is often used to make existing components cooperate with others without modifying their source code.

#### **Aggregate**

Aggregate is a building block of [Domain-Driven Design](#). Aggregates are complex object structures that are made of [entities](#) and [value objects](#). Each aggregate has a root entity and is regarded as one unit when it comes to changes. An aggregate ensure consistency and integrity of its contained entities with invariants.

#### **Aggregation**

A form of object [composition](#) in object-oriented programming. It differs from composition, as aggregation does not imply ownership. When the element is destroyed, the contained elements remain intact.

#### **Appropriateness**

(syn: adequacy) Suitability for a particular purpose.

#### **arc42**

Free and open-source [template](#) for communication and documentation of software architectures. arc42 consists of 12 (optional) parts or sections.

#### **Architectural (Architecture) Pattern**

“An architectural pattern expresses a fundamental structural organization schema for software systems. It provides a set of predefined sub-systems, specifies their responsibilities, and includes rules and guidelines for organizing the relationships between them” ([[Buschmann+1996](#)], page 12). Similar to [architecture style](#).

Examples include:

- Layers
- Pipes-and-Filter
- Microservices
- [CQRS](#)

## Architectural Decision

Decision, which has an sustainable or essential effect on the architecture.

Example: Decision about database technology or technical basics of the user interface.

Following ISO/IEC/IEEE 42010 an architectural decision pertain to system concerns. However, there is often no simple mapping between the two. A decision can affect the architecture in several ways. These can be reflected in the architecture description (as defined in ISO/IEC/IEEE 42010).

## Architectural Tactic

A technique, strategy, approach or decision helping to achieve one or several quality requirements. The term was coined by [\[Bass et al. 2022\]](#).

## Architecture

See [Software Architecture](#)

## Architecture Description

Work product used to express an architecture (as defined in ISO/IEC/IEEE 42010).

## Architecture Evaluation

Quantitative or qualitative assessment of a (software or system) architecture. Determines if an architecture can achieve its target qualities or quality attributes.

See [Assessment](#)



Comment (Gernot Starke) In my opinion the terms *architecture analysis* or *architecture assessment* are more appropriate, as *evaluation* contains *value*, implying numerical assessment or metrics, which is usually only *part* of what you should do in architecture analysis.

## Architecture Goal

(syn: Architectural quality goal, architectural quality requirement): A quality attribute that the system needs to achieve and the quality attribute is understood to be an architectural issue.

Hence, the architecture needs to be designed in a way to fulfill this architectural goal. These goals often have *long term character* in contrast to (short term) project goals.

## Architecture Model

An architecture view is composed of one or more architecture models. An architecture model uses modelling conventions appropriate to the concerns to be addressed. These conventions are specified by the model kind governing that model. Within an architecture description, an architecture model can be a part of more than one architecture view (as defined in ISO/IEC/IEEE 42010).

## Architecture Quality Requirement

See [architecture goal](#).

## Architecture Rationale

Architecture rationale records explanation, justification or reasoning about architecture decisions that have been made. The rationale for a decision can include the basis for a decision, alternatives and trade-offs considered, potential consequences of the decision and citations to sources of additional information (as defined in ISO/IEC/IEEE 42010).

## Architecture Style

Description of element and relation types, together with constraints on how they can be used. Often called [architecture pattern](#). Examples: Pipes-and-Filter, Model-View-Controller, Layers.



Comment (Alexander Lorz)

Depending on who you ask, some might consider architecture styles a generalization of architecture patterns. That is, "distributed system" is a style while "client-server, CQRS, broker and peer-to-peer" are more specific patterns that belong to this style. However, from a practical point of view this distinction is not essential.

## Architecture View

A representation of a system from a specific perspective. Important and well-known views are:

- [Context view](#)
- Building block view
- Runtime view
- Deployment view

[[Bass et al. 2022](#)] and [[Rozanski & Woods 2011](#)] extensively discuss this concept.

Following ISO/IEC/IEEE 42010, an architecture view is a work product expressing the architecture of a system from the perspective of specific system concerns (as defined in ISO/IEC/IEEE 42010).

## Architecture Viewpoint

Work product establishing the conventions for the construction, interpretation and use of architecture views to frame specific system concerns (as defined in ISO/IEC/IEEE 42010).

## Artifact

Tangible by-product created or generated during development of software. Examples of artifacts are use cases, all kinds of diagrams, UML models, requirements and design documents, source code, test cases, class-files, archives.

## Assessment

See also [Evaluation](#).

Gathering information about status, risks or vulnerabilities of a system. Assessment might potentially concern all aspects (development, organization, architecture, code, etc.).



## ATAM

*Architecture Tradeoff Analysis Method*. Qualitative architecture evaluation method, based upon a (hierarchical) quality tree and concrete quality scenarios. Basic idea: Compare fine-grained quality scenarios ("[quality requirements](#)") with the corresponding architectural approaches to identify risks and trade-offs.

## B

### Black Box

View on a [building block](#) (or [component](#)) that hides the internal structure. Blackboxes respect the [information hiding principle](#). They shall have clearly defined input- and output interfaces plus a precisely formulated *responsibility* or *objective*. Optionally a blackbox defines some quality attributes, for example timing behavior, throughput or security aspects.

### Bottom-Up Approach

Direction of work (or strategy of processing) for modeling and design. Starting with something detailed or concrete, working towards something more general or abstract.

"In a bottom-up approach the individual base elements of the system are first specified in great detail. These elements are then linked together to form larger subsystems." (quote from [Wikipedia](#))

### Bounded Context

Bounded Context is principle of the strategy design of [Domain-Driven Design](#). "A bounded context explicitly defines the context within which a [domain model](#) for a software system applies. Ideally, it would be preferable to have a single, unified model for all software systems in the same domain. While this is a noble goal, in reality it typically fragments into multiple models. It is useful to recognize this fact of life and work with it." (quote from Wikipedia)

"Multiple domain models are in play on any large project. Yet when code based on distinct models is combined, software becomes buggy, unreliable, and difficult to understand. Communication among team members becomes confusing. It is often unclear in what context a model should not be applied. Therefore: Explicitly set boundaries in terms of team organization, usage within specific parts of the application, and physical manifestations such as code bases and database schemas. Keep the model strictly consistent within these bounds, but don't be distracted or confused by issues outside." (quote from Wikipedia)

### Building Block

General or abstract term for all kinds of artifacts from which software is constructed. Part of the statical structure ([Building Block View](#)) of software architecture.

Building blocks can be hierarchically structured, they may contain other (smaller) building blocks.

Some examples of alternative (concrete) names for building blocks:

Component, module, package, namespace, class, file, program, subsystem, function, configuration, data-definition.

### Building Block View

Shows the statical structure of the system, how its source code is organized. Usually a hierarchical

manner, starting from the [\[context view\]](#). Complemented by one or several [\[runtime views\]](#).

## Business Architecture

A blueprint of the enterprise that provides a common understanding of the organization and is used to align strategic objectives and tactical demands.

## Business Context

Shows the complete system as one [blackbox](#) within its environment from a business perspective and includes a specification of all communication partners (users, IT-systems, etc.) with explanations of domain specific inputs and outputs or interfaces. Note that the specific technical solutions for interacting with external actors should usually be omitted from the business context, as they are subject to the [technical context](#)).

See [Context View](#).

## C

### C4 Model

The [C4 Model for Software Architecture Documentation](#) was developed by Simon Brown. It consists of a hierarchical set of software architecture diagrams for context, containers, components, and code. The hierarchy of the C4 diagrams provides different levels of abstraction, each of which is relevant to a different audience.

## Cohesion

The degree to which elements of a building block, component or module belong together is called [cohesion](#). It measures the strength of relationship between pieces of functionality within a given component. In cohesive systems, functionality is strongly related. It is usually characterized as *high cohesion* or *low cohesion*. Strive for high cohesion, because high cohesion often implies reusability, low coupling and understandability.

## Complexity

"Complexity is generally used to characterize something with many parts where those parts interact with each other in multiple ways." (quoted from Wikipedia.)

- *Essential* complexity is the core of the problem we have to solve, and it consists of the parts of the software that are legitimately difficult problems. Most software problems contain some complexity.
- *Accidental* complexity is all the stuff that doesn't necessarily relate directly to the solution, but that we have to deal with anyway.

(quoted from [Mark Needham](#))

Architects shall strive to reduce accidental complexity.

## Component

See [Building block](#). Structural element of an architecture.

## Concept

Plan, principle(s) or rule(s) how to solve a specific problem.

Concepts are often *cross-cutting* in a sense that multiple architectural elements might be affected by a single concept. That means that implementors of e.g. implementation units (building blocks) should adhere to the corresponding concept.

Concepts form the basis for [conceptual integrity](#).

## Conceptual Integrity

Concepts, rules, patterns and similar solution approaches are applied in a consistent (homogeneous, similar) way throughout the system. Similar problems are solved in similar or identical ways.

## Concern

"A *concern* about an architecture is a requirement, an objective, a constraint, an intention, or an aspiration a stakeholder has for that architecture." (quoted from [\[Rozanski & Woods 2011\]](#), chapter 8)

Following ISO/IEC/IEEE 42010 a concern is defined as (system) interest in a system relevant to one or more of its stakeholders (as defined in ISO/IEC/IEEE 42010).

Note, a concern pertains to any influence on a system in its environment, including developmental, technological, business, operational, organizational, political, economic, legal, regulatory, ecological and social influences.

## Consistency

A consistent systems does not contain contradictions.

- Identical problems are solved with identical (or at least similar) approaches.
- Degree, to which data and their relations comply to validation rules.
- Clients (of a database) get identical results for identical queries (e.g. Monotonic-Read-Consistency, Monotonic-Write-Consistency, Read-Your-Writes-Consistency etc.)
- With respect to behavior: Degree, to which a system behaves coherent, replicable and reasonable.

## Constraint

A restriction on the degree of freedom you have in creating, designing, implementing or otherwise providing a solution. Constraints are often *global requirements*, such as limited development resources or a decision by senior management that restricts the way you plan, design, develop or operate a system.

Based upon a [definition from Scott Ambler](#)

## Context (of a System)

"Defines the relationships, dependencies, and interactions between the system and its environment: People, systems, and external entities with which it interacts." (quoted from [Rozanski-Woods](#))

Another definition from arc42: "System scope and context - as the name suggests - delimits your system (i.e. your scope) from all its communication partners (neighboring systems and users, i.e. the context of

your system). It thereby specifies the external interfaces." (quoted from [docs.arc42.org](https://docs.arc42.org))

Distinguish between *business* and *technical* context:

- The **business** context (formerly called *logical* context) shows the external relationships from a business- or non-technical perspective. It abstracts from technical, hardware or implementation details. Input-/Output relationships are named by their *business meaning* instead of their technical properties.
- The **technical** context shows technical details, like transmission channel, technical protocol, IP-address, bus or similar hardware details. Embedded systems, for example, often care for hardware-related information very early in development.

### Context View

Shows the complete system as one [blackbox](#) within its environment. This can be done from a business perspective ([business context](#)) and/or from a technical or deployment perspective ([technical context](#)). The context view (or context diagram) shows the boundary between a system and its environment, showing the entities in its environment (its neighbors) with which it interacts.

Neighbors can either be other software, hardware (like sensors), humans, user-roles or even organizations using the system.

See [Context](#).

### Coupling

[Coupling](#) is the kind and degree of *interdependence* between building blocks of software; a measure of how closely connected two components are.

You should always aim for *low* coupling. Coupling is usually contrasted with [cohesion](#). Low coupling often correlates with high cohesion, and vice versa. Low coupling is often a sign of a well-structured system. When combined with high cohesion, it supports understandability and maintainability.

### Cross-Cutting Concept

See [concept](#).

Synonym: principle, rule.

### Cross-Cutting Concern

Functionality of the architecture or system that affects several elements. Examples of such concerns are logging, transactions, security, exception handling, caching etc.

Often these concerns will be addressed in systems via [concepts](#).

## D

### Decomposition

(syn: factoring) Breaking or dividing a complex system or problem into several smaller parts that are easier to understand, implement or maintain.

## Dependency

See [coupling](#).

## Dependency Injection (DI)

Instead of having your objects or a factory creating a dependency, you pass the needed dependencies to the constructor or via property setters. You therefore make the creation of specific dependencies *somebody else's problem*.

## Dependency Inversion Principle

High level (abstract) elements should not depend upon low level (specific) elements. "Details should depend upon abstractions" ([[Martin-2003](#)]). One of the [SOLID principles](#), nicely explained by [Brett Schuchert](#), and closely related to the [SDP](#) and [SAP](#).

## Deployment

Bring software onto its execution environment (hardware, processor etc). Put software into operation.

## Deployment View

Architectural view showing the technical infrastructure where a system or artifacts will be deployed and executed.

"This view defines the physical environment in which the system is intended to run, including the hardware environment your system needs (e.g., processing nodes, network interconnections, and disk storage facilities), the technical environment requirements for each node (or node type) in the system, and the mapping of your software elements to the runtime environment that will execute them." (as defined by [Rozanski+2011](#))

## Design Pattern

General or generic reusable solution to a commonly occurring problem within a given context in design. Initially conceived by the famous architect [Christopher Alexander](#), the concept of *design patterns* was taken up by software engineers.

In our opinion, every serious software developer should know at least some patterns from the pioneering [Gang-of-Four](#) book by Erich Gamma ([[GoF: Design-Patterns](#)]) and his three allies.

## Design Principle

Set of guidelines that helps software developers to design and implement better solutions, where "better" could, for example, mean one or more of the following:

- low [coupling](#).
- high [cohesion](#).
- [separation of concerns](#) or adherence to the [Single Responsibility Principle](#).
- adherence to the [Information Hiding](#) principle.
- avoid **Rigidity**: A system or element is difficult to change because every change potentially affects many other elements.

- avoid **Fragility**: When elements are changed, unexpected results, defects or otherwise negative consequences occur at other elements.
- avoid **Immobility**: An element is difficult to reuse because it cannot be disentangled from the rest of the system.

### Design Rationale

An explicit documentation of the reasons behind decisions made when designing any architectural element.

### Document

A (usually written) artifact conveying information.

### Documentation

A systematically ordered collection of documents and other material of any kind that makes usage or evaluation easier. Examples for "other material": presentation, video, audio, web page, image, etc.

### Documentation Build

Automatic build process that collects artifacts into a consistent documentation.

### Domain Model

The domain model is a concept of [Domain-Driven Design](#). It provides a system of abstractions that describes selected aspects of a domain and can be used to solve problems related to that domain.

### Domain-Driven Design (DDD)

"Domain-driven design (DDD) is an approach to developing software for complex needs by deeply connecting the implementation to an evolving model of the core business concepts."

(quoted from [DDCommunity](#)). See [\[Evans-2004\]](#).

See also:

- [Entity](#)
- [Value Object](#)
- [Aggregate](#)
- [Service](#)
- [Factory](#)
- [Repository](#)
- [Ubiquitous Language](#)

## E

## Embedded System

System *embedded* within a larger mechanical or electrical system. Embedded systems often have real-time computing constraints. Typical properties of embedded systems are low power consumption, limited memory and processing resources, small size.

## Encapsulation

Encapsulation has two slightly distinct notions, and sometimes the combination thereof:

- restricting access to some of the object's components
- bundling of data with the methods or functions operating on that data

Encapsulation is a mechanism for [information hiding](#).

## Enterprise IT Architecture

Synonym: Enterprise Architecture.

Structures and concepts for the IT support of an entire company. Atomic subject matters of the enterprise architecture are single software systems also referred to as "applications".

## F

### Filter

Part of the pipe-and-filter architectural style that creates or transforms data. Filters are typically executed independently of other filters.

### Fitness Function

"An architectural fitness function provides an objective integrity assessment of some architectural characteristics." ([[Ford+2017](#)]).

A fitness function is derived from manual evaluations and automated tests and shows to which extent architectural or quality requirements are met.

## H

### Heuristic

Informal rule, rule-of-thumb. Any way of problem-solving not guaranteed to be optimal, but somehow sufficient. Examples from [Object-Oriented Design](#) or [User Interface Design](#).

### Hybrid Architecture Style

Combination of two or more existing architecture styles or patterns. For example, an MVC construct embedded in a layer structure.

## I

## Incremental Development

See [iterative and incremental development](#).

## Information Hiding

A fundamental principle in software design: Keep those design or implementation decisions *hidden* that are likely to change, thus protecting other parts of the system from modification if these decisions or implementations are changed. Is one important attributes of [blackboxes](#). Separates interface from implementation.

The term [encapsulation](#) is often used interchangeably with information hiding.

## Integrity

Various meanings:

One of the basic [security goals](#) which means maintaining and assuring accuracy and completeness of data. Usually this is achieved by the usage of cryptographic algorithms to create a digital signature.

Data or behavioral integrity:

- Degree to which clients (of a database) get identical results for identical queries (e.g. Monotonic-Read-Consistency, Monotonic-Write-Consistency, Read-Your-Writes-Consistency etc.)
- Degree, to which a system behaves coherent, replicable and reasonable.

See also [consistency](#).

## Interface

Multiple meanings, depending on context:

1. Boundary across which two building blocks interact or communicate with each other.
2. Design construct that provides an abstraction of the behavior of concrete components, declares possible interactions with these components and constraints for these interactions.

An example for the second meaning is the programming language construct interface from the object-oriented language Java(tm):



```
/* File name : Animal.java */
interface Animal {
    public void eat();
    public void move();
}

/* File name : Horse.java */
public class Horse implements Animal {

    public void eat() {
        System.out.println("Horse eats");
    }

    public void move() {
        System.out.println("Horse moves");
    }
}
```

### Interface Segregation Principle (ISP)

Building blocks (classes, components) should not be forced to depend on methods they don't use. ISP splits larger interfaces into smaller and more (client) specific ones so that clients will only need to know about methods that they actually use.

### ISO 25010

Official name:

Systems and software engineering — Systems and software Quality Requirements and Evaluation (SQuaRE)

It is a standard to describe *software product quality*.

ISO proposes a hierarchical model of product quality, with currently (standard version 2011) 8 top-level attributes:

image::1\_architecture/ISO-25010-EN.png

The future version of the ISO standard will contain 9 of these attributes.

For a list of quality attributes defined by the ISO 25010 standard, refer to [\[ISO-25010\]](#).

Systems and software engineering — Systems and software Quality Requirements and Evaluation (SQuaRE)

### Iterative and Incremental Development

Combination of iterative and incremental approaches for software development. These are essential parts of the various *agile* development approaches, e.g. Scrum and XP.

## Iterative Development

"Development approach that *cycles* through development phases, from gathering requirements to delivering functionality in a working release." (quoted from [c2-wiki](#))

Such cycles are repeated to improve either functionality, quality or both.

Contrast to the [Waterfall Development](#).

## L

### Latency

Latency is the time delay between the cause and the effect of some change in a system.

In computer networks, latency describes the time it takes for an amount of data (*packet*) to get from one specific location to another.

In interactive systems, latency is the time interval between some input to the system and the audio-visual response. Often a delay exists, often caused by network delays.

### Layer

Grouping of building blocks or components that (together) offer a cohesive set of services to other layers. Layers are related to each other by the ordered relation *allowed to use*.

### Liskov Substitution Principle

Refers to object-oriented programming: If you use inheritance, do it right: Instances of derived types (subclasses) must be completely substitutable for their base types. If code uses a base class, these references can be replaced with any instance of a derived class without affecting the functionality of that code.

## M

### Microservice

An architectural style, proposing to divide large systems into small units. "Microservices have to be implemented as virtual machines, as more light-weight alternatives such as Docker containers or as individual processes. Thereby they can easily be brought into production individually." (quoted from the (free) [LeanPub booklet on Microservices](#) by [Eberhard Wolff](#))

### Model-Driven Software Development (MDSD)

The underlying idea is to generate code from more abstract models of requirements or the domain.

### Model-View-Controller

Architecture pattern, often used to implement user interfaces. It divides a system into three interconnected parts (model, view and controller) to separate the following responsibilities:

- Model manages data and logic of the system. The "truth" that will be shown or displayed by one or many views. Model does not know (depend on) its views.

- View can be any number of (arbitrary) output representation of (model) information. Multiple views of the same model are possible.
- Controller accepts (user) input and converts those to commands for the model or view.

### Modeling Tool

A tool that creates models (e.g. UML or BPMN models). Can be used to create consistent diagrams for documentation because it has the advantage that each model element exists only once but can be consistently displayed in many diagrams (as opposed to a mere [Drawing Tool](#)).

### Module

(see also [Modular programming](#))

1. structural element or building block, usually regarded as a *black box* with a clearly defined responsibility. It encapsulates data and code and provides public interfaces, so clients can access its functionality. This meaning has first been described in a groundbreaking and fundamental paper from David L. Parnas: [On the Criteria to be Used in Decomposing Software into Modules](#)
2. In several programming languages, *module* is a construct for aggregating smaller programming units, e.g. in Python. In other languages (like Java), modules are called *packages*.
3. The CPSA®-Advanced Level is currently divided into several modules, which can be learned or taught separately and in any order. The exact relationships between these modules and the contents of these modules are defined in the respective curricula.

## N

### Non Functional Requirement (NFR)

Requirements that *constrain the solution*. Nonfunctional requirements are also known as *quality attribute requirements* or [quality requirements](#). The term NFR is actually misleading, as many of the *attributes* involved directly relate to specific system *functions* (so modern requirements engineering likes to call these things *required constraints*).

### Notation

A system of marks, signs, figures, or characters that is used to represent information. Examples: prose, table, bullet point list, numbered list, UML, BPMN.

## O

### Open-Close-Principle (OCP)

"Software entities (classes, modules, functions, etc.) should be open for extension, but closed for modification" (Bertrand Meyer, 1998). In plain words: To *add* functionality (extension) to a system, you should *not need to modify* existing code. Part of Robert Martin's "SOLID" principles for object-oriented systems. Can be implemented in object-oriented languages by interface inheritance, in a more general way as *plugins*.

## P

### Pattern

A reusable or repeatable solution to a common problem in software design or architecture.

See [architecture pattern](#) or [design pattern](#).

### Perspective

A perspective is used to consider a set of related quality properties and concerns of a system.

Architects apply perspectives iteratively to the system's *architectural views* in order to assess the effects of *architectural design decisions* across multiple *viewpoints* and *architectural views*.

[Rozanski & Woods 2011] associates with the term *perspective* also activities, tactics, and guidelines that must be considered if a system should provide a set of related quality properties and suggests the following perspectives:

- Accessibility
- Availability and Resilience
- Development Resource
- Evolution
- Internationalization
- Location
- Performance and Scalability
- Regulation
- Security
- Usability

### Pipe

Connector in the pipes-and-filters architectural style that transfers streams or chunks of data from the output of one filter to the input of another filter without modifying values or order of data.

### Port

UML construct, used in component diagrams. An interface, defining a point of interaction of a component with its environment.

## Q

### Qualitative Evaluation

Finding risks concerning the desired quality attributes of a system. Analyzing or assessing if a system or its architecture can meet the desired or required quality goals.

Instead of calculating or measuring certain characteristics of systems or architectures, qualitative evaluation is concerned with risks, trade-offs and sensitivity points.

See also [assessment](#).

## Quality

See [software quality](#) and [quality attributes](#).

## Quality Attribute

Software quality is the degree to which a system possesses the desired combination of *attributes* (see: [software quality](#)).

The Standard [ISO-25010](#) defines the following quality attributes:

- [Functional suitability](#)
  - [Functional completeness](#)
  - [Functional correctness](#)
  - [Functional appropriateness](#)
- [Performance efficiency](#)
  - [Time behaviour](#)
  - [Resource utilization](#)
  - [Capacity](#)
- [Compatibility](#)
  - [Co-existence](#)
  - [Interoperability](#)
- [Usability](#)
  - [Appropriateness recognizability](#)
  - [Learnability](#)
  - [Operability](#)
  - [User error protection](#)
  - [User interface aesthetics](#)
  - [Accessibility](#)
- [Reliability](#)
  - [Availability](#)
  - [Fault tolerance](#)
  - [Recoverability](#)
- [Security](#)
  - [Confidentiality](#)
  - [Integrity](#)

- Non-repudiation
- Accountability
- Authenticity
- Maintainability
  - Modularity
  - Reusability
  - Analysability
  - Modifiability
  - Testability
- Portability
  - Adaptability
  - Installability
  - Replaceability

It might be helpful to distinguish between the following types of quality attributes:

- *runtime quality attributes* (which can be observed at execution time of the system),
- *non-runtime quality attributes* (which cannot be observed as the system executes) and
- *business quality attributes* (cost, schedule, marketability, appropriateness for organization)

Examples of runtime quality attributes are functional suitability, performance efficiency, security, reliability, usability and interoperability.

Examples of non-runtime quality attributes are modifiability, portability, understandability and testability.

### Quality Characteristic

synonym: [quality attribute](#).

### Quality Model

(from ISO 25010) A model that defines quality characteristics that relate to static properties of software and dynamic properties of the computer system and software products. The quality model provides consistent terminology for specifying, measuring and evaluating system and software product quality.

The scope of application of the quality models includes supporting specification and evaluation of software and software-intensive computer systems from different perspectives by those associated with their acquisition, requirements, development, use, evaluation, support, maintenance, quality assurance and control, and audit.



Comment (Gernot Starke)

A quality model (like ISO-25010) **only** provides a taxonomy of terms, but does **not** provide any means to specify or evaluate quality. I consent to the phrase above "consistent terminology", but strongly object to "measuring and evaluating". For measuring and evaluating you definitely need additional tools and/or methods, the pure model does not help.

## Quality Requirement

Characteristic or attribute of a component of a system. Examples include runtime performance, safety, security, reliability or maintainability. See also [software quality](#).

## Quality Tree

(syn: quality attribute utility tree). A hierarchical model to describe product quality: The root "quality" is hierarchically refined in *areas* or topics, which itself are refined again. Quality scenarios form the leaves of this tree.

- Standards for product quality, like [ISO 25010](#), propose *generic* quality trees.
- The quality of a specific system can be described by a *specific* quality tree (see the example below).

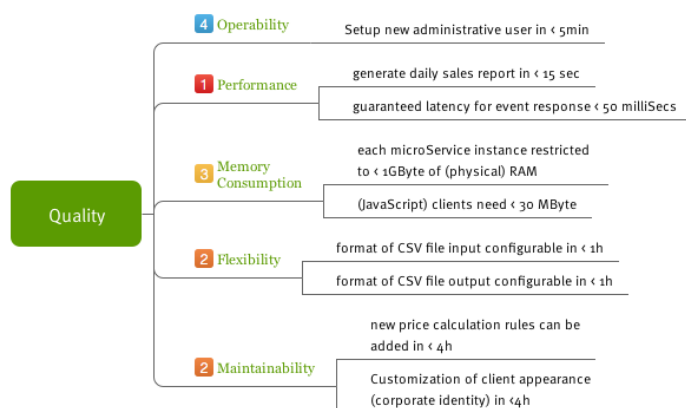


Figure 1. Sample Quality Tree

## Quantitative Evaluation

(syn: quantative analysis): Measure or count values of software artifacts, e.g. [coupling](#), cyclomatic complexity, size, test coverage. Metrics like these can help to identify critical parts or elements of systems.

## R

### Rationale

Explanation of the reasoning or arguments that lie behind an architecture decision.

## Redesign

The alteration of software units in such a way that they fulfill a similar purpose as before, but in a different manner and possibly by different means. Often mistakenly called refactoring.

## Refactoring

A term denoting the improvement of software units by changing their internal structure without changing the behavior. (see "Refactoring is the process of changing a software system in such a way that it does not alter the external behavior of the code yet improves the internal structure." – Refactoring, Martin Fowler, 1999) Not to be confused with **redesign**.

## Relationship

Generic term denoting some kind of dependency between elements of an architecture. Different types of relationship are used within architectures, e.g. call, notification, ownership, containment, creation or inheritance.

## Risk

Simply said, a risk is the possibility that a problem occurs. A risk involves *uncertainty* about the effects, consequences or implications of an activity or decision, usually with a negative connotation concerning a certain value (such as health, money, or qualities of a system like availability or security).

To quantify a risk the likelihood of occurrence is multiplied by the potential value which is usually a loss – otherwise the risk would be a chance which given the uncertainty might be a potential outcome for some risks.

## Round-trip Engineering

"Concept of being able to make any kind of change to a model as well as to the code generated from that model. The changes always propagate bidirectional and both artifacts are always consistent." (quoted from [Wikipedia](#))



*Comment (Gernot Starke)*

In my personal opinion, it does not work in practical situations, only in hello-world-like scenarios, as the inverse abstraction (from low-level sourcecode to higher-level architectural elements) usually involves design-decisions and cannot realistically be automated.



*Comment (Matthias Bohlen)*

Recently I have seen code that originated from DDD where reverse engineering did indeed work.

## Runtime View

Shows the cooperation or collaboration of building blocks (respectively their instances) at runtime in concrete scenarios. Should refer to elements of the [Building Block View](#). Could for example (but doesn't need to) be expressed in UML sequence or activity diagrams.



## S

### S.O.L.I.D. principles

SOLID (single responsibility, open-closed, Liskov substitution, interface segregation and dependency inversion) is an acronym for some principles (named by [Robert C. Martin](#)) to improve object-oriented programming and design. The principles make it more likely that a developer will write code that is easy to maintain and extend over time.

For some additional sources, see [\[SOLID-principles\]](#).

### Scenario

Quality scenarios document required quality attributes. They "... are brief narratives of expected or anticipated use of a system from both development and end-user viewpoints." ([\[Kazman+1996\]](#)) Thus, they help to describe required or desired qualities of a system in pragmatic and informal manner, yet making the abstract notion of "quality" concrete and tangible.

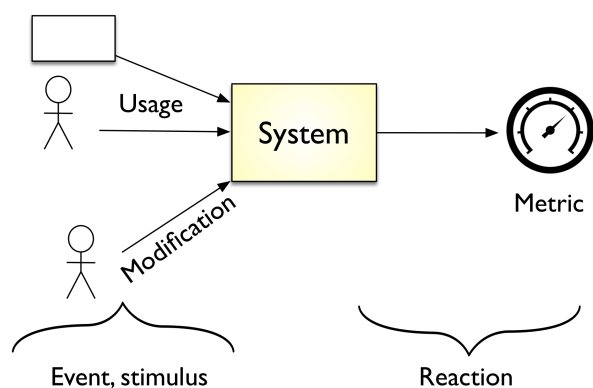


Figure 2. Generic form of (Quality) scenario

- Event/stimulus: Any condition or event arriving at the system
- System (or part of the system) is stimulated by the event.
- Response: The activity undertaken after the arrival of the stimulus.
- Metric (response measure): The response should be measurable in some fashion.

Usually scenarios are differentiated into:

- Usage scenarios (application scenarios)
- Change scenarios (modification or growth scenarios)
- Failure scenarios (boundary, stress, or exploratory scenarios)

### Sensitivity Point

(in qualitative evaluation like ATAM): Element of the architecture or system influencing several quality attributes. For example, if one component is responsible for both runtime performance *and* robustness, that component is a sensitivity point.

Casually said, if you mess up a sensitivity point, you will most often have more than one problem.

## Separation of Concerns (SoC)

Any element of an architecture should have exclusivity and singularity of responsibility and purpose: No element should share the responsibilities of another element or contain unrelated responsibilities.

Another definition is "breaking down a system into elements that overlap as little as possible."

Famous Edgar Dijkstra said in 1974: "Separation of concerns ... even if not perfectly possible, is the only available technique for effective ordering of one's thoughts".

Similar to the [Single Responsibility Principle](#).

## Sequence Diagram

Type of diagram to illustrate how elements of an architecture interact to achieve a certain scenario. It shows the sequence (flow) of messages between elements. As parallel vertical lines it shows the lifespan of objects or components, horizontal lines depict interactions between these components. See the following example.

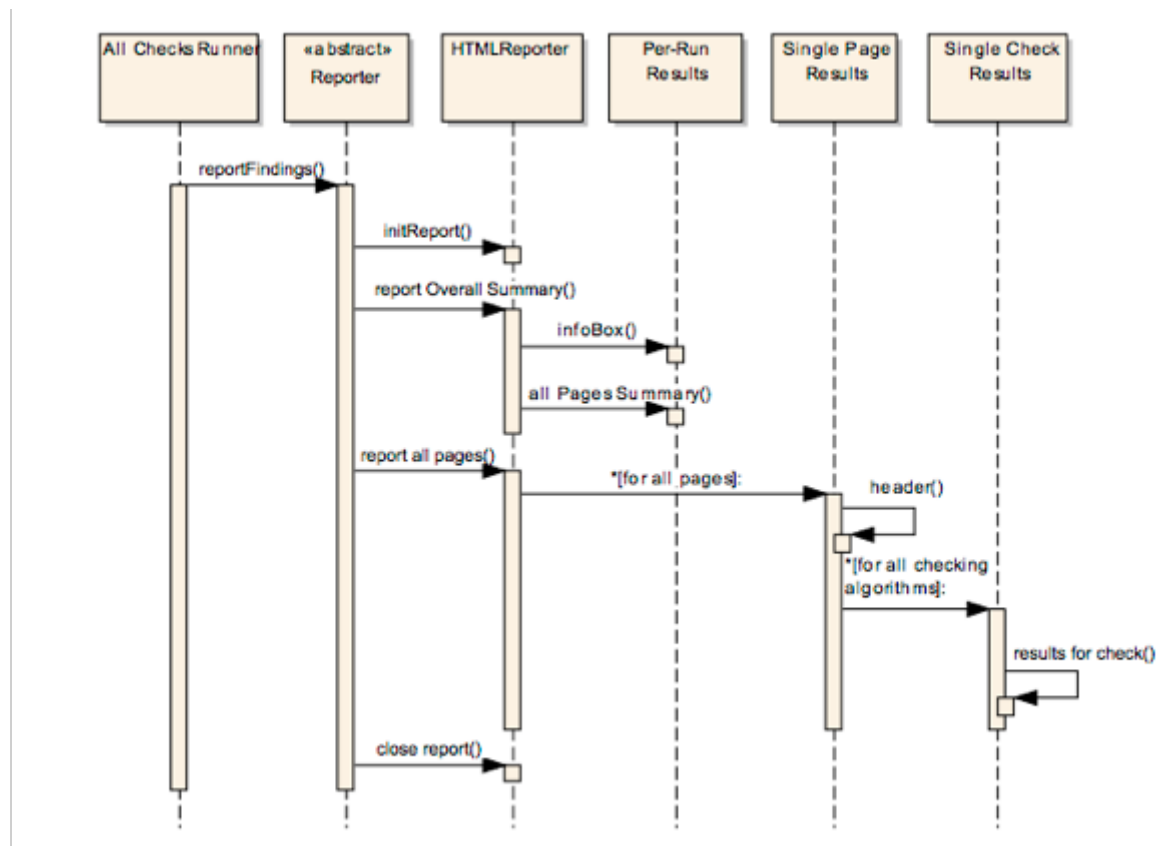


Figure 3. Example of Sequence Diagram

## Service

A service is a technical, autonomous unit that bundles related functionalities, typically on a topic, and makes them available for use by other [building blocks](#) via a well-defined interface.

A service optimally abstracts the internal, technical function to such an extent that it is not necessary to know or even understand internal implementation details in order to use the service.

Typical examples of externally accessible services are web services, network services, system services or telecommunications services.

(based on [Wikipedia](#))

### Single Responsibility Principle (SRP)

Each element within a system or architecture should have a single responsibility, and that all its functions or services should be aligned with that responsibility.

[Cohesion](#) is sometimes considered to be associated with the SRP.

### Software Architecture

There exist several (!) valid and plausible definitions of the term *Software Architecture*.

The following definition has been proposed by the [IEEE 1471](#) standard:



Software Architecture: the fundamental organization of a system embodied in its components, their relationships to each other and to the environment and the principles guiding its design and evolution.

The new standard ISO/IEC/IEEE 42010:2011 has adopted and revised the definition as follows:



Architecture: (system) fundamental concepts or properties of a system in its environment embodied in its elements, relationships, and in the principles of its design and evolution.

The key terms in this definition require some explanation:

- Components: Subsystems, modules, classes, functions or the more general term [building blocks](#): structural elements of software. Components are usually implemented in a programming language, but can also be other artifacts that (together) *make up the system*.
- Relationships: Interfaces, dependencies, associations – different names for the same feature: Components need to interact with other components to enable [separation of concerns](#).
- Environment: Every system has some relationships to its environment: data, control flow or events are transferred to and from maybe different kinds of neighbours.
- Principles: Rules or conventions that hold for a system or several parts of it. Decision or definition, usually valid for several elements of the system. Often called [concepts](#) or even *solution patterns*. Principles (concepts) are the foundation for [conceptual integrity](#).

The *Software Engineering Institute* maintains a [collection of further definitions](#)

Although the term often refers to the *software architecture of an IT system*, it is also used to refer to *software architecture as an engineering science*.

### Software Quality

(from IEEE Standard 1061): Software quality is the degree to which software possesses a desired combination of attributes. This desired combination of attributes need to be clearly defined; otherwise,

assessment of quality is left to intuition.

(from ISO/IEC Standard 25010): The quality of a system is the degree to which the system satisfies the stated and implied needs of its various stakeholders, and thus provides value. These stated and implied needs are represented in the ISO 25000 quality models that categorize product quality into characteristics, which in some cases are further subdivided into subcharacteristics.

## Stakeholder

Person or organization that can be affected by or have an interest (*stake*) in a system, its development or execution.

Examples include users, employees, owners, administrators, developers, designers, project- or product-managers, product-owner, project manager, requirements engineers, business-analysts, government agencies, enterprise architects etc.

Following ISO/IEC/IEEE 42010 a stakeholder is a (system) individual, team, organization, or classes thereof, having an interest in a system (as defined in ISO/IEC/IEEE 42010).

Such interest can be positive (e.g. stakeholder wants to benefit from the system), neutral (stakeholder has to test or verify the system) or negative (stakeholder is competing with the system or wants it to fail).

## Structural Element

see [Building Block](#) or [Component](#)

## Structure

An arrangement, order or organization of interrelated elements in a system. Structures consist of building blocks (structural elements) and their relationships (dependencies).

Structures in software architecture are often used in [architecture views](#), e.g. the [building block view](#). A documentation template (e.g. [arc42](#)) is a kind of structure too.

## System

Collection of elements (building blocks, components etc) organized for a common purpose.

In ISO/IEC/IEEE Standards a couple of system definitions are available:

- systems as described in [ISO/IEC 15288]: “systems that are man-made and may be configured with one or more of the following: hardware, software, data, humans, processes (e.g., processes for providing service to users), procedures (e.g. operator instructions), facilities, materials and naturally occurring entities”.
- software products and services as described in [ISO/IEC 12207].
- software-intensive systems as described in [IEEE Std 1471:2000]: “any system where software contributes essential influences to the design, construction, deployment, and evolution of the system as a whole” to encompass “individual applications, systems in the traditional sense, subsystems, systems of systems, product lines, product families, whole enterprises, and other aggregations of interest”.

## T

### Technical Context

Shows the complete system as one [blackbox](#) within its environment from a technical or deployment perspective. This includes, in particular, technical interfaces and communication channels as well as the relevant technical details of the neighboring systems. The technical context thus supplements the [business context](#) by mapping domain-specific interactions with neighboring systems to e.g. specific communication channels and technical protocols.

See [context view](#).

### Template (for Documentation)

Standardized order of artifacts used in software development. It can help base other files, especially documents in a predefined structure without prescribing the content of these single files.

A well known example of such templates is [arc42](#)

### Temporal Coupling

Different interpretations exist from various sources. Temporal coupling

- means that processes that are communicating will both have to be up and running. See [\[Tanenbaum+2016\]](#).
- when you often commit (*modify*) different components at the same time. See [\[Tornhill-2015\]](#).
- when there's an implicit relationship between two, or more, members of a class requiring clients to invoke one member before the other. Mark Seemann, see [Design Smell Temporal Coupling](#).
- means that one system needs to wait for the response of another system before it can continue processing. See [Rest Antipattern](#)

### Top-Down

"Direction of work" or "order of communication": Starting from an abstract or general construct working towards more concrete, special or detailed representation.

### Traceability

(more precisely: *requirements* traceability): Documents that

1. all requirements are addressed by elements of the system (forward traceability) and
2. all elements of the system are justified by at least one requirement (backward traceability).

My personal opinion: If you can, you should avoid traceability, as it creates a lot of documentation overhead.

### Trade-Off

(syn: compromise). A balance achieved or negotiated between two desired or required but usually incompatible or contradicting features. For example, software development usually has to tradeoff memory consumption and runtime speed.

More colloquially, if one thing increases, some other thing must decrease.

Even more colloquially: There is no free lunch. Every quality attribute has a price among other quality attributes.

## U

### Unified Modeling Language (UML)

[Unified Modeling Language \(UML\)](#) is a graphical language for visualizing, specifying and documenting the artifacts and structures of a software system.

- For building block views or the context view, use component diagrams, with either components, packages or classes to denote building blocks.
- For runtime views, use sequence- or activity diagrams (with swim-lanes). Object diagrams can theoretically be used, but are practically not advised, as they become cluttered even for small scenarios.
- For Deployment views, use deployment diagrams with node symbols.

### Uses Relationship

Dependency that exists between two building blocks. If A uses B then execution of A depends on the presence of a correct implementation of B.

## V

### View

See [architecture view](#).

## W

### Waterfall Development

Development approach "where you gather all the requirements up front, do all necessary design, down to a detailed level, then hand the specs to the coders, who write the code; then you do testing (possibly with a side trip to IntegrationHell) and deliver the whole thing in one big end-all release. Everything is big including the risk of failure." (quoted from the [C2 wiki](#))

See also [iterative development](#).

### Web of Trust

Since a single [CA](#) could be an easy target for an attacker the web of trust delegates the establishment of trust to the user. Each user decides which other users proof of identity he trusts, usually by verifying a fingerprint of a given key. This trust is expressed by signing the key of the other user who can then publish it with the additional signature. A third user can then verify this signature and decide to trust the identity or not.

The email encryption PGP is an example for a [PKI](#) based on a web of trust.

## White Box

Shows the internal structure of a system or building block, made up from blackboxes and the internal/external relationships and interfaces.

See also [black box](#).

## Workflow Management System (WFMS)

"Provides an infrastructure for the set-up, performance and monitoring of a defined sequence of tasks, arranged as a workflow." (quoted from Wikipedia)

## Wrapper

(syn: Decorator, Adapter, Gateway) Patterns to abstract away the concrete interface or implementation of a component. Attach additional responsibilities to an object dynamically.

Depending on the sources, the semantics of the term *wrapper* may vary.



Comment (Gernot Starke)

The tiny differences found in literature regarding this term often don't matter in real-life. *Wrapping* a component or building-block shall have clear semantics within a single software system.

## Translation Tables

Here you find translations of the terms between English and German (see below) and [German-to-English](#) (next section).

Several of these terms are based in the legal and organizational foundations of the iSAQB® association (and therefore not related to software architecture).

The following translations are maintained<sup>[^generateTranslation]</sup> in a simple JSON input file, contained within this books' open source [GitHub repository](#).

[^generateTranslation]: The documentation found in <https://github.com/isaqb-org/glossary> contains all information required to generate the translation tables. Currently, only English and German are supported. The translation tables are maintained in JSON format, suggestions for improvements are highly welcome!

### English to German



Please note: This translation table is not supposed to be complete, several English terms will not be translated but preferably used in their original language (e.g. several pattern names).

English	German
Accessibility	Barrierefreiheit, Zugänglichkeit
Accountability	Rechenschaft, Verantwortlichkeit
Accreditation contract	Akkreditierungsvertrag
Accreditation fee	Akkreditierungsgebühr
Action	Maßnahme
Adaptability	Adaptierbarkeit
Adaption	Anpassung
Adequacy	Angemessenheit
Analysability	Analysierbarkeit
Approach	Ansatz
Appropriateness	Angemessenheit
Appropriateness Recognizability	Erkennbarkeit der Brauchbarkeit, Verständlichkeit
Architectural objective	Architekturziel
Architectural pattern	Architekturmuster
Architectural view	Architektursicht, Sicht
Architecture assessment	Architekturanalyse, Architekturbewertung
Architecture evaluation	Architekturbewertung, Architekturanalyse
Architecture objective	Architekturziel
Articles of association	Satzung des Vereins
Artifact	Artefakt
Aspect	Aspekt, Belang



Assessment	Bewertung, Begutachtung, Einschätzung, Untersuchung
Association	Verein, Beziehung
Attack Tree	Angriffsbäume
Authenticity	Authentifizierbarkeit
Availability	Verfügbarkeit
Bounded Context	Kontextgrenze
Building block	Baustein
Building block view	Bausteinsicht
Business	Fachlichkeit, Domäne
Business architecture	fachliche Architektur, Geschäftsarchitektur
Business context	Fachlicher Kontext
Cabinet (as methaphor for template)	Schrank (als Metapher für Template)
Capacity	Kapazität
Cash audit	Rechnungsprüfung
Cash auditor	Rechnungsprüfer
Certification authority	Zertifizierungsstelle
Certification body	Zertifizierungsstelle
Chairman	Vorsitzender
Channel	Kanal
Co-Existence	Koexistenz
Cohesion	Kohäsion, innerer Zusammenhalt
Commensurability	Angemessenheit, Messbarkeit, Vergleichbarkeit
Compatibility	Kompatibilität
Compliance	Erfüllung, Einhaltung
Component	Baustein, Komponente
Concern	Belang
Confidentiality	Vertraulichkeit
Constraint	Randbedingung, Einschränkung
Context (of a term)	Einordnung (eines Begriffes) in einen Zusammenhang
Context view	Kontextabgrenzung
Coupling	Kopplung, Abhängigkeit
Cross-cutting	Querschnittlich
Curriculum	Lehrplan
Decomposition	Zerlegung
Dependency	Abhängigkeit, Beziehung
Deployment	Verteilung
Deployment unit	Verteilungsartefakt

Deployment view	Verteilungssicht
Deputy chairman	Stellvertretender Vorsitzender
Design	Entwurf
Design approach	Entwurfsansatz, Entwurfsmethodik
Design decision	Entwurfsentscheidung
Design principle	Entwurfsprinzip
Domain	Fachdomäne, Fachlicher Bereich, Geschäftsbereich
Domain event	Fachliches Event
Domain-related architecture	fachliche Architektur
Drawing Tool	Mal-/Zeichenprogramm
Economicalness	Sparsamkeit, Wirtschaftlichkeit
Embedded	Eingebettet
Encapsulation	Kapselung
Enterprise IT architecture	Unternehmens-IT-Architektur
Estimation	Schätzung
Evaluation	Bewertung
Examination question	Prüfungsfrage
Examination rules and regulations	Prüfungsordnung
Examination sheet	Prüfungsbogen
Examination task	Prüfungsaufgabe
Examinee	Prüfling
Examiner	Prüfer
Executive board	Vorstand
Fault Tolerance	Fehlertoleranz
Fees rules and regulations	Gebührenordnung
Fitness Function	Fitnessfunktion
Functional Appropriateness	Funktionale Angemessenheit
Functional Completeness	Funktionale Vollständigkeit
Functional Correctness	Funktionale Korrektheit
Functional Suitability	Funktionale Eignung
General meeting	Mitgliederversammlung
Improvement	Verbesserung
Improvement action	Verbesserungsmaßnahme
Influencing Factor	Einflussfaktor
Information hiding principle	Geheimnisprinzip
Installability	Installierbarkeit
Integrity	Integrität
Interdependency (between design decisions)	Abhängigkeit (zwischen Entwurfsentscheidungen)

Interface	Schnittstelle
Interface description	Schnittstellenbeschreibung, Schnittstellendokumentation
Interoperability	Interoperabilität
Learnability	Erlernbarkeit
Learning goal	Lernziel
License fee	Akkreditierungsgebühr
Licensee	Lizenznehmer
Licensing agreement	Lizenzvertrag, Lizenzvereinbarung, Akkreditierungsvertrag
Local court	Amtsgericht
Maintainability	Wartbarkeit
Maturity	Reifegrad
Means for describing	Beschreibungsmittel
Means for documenting	Beschreibungsmittel
Measurability	Messbarkeit
Members' meeting	Mitgliederversammlung
message-driven	Nachrichten-zentrisch
Modeling Tool	Modellierungswerkzeug
Modifiability	Modifizierbarkeit
Modularity	Modularität
Module	Komponente, Modul, Baustein
Node	Knoten
Non-exclusive license	Einfache Lizenz
Non-profit	Gemeinnützig
Non-repudiation	Nichtabstreitbarkeit
Normal case	Normalfall
Notification	Benachrichtigung
Objective	Ziel
Operability	Bedienbarkeit
Operational processes	Betriebsprozesse (von Software)
Pattern	Muster
Pattern language	Mustersprache, Musterfamilie
Performance Efficiency	Leistungseffizienz, Performance
Perspective	Perspektive
Portability	Portierbarkeit
Principle	Prinzip, Konzept
Quality attribute	Qualitätsmerkmal, Qualitätseigenschaft
Quality characteristic	Qualitätsmerkmal, Qualitätseigenschaft

Quality feature	Qualitätsmerkmal, Qualitätseigenschaft
Rationale	Begründung, Erklärung
Real-time system	Echtzeitsystem
Recoverability	Widerherstellbarkeit
Registered trademark	Marke (gesetzlich geschützt)
Relationship	Beziehung
Relationship (kind of)	Beziehungsart
Reliability	Zuverlässigkeit
Replaceability	Austauschbarkeit
Repository	Ablage
Requirement	Anforderung
resilient	unverwüstlich, selbstwiederherstellend
Resolution	Beschluss
Resource Utilization	Ressourcenverbrauch
Responsibility	Verantwortlichkeit
responsive	reaktionsfähig
Reusability	Wiederverwendbarkeit
Rights of use	Nutzungsrecht
Runtime	Laufzeit
Runtime view	Laufzeitsicht
Security	Sicherheit
Security Goals	Schutzziele, Sachziele
Skill	Fähigkeit, Fertigkeit
Specification (of software architecture)	Beschreibung (von Softwarearchitektur)
sponsoring (board) member	materiell förderndes Mitglied
statutory	satzungsgemäß
Structure	Struktur
Task	Aufgabe
Team regulations	Arbeitsgruppenordnung
Technical context	Technischer Kontext
Term	Begriff
Testability	Testbarkeit
Thriftyness	Sparsamkeit, Wirtschaftlichkeit
Time Behaviour	Zeitverhalten
Tools	Arbeitsmittel, Werkzeug
Tools-and-material-approach	Werkzeug-Material-Ansatz
Tradeoff	Kompromiss, Abwägung, Wechselwirkung
Training provider	Schulungsanbieter
Treasurer	Schatzmeister

Ubiquitous language	Allgegenwärtige Sprache
Usability	Benutzbarkeit, Benutzerfreundlichkeit
User Error Protection	Schutz vor Fehlbedienung
User Interface Aesthetics	Ästhetik der Benutzeroberfläche
Uses relationship	Benutzt-Beziehung, Nutzungsbeziehung
View	Sicht, Architektursicht
Workflow management	Ablaufsteuerung
Working environment	Arbeitsumgebung
Working group	Arbeitsgruppe
Working group head	Arbeitsgruppenleiter

## German to English

In this section we collect the iSAQB® translation of the terms from German to English.



Please note: This translation table is not supposed to be complete, several English terms will not be translated but preferably used in their original language (e.g. many of the design pattern names).

The actual translation tables are generated from a JSON file in the [/translations](#) directory.

German	English
Abhängigkeit	Coupling, Dependency
Abhängigkeit (zwischen Entwurfsentscheidungen)	Interdependency (between design decisions)
Ablage	Repository
Ablaufsteuerung	Workflow management
Abwägung	Tradeoff
Adaptierbarkeit	Adaptability
Akkreditierungsgebühr	Accreditation fee, License fee
Akkreditierungsvertrag	Accreditation contract, Licensing agreement
Allgegenwärtige Sprache	Ubiquitous language
Amtsgericht	Local court
Analysierbarkeit	Analysability
Anforderung	Requirement
Angemessenheit	Adequacy, Appropriateness, Commensurability
Angriffsbäume	Attack Tree
Anpassung	Adaption
Ansatz	Approach
Arbeitsgruppe	Working group
Arbeitsgruppenleiter	Working group head
Arbeitsgruppenordnung	Team regulations
Arbeitsmittel	Tools
Arbeitsumgebung	Working environment
Architekturanalyse	Architecture assessment, Architecture evaluation
Architekturbewertung	Architecture assessment, Architecture evaluation
Architekturmuster	Architectural pattern
Architektursicht	Architectural view, View
Architekturziel	Architectural objective, Architecture objective
Artefakt	Artifact
Aspekt	Aspect
Aufgabe	Task
Austauschbarkeit	Replaceability

Authentifizierbarkeit	Authenticity
Barrierefreiheit	Accessibility
Baustein	Building block, Component, Module
Bausteinsicht	Building block view
Bedienbarkeit	Operability
Begriff	Term
Begründung	Rationale
Begutachtung	Assessment
Belang	Aspect, Concern
Benachrichtigung	Notification
Benutzbarkeit	Usability
Benutzerfreundlichkeit	Usability
Benutzt-Beziehung	Uses relationship
Beschluss	Resolution
Beschreibung (von Softwarearchitektur)	Specification (of software architecture)
Beschreibungsmittel	Means for describing, Means for documenting
Betriebsprozesse (von Software)	Operational processes
Bewertung	Assessment, Evaluation
Beziehung	Association, Dependency, Relationship
Beziehungsart	Relationship (kind of)
Domäne	Business
Echtzeitsystem	Real-time system
Einfache Lizenz	Non-exclusive license
Einflussfaktor	Influencing Factor
Eingebettet	Embedded
Einhaltung	Compliance
Einordnung (eines Begriffes) in einen Zusammenhang	Context (of a term)
Einschränkung	Constraint
Einschätzung	Assessment
Entwurf	Design
Entwurfsansatz	Design approach
Entwurfsentscheidung	Design decision
Entwurfsmethodik	Design approach
Entwurfsprinzip	Design principle
Erfüllung	Compliance
Erkennbarkeit der Brauchbarkeit	Appropriateness Recognizability
Erklärung	Rationale
Erlernbarkeit	Learnability

Fachdomäne	Domain
fachliche Architektur	Business architecture, Domain-related architecture
Fachlicher Bereich	Domain
Fachlicher Kontext	Business context
Fachliches Event	Domain event
Fachlichkeit	Business
Fehlertoleranz	Fault Tolerance
Fertigkeit	Skill
Fitnessfunktion	Fitness Function
Funktionale Angemessenheit	Functional Appropriateness
Funktionale Eignung	Functional Suitability
Funktionale Korrektheit	Functional Correctness
Funktionale Vollständigkeit	Functional Completeness
Fähigkeit	Skill
Gebührenordnung	Fees rules and regulations
Geheimnisprinzip	Information hiding principle
Gemeinnützig	Non-profit
Geschäftsarchitektur	Business architecture
Geschäftsbereich	Domain
innerer Zusammenhalt	Cohesion
Installierbarkeit	Installability
Integrität	Integrity
Interoperabilität	Interoperability
Kanal	Channel
Kapazität	Capacity
Kapselung	Encapsulation
Knoten	Node
Koexistenz	Co-Existence
Kohäsion	Cohesion
Kompatibilität	Compatibility
Komponente	Component, Module
Kompromiss	Tradeoff
Kontextabgrenzung	Context view
Kontextgrenze	Bounded Context
Konzept	Principle
Kopplung	Coupling
Laufzeit	Runtime
Laufzeitsicht	Runtime view
Lehrplan	Curriculum



Leistungseffizienz	Performance Efficiency
Lernziel	Learning goal
Lizenznehmer	Licensee
Lizenzvereinbarung	Licensing agreement
Lizenzvertrag	Licensing agreement
Mal-/Zeichenprogramm	Drawing Tool
Marke (gesetzlich geschützt)	Registered trademark
materiell förderndes Mitglied	sponsoring (board) member
Maßnahme	Action
Messbarkeit	Commensurability, Measurability
Mitgliederversammlung	General meeting, Members' meeting
Modellierungswerkzeug	Modeling Tool
Modifizierbarkeit	Modifiability
Modul	Module
Modularität	Modularity
Muster	Pattern
Musterfamilie	Pattern language
Mustersprache	Pattern language
Nachrichten-zentrisch	message-driven
Nichtabstreitbarkeit	Non-repudiation
Normalfall	Normal case
Nutzungsbeziehung	Uses relationship
Nutzungsrecht	Rights of use
Performance	Performance Efficiency
Perspektive	Perspective
Portierbarkeit	Portability
Prinzip	Principle
Prüfer	Examiner
Prüfling	Examinee
Prüfungsaufgabe	Examination task
Prüfungsbogen	Examination sheet
Prüfungsfrage	Examination question
Prüfungsordnung	Examination rules and regulations
Qualitätseigenschaft	Quality attribute, Quality characteristic, Quality feature
Qualitätsmerkmal	Quality attribute, Quality characteristic, Quality feature
Querschnittlich	Cross-cutting
Randbedingung	Constraint

reaktionsfähig	responsive
Rechenschaft	Accountability
Rechnungsprüfer	Cash auditor
Rechnungsprüfung	Cash audit
Reifegrad	Maturity
Ressourcenverbrauch	Resource Utilization
Sachziele	Security Goals
Satzung des Vereins	Articles of association
satzungsgemäß	statutory
Schatzmeister	Treasurer
Schnittstelle	Interface
Schnittstellenbeschreibung	Interface description
Schnittstellendokumentation	Interface description
Schrank (als Metapher für Template)	Cabinet (as methaphor for template)
Schulungsanbieter	Training provider
Schutz vor Fehlbedienung	User Error Protection
Schutzziele	Security Goals
Schätzung	Estimation
selbstwiederherstellend	resilient
Sicherheit	Security
Sicht	Architectural view, View
Sparsamkeit	Economicalness, Thriftyness
Stellvertretender Vorsitzender	Deputy chairman
Struktur	Structure
Technischer Kontext	Technical context
Testbarkeit	Testability
Unternehmens-IT-Architektur	Enterprise IT architecture
Untersuchung	Assessment
unverwüstlich	resilient
Verantwortlichkeit	Accountability, Responsibility
Verbesserung	Improvement
Verbesserungsmaßnahme	Improvement action
Verein	Association
Verfügbarkeit	Availability
Vergleichbarkeit	Commensurability
Verständlichkeit	Appropriateness Recognizability
Verteilung	Deployment
Verteilungsartefakt	Deployment unit
Verteilungssicht	Deployment view

Vertraulichkeit	Confidentiality
Vorsitzender	Chairman
Vorstand	Executive board
Wartbarkeit	Maintainability
Wechselwirkung	Tradeoff
Werkzeug	Tools
Werkzeug-Material-Ansatz	Tools-and-material-approach
Widerherstellbarkeit	Recoverability
Wiederverwendbarkeit	Reusability
Wirtschaftlichkeit	Economicalness, Thriftyness
Zeitverhalten	Time Behaviour
Zerlegung	Decomposition
Zertifizierungsstelle	Certification authority, Certification body
Ziel	Objective
Zugänglichkeit	Accessibility
Zuverlässigkeit	Reliability
Ästhetik der Benutzeroberfläche	User Interface Aesthetics

## References and Resources

This section contains references that are cited in the glossary or one of the curriculumae.

### A

- [Anderson-2008] Ross Anderson, Security Engineering - A Guide to Building Dependable Distributed Systems, 2nd edition 2008, John Wiley & Sons. One of the most comprehensive books about information security available.

### B

- [Bachmann et al. 2000] Bachmann, F., L. Bass, et al.: Software Architecture Documentation in Practice. Software Engineering Institute, CMU/SEI-2000-SR-004.
- [Bass et al. 2022] Bass, L., Clements, P. und Kazman, R. (2003): Software Architecture in Practice. 4th edition 2022, Addison-Wesley. Although the title suggests otherwise, a quite fundamental (and sometimes abstract) book. The authors have a strong background in ultra-large scale (often military) systems - so their advice might sometimes conflict with small or lean kinds of projects.
- [Buschmann+1996] Buschmann, Frank/Meunier, Regine/Rohnert, Hans/Sommerlad, Peter: *A System of Patterns: Pattern-Oriented Software Architecture 1*, 1st edition, 1996, John Wiley & Sons.

Also known as POSA-1. Most likely the most famous and groundbreaking book on architecture patterns.

### C

- [Clements et al. 2003] Clements, P., F. Bachmann, L. Bass, D. Garlan, J. Ivers et al.: Documenting Software Architectures – Views and Beyond. Addison Wesley, 2003.

### E

- [Evans-2004] Evans, Eric: *Domain-Driven Design: Tackling Complexity in the Heart of Software*, 1st edition, Addison-Wesley, 2004.

### F

- [Ford+2017] Neil Ford, Rebecca Parsons, Patrick Kua: Building Evolutionary Architectures: Support Constant Change. OReilly 2017

### G

- [GoF: Design-Patterns] Gamma, Erich/Helm, Richard/Johnson, Ralph/Vlissides, John M. *Design Patterns: Elements of Reusable Object-Oriented Software*, 1st edition, 1994, Addison-Wesley, 1994.

A classic on design patterns.

- [Gang-of-Four, short: GoF] See [\[GoF: Design-Patterns\]](#)

### H

- [Hargis 2004] Hargis, Gretchen et al.: Quality Technical Information: A Handbook for Writers and Editors. Prentice Hall, IBM Press, 2004.

- [Hofmeister+2000] Hofmeister, Christine/Nord, Robert/Soni, Dilip]]]: *Applied Software Architecture*, 1st edition, Addison-Wesley, 1999

## I

- [ISO-25010] ISO/IEC DIS 25010, Systems and software engineering — Systems and software Quality Requirements and Evaluation (SQuaRE) — Product quality model. Online: link:<https://www.iso.org/obp/ui/#iso:std:iso-iec:25010>

## K

- [Kazman+1996] Kazman, R., Abowd, G., Bass, L., & Clements, P.: *Scenario-based analysis of software architecture*, IEEE software, 13(6), 47-55, 1996.
- [Kruchten 1995] Kruchten, P.: Architectural Blueprints – The 4-1 View Model of Architecture. IEEE Software November 1995; 12(6), p. 42-50.

## L

- [Lilienthal-2019] Lilienthal, Carola: *Langlebige Software-Architekturen: Technische Schulden analysieren, begrenzen und abbauen* 3rd edition, dpunkt.verlag, 2019

## M

- [Martin-2003] Martin, Robert C.: *Agile Software Development: Principles, Patterns and Practices*, Prentice Hall, 2003
- [SOLID-principles] Martin, Robert: SOLID-principles. S.O.L.I.D is an acronym for the first five object-oriented design(OOD) principles by Robert C. Martin. Some original papers have been moved around onto various locations - see [Wikipedia](#)
- [McGraw-2006] Garry McGraw, "Software Security - Building Security In", Addison-Wesley 2006 Covering the whole process of software design from a security perspective by the means of risk management, code reviews, risk analysis, penetration testing, security testing abuse case development.

## P

- [Parnas-1972] Parnas, David: *On the criteria to be used in decomposing systems into modules*", Communications of the ACM, volume 15, issue 12, Dec 1972. One of the most influential articles ever written in software engineering, introducing encapsulation and modularity. Thank you, David!

## R

- [RMIAS-2013] Yulia Cherdantseva, Jeremy Hilton, A Reference Model of Information Assurance & Security, 2013 Eight International Conference on Availability, Reliability and Security (ARES), DOI: 10.1109/ARES.2013.72, <http://users.cs.cf.ac.uk/Y.V.Cherdantseva/RMIAS.pdf> Conference Paper of Yulia Cherdantseva and Jeremy Hilton describing the RMIAS.
- [Rozanski & Woods 2011] Eoin Woods and Nick Rozanski: *Software Systems Architecture: Working With Stakeholders Using Viewpoints and Perspectives*. 2nd edition 2011, Addison-Wesley. Presents a set of architectural viewpoints and perspectives.

## S

- [Schmidt, Douglas C/Stal, Michael/Rohnert, Hans/Buschmann, Frank.] Pattern-Oriented Software Architecture, volume 2: *Patterns for Concurrent and Networked Objects*, Wiley & Sons, 2000
- [Schneier, Bruce] Applied Cryptography, 2nd Edition 1996, John Wiley & Sons. Comprehensive survey of modern cryptography.
- [Starke 2019] Starke, G. Effektive Software-Architekturen - Ein praktischer Leitfaden. 9. Auflage 2019, Carl Hanser Verlag.

## T

- [Tanenbaum+2016] Andrew Tanenbaum, Maarten van Steen: Distributed Systems, Principles and Paradigms, 2016. <https://www.distributed-systems.net/>
- [Tornhill-2015] Adam Tornhill: Your Code as a Crime Scene. Use Forensic Techniques to Arrest Defects, Bottlenecks, and Bad Design in Your Programs. Pragmatic Programmers, 2015. <https://www.adamtornhill.com>