



UNIVERSITÀ
DEGLI STUDI
DELL'AQUILA



DISIM
Dipartimento di Ingegneria
e Scienze dell'Informazione
e Matematica




Laboratorio di Algoritmi e Strutture Dati a.a. 2022/2023

Le classi

HashMap<K,V> e TreeMap<K,V>

Giovanna Melideo
Università degli Studi dell'Aquila
DISIM

JCF: Interfacce fondamentali (richiami)

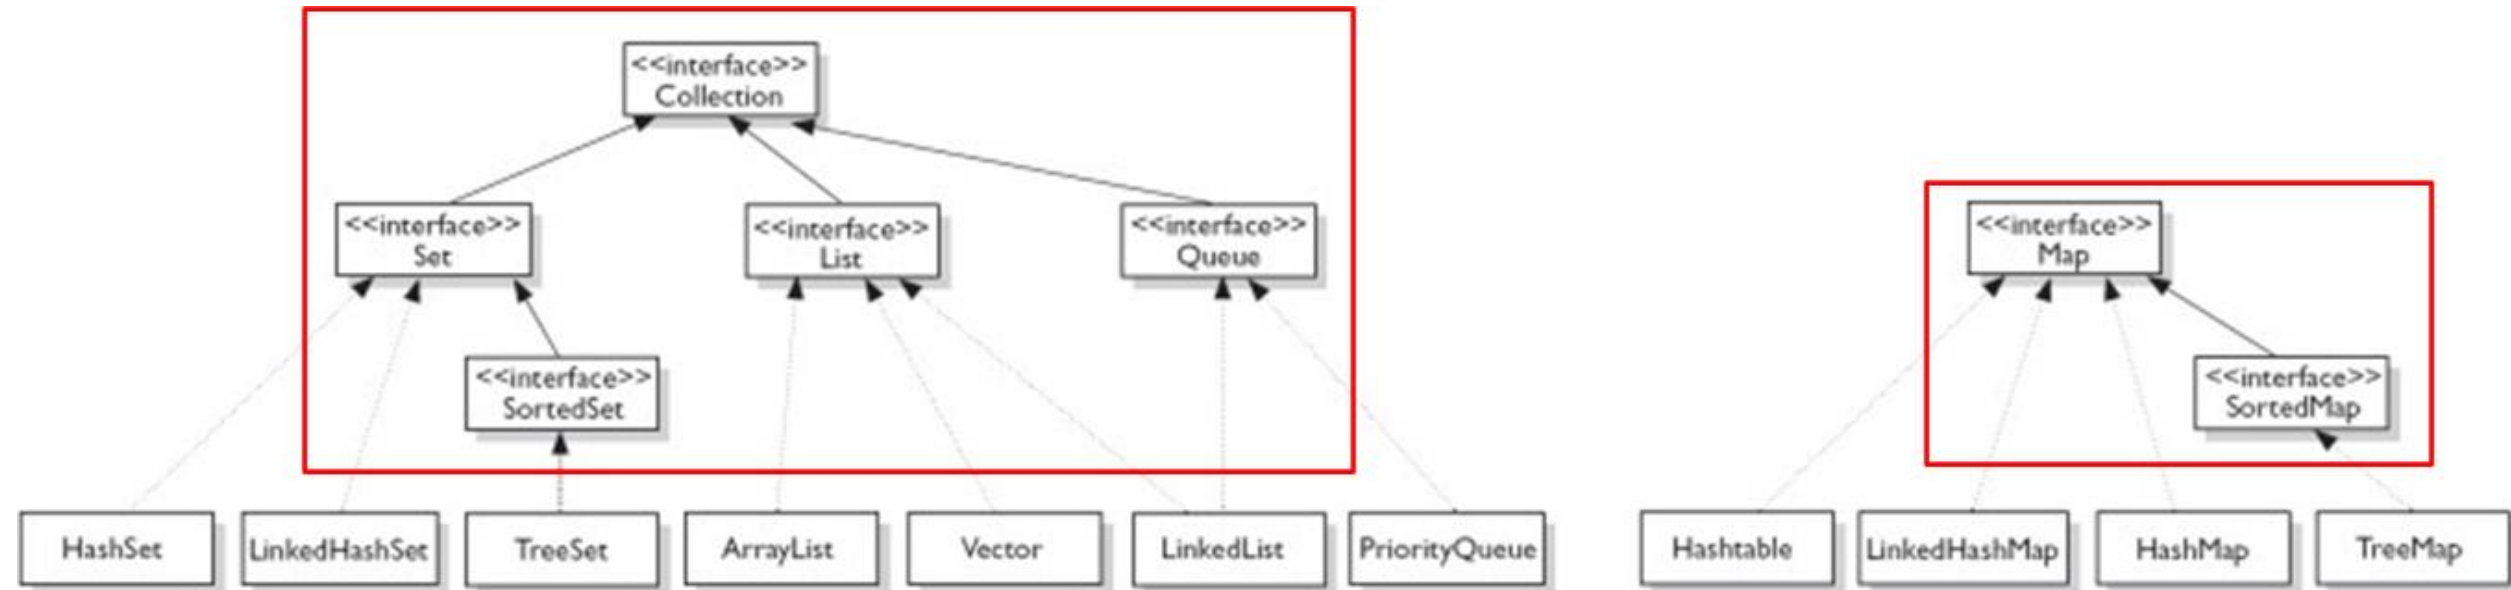

ADT Mappa

- Una **mappa** è una raccolta in cui ogni elemento è una coppia (**chiave di ricerca, valore**)
 - dove la chiave (di ricerca) ha lo scopo di individuare univocamente il valore associato.
- Un “dizionario” (vocabolario) è un esempio di mappa:
 - la chiave (univoca) è la parola che viene definita
 - il valore è costituito dalla sua definizione e dall’etimologia
 - talvolta i termini **dizionario** e **mappa** vengono usati come sinonimi

ADT Mappa: esempi

- Studenti - coppie (ID-matricola, voto medio)
- Anagrafe – coppie (codice fiscale, nome)
- Rubrica telefonica - coppie (nominativo univoco, elenco dei numeri telefonici)
- Funzione discreta f - coppie (x,y) t.c. $f(x) = y$
- ...

ADT Mappa: operazioni

Le principali operazioni sulle mappe sono le seguenti:

- **inserimento** di una nuova coppia (chiave, valore)
- **aggiornamento** del valore associato ad una chiave
- **eliminazione** di una coppia (chiave, valore)
- **ricerca** del valore associato ad una chiave

L'interfaccia `Map<K, V>`

- Il JCF contiene un'interfaccia `java.util.Map<K, V>` che definisce le intestazioni dei metodi per il dato astratto "Mappa"
- L'interfaccia `java.util.Map<K, V>` specifica il tipo Mappa con chiavi di tipo `K` e valori associati di tipo `V`
- L'interfaccia `Map` non estende l'interfaccia `Collection`

Method Summary

Methods

Modifier and Type	Method and Description
void	clear() Removes all of the mappings from this map (optional operation).
boolean	containsKey(Object key) Returns <code>true</code> if this map contains a mapping for the specified key.
boolean	containsValue(Object value) Returns <code>true</code> if this map maps one or more keys to the specified value.
Set<Map.Entry<K, V>>	entrySet() Returns a <code>Set</code> view of the mappings contained in this map.
boolean	equals(Object o) Compares the specified object with this map for equality.
V	get(Object key) Returns the value to which the specified key is mapped, or <code>null</code> if this map contains no mapping for the key.
int	hashCode() Returns the hash code value for this map.
boolean	isEmpty() Returns <code>true</code> if this map contains no key-value mappings.
Set<K>	keySet() Returns a <code>Set</code> view of the keys contained in this map.
V	put(K key, V value) Associates the specified value with the specified key in this map (optional operation).
void	putAll(Map<? extends K, ? extends V> m) Copies all of the mappings from the specified map to this map (optional operation).
V	remove(Object key) Removes the mapping for a key from this map if it is present (optional operation).
int	size() Returns the number of key-value mappings in this map.
Collection<V>	values() Returns a <code>Collection</code> view of the values contained in this map.

L'interfaccia Map.Entry<K,V> (cenno)

- Il metodo `Set<Map.Entry<K,V>> entrySet()` restituisce un insieme di `Map.Entry`

```
public static interface Map.Entry<K,V>
```

- «A map entry (**key-value pair**). The `Map.entrySet` method returns a collection-view of the map, whose elements are of this class. The only way to obtain a reference to a map entry is from the iterator of this collection-view. These `Map.Entry` objects are valid only for the duration of the iteration; more formally, the behavior of a map entry is undefined if the backing map has been modified after the entry was returned by the iterator, except through the `setValue` operation on the map entry.»

L'interfaccia Map.Entry<K,V>: metodi

Interface Map.Entry<K,V>

Enclosing interface: [Map<K,V>](#)

```
public static interface Map.Entry<K,V>
```

Method Summary

Methods

Modifier and Type	Method and Description
boolean	<code>equals (Object o)</code> Compares the specified object with this entry for equality.
K	<code>getKey ()</code> Returns the key corresponding to this entry.
V	<code>getValue ()</code> Returns the value corresponding to this entry.
int	<code>hashCode ()</code> Returns the hash code value for this map entry.
V	<code>setValue (V value)</code> Replaces the value corresponding to this entry with the specified value (optional operation).

La classe `HashMap<K, V>`

- Implementa l'interfaccia `Map<K, V>`

Constructor Summary

Constructors

Constructor and Description

`HashMap()`

Constructs an empty `HashMap` with the default initial capacity (16) and the default load factor (0.75).

`HashMap(int initialCapacity)`

Constructs an empty `HashMap` with the specified initial capacity and the default load factor (0.75).

`HashMap(int initialCapacity, float loadFactor)`

Constructs an empty `HashMap` with the specified initial capacity and load factor.

`HashMap(Map<? extends K, ? extends V> m)`

Constructs a new `HashMap` with the same mappings as the specified `Map`.

L'interfaccia `SortedMap<K, V>`

- `SortedMap` estende e specializza `Map` analogamente a quanto `SortedSet` fa con `Set`
- L'ordinamento è quello naturale degli elementi (espresso dalla loro `compareTo`) o quello fornito da un apposito `Comparator` all'atto della creazione del `SortedSet`
- L'interfaccia di accesso aggiunge metodi che sfruttano l'esistenza di un ordinamento totale fra gli elementi:
 - **`firstKey`** e **`lastKey`** restituiscono la prima/ultima chiave nell'ordine
 - **`headMap`**, **`subMap`** e **`tailMap`** restituiscono le sottotabelle con le sole entry le cui chiavi sono minori/comprese/maggiori di quella data

L'interfaccia `SortedMap<K, V>`: metodi

Method Summary

Methods

Modifier and Type	Method and Description
<code>Comparator<? super K></code>	<code>comparator()</code> Returns the comparator used to order the keys in this map, or <code>null</code> if this map uses the natural ordering of its keys.
<code>Set<Map.Entry<K, V>></code>	<code>entrySet()</code> Returns a Set view of the mappings contained in this map.
<code>K</code>	<code>firstKey()</code> Returns the first (lowest) key currently in this map.
<code>SortedMap<K, V></code>	<code>headMap(K toKey)</code> Returns a view of the portion of this map whose keys are strictly less than <code>toKey</code> .
<code>Set<K></code>	<code>keySet()</code> Returns a Set view of the keys contained in this map.
<code>K</code>	<code>lastKey()</code> Returns the last (highest) key currently in this map.
<code>SortedMap<K, V></code>	<code>subMap(K fromKey, K toKey)</code> Returns a view of the portion of this map whose keys range from <code>fromKey</code> , inclusive, to <code>toKey</code> , exclusive.
<code>SortedMap<K, V></code>	<code>tailMap(K fromKey)</code> Returns a view of the portion of this map whose keys are greater than or equal to <code>fromKey</code> .
<code>Collection<V></code>	<code>values()</code> Returns a Collection view of the values contained in this map.

Methods inherited from interface `java.util.Map`

`clear`, `containsKey`, `containsValue`, `equals`, `get`, `hashCode`, `isEmpty`, `put`, `putAll`, `remove`, `size`

La classe `TreeMap<K, V>`

- La classe alloca una mappa in un albero red-black, ordinato in base alle chiavi
- Implementa l'interfaccia `SortedMap<K, V>`

Constructors

Constructor and Description

`TreeMap()`

Constructs a new, empty tree map, using the natural ordering of its keys.

`TreeMap(Comparator<? super K> comparator)`

Constructs a new, empty tree map, ordered according to the given comparator.

`TreeMap(Map<? extends K, ? extends V> m)`

Constructs a new tree map containing the same mappings as the given map, ordered according to the *natural ordering* of its keys.

`TreeMap(SortedMap<K, ? extends V> m)`

Constructs a new tree map containing the same mappings and using the same ordering as the specified sorted map.

Esempio

- Uso di HashMap e TreeMap
 - Rif. Province.java

```
public class Capoluoghi {  
    private static Map<String, String> province = ;  
    ...  
    province.put("L'Aquila", "Abruzzo");  
  
}
```

Il metodo `Map.entrySet()` : osservazioni

- Una mappa non è iterabile
 - A partire dalla versione 8 di java l'interfaccia `java.util.Map` prevede un metodo `forEach()` che consente di specificare una azione da eseguire su tutti gli elementi della mappa.
- Il metodo `Map.entrySet()` consente di **iterare le coppie di una mappa** nell'ambito del set di entries associato all'oggetto `HashMap/TreeMap`
- Schema generale (data un'istanza "map" di tipo `Map<K,V>`):
 - ```
for (Map.Entry<K, V> entry: map.entrySet()) { ... }
```
- Se si modifica la mappa mentre è in corso un'iterazione sul corrispondente set, l'esito dell'iterazione è indefinito (tranne quando le modifiche avvengono mediante l'operazione `setValue` su una map entry restituita dall'iteratore).

# Esercizio 1

- Suppose we are given the name and division number for each employee in a company. There are no duplicate names. We would like to store this information alphabetically, by name.
  - How should this be done?
  - TreeMap? TreeSet? Comparable? Comparator?



# Esercizio 1: Esempio

|                   |    |
|-------------------|----|
| Misino,John       | 8  |
| Nguyen,Viet       | 14 |
| Panchenko,Eric    | 6  |
| Dunn,Michael      | 6  |
| Deusenbery,Amanda | 14 |
| Taoubina,Xenia    | 6  |

We want these elements stored in the following order:

|                   |    |
|-------------------|----|
| Deusenbery,Amanda | 14 |
| Dunn,Michael      | 6  |
| Misino,John       | 8  |
| Nguyen,Viet       | 14 |
| Panchenko,Eric    | 6  |
| Taoubina,Xenia    | 6  |

# Esercizio 1 (continua)

- We can use a **TreeMap** object.
- The keys will be names, of type String, and the values will be division numbers of type Integer.
- The String class implements the Comparable interface, so the elements will be stored in alphabetical order of keys.
  - **Rif. CompanyMap.java**
- Remark: If we use a HashMap object, the elements will not be stored in alphabetical order of keys

# Esercizio 2

- Re-do Programming Exercise 1, but now the ordering should be by increasing division numbers, and within each division number, by alphabetical order of names.

# Esercizio 2: Esempio

|                   |    |
|-------------------|----|
| Misino,John       | 8  |
| Nguyen,Viet       | 14 |
| Panchenko,Eric    | 6  |
| Dunn,Michael      | 6  |
| Deusenbery,Amanda | 14 |
| Taubina,Xenia     | 6  |

We want these elements stored in the following order:

|                   |    |
|-------------------|----|
| Dunn,Michael      | 6  |
| Panchenko,Eric    | 6  |
| Taubina,Xenia     | 6  |
| Misino,John       | 8  |
| Deusenbery,Amanda | 14 |
| Nguyen,Viet       | 14 |

## Esercizio 2 (continua)

- We can use a `TreeSet` object.
- The elements will be objects in an `Employee` class, which implements the `Comparable` interface.
  - **Rif. `Employee.java`**



UNIVERSITÀ  
DEGLI STUDI  
DELL'AQUILA



DISIM  
Dipartimento di Ingegneria  
e Scienze dell'Informazione  
e Matematica



# Domande?

**Giovanna Melideo**  
Università degli Studi dell'Aquila  
DISIM