


The screenshot shows a SQL IDE window with a toolbar at the top. The main editor contains the following SQL script:

```
1 -- Crear la base de datos
2 • CREATE DATABASE registroEscolar;
3 • USE registroEscolar;
```

Below the editor is an "Output" pane with a dropdown menu set to "Action Output". It displays a single successful action:

#	Time	Action
1	21:43:24	CREATE DATABASE registroEscolar

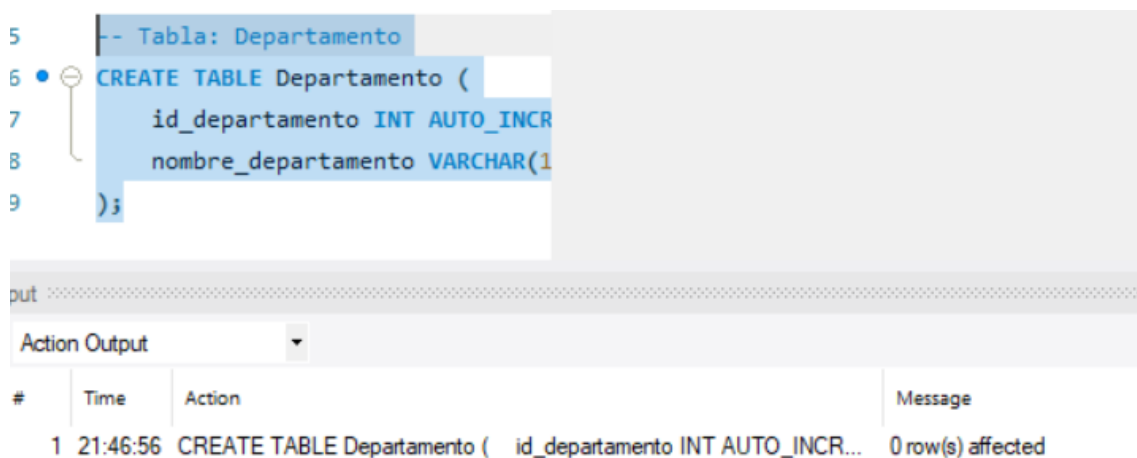

The screenshot shows a SQL IDE window with a toolbar at the top. The main editor contains the following SQL script:

```
5 -- Tabla: Departamento
6 • CREATE TABLE Departamento (
7     id_departamento INT AUTO_INCR
8     nombre_departamento VARCHAR(1
9 );
```

Below the editor is an "Output" pane with a dropdown menu set to "Action Output". It displays a single action with a message:

#	Time	Action	Message
1	21:46:56	CREATE TABLE Departamento (id_departamento INT AUTO_INCR...	0 row(s) affected

```
10
11 -- Tabla: Direcciones
12 CREATE TABLE Direcciones (
13     id_direccion INT AUTO_INCREMENT
14     calle VARCHAR(100),
15     ciudad VARCHAR(50),
16     estado VARCHAR(50),
17     codigo_postal VARCHAR(10)
18 );
```

Output

Action Output

#	Time	Action	Message
✓ 1	21:48:50	CREATE TABLE Direcciones (id_direccion INT AUTO_INCREMENT...	0 row(s) affected

```
19 -- Tabla: Estudiantes
20 CREATE TABLE Estudiantes (
21     id_estudiante INT AUTO_INCREMENT
22     nombre VARCHAR(100),
23     fecha_nacimiento DATE,
24     id_direccion INT,
25     FOREIGN KEY (id_direccion) RE
26         ON DELETE SET NULL
27         ON UPDATE CASCADE
28 );
29
```

Output

Action Output

#	Time	Action	Message
✓ 1	21:53:57	CREATE TABLE Estudiantes (id_estudiante INT AUTO...	0 row(s) affected

```
30 -- Tabla: Profesores
31 CREATE TABLE Profesores (
32     id_profesor INT AUTO_INCREMENT
33     nombre VARCHAR(100),
34     id_departamento INT,
35     FOREIGN KEY (id_departamento)
36         ON DELETE SET NULL
37         ON UPDATE CASCADE
```

Output

Action Output

#	Time	Action	Message
1	21:56:19	CREATE TABLE Profesores (id_profesor INT AUTO_IN...	0 row(s) affected

```
40 -- Tabla: Curso
41 CREATE TABLE Curso (
42     id_curso INT AUTO_INCREMENT
43     nombre_curso VARCHAR(100),
44     id_profesor INT,
45     FOREIGN KEY (id_profesor) REF
46         ON DELETE SET NULL
47         ON UPDATE CASCADE
48 );
```

Output

Action Output

#	Time	Action	Message
1	21:58:06	CREATE TABLE Curso (id_curso INT AUTO_INCREM...	0 row(s) affected

```

50 -- Tabla: Matriculas
51 • CREATE TABLE Matriculas (
52     id_matricula INT AUTO_INCREMENT,
53     id_estudiante INT,
54     id_curso INT,
55     fecha_matricula DATE,
56     FOREIGN KEY (id_estudiante) REFERENCES Estudiantes (id_estudiante)
57     ON DELETE CASCADE
58     ON UPDATE CASCADE,

```

disabled, use
manually get
current caret
toggle auto

Context Help Snippets

Output

Action Output

#	Time	Action	Message
1	21:58:06	CREATE TABLE Curso (id_curso INT AUTO_INCREMENT...	0 row(s) affected
2	21:59:32	CREATE TABLE Matriculas (id_matricula INT AUTO_I...	0 row(s) affected

