

# Data Summarization

# Recap

- `select()`: subset and/or reorder columns
- `filter()`: remove rows
- `arrange()`: reorder rows
- `mutate()`: create new columns or modify them
- `select()` and `filter()` can be combined together
- remove a column: `select()` with negative sign (`-col_name`)
- you can do sequential steps: especially using pipes `%>%`

▮ [Cheatsheet](#)

# Data Summarization

- Basic statistical summarization
  - `mean(x)`: takes the mean of `x`
  - `sd(x)`: takes the standard deviation of `x`
  - `median(x)`: takes the median of `x`
  - `quantile(x)`: displays sample quantiles of `x`. Default is min, IQR, max
  - `range(x)`: displays the range. Same as `c(min(x), max(x))`
  - `sum(x)`: sum of `x`
  - `max(x)`: maximum value in `x`
  - `min(x)`: minimum value in `x`
- **all have the `na.rm` = argument for missing data**

# Statistical summarization

The vector getting summarized goes inside the parentheses:

```
x <- c(1, 5, 7, 4, 2, 8)
```

```
mean(x)
```

```
[1] 4.5
```

```
range(x)
```

```
[1] 1 8
```

```
sum(x)
```

```
[1] 27
```

# Statistical summarization

Note that many of these functions have additional inputs regarding missing data, typically requiring the `na.rm` argument (“remove NAs”).

```
x <- c(1, 5, 7, 4, 2, 8, NA)
mean(x)
```

```
[1] NA
```

```
mean(x, na.rm = TRUE)
```

```
[1] 4.5
```

```
quantile(x)
```

```
Error in quantile.default(x): missing values and NaN's not allowed if 'na.rm' is FALSE
```

```
quantile(x, na.rm = TRUE)
```

| 0%  | 25% | 50% | 75% | 100% |
|-----|-----|-----|-----|------|
| 1.0 | 2.5 | 4.5 | 6.5 | 8.0  |

# Statistical summarization

We will talk more about data types later, but you can only do summarization on numeric or logical types. Not characters.

```
x <- c(1, 5, 7, 4, 2, 8)
sum(x)
```

```
[1] 27
```

```
y <- c(TRUE, FALSE, FALSE, TRUE) # FALSE == 0 and TRUE == 1
sum(y)
```

```
[1] 2
```

```
z <- c("TRUE", "FALSE", "FALSE", "TRUE")
sum(z)
```

```
Error in sum(z): invalid 'type' (character) of argument
```

## Some examples

We can use the `jhu_cars` to explore different ways of summarizing data. The `head` command displays the first rows of an object:

```
library(jhur)
head(jhu_cars)
```

|   | car               | mpg  | cyl | disp | hp  | drat | wt    | qsec  | vs | am | gear | carb |
|---|-------------------|------|-----|------|-----|------|-------|-------|----|----|------|------|
| 1 | Mazda RX4         | 21.0 | 6   | 160  | 110 | 3.90 | 2.620 | 16.46 | 0  | 1  | 4    | 4    |
| 2 | Mazda RX4 Wag     | 21.0 | 6   | 160  | 110 | 3.90 | 2.875 | 17.02 | 0  | 1  | 4    | 4    |
| 3 | Datsun 710        | 22.8 | 4   | 108  | 93  | 3.85 | 2.320 | 18.61 | 1  | 1  | 4    | 1    |
| 4 | Hornet 4 Drive    | 21.4 | 6   | 258  | 110 | 3.08 | 3.215 | 19.44 | 1  | 0  | 3    | 1    |
| 5 | Hornet Sportabout | 18.7 | 8   | 360  | 175 | 3.15 | 3.440 | 17.02 | 0  | 0  | 3    | 2    |
| 6 | Valiant           | 18.1 | 6   | 225  | 105 | 2.76 | 3.460 | 20.22 | 1  | 0  | 3    | 1    |

## Statistical summarization

You might see base R `$` to reference/select columns from a `data.frame/tibble`:

```
mean(jhu_cars$hp)
```

```
[1] 146.6875
```

```
quantile(jhu_cars$hp)
```

| 0%   | 25%  | 50%   | 75%   | 100%  |
|------|------|-------|-------|-------|
| 52.0 | 96.5 | 123.0 | 180.0 | 335.0 |



# Statistical summarization

The “tidy” way:

```
jhu_cars %>% pull(hp) %>% mean() # alt: pull(jhu_cars, hp) %>% mean()
```

```
[1] 146.6875
```

```
jhu_cars %>% pull(hp) %>% quantile()
```

| 0%   | 25%  | 50%   | 75%   | 100%  |
|------|------|-------|-------|-------|
| 52.0 | 96.5 | 123.0 | 180.0 | 335.0 |

# Statistical summarization

```
jhu_cars %>% pull(wt) %>% median()
```

```
[1] 3.325
```

```
jhu_cars %>% pull(wt) %>% quantile(probs = 0.6)
```

```
60%  
3.44
```

## Data Summarization on data frames

- Basic statistical summarization
  - `rowMeans(x)`: takes the means of each row of `x`
  - `colMeans(x)`: takes the means of each column of `x`
  - `rowSums(x)`: takes the sum of each row of `x`
  - `colSums(x)`: takes the sum of each column of `x`
  - `summary(x)`: for data frames, displays the quantile information

## TB Incidence

Let's read in a `tibble` of values from TB incidence.

If you have the `jhur` package installed successfully:

```
tb <- jhur::read_tb()
```

If not, download the `xlsx` file from this link and read it in using `read_csv()`:

[http://jhudatascience.org/intro\\_to\\_r/data/tb\\_incidence.xlsx](http://jhudatascience.org/intro_to_r/data/tb_incidence.xlsx)

# TB Incidence

Check out the data:

```
head(tb)
```

```
# A tibble: 6 × 19
  `TB incidence, all f...` `1990` `1991` `1992` `1993` `1994` `1995` `1996` `1997`
  <chr>          <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
1 Afghanistan      168    168    168    168    168    168    168    168
2 Albania           25     24     25     26     26     27     27     28
3 Algeria           38     38     39     40     41     42     43     44
4 American Samoa    21      7      2      9      9     11      0     12
5 Andorra           36     34     32     30     29     27     26     26
6 Angola            205    209    214    218    222    226    231    236
# ... with 10 more variables: `1998` <dbl>, `1999` <dbl>, `2000` <dbl>,
#   `2001` <dbl>, `2002` <dbl>, `2003` <dbl>, `2004` <dbl>, `2005` <dbl>,
#   `2006` <dbl>, `2007` <dbl>
```

# TB Incidence

Check out the data:

```
str(tb)
```

```
tibble [208 × 19] (S3: tbl_df/tbl/data.frame)
```

```
$ TB incidence, all forms (per 100 000 population per year): chr [1:208] "Afghanistan" "Albania"  
$ 1990 : num [1:208] 168 25 38 21 36 205 2  
$ 1991 : num [1:208] 168 24 38 7 34 209 24  
$ 1992 : num [1:208] 168 25 39 2 32 214 24  
$ 1993 : num [1:208] 168 26 40 9 30 218 24  
$ 1994 : num [1:208] 168 26 41 9 29 222 23  
$ 1995 : num [1:208] 168 27 42 11 27 226 2  
$ 1996 : num [1:208] 168 27 43 0 26 231 23  
$ 1997 : num [1:208] 168 28 44 12 26 236 2  
$ 1998 : num [1:208] 168 28 46 6 25 240 23  
$ 1999 : num [1:208] 168 27 47 8 23 245 23  
$ 2000 : num [1:208] 168 25 48 6 22 250 23  
$ 2001 : num [1:208] 168 23 49 6 21 255 22  
$ 2002 : num [1:208] 168 23 50 4 21 260 22  
$ 2003 : num [1:208] 168 22 51 5 20 265 22  
$ 2004 : num [1:208] 168 21 53 9 20 270 22  
$ 2005 : num [1:208] 168 20 54 10 19 276 2  
$ 2006 : num [1:208] 168 18 55 7 19 281 22  
$ 2007 : num [1:208] 168 17 57 5 19 287 22
```

## Indicator of TB

Before we go further, let's rename the first column using the `rename()` function in `dplyr`.

In this case, we have to use the backticks (```) because there are spaces and funky characters in the name:

```
library(dplyr)
tb <- tb %>% rename(country = `TB incidence, all forms (per 100 000 population per year)`)
```

## Indicator of TB

`colnames()` will show us the column names and show that country is renamed:

```
colnames(tb)
```

```
[1] "country" "1990"    "1991"    "1992"    "1993"    "1994"    "1995"  
[8] "1996"    "1997"    "1998"    "1999"    "2000"    "2001"    "2002"  
[15] "2003"    "2004"    "2005"    "2006"    "2007"
```



## Summarize the data: **dplyr** `summarize()` function

`summarize` creates a summary table of a column you're interested in.

*# General format - Not the code!*

```
{data to use} %>%  
  summarize({summary column name} = {operator(source column)})
```

```
tb %>%  
  summarize(mean_2006 = mean(`2006`, na.rm = TRUE))
```

# A tibble: 1 × 1

```
mean_2006  
  <dbl>  
1      135.
```

## Summarize the data: `dplyr summarize()` function

`summarize()` can do multiple operations at once. Just separate by a comma.

```
tb %>%
  summarize(mean_2006 = mean(`2006`, na.rm = TRUE),
            median_2007 = median(`2007`, na.rm = TRUE),
            median(`2004`, na.rm = TRUE))

# A tibble: 1 × 3
  mean_2006 median_2007 `median(\`2004\`, na.rm = TRUE)`
    <dbl>         <dbl>                <dbl>
1    135.          53                56
```

Notice how when we forget to provide a new name, output is still provided, but the column name is messy.

## Summarize the data: `dplyr summarize()` function

This looks better.

```
tb %>%  
  summarize(mean_2006 = mean(`2006`, na.rm = TRUE),  
            median_2007 = median(`2007`, na.rm = TRUE),  
            median_2004 = median(`2004`, na.rm = TRUE))
```

```
# A tibble: 1 × 3  
  mean_2006 median_2007 median_2004  
    <dbl>         <dbl>         <dbl>  
1    135.           53           56
```

## Iterative summaries: **dplyr** `summarize()` and `across()` functions

Use the `across` function with `summarize()` to summarize across multiple columns of your data.

*# General format - Not the code!*

```
across({ columns to go across }, ~ { summarization_function(.x, na.rm = ..) })
```

```
tb %>%
```

```
  summarize(across( c(`1990`, `1991`, `1992`, `1993`), ~ sum(.x, na.rm = TRUE)))
```

```
# A tibble: 1 × 4
```

```
  `1990` `1991` `1992` `1993`  
  <dbl>  <dbl>  <dbl>  <dbl>  
1  21855  22288  22421  22836
```

## Iterative summaries: `dplyr summarize()` and `across()` functions

Another example using select helpers:

```
tb %>%  
  summarize(across( starts_with("2"), ~ range(.x, na.rm = TRUE)))
```

```
# A tibble: 2 × 8
```

|   | `2000`<br><dbl> | `2001`<br><dbl> | `2002`<br><dbl> | `2003`<br><dbl> | `2004`<br><dbl> | `2005`<br><dbl> | `2006`<br><dbl> | `2007`<br><dbl> |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 1 | 0               | 0               | 3               | 0               | 0               | 0               | 0               | 0               |
| 2 | 801             | 916             | 994             | 1075            | 1127            | 1141            | 1169            | 1198            |

## Row means

`colMeans()` and `rowMeans()` require **all numeric data**.

Let's see what the mean is across each row (country):

```
tb_2 <- column_to_rownames(tb, var = "country") # opposite of rownames_to_column() !
head(tb_2, n = 2)
```

|             | 1990 | 1991 | 1992 | 1993 | 1994 | 1995 | 1996 | 1997 | 1998 | 1999 | 2000 | 2001 | 2002 |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Afghanistan | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  | 168  |
| Albania     | 25   | 24   | 25   | 26   | 26   | 27   | 27   | 28   | 28   | 27   | 25   | 23   | 23   |
|             | 2003 | 2004 | 2005 | 2006 | 2007 |      |      |      |      |      |      |      |      |
| Afghanistan | 168  | 168  | 168  | 168  | 168  |      |      |      |      |      |      |      |      |
| Albania     | 22   | 21   | 20   | 18   | 17   |      |      |      |      |      |      |      |      |

```
rowMeans(tb_2, na.rm = TRUE)
```

|             |            |                     |            |
|-------------|------------|---------------------|------------|
| Afghanistan | 168.000000 | Albania             | 24.000000  |
| Algeria     | 46.388889  | American Samoa      | 7.611111   |
| Andorra     | 24.944444  | Angola              | 243.888889 |
| Anguilla    | 22.833333  | Antigua and Barbuda | 7.222222   |
| Argentina   | 43.666667  | Armenia             | 57.611111  |
| Australia   | 6.444444   | Austria             | 16.333333  |
| Azerbaijan  |            | Bahamas             |            |

## Row means

`colMeans()` gives you very similar output to functions we've seen previously in this lecture (`summarize()` and `across()`).

```
colMeans(tb_2, na.rm = TRUE)
```

|  | 1990     | 1991     | 1992     | 1993     | 1994     | 1995     | 1996     | 1997     |
|--|----------|----------|----------|----------|----------|----------|----------|----------|
|  | 105.5797 | 107.6715 | 108.3140 | 110.3188 | 111.9662 | 114.1981 | 115.3527 | 118.8792 |
|  | 1998     | 1999     | 2000     | 2001     | 2002     | 2003     | 2004     | 2005     |
|  | 121.5169 | 125.0435 | 127.8454 | 130.7488 | 136.1739 | 136.1932 | 136.9662 | 135.6683 |
|  | 2006     | 2007     |          |          |          |          |          |          |
|  | 134.6106 | 133.3865 |          |          |          |          |          |          |

```
tb_2 %>%  
  summarize(across( colnames(tb_2), ~ mean(.x, na.rm = TRUE)))
```

|   | 1990     | 1991     | 1992     | 1993     | 1994     | 1995     | 1996     | 1997     |
|---|----------|----------|----------|----------|----------|----------|----------|----------|
| 1 | 105.5797 | 107.6715 | 108.314  | 110.3188 | 111.9662 | 114.1981 | 115.3527 | 118.8792 |
|   | 1998     | 1999     | 2000     | 2001     | 2002     | 2003     | 2004     | 2005     |
| 1 | 121.5169 | 125.0435 | 127.8454 | 130.7488 | 136.1739 | 136.1932 | 136.9662 | 135.6683 |
|   | 2006     | 2007     |          |          |          |          |          |          |
| 1 | 134.6106 | 133.3865 |          |          |          |          |          |          |

## summary() Function

Using `summary()` can give you rough snapshots of each numeric column (character columns are skipped):

```
summary(tb)
```

| country          | 1990          | 1991          | 1992          | 1993          | 1994        | 1995          | 1996          | 1997          | 1998          | 1999          | 2000          | 2001          |
|------------------|---------------|---------------|---------------|---------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Length:208       | Min. : 0.0    | Min. : 4.0    | Min. : 2.0    | Min. : 4.0    | Min. : 0    | Min. : 3.0    | Min. : 0.0    | Min. : 0.0    | Min. : 0.0    | Min. : 0.0    | Min. : 0.0    | Min. : 0.0    |
| Class :character | 1st Qu.: 27.5 | 1st Qu.: 27.0 | 1st Qu.: 27.0 | 1st Qu.: 27.5 | 1st Qu.: 26 | 1st Qu.: 26.5 | 1st Qu.: 25.5 | 1st Qu.: 24.5 | 1st Qu.: 23.5 | 1st Qu.: 22.5 | 1st Qu.: 21.5 | 1st Qu.: 19.0 |
| Mode :character  | Median : 60.0 | Median : 58.0 | Median : 56.0 | Median : 56.0 | Median : 57 | Median : 58.0 | Median : 60.0 | Median : 64.0 | Median : 63.0 | Median : 66.0 | Median : 60.0 | Median : 59.0 |
|                  | Mean :105.6   | Mean :107.7   | Mean :108.3   | Mean :110.3   | Mean :112   | Mean :114.2   | Mean :115.4   | Mean :118.9   | Mean :121.5   | Mean :125.0   | Mean :127.8   | Mean :130.7   |
|                  | 3rd Qu.:165.0 | 3rd Qu.:171.0 | 3rd Qu.:171.5 | 3rd Qu.:171.0 | 3rd Qu.:174 | 3rd Qu.:177.5 | 3rd Qu.:179.0 | 3rd Qu.:181.0 | 3rd Qu.:188.5 | 3rd Qu.:192.5 | 3rd Qu.:191.0 | 3rd Qu.:189.5 |
|                  | Max. :585.0   | Max. :594.0   | Max. :606.0   | Max. :618.0   | Max. :630   | Max. :642.0   | Max. :655.0   | Max. :668.0   | Max. :681.0   | Max. :695.0   | Max. :801.0   | Max. :916.0   |
|                  | NA's :1       | NA's :1       | NA's :1       | NA's :1       | NA's :1     | NA's :1       | NA's :1       | NA's :1       | NA's :1       | NA's :1       | NA's :1       | NA's :1       |



# Lab Part 1

▮ [Class Website](#)

▮ [Lab](#)

# Youth Tobacco Survey

Here we will be using the Youth Tobacco Survey data:

[http://jhudatascience.org/intro\\_to\\_r/data/Youth\\_Tobacco\\_Survey\\_YTS\\_Data.csv](http://jhudatascience.org/intro_to_r/data/Youth_Tobacco_Survey_YTS_Data.csv)

```
yts <- jhur::read_yts()
head(yts)
```

```
# A tibble: 6 × 31
```

|   | YEAR  | LocationAbbr | LocationDesc | TopicType       | TopicDesc   | MeasureDesc   | DataSource |
|---|-------|--------------|--------------|-----------------|-------------|---------------|------------|
|   | <dbl> | <chr>        | <chr>        | <chr>           | <chr>       | <chr>         | <chr>      |
| 1 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Percent of... | YTS        |
| 2 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Percent of... | YTS        |
| 3 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Percent of... | YTS        |
| 4 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Quit Attem... | YTS        |
| 5 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Quit Attem... | YTS        |
| 6 | 2015  | AZ           | Arizona      | Tobacco Use ... | Cessatio... | Quit Attem... | YTS        |

```
# ... with 24 more variables: Response <chr>, Data_Value_Unit <chr>,
#   Data_Value_Type <chr>, Data_Value <dbl>, Data_Value_Footnote_Symbol <chr>,
#   Data_Value_Footnote <chr>, Data_Value_Std_Err <dbl>,
#   Low_Confidence_Limit <dbl>, High_Confidence_Limit <dbl>, Sample_Size <dbl>,
#   Gender <chr>, Race <chr>, Age <chr>, Education <chr>, GeoLocation <chr>,
#   TopicTypeId <chr>, TopicId <chr>, MeasureId <chr>, StratificationID1 <chr>,
#   StratificationID2 <chr>, StratificationID3 <chr>, ...
```

## Column to vector

Let's work with one column as a vector using `pull()`.

```
locations <- yts %>% pull(LocationDesc)
locations
```

```
[1] "Arizona"
[3] "Arizona"
[5] "Arizona"
[7] "Arizona"
[9] "Arizona"
[11] "Arizona"
[13] "Arizona"
[15] "Arizona"
[17] "Arizona"
[19] "Arizona"
[21] "Arizona"
[23] "Arizona"
[25] "Connecticut"
[27] "Connecticut"
[29] "Connecticut"
[31] "Connecticut"
[33] "Connecticut"
[35] "Connecticut"
[37] "Connecticut"
[39] "Connecticut"
[41] "Connecticut"
[43] "Connecticut"
[45] "Connecticut"
[47] "Connecticut"
```

# Length and unique

`unique(x)` will return the unique elements of `x`

```
unique(locations)
```

```
[1] "Arizona"           "Connecticut"
[3] "Georgia"           "Hawaii"
[5] "Illinois"          "Louisiana"
[7] "Mississippi"       "Utah"
[9] "Missouri"          "National (States and DC)"
[11] "Nebraska"          "New Jersey"
[13] "North Carolina"    "North Dakota"
[15] "Pennsylvania"      "South Carolina"
[17] "West Virginia"     "Alabama"
[19] "Delaware"          "Minnesota"
[21] "Guam"              "Ohio"
[23] "Indiana"           "Kansas"
[25] "Oklahoma"          "Wisconsin"
[27] "Michigan"          "New Hampshire"
[29] "Arkansas"          "Kentucky"
[31] "Iowa"              "South Dakota"
[33] "Virginia"          "Puerto Rico"
[35] "Rhode Island"      "New Mexico"
[37] "Tennessee"         "Vermont"
[39] "Virgin Islands"    "California"
[41] "Idaho"             "Florida"
[43] "Maryland"          "Massachusetts"
[45] "New York"          "Maine"
[47] "Colorado"          "District of Columbia"
[49] "Texas"             "Wyoming"
```

## Length and unique

`length` will tell you the length of a vector. Combined with `unique`, tells you the number of unique elements:

```
length(unique(locations))
```

```
[1] 50
```

## table and dplyr: count

table(x) will return a frequency table of unique elements of x

```
table(locations)
```

```
locations
```

|               |                      |                          |
|---------------|----------------------|--------------------------|
| Alabama       | Arizona              | Arkansas                 |
| 378           | 240                  | 210                      |
| California    | Colorado             | Connecticut              |
| 96            | 48                   | 384                      |
| Delaware      | District of Columbia | Florida                  |
| 312           | 48                   | 96                       |
| Georgia       | Guam                 | Hawaii                   |
| 282           | 48                   | 270                      |
| Idaho         | Illinois             | Indiana                  |
| 48            | 282                  | 264                      |
| Iowa          | Kansas               | Kentucky                 |
| 276           | 186                  | 255                      |
| Louisiana     | Maine                | Maryland                 |
| 240           | 48                   | 96                       |
| Massachusetts | Michigan             | Minnesota                |
| 48            | 138                  | 141                      |
| Mississippi   | Missouri             | National (States and DC) |
| 567           | 294                  | 26                       |
| Nebraska      | New Hampshire        | New Jersey               |
| 234           | 180                  | 387                      |
| New Mexico    | New York             | North Carolina           |
| 24            | 90                   | 366                      |
| North Dakota  | Ohio                 | Oklahoma                 |
| 330           | 255                  | 318                      |

## table and dplyr: count

Use count directly on a data.frame and column without needing to use pull().

```
yts %>% count(LocationDesc)
```

```
# A tibble: 50 × 2
```

|    | LocationDesc         | n     |
|----|----------------------|-------|
|    | <chr>                | <int> |
| 1  | Alabama              | 378   |
| 2  | Arizona              | 240   |
| 3  | Arkansas             | 210   |
| 4  | California           | 96    |
| 5  | Colorado             | 48    |
| 6  | Connecticut          | 384   |
| 7  | Delaware             | 312   |
| 8  | District of Columbia | 48    |
| 9  | Florida              | 96    |
| 10 | Georgia              | 282   |

```
# ... with 40 more rows
```

## table and dplyr: count

Multiple columns listed further subdivides the count.

```
yts %>% count(LocationDesc, TopicDesc)
```

```
# A tibble: 146 × 3
```

|    | LocationDesc<br><chr> | TopicDesc<br><chr>            | n<br><int> |
|----|-----------------------|-------------------------------|------------|
| 1  | Alabama               | Cessation (Youth)             | 90         |
| 2  | Alabama               | Cigarette Use (Youth)         | 144        |
| 3  | Alabama               | Smokeless Tobacco Use (Youth) | 144        |
| 4  | Arizona               | Cessation (Youth)             | 60         |
| 5  | Arizona               | Cigarette Use (Youth)         | 99         |
| 6  | Arizona               | Smokeless Tobacco Use (Youth) | 81         |
| 7  | Arkansas              | Cessation (Youth)             | 42         |
| 8  | Arkansas              | Cigarette Use (Youth)         | 78         |
| 9  | Arkansas              | Smokeless Tobacco Use (Youth) | 90         |
| 10 | California            | Cessation (Youth)             | 24         |

```
# ... with 136 more rows
```



## table and dplyr: count

Multiple columns listed further subdivides the count.

```
yts %>% count(LocationDesc, TopicDesc)
```

```
# A tibble: 146 × 3
```

|    | LocationDesc<br><chr> | TopicDesc<br><chr>            | n<br><int> |
|----|-----------------------|-------------------------------|------------|
| 1  | Alabama               | Cessation (Youth)             | 90         |
| 2  | Alabama               | Cigarette Use (Youth)         | 144        |
| 3  | Alabama               | Smokeless Tobacco Use (Youth) | 144        |
| 4  | Arizona               | Cessation (Youth)             | 60         |
| 5  | Arizona               | Cigarette Use (Youth)         | 99         |
| 6  | Arizona               | Smokeless Tobacco Use (Youth) | 81         |
| 7  | Arkansas              | Cessation (Youth)             | 42         |
| 8  | Arkansas              | Cigarette Use (Youth)         | 78         |
| 9  | Arkansas              | Smokeless Tobacco Use (Youth) | 90         |
| 10 | California            | Cessation (Youth)             | 24         |

```
# ... with 136 more rows
```

**Note:** count( ) includes NAs but table( ) does not

# Grouping

# Perform Operations By Groups: dplyr

`group_by` allows you group the data set by variables/columns you specify:

```
# Regular data  
yts
```

```
# A tibble: 9,794 × 31
```

|    | YEAR  | LocationAbbr | LocationDesc | TopicType      | TopicDesc   | MeasureDesc   | DataSource |
|----|-------|--------------|--------------|----------------|-------------|---------------|------------|
|    | <dbl> | <chr>        | <chr>        | <chr>          | <chr>       | <chr>         | <chr>      |
| 1  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 2  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 3  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 4  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 5  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 6  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 7  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 8  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 9  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 10 | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |

```
# ... with 9,784 more rows, and 24 more variables: Response <chr>,  
# Data_Value_Unit <chr>, Data_Value_Type <chr>, Data_Value <dbl>,  
# Data_Value_Footnote_Symbol <chr>, Data_Value_Footnote <chr>,  
# Data_Value_Std_Err <dbl>, Low_Confidence_Limit <dbl>,  
# High_Confidence_Limit <dbl>, Sample_Size <dbl>, Gender <chr>, Race <chr>,  
# Age <chr>, Education <chr>, GeoLocation <chr>, TopicTypeId <chr>,  
# TopicId <chr>, MeasureId <chr>, StratificationID1 <chr>, ...
```

# Perform Operations By Groups: dplyr

`group_by` allows you group the data set by variables/columns you specify:

```
yts_grouped <- yts %>% group_by(Response)
yts_grouped
```

```
# A tibble: 9,794 × 31
```

```
# Groups:   Response [4]
```

|    | YEAR  | LocationAbbr | LocationDesc | TopicType      | TopicDesc   | MeasureDesc   | DataSource |
|----|-------|--------------|--------------|----------------|-------------|---------------|------------|
|    | <dbl> | <chr>        | <chr>        | <chr>          | <chr>       | <chr>         | <chr>      |
| 1  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 2  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 3  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 4  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 5  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 6  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 7  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 8  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 9  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 10 | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |

```
# ... with 9,784 more rows, and 24 more variables: Response <chr>,
# Data_Value_Unit <chr>, Data_Value_Type <chr>, Data_Value <dbl>,
# Data_Value_Footnote_Symbol <chr>, Data_Value_Footnote <chr>,
# Data_Value_Std_Err <dbl>, Low_Confidence_Limit <dbl>,
# High_Confidence_Limit <dbl>, Sample_Size <dbl>, Gender <chr>, Race <chr>,
# Age <chr>, Education <chr>, GeoLocation <chr>, TopicTypeId <chr>,
# TopicId <chr>, MeasureId <chr>, StratificationID1 <chr>, ...
```

## Summarize the grouped data

It's grouped! Grouping doesn't change the data in any way, but how **functions operate on it**. Now we can summarize `Data_Value` (percent of respondents) by group:

```
yts_grouped %>% summarize(avg_percent = mean(Data_Value, na.rm = TRUE))
```

```
# A tibble: 4 × 2
```

|   | Response | avg_percent |
|---|----------|-------------|
|   | <chr>    | <dbl>       |
| 1 | Current  | 9.68        |
| 2 | Ever     | 26.1        |
| 3 | Frequent | 3.48        |
| 4 | <NA>     | 53.5        |

## Use the **pipe** to string these together!

Pipe `yts` into `group_by`, then pipe that into `summarize`:

```
yts %>%  
  group_by(Response) %>%  
  summarize(avg_percent = mean(Data_Value, na.rm = TRUE),  
            max_percent = max(Data_Value, na.rm = TRUE))
```

# A tibble: 4 × 3

|   | Response | avg_percent | max_percent |
|---|----------|-------------|-------------|
|   | <chr>    | <dbl>       | <dbl>       |
| 1 | Current  | 9.68        | 40.6        |
| 2 | Ever     | 26.1        | 98          |
| 3 | Frequent | 3.48        | 23.9        |
| 4 | <NA>     | 53.5        | 81.9        |

# Ungroup the data

The `ungroup` function will allow you to clear the groups from the data. You can also overwrite the first `group_by` with a new one.

```
yts = ungroup(yts)
yts
```

```
# A tibble: 9,794 × 31
```

|    | YEAR  | LocationAbbr | LocationDesc | TopicType      | TopicDesc   | MeasureDesc   | DataSource |
|----|-------|--------------|--------------|----------------|-------------|---------------|------------|
|    | <dbl> | <chr>        | <chr>        | <chr>          | <chr>       | <chr>         | <chr>      |
| 1  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 2  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 3  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Percent of... | YTS        |
| 4  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 5  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 6  | 2015  | AZ           | Arizona      | Tobacco Use... | Cessatio... | Quit Attem... | YTS        |
| 7  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 8  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 9  | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |
| 10 | 2015  | AZ           | Arizona      | Tobacco Use... | Cigarett... | Smoking St... | YTS        |

```
# ... with 9,784 more rows, and 24 more variables: Response <chr>,
# Data_Value_Unit <chr>, Data_Value_Type <chr>, Data_Value <dbl>,
# Data_Value_Footnote_Symbol <chr>, Data_Value_Footnote <chr>,
# Data_Value_Std_Err <dbl>, Low_Confidence_Limit <dbl>,
# High_Confidence_Limit <dbl>, Sample_Size <dbl>, Gender <chr>, Race <chr>,
# Age <chr>, Education <chr>, GeoLocation <chr>, TopicTypeId <chr>,
# TopicId <chr>, MeasureId <chr>, StratificationID1 <chr>, ...
```

## group\_by with mutate - just add data

We can also use `mutate` to calculate the mean value for each year and add it as a column:

```
yts %>%  
  group_by(YEAR) %>%  
  mutate(year_avg = mean(Data_Value, na.rm = TRUE)) %>%  
  select(LocationDesc, Data_Value, year_avg)
```

```
# A tibble: 9,794 × 4
```

```
# Groups:   YEAR [17]
```

|    | YEAR  | LocationDesc | Data_Value | year_avg |
|----|-------|--------------|------------|----------|
|    | <dbl> | <chr>        | <dbl>      | <dbl>    |
| 1  | 2015  | Arizona      | NA         | 15.2     |
| 2  | 2015  | Arizona      | NA         | 15.2     |
| 3  | 2015  | Arizona      | NA         | 15.2     |
| 4  | 2015  | Arizona      | NA         | 15.2     |
| 5  | 2015  | Arizona      | NA         | 15.2     |
| 6  | 2015  | Arizona      | NA         | 15.2     |
| 7  | 2015  | Arizona      | 3.2        | 15.2     |
| 8  | 2015  | Arizona      | 3.2        | 15.2     |
| 9  | 2015  | Arizona      | 3.1        | 15.2     |
| 10 | 2015  | Arizona      | 12.5       | 15.2     |

```
# ... with 9,784 more rows
```



# Counting

There are other functions, such as `n()` count the number of observations.

```
yts %>%  
  group_by(YEAR) %>%  
  summarize(n = n(),  
            mean = mean(Data_Value, na.rm = TRUE))
```

```
# A tibble: 17 × 3  
  YEAR      n  mean  
  <dbl> <int> <dbl>  
1  1999   372  26.1  
2  2000  1224  26.7  
3  2001   426  23.4  
4  2002  1016  25.2  
5  2003   498  21.3  
6  2004   611  20.7  
7  2005   636  21.8  
8  2006   518  21.8  
9  2007   516  20.0  
10 2008   483  18.2  
11 2009   686  18.3  
12 2010   447  17.8  
13 2011   521  17.8  
14 2012   244  15.5  
15 2013   685  16.7  
16 2014   334  15.7  
17 2015   577  15.2
```

## Lab Part 2

▮ [Class Website](#)

▮ [Lab](#)

Preview: plotting


# Basic Plots

Plotting is an important component of exploratory data analysis. These are some rough plots that you can use in real time while exploring your data. We will go over formatting and making plots look nicer in additional lectures.

- Basic summarization plots:
  - `hist(x)`: histogram of x
  - `plot(x, y)`: scatterplot of x and y
  - `boxplot(y~x)`: boxplot of y against levels of x

# Histogram


```
mpg <- jhu_cars %>% pull(mpg)
hist(x = mpg)
```

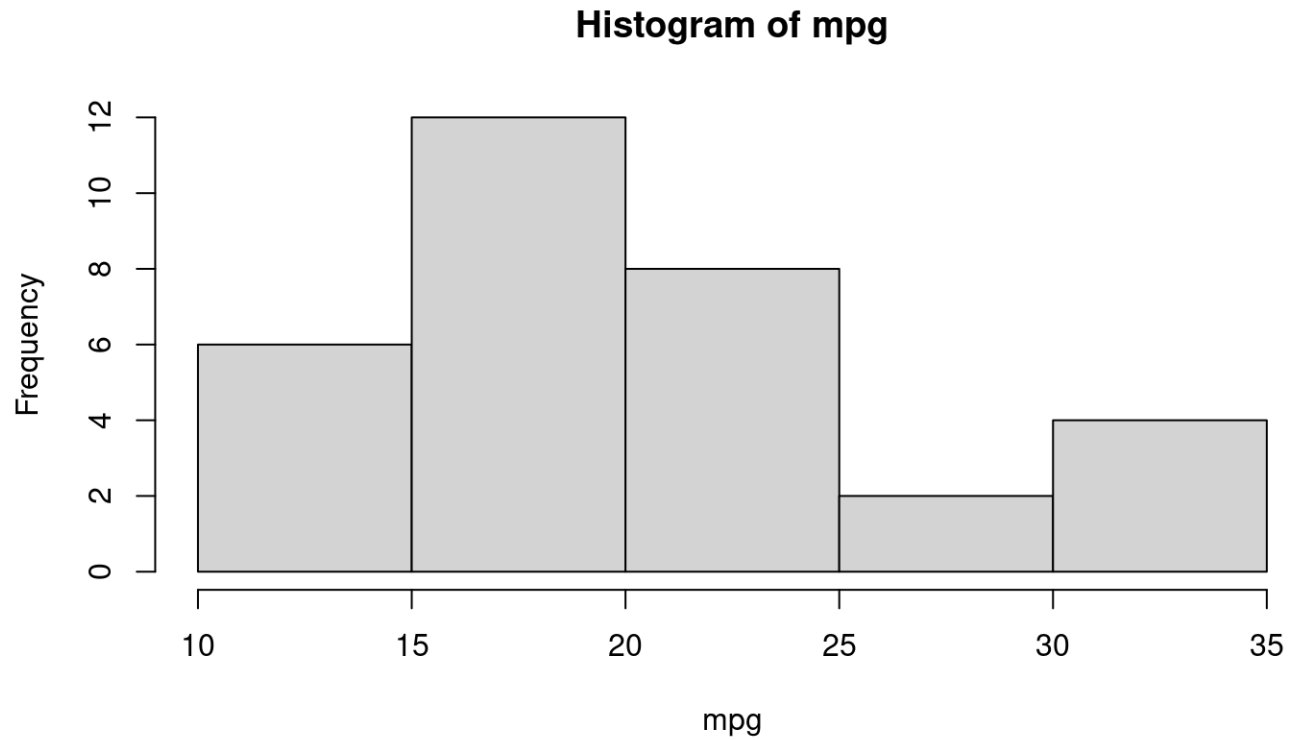

# Histogram


Use the `breaks` = argument to tweak the resolution:

```
hist(x = mpg, breaks = 10)
```

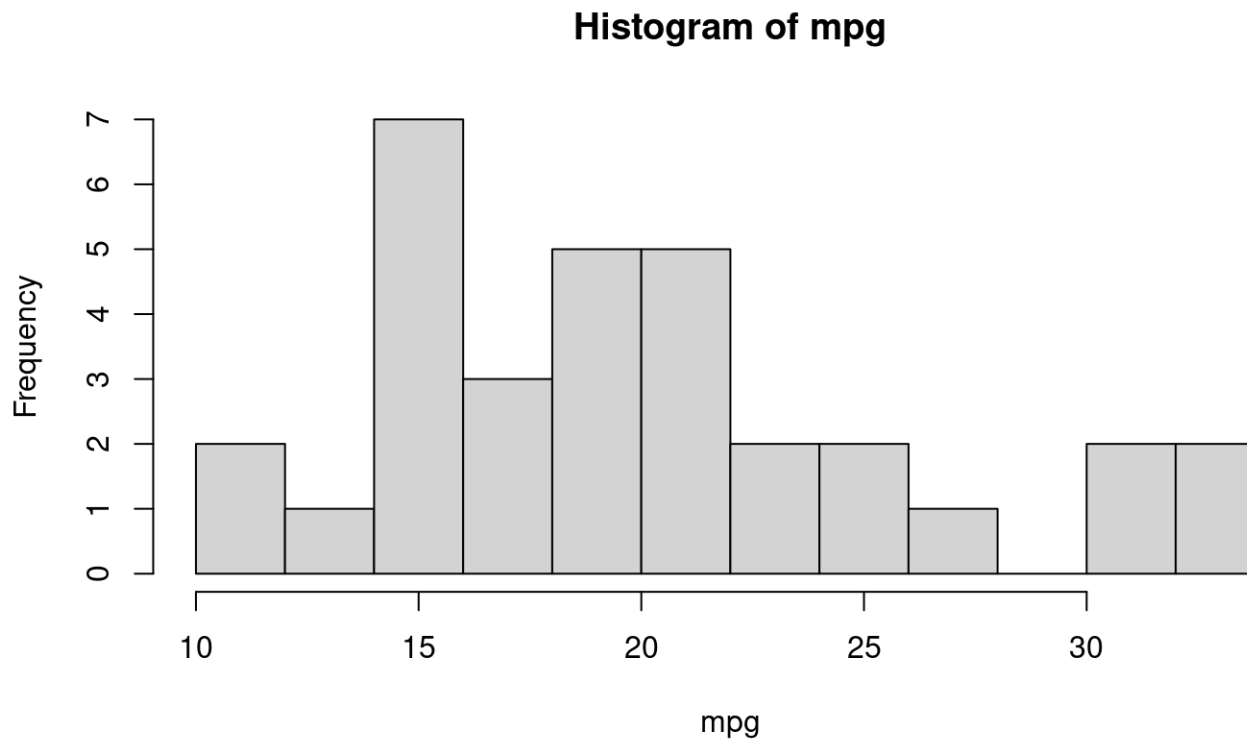


# Scatterplot

```
mpg <- jhu_cars %>% pull(mpg)
hp <- jhu_cars %>% pull(hp)
plot(x = hp, y = mpg) # plot(hp, mpg)
```

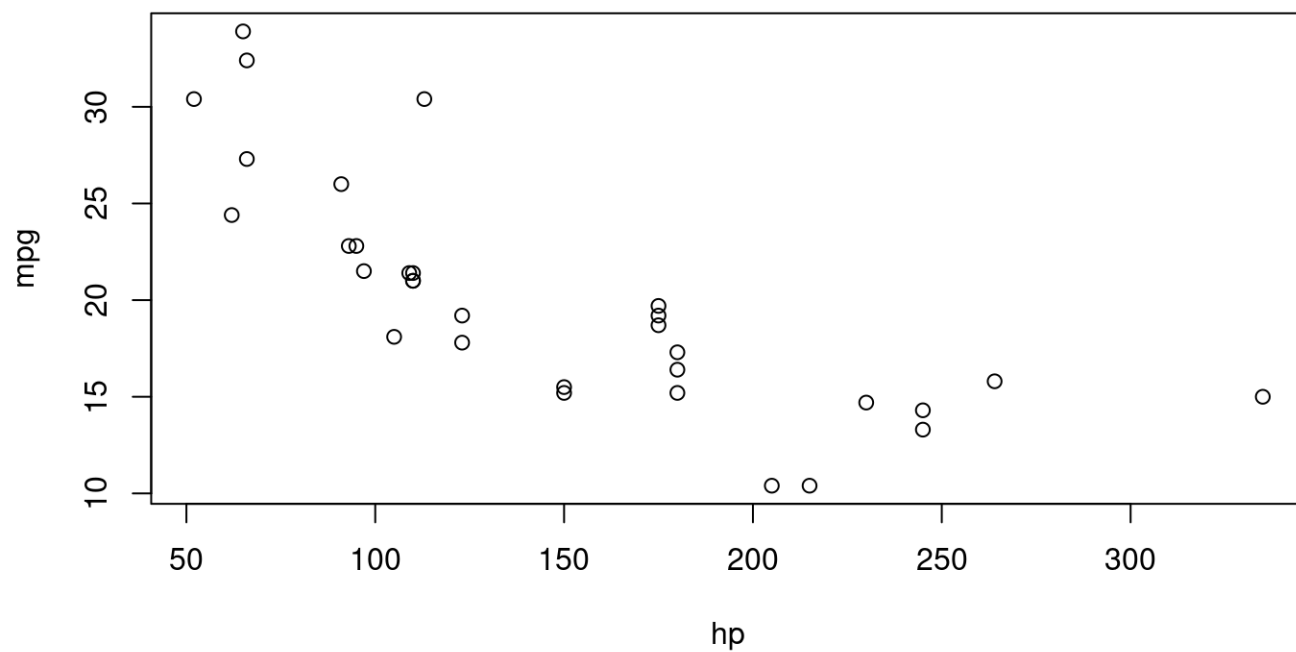

# Boxplot

```
cyl <- jhu_cars %>% pull(cyl)  
hp <- jhu_cars %>% pull(hp)  
boxplot(formula = hp ~ cyl)
```

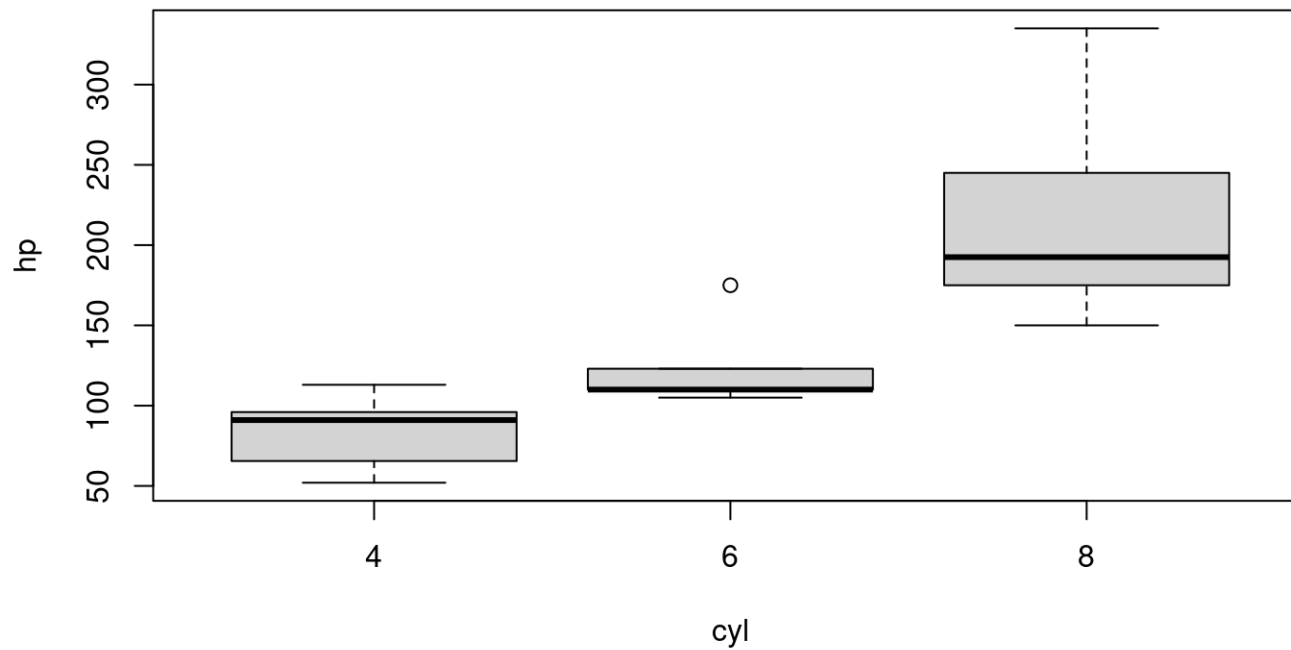



# Summary

- summary stats (`mean()`) work with `pull()`
- `summary(x)`: quantile information
- `summarize`: creates a summary table of columns of interest
  - combine with `across()` to programmatically select columns
- `count(x)`: what unique values do you have?
  - `pull() + table()`
  - `unique()` combined with `length()`
- `group_by()`: changes all subsequent functions
  - combine with `summarize()` to get statistics per group
- `plot()` and `hist()` are great for a **quick snapshot** of the data

# Lab Part 3

▮ [Class Website](#)

▮ [Lab](#)