

Which Stats Method Should I Use?

Richard White

2017-06-07

Contents

| | | |
|----------|-------------------------|----------|
| 1 | Syllabus | 5 |
| 1.1 | Logistics | 5 |
| 2 | File setup | 7 |
| 2.1 | blah | 7 |
| 2.2 | Rationale | 7 |
| 3 | Folder structure | 9 |

Chapter 1

Syllabus

1.1 Logistics

Instructor: Richard White [richard.white@fhi.no] Time: 09:00 - 11:45, 18th September 2017 Location: Main auditorium, L8, Lindern Campus

Chapter 2

File setup

2.1 blah

Instructor: Richard White [richard.white@fhi.no] Time: 09:00 - 11:45, 18th September 2017 Location: Main auditorium, L8, Lindern Campus

2.2 Rationale

You can label chapter and section titles using `{#label}` after them, e.g., we can reference Chapter 2. If you do not manually label them, there will be automatic labels anyway, e.g., .

Figures and tables with captions will be placed in **figure** and **table** environments, respectively.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

Reference a figure by its code chunk label with the **fig:** prefix, e.g., see Figure 2.1. Similarly, you can reference tables generated from `knitr::kable()`, e.g., see Table 2.1.

```
knitr::kable(
  head(iris, 20), caption = 'Here is a nice table!',
  booktabs = TRUE
)
```

You can write citations, too. For example, we are using the **bookdown** package (Xie, 2016) in this sample book, which was built on top of R Markdown and **knitr**

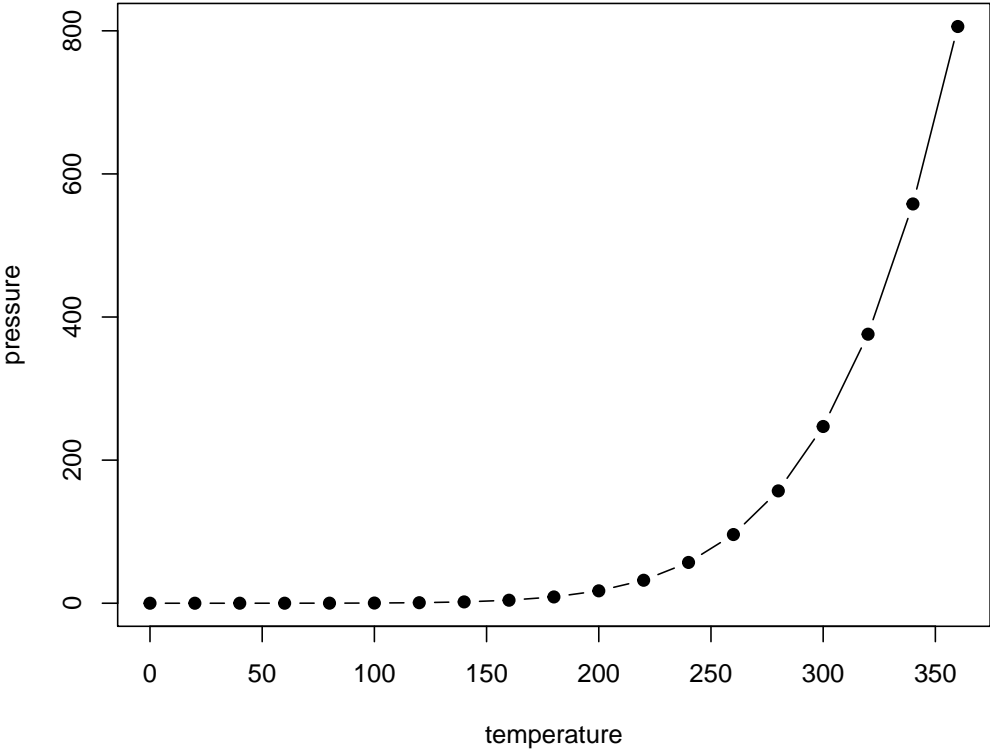


Figure 2.1: Here is a nice figure!

Table 2.1: Here is a nice table!

| Sepal.Length | Sepal.Width | Petal.Length | Petal.Width | Species |
|--------------|-------------|--------------|-------------|---------|
| 5.1 | 3.5 | 1.4 | 0.2 | setosa |
| 4.9 | 3.0 | 1.4 | 0.2 | setosa |
| 4.7 | 3.2 | 1.3 | 0.2 | setosa |
| 4.6 | 3.1 | 1.5 | 0.2 | setosa |
| 5.0 | 3.6 | 1.4 | 0.2 | setosa |
| 5.4 | 3.9 | 1.7 | 0.4 | setosa |
| 4.6 | 3.4 | 1.4 | 0.3 | setosa |
| 5.0 | 3.4 | 1.5 | 0.2 | setosa |
| 4.4 | 2.9 | 1.4 | 0.2 | setosa |
| 4.9 | 3.1 | 1.5 | 0.1 | setosa |
| 5.4 | 3.7 | 1.5 | 0.2 | setosa |
| 4.8 | 3.4 | 1.6 | 0.2 | setosa |
| 4.8 | 3.0 | 1.4 | 0.1 | setosa |
| 4.3 | 3.0 | 1.1 | 0.1 | setosa |
| 5.8 | 4.0 | 1.2 | 0.2 | setosa |
| 5.7 | 4.4 | 1.5 | 0.4 | setosa |
| 5.4 | 3.9 | 1.3 | 0.4 | setosa |
| 5.1 | 3.5 | 1.4 | 0.3 | setosa |
| 5.7 | 3.8 | 1.7 | 0.3 | setosa |
| 5.1 | 3.8 | 1.5 | 0.3 | setosa |

Chapter 3

Folder structure

Here is a review of existing methods.

Bibliography

Xie, Y. (2016). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.3.8.